

Programming Fundamentals

Programming Fundamentals

A Modular Structured Approach, 2nd Edition

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG



Programming Fundamentals by Authors and Contributors is licensed under a Creative Commons Attribution-ShareAlike 4.0 International License, except where otherwise noted.

Creative Commons Attribution CC-BY License

You are free to:

- Share — copy and redistribute the material in any medium or format
- Adapt — remix, transform, and build upon the material for any purpose, even commercially.

Under the following terms:

- Attribution — You must give appropriate credit, provide a link to the license, and indicate if changes were made. You may do so in any reasonable manner, but not in any way that suggests the licensor endorses you or your use.
- No additional restrictions — You may not apply legal terms or technological measures that legally restrict others from doing anything the license permits.

See <https://creativecommons.org/licenses/by/4.0/> for more information.

Contents

A Note To Readers	xvii
Dave Braunschweig	
Contents	xviii
Author Acknowledgements	xix
Kenneth Leroy Busbee and Dave Braunschweig	
Preface	1
Kenneth Leroy Busbee and Dave Braunschweig	
 Part I. Introduction to Programming	
 Systems Development Life Cycle	5
Kenneth Leroy Busbee	
Program Design	8
Kenneth Leroy Busbee	
Program Quality	10
Dave Braunschweig	
Pseudocode	12
Kenneth Leroy Busbee	
Flowcharts	14
Kenneth Leroy Busbee	
Software Testing	24
Kenneth Leroy Busbee	
Integrated Development Environment	27
Kenneth Leroy Busbee	
Version Control	32
Dave Braunschweig	
Input and Output	35
Kenneth Leroy Busbee	
Hello World	37
Dave Braunschweig	

C++ Examples	40
Dave Braunschweig	
C# Examples	43
Dave Braunschweig	
Java Examples	46
Dave Braunschweig	
JavaScript Examples	49
Dave Braunschweig	
Python Examples	52
Dave Braunschweig	
Swift Examples	54
Dave Braunschweig	
Practice: Introduction to Programming	56
Kenneth Leroy Busbee and Dave Braunschweig	
Part II. Data and Operators	
Constants and Variables	61
Kenneth Leroy Busbee and Dave Braunschweig	
Identifier Names	64
Kenneth Leroy Busbee and Dave Braunschweig	
Data Types	66
Kenneth Leroy Busbee and Dave Braunschweig	
Integer Data Type	71
Kenneth Leroy Busbee and Dave Braunschweig	
Floating-Point Data Type	74
Kenneth Leroy Busbee and Dave Braunschweig	
String Data Type	76
Kenneth Leroy Busbee and Dave Braunschweig	
Boolean Data Type	79
Kenneth Leroy Busbee and Dave Braunschweig	
Nothing Data Type	81
Dave Braunschweig	
Order of Operations	82
Kenneth Leroy Busbee and Dave Braunschweig	

Assignment	84
Kenneth Leroy Busbee	
Arithmetic Operators	86
Kenneth Leroy Busbee and Dave Braunschweig	
Integer Division and Modulus	91
Kenneth Leroy Busbee	
Unary Operations	93
Kenneth Leroy Busbee	
Lvalue and Rvalue	95
Kenneth Leroy Busbee	
Data Type Conversions	97
Kenneth Leroy Busbee and Dave Braunschweig	
Input-Process-Output Model	100
Dave Braunschweig	
C++ Examples	104
Dave Braunschweig	
C# Examples	108
Dave Braunschweig	
Java Examples	112
Dave Braunschweig	
JavaScript Examples	116
Dave Braunschweig	
Python Examples	121
Dave Braunschweig	
Swift Examples	124
Dave Braunschweig	
Practice: Data and Operators	127
Kenneth Leroy Busbee and Dave Braunschweig	
 Part III. Functions	
 Modular Programming	131
Kenneth Leroy Busbee and Dave Braunschweig	
Hierarchy or Structure Chart	135
Kenneth Leroy Busbee	

Function Examples	137
Dave Braunschweig	
Parameters and Arguments	141
Dave Braunschweig	
Call by Value vs. Call by Reference	143
Dave Braunschweig	
Return Statement	146
Dave Braunschweig and Kenneth Leroy Busbee	
Void Data Type	148
Kenneth Leroy Busbee and Dave Braunschweig	
Scope	149
Kenneth Leroy Busbee	
Programming Style	151
Kenneth Leroy Busbee and Dave Braunschweig	
Standard Libraries	154
Kenneth Leroy Busbee and Dave Braunschweig	
C++ Examples	156
Dave Braunschweig	
C# Examples	158
Dave Braunschweig	
Java Examples	160
Dave Braunschweig	
JavaScript Examples	162
Dave Braunschweig	
Python Examples	164
Dave Braunschweig	
Swift Examples	166
Dave Braunschweig	
Practice: Functions	168
Kenneth Leroy Busbee and Dave Braunschweig	
 Part IV. Conditions	
 Structured Programming	173
Kenneth Leroy Busbee	

Selection Control Structures	175
Kenneth Leroy Busbee and Dave Braunschweig	
If Then Else	177
Kenneth Leroy Busbee	
Code Blocks	180
Kenneth Leroy Busbee and Dave Braunschweig	
Relational Operators	183
Kenneth Leroy Busbee	
Assignment vs Equality	185
Kenneth Leroy Busbee	
Logical Operators	187
Kenneth Leroy Busbee and Dave Braunschweig	
Nested If Then Else	191
Kenneth Leroy Busbee	
Case Control Structure	193
Kenneth Leroy Busbee	
Condition Examples	198
Dave Braunschweig	
C++ Examples	203
Dave Braunschweig	
C# Examples	207
Dave Braunschweig	
Java Examples	211
Dave Braunschweig	
JavaScript Examples	215
Dave Braunschweig	
Python Examples	219
Dave Braunschweig	
Swift Examples	222
Dave Braunschweig	
Practice: Conditions	226
Kenneth Leroy Busbee	

Part V. Loops

Iteration Control Structures	231
Kenneth Leroy Busbee and Dave Braunschweig	
While Loop	233
Kenneth Leroy Busbee	
Do While Loop	238
Kenneth Leroy Busbee and Dave Braunschweig	
Flag Concept	242
Kenneth Leroy Busbee	
For Loop	245
Kenneth Leroy Busbee	
Branching Control Structures	248
Kenneth Leroy Busbee	
Increment and Decrement Operators	251
Kenneth Leroy Busbee	
Integer Overflow	254
Kenneth Leroy Busbee	
Nested For Loops	257
Kenneth Leroy Busbee	
Loop Examples	259
Dave Braunschweig	
C++ Examples	264
Dave Braunschweig	
C# Examples	268
Dave Braunschweig	
Java Examples	272
Dave Braunschweig	
JavaScript Examples	275
Dave Braunschweig	
Python Examples	279
Dave Braunschweig	
Swift Examples	282
Dave Braunschweig	

Practice: Loops	285
Kenneth Leroy Busbee	
 Part VI. Arrays and Lists	
 Arrays and Lists	289
Kenneth Leroy Busbee and Dave Braunschweig	
Index Notation	292
Kenneth Leroy Busbee and Dave Braunschweig	
Displaying Array Members	294
Kenneth Leroy Busbee and Dave Braunschweig	
Arrays and Functions	296
Kenneth Leroy Busbee and Dave Braunschweig	
Math Statistics with Arrays	298
Kenneth Leroy Busbee and Dave Braunschweig	
Searching Arrays	300
Kenneth Leroy Busbee and Dave Braunschweig	
Sorting Arrays	303
Kenneth Leroy Busbee and Dave Braunschweig	
Parallel Arrays	304
Dave Braunschweig	
Multidimensional Arrays	306
Kenneth Leroy Busbee	
Dynamic Arrays	308
Dave Braunschweig	
C++ Examples	309
Dave Braunschweig	
C# Examples	313
Dave Braunschweig	
Java Examples	317
Dave Braunschweig	
JavaScript Examples	321
Dave Braunschweig	
Python Examples	325
Dave Braunschweig	

Swift Examples	328
Dave Braunschweig	
Practice: Arrays and Lists	331
Kenneth Leroy Busbee	
Part VII. Strings and Files	
Strings	335
Kenneth Leroy Busbee and Dave Braunschweig	
String Functions	337
Dave Braunschweig	
String Formatting	339
Kenneth Leroy Busbee and Dave Braunschweig	
File Input and Output	341
Kenneth Leroy Busbee	
Loading an Array from a Text File	344
Kenneth Leroy Busbee and Dave Braunschweig	
C++ Examples	347
Dave Braunschweig	
C# Examples	352
Dave Braunschweig	
Java Examples	357
Dave Braunschweig	
JavaScript Examples	362
Dave Braunschweig	
Python Examples	366
Dave Braunschweig	
Swift Examples	370
Dave Braunschweig	
Practice: Strings and Files	375
Kenneth Leroy Busbee	
Part VIII. Object-Oriented Programming	
Objects and Classes	381
Dave Braunschweig	

Encapsulation	382
Dave Braunschweig	
Inheritance	383
Dave Braunschweig	
Polymorphism	384
Dave Braunschweig	
C++ Examples	385
Dave Braunschweig	
C# Examples	388
Dave Braunschweig	
Java Examples	391
Dave Braunschweig	
JavaScript Examples	393
Dave Braunschweig	
Python Examples	396
Dave Braunschweig	
Swift Examples	399
Dave Braunschweig	
Practice	402
Kenneth Leroy Busbee	
 Part IX. Review Materials	
 Review: Foundation Topics Group: 1-5	407
Kenneth Leroy Busbee	
Review: Modular Programming Group: 6-9	408
Kenneth Leroy Busbee	
Review: Structured Programming Group: 10-16	409
Kenneth Leroy Busbee	
Review: Intermediate Topics Group: 17-21	410
Kenneth Leroy Busbee	
Review: Advanced Topics Group: 22-24	411
Kenneth Leroy Busbee	

Part X. Appendix

Conditional Operator	415
Kenneth Leroy Busbee	
Versatile Code with Typedef	417
Kenneth Leroy Busbee	
Address Operator	419
Kenneth Leroy Busbee	
Conditional Compilation	421
Kenneth Leroy Busbee	
Bloodshed Dev-C++ 5 Compiler/IDE	423
Kenneth Leroy Busbee	
Recursion vs Iteration	427
Kenneth Leroy Busbee	
Practice	429
Kenneth Leroy Busbee	
Parameter Passing by Reference	431
Kenneth Leroy Busbee	
Practice	433
Kenneth Leroy Busbee	
Abbreviated Precedence Chart for C++ Operators	435
Kenneth Leroy Busbee	
Practice	438
Kenneth Leroy Busbee	
Pointer Data Type	441
Kenneth Leroy Busbee	
C++ Reserved Keywords	442
Kenneth Leroy Busbee	
Indirection Operator	444
Kenneth Leroy Busbee	
ASCII Character Set	447
Kenneth Leroy Busbee	
Typedef - An Alias	448
Kenneth Leroy Busbee	

Practice	449
Kenneth Leroy Busbee	
Show Hide File Extensions	451
Kenneth Leroy Busbee	
Understanding High Performance Computing	453
Kenneth Leroy Busbee	
Academic or Scholastic Dishonesty	460
Kenneth Leroy Busbee	
Sizeof Operator	463
Kenneth Leroy Busbee	
Successful Learning Skills	465
Kenneth Leroy Busbee	
Study Habits that Build the Brain	468
Kenneth Leroy Busbee	
Comments and Suggestions	469
Dave Braunschweig	

A Note To Readers

DAVE BRAUNSCHWEIG

Welcome to Programming Fundamentals – A Modular Structured Approach, 2nd Edition!

Please note that this textbook edition is a work in progress, with the first seven chapters nearly complete. The remaining chapters will be finished soon while the book is being piloted in Fall 2018.

The original content for this book was created by Kenneth Leroy Busbee and written specifically for his course based on C++. The goal for this second edition is to make it programming-language neutral, so that it may serve as an introductory programming textbook for students using any of a variety of programming languages, including C++, C#, Java, JavaScript, Python, and Swift. Other languages will be considered upon request.

Programming concepts are introduced generically, with logic demonstrated in pseudocode and flowchart form, followed by examples for different programming languages. Emphasis is placed on a modular, structured approach that supports reuse, maintenance, and self-documenting code.

As you begin to review this edition, please keep the audience in mind. If something is missing, think about whether that concept applies to programming in general or only to certain programming languages, and whether it is a fundamental, first-semester programming concept or something better addressed in a more advanced textbook.

You are encouraged to make use of Comments at the bottom of every page wherever you have suggestions or concerns regarding content or approach. All suggestions will be reviewed and considered.

Dave Braunschweig

Contents

Chapters

- Front Matter
- Introduction to Programming
- Data and Operators
- Functions
- Conditions
- Loops
- Arrays and Lists
- Strings and Files
- Object-Oriented Programming
- Appendix

Author Acknowledgements

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

1st Edition Acknowledgements

I wish to acknowledge the many people who have helped me and have encouraged me in this project.

1. Mr. Abass Alamnehe, who is a fellow faculty member at Houston Community College. He has encouraged the use of Connexions as an “open source” publishing concept. His comments on several modules have led directly to the improvement of the materials in this textbook/collection.
2. The hundreds (most likely a thousand plus) students that I have taken programming courses that I have taught since 1984. The languages include: COBOL, main frame IBM assembly, Intel assembly, Pascal, “C” and “C++”. They have often suggested that I write my own book because they thought that I was explaining the subject matter better than the author of the textbook that we were using. Little did my students understand that directly or indirectly they aided in the improvement of the materials from which I taught as well as improving me as a teacher.
3. To my future students and all those that will use this textbook/collection. They will provide suggestions for improvement as well as being the thousand eyes identifying the hard to find typos, etc.
4. My wife, Carol, who supports me in all that I do. She has tolerated the many hours that I have spent in concentration on developing the modules that comprise this work. Without her support, this work would not have happened.

Kenneth Leroy Busbee

2nd Edition Acknowledgements

I wish to acknowledge the many people who have helped make this edition possible, including:

- Kenneth Leroy Busbee for his initial vision and willingness to share content as CC-BY, making it possible to build on his success.
- Jay Singelmann and Jean Longhurst, who first taught me structured programming.
- Joyce Farrell, whose *Programming Logic and Design* book I have used for several years and has no doubt influenced my approach.
- Devin Cook for developing Flowgorithm, releasing it as free software, and graciously allowing its use to generate most of the pseudocode and flowcharts used in this edition of the book.
- Zoe Wake Hyde and the staff and volunteers at Rebus Community for providing a community and platform to create and collaborate on open content.
- April Browne, Carol Potaczek, and Maisie Sparks for providing subject matter expertise and recommendations for content improvement.
- My wife and family for accepting my dedication to open educational resources and loving me anyway.

Dave Braunschweig

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Preface

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

About this Textbook

Programming Fundamentals – A Modular Structured Approach, 2nd Edition is an adaptation of “*Programming Fundamentals – A Modular Structured Approach using C++*”, written by Kenneth Leroy Busbee, a faculty member at Houston Community College in Houston, Texas. The materials used in the first edition were originally developed by Busbee and others as independent modules for publication within the Connexions environment. The original source is available at <https://cnx.org/contents/MDgA8wfz@22.2:YzfkjC2r@17/>.

This second edition, adapted by Dave Braunschweig and others, expands on the original vision by supporting multiple programming languages with pseudocode and flowcharts, and includes example code in C++, C#, Java, JavaScript, Python, and Swift.

Programming fundamentals are often divided into three college courses: Modular/Structured, Object Oriented and Data Structures. This textbook/collection covers the first of those three courses.

Learning Modules

The learning modules of this textbook were written as **standalone** modules. Students using a collection of modules as a textbook will usually view its contents by reading the modules sequentially as presented by the author of the collection.

However, many readers of these modules may find them as a result of an Internet search. The textbook design allows the author of a module to create web links to other modules and Internet locations and designate any necessary prerequisites.

Conceptual Approach

The learning modules of this textbook were, for the most part, written without consideration of a specific programming language. Concepts are presented generically, with program logic demonstrated first in pseudocode and flowchart format. Language-specific examples follow the general overview.

Re-use and Customization

The Creative Commons (CC) Attribution license applies to all modules in this textbook. Under this license, any module may be used or modified for any purpose as long as proper attribution to the original author(s) is maintained.

PDF Conversion Problems

There are several known PDF printing problems. A description of the known problems are:

1. When it converts an “Example” the PDF displays the first line of an example properly but indents the remaining lines of the example. This problem occurs for the printing of a book (because it prints a PDF) and downloading either a module or a textbook/collection as a PDF.
2. Within C++ there are three operators that do not convert properly to PDF format.

decrement	—	which is two minus signs
insertion	<<	which is two less than signs
extraction	>>	which is two greater than signs

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

PART I

INTRODUCTION TO PROGRAMMING

Overview

This chapter introduces programming, the software development process, tools and methods used to develop and test programs. These include integrated development environments (IDEs), version control, input and output, and a Hello World program in pseudocode and flowchart format. The programming languages C++, C#, Java, JavaScript, Python, and Swift are introduced with example code.

Chapter Outline

- Systems Development Life Cycle
- Program Design
- Program Quality
- Pseudocode
- Flowcharts
- Software Testing
- Integrated Development Environment
- Version Control
- Input and Output
- Hello World
- Code Examples
 - C++
 - C#
 - Java
 - JavaScript
 - Python
 - Swift
- Practice

Learning Objectives

1. Understand key terms and definitions.
2. Create pseudocode for a programming problem.
3. Create a flowchart for a programming problem.
4. Perform software testing for a programming problem.
5. List the four categories and give examples of errors that may be encountered when using an Integrated Development Environment (IDE).
6. Test an Integrated Development Environment using a Hello World program.
7. Modify an existing program to meet given requirements.

Systems Development Life Cycle

KENNETH LEROY BUSBEE

Overview

The **Systems Development Life Cycle** describes a process for planning, creating, testing, and deploying an information system.¹


Discussion

The Systems Development Life Cycle is the big picture of creating an information system that handles a major task (referred to as an application). The **applications** usually consist of many programs. An example would be the Department of Defense supply system, the customer system used at your local bank, the repair parts inventory system used by car dealerships. There are thousands of applications that use an information system created just to help solve a business problem.

Another example of an information system would be the “101 Computer Games” software you might buy at any of several retail stores. This is an entertainment application, that is we are applying the computer to do a task (entertain you). The software actually consists of many different programs (checkers, chess, tic tac toe, etc.) that were most likely written by several different programmers.

Computer professionals that are in charge of creating applications often have the job title of **System Analyst**. The major steps in creating an application include the following and start at **Planning** step.

1. Wikipedia: Systems development life cycle

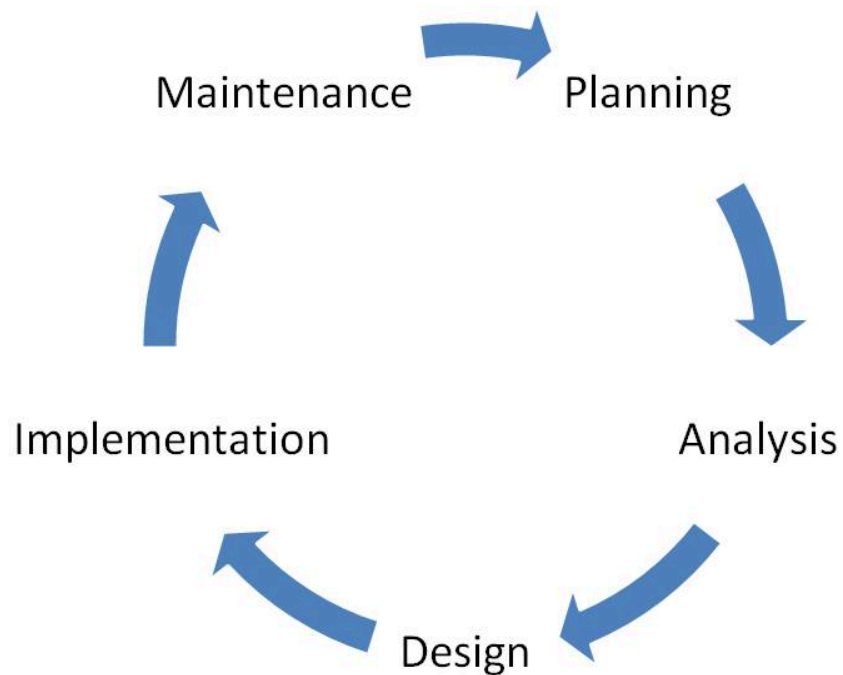

Systems Development Life Cycle

During the **Design** phase the System Analyst will document the inputs, processing and outputs of each program within the application. During the **Implementation** phase programmers would be assigned to write the specific programs using a programming language decided by the System Analyst. Once the system of programs is tested the new application is installed for people to use. As time goes by, things change and a specific part or program might need repair. During the **Maintenance** phase, it goes through a mini planning, analysis, design and implementation. The programs that need modification are identified and programmers change or repair those programs. After several years of use, the system usually becomes obsolete. At this point a major revision of the application is done. Thus the cycle repeats itself.

Key Terms

applications

An information system or collection of programs that handles a major task.

implementation

The phase of a Systems Development Life Cycle where the programmers would be assigned to write specific programs.

life cycle

Systems Development Life Cycle: Planning – Analysis – Design – Implementation – Maintenance

system analyst

Computer professional in charge of creating applications.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Program Design

KENNETH LEROY BUSBEE

Overview

Program design consists of the steps a programmer should do before they start coding the program in a specific language. These steps when properly documented will make the completed program easier for other programmers to maintain in the future. There are three broad areas of activity:

- Understanding the Program
- Using Design Tools to Create a Model
- Develop Test Data

Understanding the Program

If you are working on a project as one of many programmers, the system analyst may have created a variety of documentation items that will help you understand what the program is to do. These could include screen layouts, narrative descriptions, documentation showing the processing steps, etc. If you are not on a project and you are creating a simple program you might be given only a simple description of the purpose of the program. Understanding the purpose of a program usually involves understanding its:

- Inputs
- Processing
- Outputs

This **IPO** approach works very well for beginning programmers. Sometimes, it might help to visualize the programming running on the computer. You can imagine what the monitor will look like, what the user must enter on the keyboard and what processing or manipulations will be done.

Using Design Tools to Create a Model

At first you will not need a hierarchy chart because your first programs will not be complex. But as they grow and become more complex, you will divide your program into several modules (or functions).

The first modeling tool you will usually learn is **pseudocode**. You will document the logic or algorithm of each function in your program. At first, you will have only one function, and thus your pseudocode will follow closely the IPO approach above.

There are several methods or tools for planning the logic of a program. They include: flowcharting, hierarchy or structure charts, pseudocode, HIPO, Nassi-Schneiderman charts, Warnier-Orr diagrams, etc. Programmers are expected to be able to understand and do flowcharting and pseudocode. These methods of developing the model of a program are usually taught in most computer courses. Several standards exist for flowcharting and pseudocode and most are very similar to each other. However, most companies have their own documentation standards and styles. Programmers are expected to be able to quickly adapt to any flowcharting or pseudocode

standards for the company at which they work. The others methods that are less universal require some training which is generally provided by the employer that chooses to use them.

Later in your programming career, you will learn about using applications software that helps create an information system and/or programs. This type of software is called Computer-aided Software Engineering.

Understanding the logic and planning the algorithm on paper before you start to code is very important concept. Many students develop poor habits and skipping this step is one of them.

Develop Test Data

Test data consists of the user providing some input values and predicting the outputs. This can be quite easy for a simple program and the test data can be used to check the model to see if it produces the correct results.

Key Terms

IPO

Inputs – Processing – Outputs

pseudocode

English-like statements used to convey the steps of an algorithm or function.

test data

Providing input values and predicting the outputs.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Program Quality

DAVE BRAUNSCHWEIG

Overview

Program quality describes fundamental properties of the program's source code and executable code, including reliability, robustness, usability, portability, maintainability, efficiency, and readability.

Discussion

Whatever the approach to development may be, the final program must satisfy some fundamental properties. The following properties are among the most important:

- **Reliability:** how often the results of a program are correct. This depends on conceptual correctness of algorithms, and minimization of programming mistakes, such as mistakes in resource management (e.g., buffer overflows and race conditions) and logic errors (such as division by zero or off-by-one errors).
- **Robustness:** how well a program anticipates problems due to errors (not bugs). This includes situations such as incorrect, inappropriate or corrupt data, unavailability of needed resources such as memory, operating system services and network connections, user error, and unexpected power outages.
- **Usability:** the ergonomics of a program: the ease with which a person can use the program for its intended purpose or in some cases even unanticipated purposes. Such issues can make or break its success even regardless of other issues. This involves a wide range of textual, graphical and sometimes hardware elements that improve the clarity, intuitiveness, cohesiveness and completeness of a program's user interface.
- **Portability:** the range of computer hardware and operating system platforms on which the source code of a program can be compiled/interpreted and run. This depends on differences in the programming facilities provided by the different platforms, including hardware and operating system resources, expected behavior of the hardware and operating system, and availability of platform specific compilers (and sometimes libraries) for the language of the source code.
- **Maintainability:** the ease with which a program can be modified by its present or future developers in order to make improvements or customizations, fix bugs and security holes, or adapt it to new environments. Good practices during initial development make the difference in this regard. This quality may not be directly apparent to the end user but it can significantly affect the fate of a program over the long term.
- **Efficiency/performance:** the measure of system resources a program consumes (processor time, memory space, slow devices such as disks, network bandwidth and to some extent even user interaction): the less, the better. This also includes careful management of resources, for example cleaning up temporary files and eliminating memory leaks.
- **Readability:** the ease with which a human reader can comprehend the purpose, control flow, and operation of source code. It affects the aspects of quality above, including portability, usability and most importantly maintainability. Readability is important because programmers spend the majority of their time reading, trying to understand and modifying existing source

code, rather than writing new source code. Unreadable code often leads to bugs, inefficiencies, and duplicated code.

References

- https://en.wikipedia.org/wiki/Computer_programming

Pseudocode

KENNETH LEROY BUSBEE

Overview

Pseudocode is an informal high-level description of the operating principle of a computer program or other algorithm.¹

Discussion

Pseudocode is one method of designing or planning a program. **Pseudo** means false, thus pseudocode means false code. A better translation would be the word fake or imitation. Pseudocode is fake (not the real thing). It looks like (imitates) real code but it is NOT real code. It uses English statements to describe what a program is to accomplish. It is fake because no compiler exists that will translate the pseudocode to any machine language. Pseudocode is used for documenting the program or module design (also known as the algorithm).

The following outline of a simple program illustrates pseudocode. We want to be able to enter the ages of two people and have the computer calculate their average age and display the answer.

Outline using Pseudocode

Input

```
display a message asking the user to enter the first age
get the first age from the keyboard
display a message asking the user to enter the second age
get the second age from the keyboard
```

Processing

```
calculate the answer by adding the two ages together and dividing by two
```

Output

```
display the answer on the screen
pause so the user can see the answer
```

After developing the program design, we use the pseudocode to write code in a language (like C++, Java, Python, etc.) where you must follow the rules of the language (syntax) in order to code the logic or algorithm presented in the pseudocode. Pseudocode usually does not include other items produced during programming design such as identifier lists for variables or test data.

There are other methods for planning and documenting the logic for a program. One method is HIPO. It stands for Hierarchy plus Input Process Output and was developed by IBM in the 1960s. It involved using a hierarchy (or structure) chart to show the relationship of the sub-routines (or

1. Wikipedia: Pseudocode

functions) in a program. Each sub-routine had an IPO piece. Since the above problem/task was simple, we did not need to use multiple sub-routines, thus we did not produce a hierarchy chart. We did incorporate the IPO part of the concept for the pseudocode outline.

Key Terms

pseudo

Means false and includes the concepts of fake or imitation.

References

- cnx.org; Programming Fundamentals – A Modular Structured Approach using C++

Flowcharts

KENNETH LEROY BUSBEE

Overview

A **flowchart** is a type of diagram that represents an algorithm, workflow or process. The flowchart shows the steps as boxes of various kinds, and their order by connecting the boxes with arrows. This diagrammatic representation illustrates a solution model to a given problem. Flowcharts are used in analyzing, designing, documenting or managing a process or program in various fields.¹

Discussion

Common flowcharting symbols and examples follow. When first reading this section, focus on the simple symbols and examples. Return to this section in later chapters to review the advanced symbols and examples.

Simple Flowcharting Symbols

Terminal


The rounded rectangles, or terminal points, indicate the flowchart's starting and ending points.



Flow Lines


Note: The default flow is left to right and top to bottom (the same way you read English). To save time arrowheads are often only drawn when the flow lines go contrary the normal.

1. Wikipedia: Flowchart



Input/Output

The parallelograms designate input or output operations.




Process

The rectangle depicts a process such as a mathematical computation, or a variable assignment.



Decision

The diamond is used to represent the true/false statement being tested in a decision symbol.

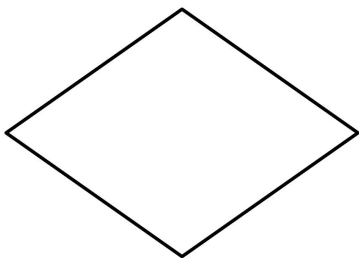


Advanced Flowcharting Symbols


Module Call

A program module is represented in a flowchart by rectangle with some lines to distinguish it from process symbol. Often programmers will make a distinction between program control and specific task modules as shown below.

Local module: usually a program control function.




Library module: usually a specific task function.




Connectors

Sometimes a flowchart is broken into two or more smaller flowcharts. This is usually done when a flowchart does not fit on a single page, or must be divided into sections. A connector symbol, which is a small circle with a letter or number inside it, allows you to connect two flowcharts on the same page. A connector symbol that looks like a pocket on a shirt, allows you to connect to a flowchart on a different page.

On-Page Connector



Off-Page Connector




Simple Examples

We will demonstrate various flowcharting items by showing the flowchart for some pseudocode.

Functions

pseudocode: Function with no parameter passing

```
Function clear monitor
  Pass In: nothing
  Direct the operating system to clear the monitor
  Pass Out: nothing
Endfunction
```




Function clear monitor

pseudocode: Function main calling the clear monitor function

```
Function main
  Pass In: nothing
  Doing some lines of code
  Call: clear monitor
```

```
Doing some lines of code
Pass Out: value zero to the operating system
Endfunction
```



Function main

Sequence Control Structures

The next item is pseudocode for a simple temperature conversion program. This demonstrates the use of both the on-page and off-page connectors. It also illustrates the sequence control structure where nothing unusual happens. Just do one instruction after another in the sequence listed.

pseudocode: Sequence control structure

```
Filename: Solution_Lab_04_Pseudocode.txt
Purpose: Convert Temperature from Fahrenheit to Celsius
Author: Ken Busbee; © 2008 Kenneth Leroy Busbee
Date: Dec 24, 2008
```

Pseudocode = IPO Outline

input


```
display a message asking user for the temperature in Fahrenheit
get the temperature from the keyboard
```

processing


```
calculate the Celsius by subtracting 32 from the Fahrenheit
temperature then multiply the result by 5 then
divide the result by 9. Round up or down to the whole number
HINT: Use 32.0 when subtracting to ensure floating-point accuracy
```

output

display the celsius with an appropriate message
pause so the user can see the answer

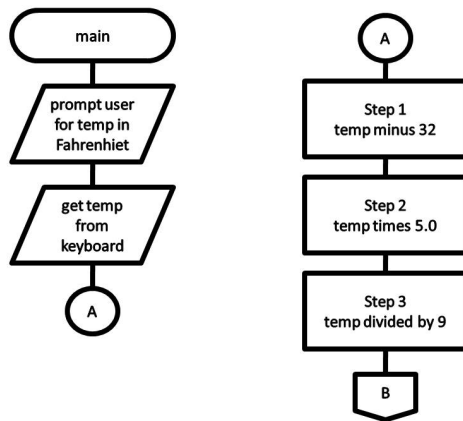

Sequence control structure

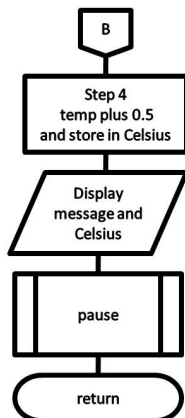


Sequence control structured continued

Advanced Examples

Selection Control Structures

pseudocode: If then Else

```
If age > 17
    Display a message indicating you can vote.
Else
    Display a message indicating you can't vote.
Endif
```

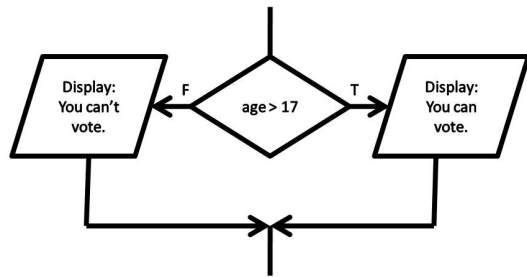


If then Else control structure

pseudocode: Case

```

Case of age
  0 to 17   Display "You can't vote."
  18 to 64  Display "Your in your working years."
  65 +      Display "You should be retired."
Endcase
  
```

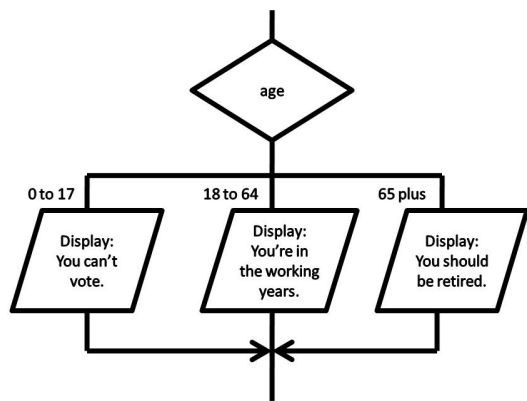

Case control structure


Iteration (Repetition) Control Structures

pseudocode: While

```

count assigned zero
While count < 5
  Display "I love computers!"
  Increment count
  
```


Endwhile

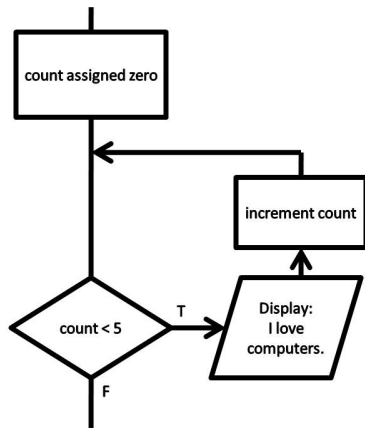


While control structure

pseudocode: For

```
For x starts at 0, x < 5, increment x
    Display "Are we having fun?"
Endfor
```

The for loop does not have a standard flowcharting method and you will find it done in different ways. The for loop as a counting loop can be flowcharted similar to the while loop as a counting loop.

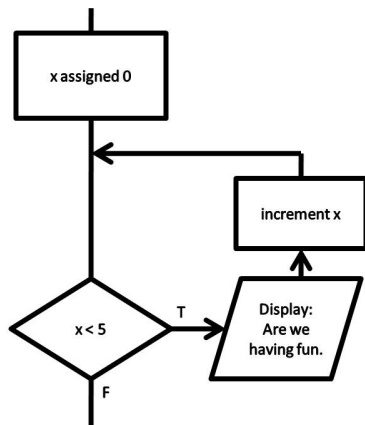


For control structure

pseudocode: Do While

```
count assigned five
Do
    Display "Blast off is soon!"
```


Decrement count
While count > zero

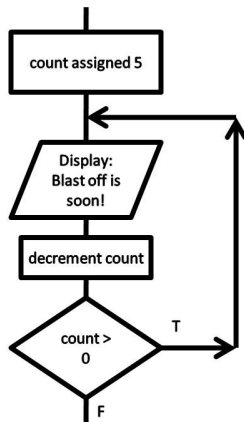

Do While control structure

pseudocode: Repeat Until

```
count assigned five
Repeat
    Display "Blast off is soon!"
    Decrement count
Until count < one
```

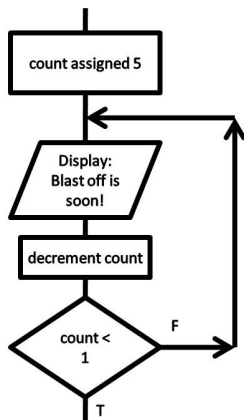

Repeat Until control structure

Key Terms

decision symbol

A diamond used in flowcharting for asking a question and making a decision.

flow lines

Lines (sometimes with arrows) that connect the various flowcharting symbols.

flowcharting

A programming design tool that uses graphical elements to visually depict the flow of logic within a function.

input/output symbol

A parallelogram used in flowcharting for input/output interactions.

process symbol

A rectangle used in flowcharting for normal processes such as assignment.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Software Testing

KENNETH LEROY BUSBEE

Overview

Software testing involves the execution of a software component or system component to evaluate one or more properties of interest. In general, these properties indicate the extent to which the component or system under test:¹

- meets the requirements that guided its design and development
- responds correctly to all kinds of inputs
- performs its functions within an acceptable time
- is sufficiently usable
- can be installed and run in its intended environments
- achieves the general result its stakeholders desire

Discussion

Test data consists of the user providing some input values and predicting the outputs. This can be quite easy for a simple program and the test data can be used twice.

1. to check the model to see if it produces the correct results (**model checking**)
2. to check the coded program to see if it produces the correct results (**code checking**)

Test data is developed by using the algorithm of the program. This algorithm is usually documented during the program design with either flowcharting or pseudocode. Here is the pseudocode in outline form describing the inputs, processing and outputs for a program used to calculate gross pay for hourly work.

Pseudocode using an IPO Outline for Calculating Gross Pay

Input

```
display a message asking user for their hours worked
get the hours from the keyboard
display a message asking user for their pay rate
get the rate from the keyboard
```

Processing

```
calculate the gross pay by:
    multiplying the hours worked by the hourly rate
```

1. Wikipedia: Software testing

Output

```
display the gross pay on the monitor  
pause so the user can see the answer
```

Creating Test Data and Model Checking

Test data is used to verify that the inputs, processing and outputs are working correctly. As test data is initially developed it can verify that the documented algorithm (pseudocode in the example we are doing) is correct. It helps us understand and even visualize the inputs, processing and outputs of the program.

Inputs: I worked 37.5 hours this week and my hourly rate is \$15.50 per hour. We should verify that the pseudocode is prompting the user for this data.

Processing: Using my solar powered hand held calculator, I can calculate the gross pay would be: $37.5 * 15.50$ or \$581.25. We should verify that the pseudocode is performing the correct calculations.

Output: Only the significant information (total gross pay) is displayed for the user to see. We should verify that the appropriate information is being displayed.

Testing the Coded Program – Code Checking

The test data can be developed and used to test the algorithm that is documented (in our case our pseudocode) during the program design phase. Once the program is code with compiler and linker errors resolved, the programmer gets to play user and should test the program using the test data developed. When you run your program, how will you know that it is working properly? Did you properly plan your logic to accomplish your purpose? Even if your plan was correct, did it get converted correctly (coded) into the chosen programming language? The answer (or solution) to all of these questions is our test data.

By developing test data we are predicting what the results should be, thus we can verify that our program is working properly. When we run the program we would enter the input values used in our test data. Hopefully the program will output the predicted values. If not then our problem could be any of the following:

1. The plan (IPO outline or other item) could be wrong
2. The conversion of the plan to code might be wrong
3. The test data results were calculated wrong

Resolving problems of this nature can be the most difficult problems a programmer encounters. You must review each of the above to determine where the error is lies. Fix the error and re-test your program.

Key Terms

code checking

Using test data to check the coded program in a specific language (like C++).

model checking

Using test data to check the design model (usually done in pseudocode).

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Integrated Development Environment

KENNETH LEROY BUSBEE

Overview

An **integrated development environment (IDE)** is a software application that provides comprehensive facilities to computer programmers for software development. An IDE normally consists of a source code editor, build automation tools, and a debugger. Most modern IDEs have intelligent code completion. Some IDEs contain a compiler, interpreter, or both. The boundary between an integrated development environment and other parts of the broader software development environment is not well-defined. Sometimes a version control system, or various tools to simplify the construction of a graphical user interface (GUI), are integrated. Many modern IDEs also have a class browser, an object browser, and a class hierarchy diagram, for use in object-oriented software development.¹


Discussion

High-level language programs are usually written (coded) as ASCII text into a source code file. A unique file extension (Examples: .asm .c .cpp .java .js .py) is used to identify it as a source code file. As you might guess for our examples – Assembly, “C”, “C++”, Java, JavaScript, and Python however, they are just ASCII text files (other text files usually use the extension of .txt). The source code produced by the programmer must be converted to an executable machine code file specifically for the computer’s CPU (usually an Intel or Intel compatible CPU within today’s world of micro computers). There are several steps in getting a program from its source code stage to running the program on your computer. Historically, we had to use several software programs (a text editor, a compiler, a linker and operating system commands) to make the conversion and run our program. However, today all those software programs with their associated tasks have been **integrated** into one program. However, this one program is really many software items that create an **environment** used by programmers to **develop** software. Thus the name: Integrated Development Environment or IDE.

Programs written in a high level language are either directly executed by some kind of interpreter, or converted into machine code by a compiler (and assembler and linker) for the CPU to execute. JavaScript, Perl, Python, and Ruby are examples of interpreted programming languages. C, C++, C#, Java, and Swift are examples of compiled programming languages.² The following figure shows the progression of activity in an IDE as a programmer enters the source code and then directs the IDE to compile and run the program.

1. Wikipedia: Integrated development environment

2. Wikipedia: Interpreter (computing)

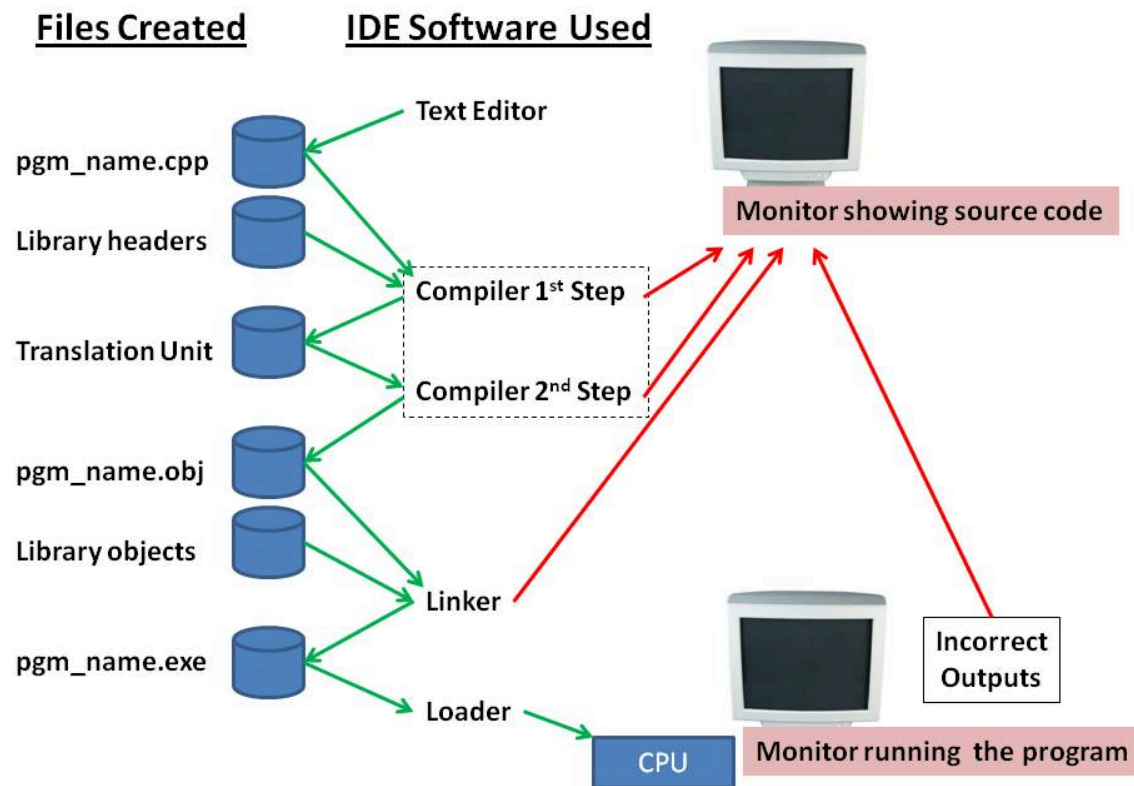

Integrated Development Environment or IDE

Upon starting the IDE software the programmer usually indicates the file he or she wants to open for editing as source code. As they make changes they might either do a “save as” or “save”. When they have finished entering the source code, they usually direct the IDE to “compile & run” the program. The IDE does the following steps:

1. If there are any unsaved changes to the source code file it has the **test editor** save the changes.
2. The **compiler** opens the source code file and does its **first step** which is executing the **pre-processor** compiler directives and other steps needed to get the file ready for the second step. The `#include` will insert header files into the code at this point. If it encounters an error, it stops the process and returns the user to the source code file within the text editor with an error message. If no problems encountered it saves the source code to a temporary file called a translation unit.
3. The **compiler** opens the translation unit file and does its **second step** which is **converting** the programming language code to machine instructions for the CPU, a data area and a list of items to be resolved by the linker. Any problems encountered (usually a syntax or violation of the programming language rules) stops the process and returns the user to the source code file within the text editor with an error message. If no problems encountered it saves the machine instructions, data area and linker resolution list as an object file.
4. The **linker** opens the program object file and links it with the library object files as needed. Unless all linker items are resolved, the process stops and returns the user to the source code file within the text editor with an error message. If no problems encountered it saves the linked objects as an executable file.

5. The IDE directs the operating system's program called the **loader** to load the executable file into the computer's memory and have the Central Processing Unit (CPU) start processing the instructions. As the user interacts with the program, entering test data, he or she might discover that the outputs are not correct. These types of errors are called logic errors and would require the user to return to the source code to change the algorithm.

Resolving Errors


Despite our best efforts at becoming perfect programmers, we will create errors. Solving these errors is known as **debugging** your program. The three types of errors in the order that they occur are:

1. Compiler
2. Linker
3. Logic


There are two types of compiler errors; pre-processor (1st step) and conversion (2nd step). A review of Figure 1 above shows the four arrows returning to the source code so that the programmer can correct the mistake.

During the conversion (2nd step) the compiler might give a **warning** message which in some cases may not be a problem to worry about. For example: Data type demotion may be exactly what you want your program to do, but most compilers give a warning message. Warnings don't stop the compiling process but as their name implies, they should be reviewed.


The next three figures show IDE monitor interaction for the **Bloodshed Dev-C++ 5 compiler/IDE**.

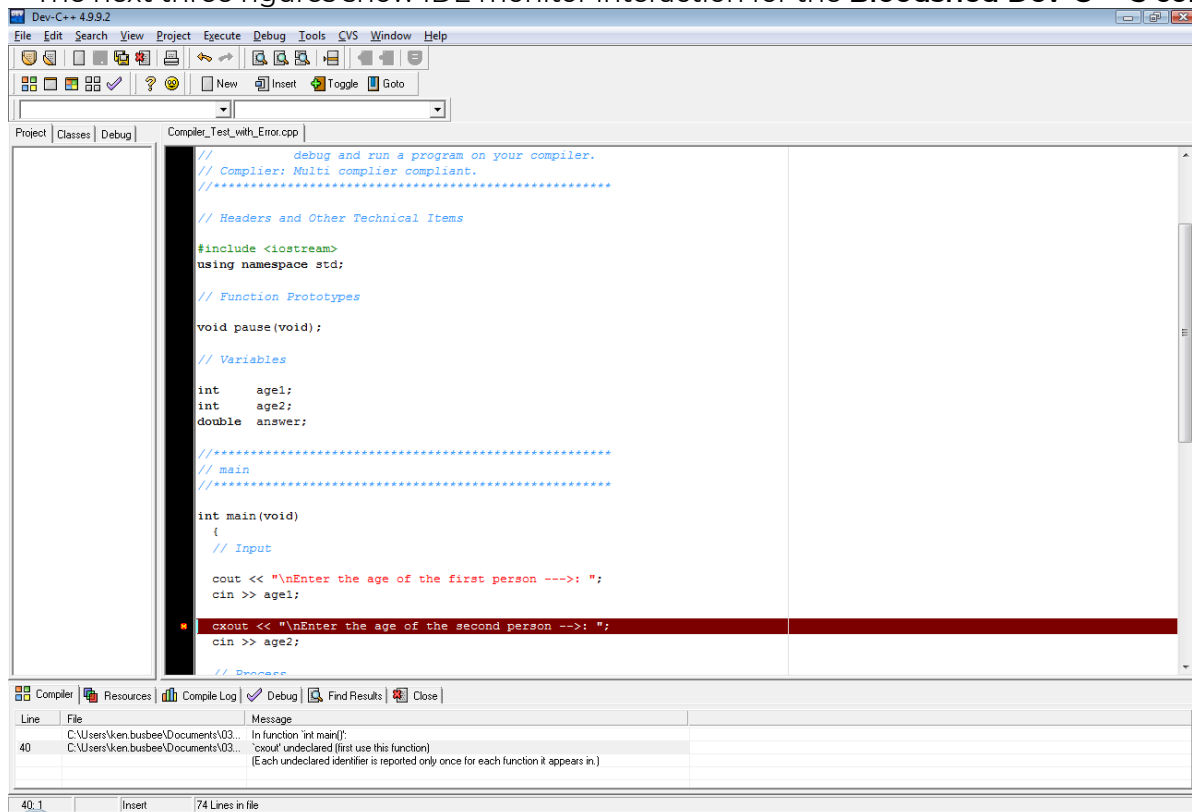

Compiler Error (the red line is where the compiler stopped)

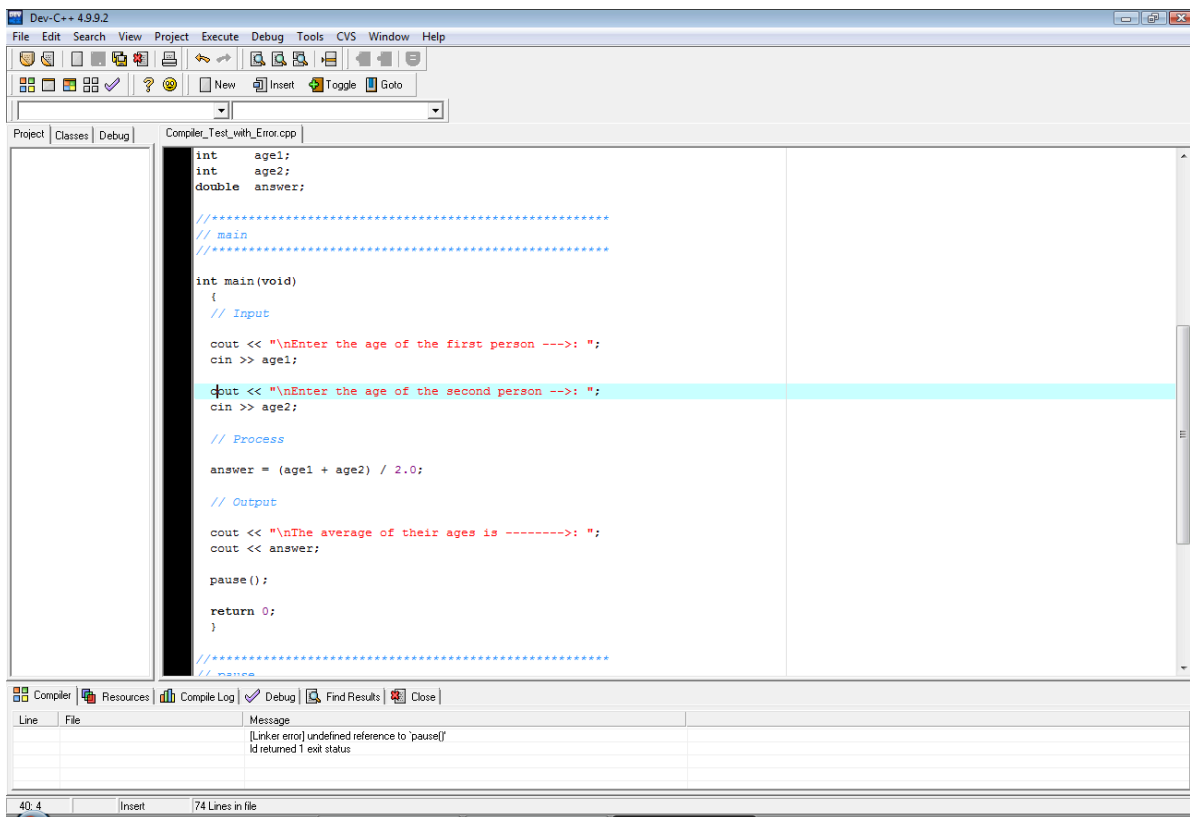

Linker Error (no red line with an error message describing linking problem)

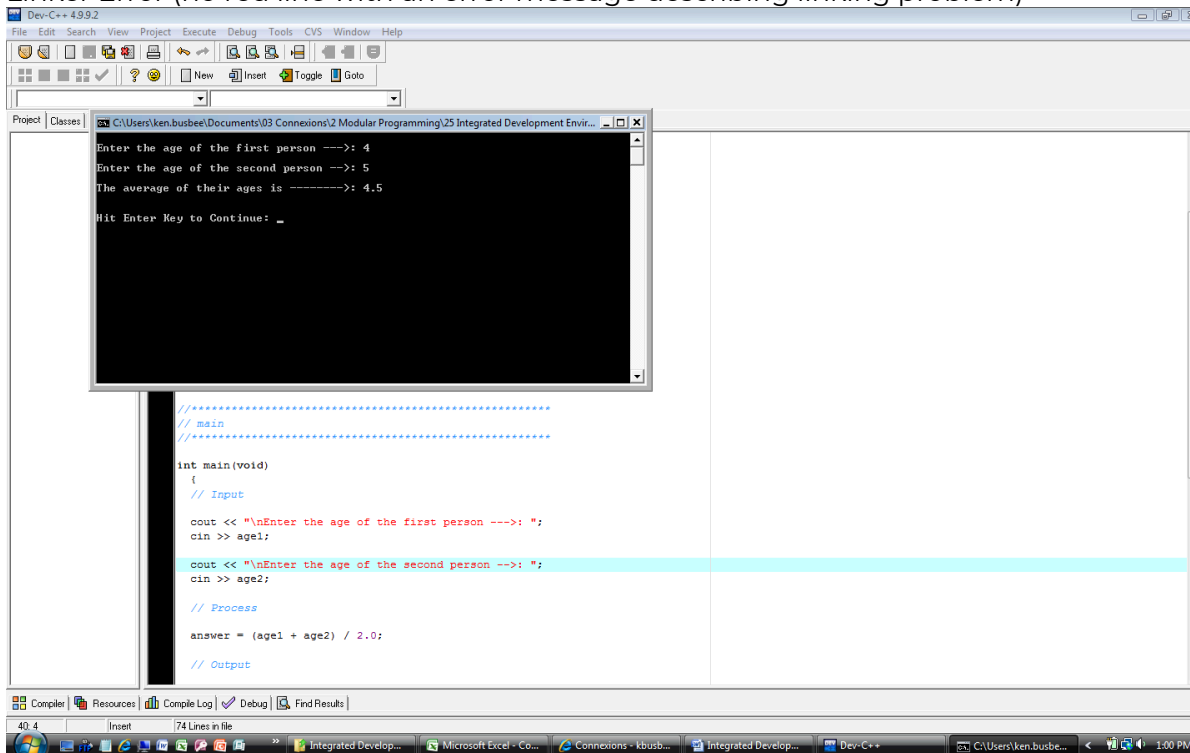

Logic Error (from the output within the “Black Box” area)

Key Terms

compiler

Converts source code to object code.

debugging

The process of removing errors from a program. 1) compiler 2) linker 3) logic

linker

Connects or links object files into an executable file.

loader

Part of the operating system that loads executable files into memory and direct the CPU to start running the program.

pre-processor

The first step the compiler does in converting source code to object code.

text editor

A software program for creating and editing ASCII text files.

warning

A compiler alert that there might be a problem.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Version Control

DAVE BRAUNSCHWEIG

Overview

Version control, also known as revision control or source control, is the management of changes to documents, computer programs, large web sites, and other collections of information. Each revision is associated with a timestamp and the person making the change. Revisions can be compared, restored, and with some types of files, merged.¹

Version control systems (VCS) most commonly run as stand-alone applications, but may also be embedded in various types of software, including integrated development environments (IDEs).

Discussion

Version control implements a systematic approach to recording and managing changes in files. At its simplest, version control involves taking 'snapshots' of your file at different stages. This snapshot records information about when the snapshot was made, and also about what changes occurred between different snapshots. This allows you to 'rewind' your file to an older version. From this basic aim of version control a range of other possibilities are made available.²

Version control allows you to:³

- Track developments and changes in your files
- Record the changes you made to your file in a way that you will be able to understand later
- Experiment with different versions of a file while maintaining the original version
- 'Merge' two versions of a file and manage conflicts between versions
- Revert changes, moving 'backwards' through your history to previous versions of your file

Version control is particularly useful for facilitating collaboration. One of the original motivations behind version control systems was to allow different people to work on large projects together. Using version control to collaborate allows for a greater deal of flexibility and control than many other solutions. As an example it would be possible for two people to work on a file at the same time and then merge these together. If there were 'conflicts' between the two versions, the version control system would allow you to see these conflicts and make an active decision about how to 'merge' these different versions into a new 'third' document. With this approach you would also retain a 'history' of the previous version should you wish to revert back to one of these later on.⁴

Popular version control systems include:⁵

- Git

1. Wikipedia: Version control

2. Programming Historian: An Introduction to Version Control Using GitHub Desktop

3. Programming Historian: An Introduction to Version Control Using GitHub Desktop

4. Programming Historian: An Introduction to Version Control Using GitHub Desktop

5. G2Crowd: Best Version Control Systems

- Helix VCS
- Microsoft Team Foundation Server
- Subversion

The remainder of this lesson focuses on using the Git version control system.

Git

Git is a version control system for tracking changes in computer files and coordinating work on those files among multiple people. It is primarily used for source code management in software development, but it can be used to keep track of changes in any set of files. Git was created by Linus Torvalds in 2005 for development of the Linux kernel, and is free and open source software.⁶

Free public git repositories are available from:

- Bitbucket
- GitHub

Cloning an existing repository requires only a URL to the repository and the following git command:

- `git clone <url>`

Once cloned, repositories are synchronized by pushing and pulling changes. If the original source repository has been modified, the following git command is used to pull those changes to the local repository:

- `git pull`

Local changes must be added and committed, and then pushed to the remote repository. *Note the period (dot) at the end of the first command.*

- `git add .`
- `git commit -m "reason for commit"`
- `git push`

If there are conflicts between the local and remote repositories, the changes should be merged and then pushed. If necessary, local changes may be forced upon the remote server using:

- `git push --force`

Key Terms

branch

A separate working copy of files under version control which may be developed independently

6. Wikipedia: Git

from the origin.

clone

Create a new repository containing the revisions from another repository.

commit

To write or merge the changes made in the working copy back to the repository.

merge

An operation in which two sets of changes are applied to a file or set of files.

push

Copy revisions from the current repository to a remote repository.

pull

Copy revisions from a remote repository to the current repository.

version control

The management of changes to documents, computer programs, large web sites, and other collections of information.

References

- Programming Historian: An Introduction to Version Control Using GitHub Desktop

Input and Output


KENNETH LEROY BUSBEE

Overview

Input and output, or I/O is the communication between an information processing system, such as a computer, and the outside world, possibly a human or another information processing system. Inputs are the signals or data received by the system and outputs are the signals or data sent from it.¹

Discussion

Every task we have the computer do happens inside the central processing unit (CPU) and the associated memory. Once our program is loaded into memory and the operating system directs the CPU to start executing our programming statements the computer looks like this:

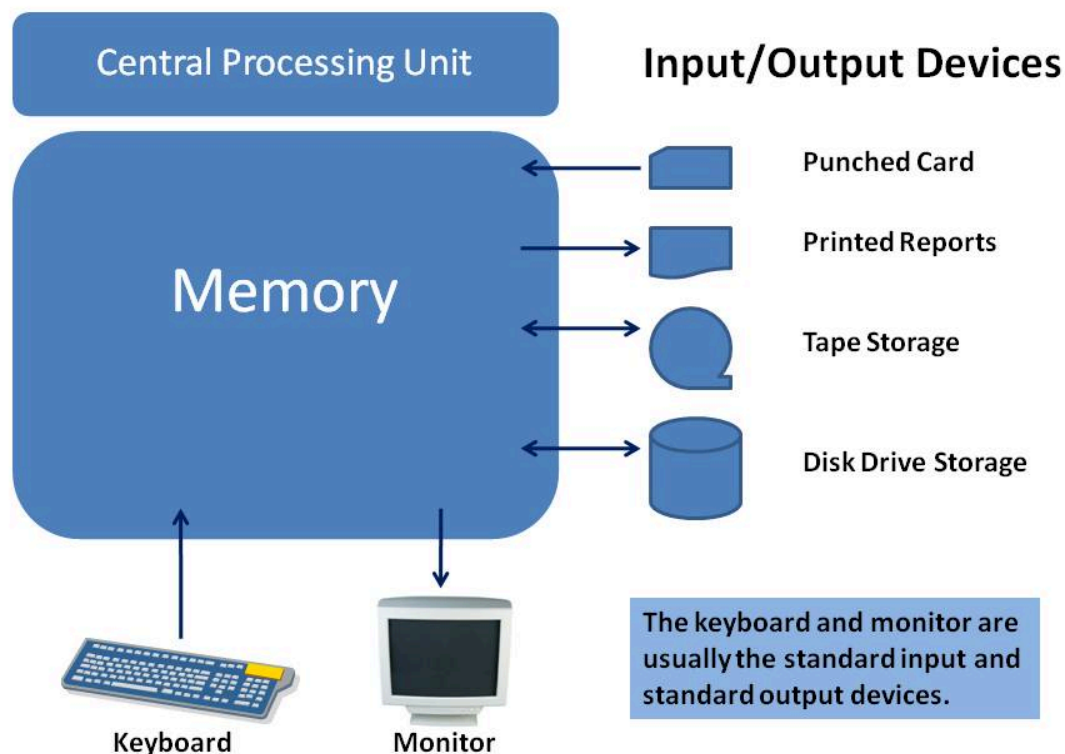

1. Wikipedia: Input/output

CPU – Memory – Input/Output Devices

Our program now located in the memory has basically two areas:

- Machine instructions – our instructions for what we want done
- Data storage – our variables that we using in our program

Often our program contains instructions to interact with the input/output devices. We need to move data into (read) and/or out of (write) the memory data area. A **device** is a piece of equipment that is electronically connected to the memory so that data can be transferred between the memory and the device. Historically this was done with punched cards and printouts. Tape drives were used for electronic storage. With time we migrated to using disk drives for storage with keyboards and monitors (with monitor output called soft copy) replacing punch cards and printouts (called hard copy).

Most computer operating systems and by extension programming languages have identified the keyboard as the **standard input device** and the monitor as the **standard output device**. Often the keyboard and monitor are treated as the default device when no other specific device is indicated.

Key Terms

device

A piece of equipment that is electronically connected to the memory so that data can be transferred between the memory and the device.

escape code

A code directing an output device to do something.

extraction

Aka reading or getting data from an input device.

insertion

Aka writing or sending data to an output device.

standard input

The keyboard.

standard output

The monitor.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Hello World

DAVE BRAUNSCHWEIG

Hello world!

Overview

A “**Hello, world!**” program is a computer program that outputs or displays “Hello, world!” to a user. Being a very simple program in most programming languages, it is often used to illustrate the basic syntax of a programming language for a working program, and as such is often the very first program people write.¹

Discussion

A “Hello, world!” program is traditionally used to introduce novice programmers to a programming language. “Hello, world!” is also traditionally used in a sanity test to make sure that a computer language is correctly installed, and that the operator understands how to use it.²

The tradition of using the phrase “Hello, world!” as a test message was influenced by an example program in the seminal book *The C Programming Language*. The example program from that book prints “hello, world” (without capital letters or exclamation mark), and was inherited from a 1974 Bell Laboratories internal memorandum by Brian Kernighan.³

In addition to displaying “Hello, world!”, a “Hello, world!” program might include comments. A **comment** is a programmer-readable explanation or annotation in the source code of a computer program. They are added with the purpose of making the source code easier for humans to understand, and are generally ignored by compilers and interpreters. The syntax of comments in various programming languages varies considerably.⁴

Pseudocode

```
Function Main
    ... This program displays "Hello world!"
    Output "Hello world!"
End
```

1. Wikipedia: “Hello, World!” program
2. Wikipedia: “Hello, World!” program
3. Wikipedia: “Hello, World!” program
4. Wikipedia: Comment (computer programming)


Output

```
Hello world!
```

Each code element represents:⁵

- `Function Main` begins the main function
- `...` begins a comment
- `Output` indicates the following value(s) will be displayed or printed
- `"Hello world!"` is the literal string to be displayed
- `End` ends a block of code

Flowchart

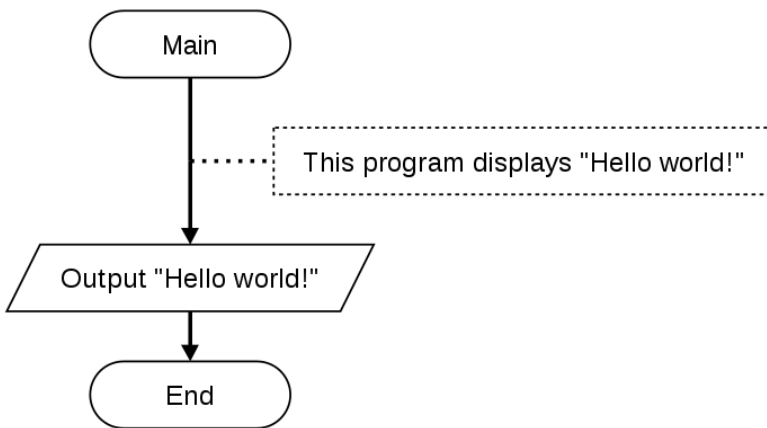

Examples

The following pages provide examples of “Hello, world!” programs in different programming languages. Each page includes an explanation of the code elements that comprise the program and links to IDEs you may use to test the program.

Key Terms

comment

A programmer-readable explanation or annotation in the source code of a computer program.

5. Wikibooks: Programming Fundamentals/Hello World

References

- Wikiversity: Computer Programming
- Flowgorithm – Flowchart Programming Language

C++ Examples

DAVE BRAUNSCHWEIG



Overview

C++ is a general-purpose programming language. It has imperative, object-oriented and generic programming features, while also providing facilities for low-level memory manipulation. C++ was developed by Bjarne Stroustrup at Bell Labs starting in 1979 as an extension of the C language. The C++ programming language was initially standardized in 1998.¹

C++ is one of the most popular current programming languages² and is often used in computer science courses.

Example

Hello World

```
// This program displays "Hello world!"
//
// References:
// http://www.cplusplus.com/doc/tutorial/program_structure/

#include <iostream>

int main()
{
    std::cout << "Hello world!";
}
```

1. Wikipedia: C++

2. TIOBE: Index

Output

```
Hello world!
```

Discussion

Each code element represents:³

- `//` begins a comment
- `#include <iostream>` includes standard input and output streams
- `int main()` begins the main function, which returns an integer value
- `{` begins a block of code
- `std::cout` is standard output
- `<<` directs the next element to standard output
- `"Hello world!"` is the literal string to be displayed
- `;` ends each line of C++ code
- `}` ends a block of code

C++ IDEs

There are many free cloud-based and local IDEs available to begin coding in C++. Check with your instructor or do your own research for recommendations.

Cloud-Based IDEs

- CodeChef
- GDB Online
- Ideone
- paiza.IO
- PythonTutor
- repl.it
- TutorialsPoint

Local IDEs

- Code::Blocks
- Dev-C++
- Microsoft Visual Studio


3. Wikibooks: Programming Fundamentals/Hello World

References

- Wikiversity: Computer Programming

C# Examples

DAVE BRAUNSCHWEIG



Overview

C# is a general-purpose, object-oriented programming language encompassing strong typing, imperative, declarative, functional, generic, object-oriented (class-based), and component-oriented programming disciplines. It was developed around 2000 by Microsoft within its .NET initiative and later approved as a standard by Ecma (ECMA-334) and ISO (ISO/IEC 23270:2006). C# is one of the programming languages designed for the Common Language Infrastructure.

C# is one of the most popular current programming languages¹, is the primary language for Windows application development, and is often used in computer science and gaming courses.

Example

Hello World

```
// This program displays "Hello world!"
//
// References:
// https://docs.microsoft.com/en-us/dotnet/csharp/programming-guide/inside-
public class Hello
{
    public static void Main()
    {
        System.Console.WriteLine("Hello world!");
    }
}
```

1. TIOBE: Index

Output

```
Hello world!
```

Discussion

Each code element represents:²

- `//` begins a comment
- `public class Hello` begins the Hello World program
- `{` begins a block of code
- `public static void Main()` begins the main function
- `System.Console.WriteLine()` calls the standard output write line function
- `"Hello world!"` is the literal string to be displayed
- `;` ends each line of C# code
- `}` ends a block of code

C# IDEs

There are many free cloud-based and local IDEs available to begin coding in C#. Check with your instructor or do your own research for recommendations.

Cloud-Based IDEs

- CodeChef
- C# Pad
- .NET Fiddle
- Ideone
- paiza.IO
- Rextester
- repl.it
- TutorialsPoint

Local IDEs

- Microsoft Visual Studio
- Visual Studio Code

References

- Wikiversity: Computer Programming

Java Examples

DAVE BRAUNSCHWEIG



Java is a general-purpose computer-programming language that is concurrent, class-based, object-oriented, and specifically designed to have as few implementation dependencies as possible. It is intended to let application developers “write once, run anywhere” (WORA), meaning that compiled Java code can run on all platforms that support Java without the need for recompilation. Java was originally developed by James Gosling at Sun Microsystems and released in 1995.

Java is one of the most popular current programming languages¹ and is often used in computer science courses.

Example

Hello World

```
// This program displays "Hello world!"
//
// References:
// https://introcs.cs.princeton.edu/java/11hello/HelloWorld.java.html

class Main {
    public static void main(String[] args) {
        System.out.println("Hello world!");
    }
}
```

1. TIOBE: Index

Output

```
Hello world!
```

Discussion

Each code element represents:²

- `//` begins a comment
- `class hello` begins the Hello World program
- `{` begins a block of code
- `public static void main(String[] args)` begins the main function
- `System.out.println()` calls the standard output print line function
- `"Hello world!"` is the literal string to be displayed
- `;` ends each line of Java code
- `}` ends a block of code

Java IDEs

There are many free cloud-based and local IDEs available to begin coding in Java. Check with your instructor or do your own research for recommendations.

Cloud-Based IDEs

- CodeChef
- GDB Online
- Ideone
- paiza.IO
- PythonTutor
- repl.it
- TutorialsPoint

Local IDEs

- BlueJ
- jEdit
- jGRASP

2. Wikibooks: Programming Fundamentals/Hello World

References

- Wikiversity: Computer Programming

JavaScript Examples

DAVE BRAUNSCHWEIG

JS

Overview

JavaScript, often abbreviated as JS, is a high-level, interpreted programming language. Alongside HTML and CSS, JavaScript is one of the three core technologies of the World Wide Web. JavaScript enables interactive web pages and thus is an essential part of web applications. The vast majority of websites use it, and all major web browsers have a dedicated JavaScript engine to execute it.¹

JavaScript is one of the most popular current programming languages², and is the primary programming language for front-end web development. JavaScript has been implemented in multiple platforms with different I/O commands. Several examples follow.

Example

Hello World – Console Log

```
// This script displays "Hello world!".  
//  
// References:  
// https://www.digitalocean.com/community/tutorials/how-to-write-your-first  
  
console.log("Hello world!")
```

Output

```
Hello world!
```

1. Wikipedia: JavaScript

2. TIOBE: Index

Discussion

Each code element represents:

- `//` begins a comment
- `console.log()` writes to the JavaScript console output log
- `"Hello world!"` is the literal string to be displayed

Hello World – Window Alert

```
// This script displays "Hello world!".  
//  
// References:  
// https://www.digitalocean.com/community/tutorials/how-to-write-your-first-javascript-hello-world  
  
alert("Hello world!")
```

Output

```
Hello world!
```

Discussion

Each code element represents:

- `//` begins a comment
- `alert()` calls the window alert function to display a message
- `"Hello world!"` is the literal string to be displayed

Hello World – Document Write

```
// This script displays "Hello world!".  
//  
// References:  
// https://www.w3schools.com/jsref/met\_doc\_write.asp  
  
document.write("Hello world!")
```

Output

```
Hello world!
```

Discussion

Each code element represents:

- `//` begins a comment
- `document.write()` writes output to the current document
- `"Hello world!"` is the literal string to be displayed

JavaScript IDEs

There are many free cloud-based and local IDEs available to begin coding in JavaScript. Check with your instructor or do your own research for recommendations.

Cloud-Based IDEs

- Chapman.edu: Online JavaScript Interpreter
- CodeChef
- GDB Online
- Ideone
- paiza.IO
- PythonTutor
- repl.it

Local IDEs

- Brackets
- Visual Studio Code

References

- Wikiversity: Computer Programming

Python Examples

DAVE BRAUNSCHWEIG



Overview

Python is an interpreted high-level programming language for general-purpose programming. Created by Guido van Rossum and first released in 1991, Python has a design philosophy that emphasizes code readability, notably using significant whitespace. It provides constructs that enable clear programming on both small and large scales.¹

Python is one of the most popular current programming languages², is frequently recommended as a first programming language, and often used in information systems and data science courses.

Example

Hello World

```
# This program displays "Hello world!"  
#  
# References:  
# https://en.wikibooks.org/wiki/Non-Programmer%27s\_Tutorial\_for\_Python\_3/Hello\_World  
  
print("Hello world!")
```

Output

```
Hello world!
```

Discussion

Each code element represents:³

1. Wikipedia: Python (programming language)
2. TIOBE: Index
3. Wikibooks: Programming Fundamentals/Hello World

- `#` begins a comment
- `print()` calls the print function
- `"Hello world!"` is the literal string to be displayed

Python IDEs

There are many free cloud-based and local IDEs available to begin coding in Python. Check with your instructor or do your own research for recommendations.

Cloud-Based IDEs

- CodeChef
- GDB Online
- Ideone
- paiza.IO
- Python Fiddle
- PythonTutor
- repl.it
- TutorialsPoint

Local IDEs

- IDLE
- Thonny

References

- Wikiversity: Computer Programming

Swift Examples

DAVE BRAUNSCHWEIG



Swift Overview

Swift is a general-purpose, multi-paradigm, compiled programming language developed by Apple Inc. for iOS, macOS, watchOS, tvOS, and Linux. Apple intended Swift to support many core concepts associated with Objective-C, but in a “safer” way, making it easier to catch software bugs. Swift was introduced in 2014.¹

Swift is a popular programming language for the Apple platforms it supports, but it lacks support for Microsoft Windows environments.²

Example

Hello World

```
// This program displays "Hello world!"  
//  
// References:  
//      https://developer.apple.com/library/content/documentation/Swift/Conc  
  
print("Hello world!")
```

Output

```
Hello world!
```

Discussion

Each code element represents:³

1. Swift (programming language)
2. TIOBE: Index
3. Wikibooks: Programming Fundamentals/Hello World

- `//` begins a comment
- `print()` calls the print function
- `"Hello world!"` is the literal string to be displayed

Swift IDEs

There are several free cloud-based and local IDEs available to begin coding in Swift. Check with your instructor or do your own research for recommendations.

Cloud-Based IDEs

- GDB Online
- IBM Swift Sandbox
- Ideone
- iSwift
- paiza.IO
- repl.it

Local IDEs

- AppCode
- Atom
- Xcode

References

- Wikiversity: Computer Programming

Practice: Introduction to Programming

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Review Questions

True / False:

1. Beginning programmers participate in all phases of the Systems Development Life Cycle.
2. Coding the program in a language like C++ is the first task of planning. You plan as you code.
3. Pseudocode is the only commonly used planning tool.
4. Pseudocode has a strict set of rules and is the same everywhere in the computer programming industry.
5. Test data is developed for testing the program once it is code into a language like C++.
6. The word pseudo means false and includes the concepts of fake or imitation.
7. Many programmers pick up the bad habit of not completing the planning step before starting to code the program.
8. IDE means Integer Division Expression.
9. Most modern compilers are really an IDE type of software, not just a compiler.
10. Programming errors are extremely easy to understand and fix.

Answers:

1. false
2. false
3. false
4. false
5. false
6. true
7. true
8. false
9. true
10. false

Short Answer:

1. List the steps of the Systems Development Life Cycle and indicate which step you are likely to work in as a new computer professional.
2. List and describe what might cause the four (4) types of errors encountered in a program using a compiler and an Integrated Development Environment software product.

Activities

The following activities focus on software planning and testing using pseudocode and / or flowcharts.

1. Search the Internet for pseudocode for making a peanut butter and jelly sandwich. Based on the examples you find, create pseudocode to make your own favorite sandwich or other prepared meal. Test your pseudocode by reading the instructions out loud as someone else follows your directions.
2. Search the Internet for a flowchart for making a peanut butter and jelly sandwich. Use a free online or downloadable flowchart tool to create a flowchart that describes how to make your favorite sandwich or other prepared meal. Test your flowchart by reading the instructions out loud while someone else follows your directions.
3. Create pseudocode or a flowchart for a program that would interact with bank customers and help them determine the value of a bag or jar of coins brought in for deposit. Include counts for pennies, nickels, dimes and quarters and calculate the total value of all of the coins deposited. Test your program by having someone else follow the instructions and guide them as they use your program.
4. Create pseudocode or a flowchart for a program that allows the user to enter gallons of gas and converts it to liters (metric system). NOTE: One US gallon equals 3.7854 liters. Test your program by having someone else follow the instructions and guide them as they use your program.
5. A major restaurant sends a chef to purchase fruits and vegetables every day. Upon returning to the store the chef must enter two pieces of data for each item purchased: the quantity (Example: 2 cases) and the price paid (Example: \$4.67). The program has a list of 20 items and after the chef enters the information, the program provides a total for the purchases for that day. Prepare test data for five (5) items: apples, oranges, bananas, lettuce and tomatoes.

The following activities focus on selecting a programming language and testing integrated development environments.

1. Research different programming languages and select a programming language to use with this textbook. Copy the Hello World example code for your selected programming language and use one of the free cloud-based IDEs to try running the Hello World program.
2. Modify the example Hello World program to instead display `Hello <name>!`, where `<name>` is your name. Include comments at the top of the program and test the program to verify that it works correctly.
3. Research free downloadable tools for your selected programming language (interpreter/ compiler, IDE, etc.). Consider downloading and installing a development environment on your system. If you set up your own development environment, test the environment using your Hello Name program written above.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++
- Wikiversity: Computer Programming

PART II

DATA AND OPERATORS

Overview

This chapter introduces constants and variables, data types, and operators.

Chapter Outline

- Constants and Variables
- Identifier Names
- Data Types
 - Integer Data Type
 - Floating-Point Data Type
 - String Data Type
 - Boolean Data Type
 - Nothing Data Type
- Order of Operations
- Assignment
- Arithmetic Operators
- Integer Division and Modulus
- Unary Operations
- Lvalue and Rvalue
- Data Type Conversions
- Input-Process-Output Model
- Code Examples
 - C++
 - C#
 - Java
 - JavaScript
 - Python
 - Swift
- Practice

Learning Objectives

1. Understand key terms and definitions.
2. Understand basic data types and how operators manipulate data.
3. Given example pseudocode, flowcharts, and source code, create a program that uses appropriate data types and operators to solve a given problem.

Constants and Variables

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

A **constant** is a value that cannot be altered by the program during normal execution, i.e., the value is constant. When associated with an identifier, a constant is said to be “named,” although the terms “constant” and “named constant” are often used interchangeably. This is contrasted with a **variable**, which is an identifier with a value that can be changed during normal execution, i.e., the value is variable.¹

Discussion

Understanding Constants

A **constant** is a data item whose value cannot change during the program’s execution. Thus, as its name implies – the value is constant.

A **variable** is a data item whose value can change during the program’s execution. Thus, as its name implies – the value can vary.

Constants are used in two ways. They are:

1. literal constant
2. defined constant

A literal constant is a **value** you type into your program wherever it is needed. Examples include the constants used for initializing a variable and constants used in lines of code:

```
21
12.34
'A'
"Hello world!"
false
null
```

In addition to literal constants, most textbooks refer to symbolic constants or named constants as a constant represented by a name. Many programming languages use ALL CAPS to define named constants.

1. Wikipedia: Constant (computer programming)

Language	Example
C++	<pre>#define PI 3.14159</pre> or <pre>const double PI = 3.14159;</pre>
C#	<pre>const double PI = 3.14159;</pre>
Java	<pre>const double PI = 3.14159;</pre>
JavaScript	<pre>const PI = 3.14159;</pre>
Python	<pre>PI = 3.14159</pre>
Swift	<pre>let pi = 3.14159</pre>

Technically, Python does not support named constants, meaning that it is possible (but never good practice) to change the value of a constant later. There are workarounds, but they are beyond the scope of a first-semester textbook.

Defining Constants and Variables

Named constants must be assigned a value when they are defined. Variables do not have to be assigned initial values. Variables once defined may be assigned a value within the instructions of the program.

Language	Example
C++	<pre>double value = 3;</pre>
C#	<pre>double value = 3;</pre>
Java	<pre>double value = 3;</pre>
JavaScript	<pre>var value = 3;</pre> <pre>let value = 3;</pre>
Python	<pre>value = 3</pre>
Swift	<pre>var value:Int = 3</pre>

Key Terms

constant

A data item whose value cannot change during the program's execution.

variable

A data item whose value can change during the program's execution.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Identifier Names

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

Within programming a variety of items are given descriptive names to make the code more meaningful to us as humans. These names are called “Identifier Names”. Constants, variables, type definitions, functions, etc. when declared or defined are identified by a name. These names follow a set of rules that are imposed by:

1. the language’s technical limitations
2. good programming practices
3. common industry standards for the language

Discussion

Technical to Language

- Use only allowable characters (in many languages the first character must be alphabetic or underscore, can continue with alphanumeric or underscore)
- Can’t use reserved words
- Length limit

These attributes vary from one programming language to another. The allowable characters and reserved words will be different. The length limit refers to how many characters are allowed in an identifier name and often is compiler dependent and may vary from compiler to compiler for the same language. However, all programming languages have these three technical rules.

Good Programming Techniques

- Meaningful
- Be case consistent

Meaningful identifier names make your code easier for another to understand. After all what does “p” mean? Is it pi, price, pennies, etc. Thus do not use cryptic (look it up in the dictionary) identifier names.

Some programming languages treat upper and lower case letters used in identifier names as the same. Thus: pig and Pig are treated as the same identifier name. Unknown to you the programmer, the compiler usually forces all identifier names to upper case. Thus: pig and Pig both get changed to PIG. However not all programming languages act this way. Some will treat upper and lower case letters as being different things. Thus: pig and Pig are two different identifier names. If you declare it as pig and then reference it in your code later as Pig – you get a different variable or perhaps a compiler error. To avoid the problem altogether, we teach students to **be case consistent**. Use an identifier name only once and spell it (upper and lower case) the same way within your program.

Industry Rules

Almost all programming languages and most coding shops have a standard code formatting style guide programmers are expected to follow. Among these are three common identifier casing standards:

- camelCase – each word is capitalized except the first word, with no intervening spaces
- PascalCase – each word is capitalized including the first word, with no intervening spaces
- snake_case – each word is lowercase with underscores separating words

C++, Java, and JavaScript typically use camelCase, with PascalCase reserved for libraries and classes. C# uses primarily PascalCase with camelCase parameters. Python uses snake_case for most identifiers. In addition, the following rules apply:

- Do not start with underscore (used for technical programming)
- CONSTANTS IN ALL UPPER CASE (often UPPER_SNAKE_CASE).

These rules are decided by the industry (those who are using the programming language).

Key Terms

camel case

The practice of writing compound words or phrases such that each word or abbreviation in the middle of the phrase begins with a capital letter, with no intervening spaces or punctuation.

Pascal case

The practice of writing compound words or phrases such that each word or abbreviation in the phrase begins with a capital letter, including the first letter, with no intervening spaces or punctuation.

reserved word

Words that cannot be used by the programmer as identifier names because they already have a specific meaning within the programming language.

snake case

The practice of writing compound words or phrases in which the elements are separated with one underscore character (_) and no spaces, with each element's initial letter usually lowercased within the compound and the first letter either upper or lower case.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Data Types

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

A **data type** is a classification of data which tells the compiler or interpreter how the programmer intends to use the data. Most programming languages support various types of data, including integer, real, character or string, and Boolean.

Discussion

Our interactions (inputs and outputs) with a program are treated in many languages as a stream of bytes. These bytes represent data that can be interpreted as representing values that we understand. Additionally, within a program we process this data in various ways such as adding them up or sorting them. This data comes in different forms. Examples include: your name which is a string of characters; your age which is usually an integer; or the amount of money in your pocket which is usually a value measured in dollars and cents (something with a fractional part). A major part of understanding how to design and code programs is centered in understanding the types of data that we want to manipulate and how to manipulate that data.

Common data types include:

Data Type	Represents	Examples
integer	whole numbers	-5 , 0 , 123
floating point (real)	fractional numbers	-87.5 , 0.0 , 3.14159
string	A sequence of characters	"Hello world!"
Boolean	logical true or false	true , false
nothing	no data	null

The common data types usually exist in most programming languages and act or behave similarly from language to language. Additional complex and/or composite data types may exist and vary from language to language.

Pseudocode

```
Function Main
    ... This program demonstrates variables, literal constants, and data ty
```

```
Declare Integer i
Declare Real r
Declare String s
Declare Boolean b


Assign i = 1234567890
Assign r = 1.23456789012345
Assign s = "string"
Assign b = true

Output "Integer i = " & i
Output "Real r = " & r
Output "String s = " & s
Output "Boolean b = " & b
End
```

Output

```
Integer i = 1234567890
Real r = 1.23456789012345
String s = string
Boolean b = true
```

Flowchart

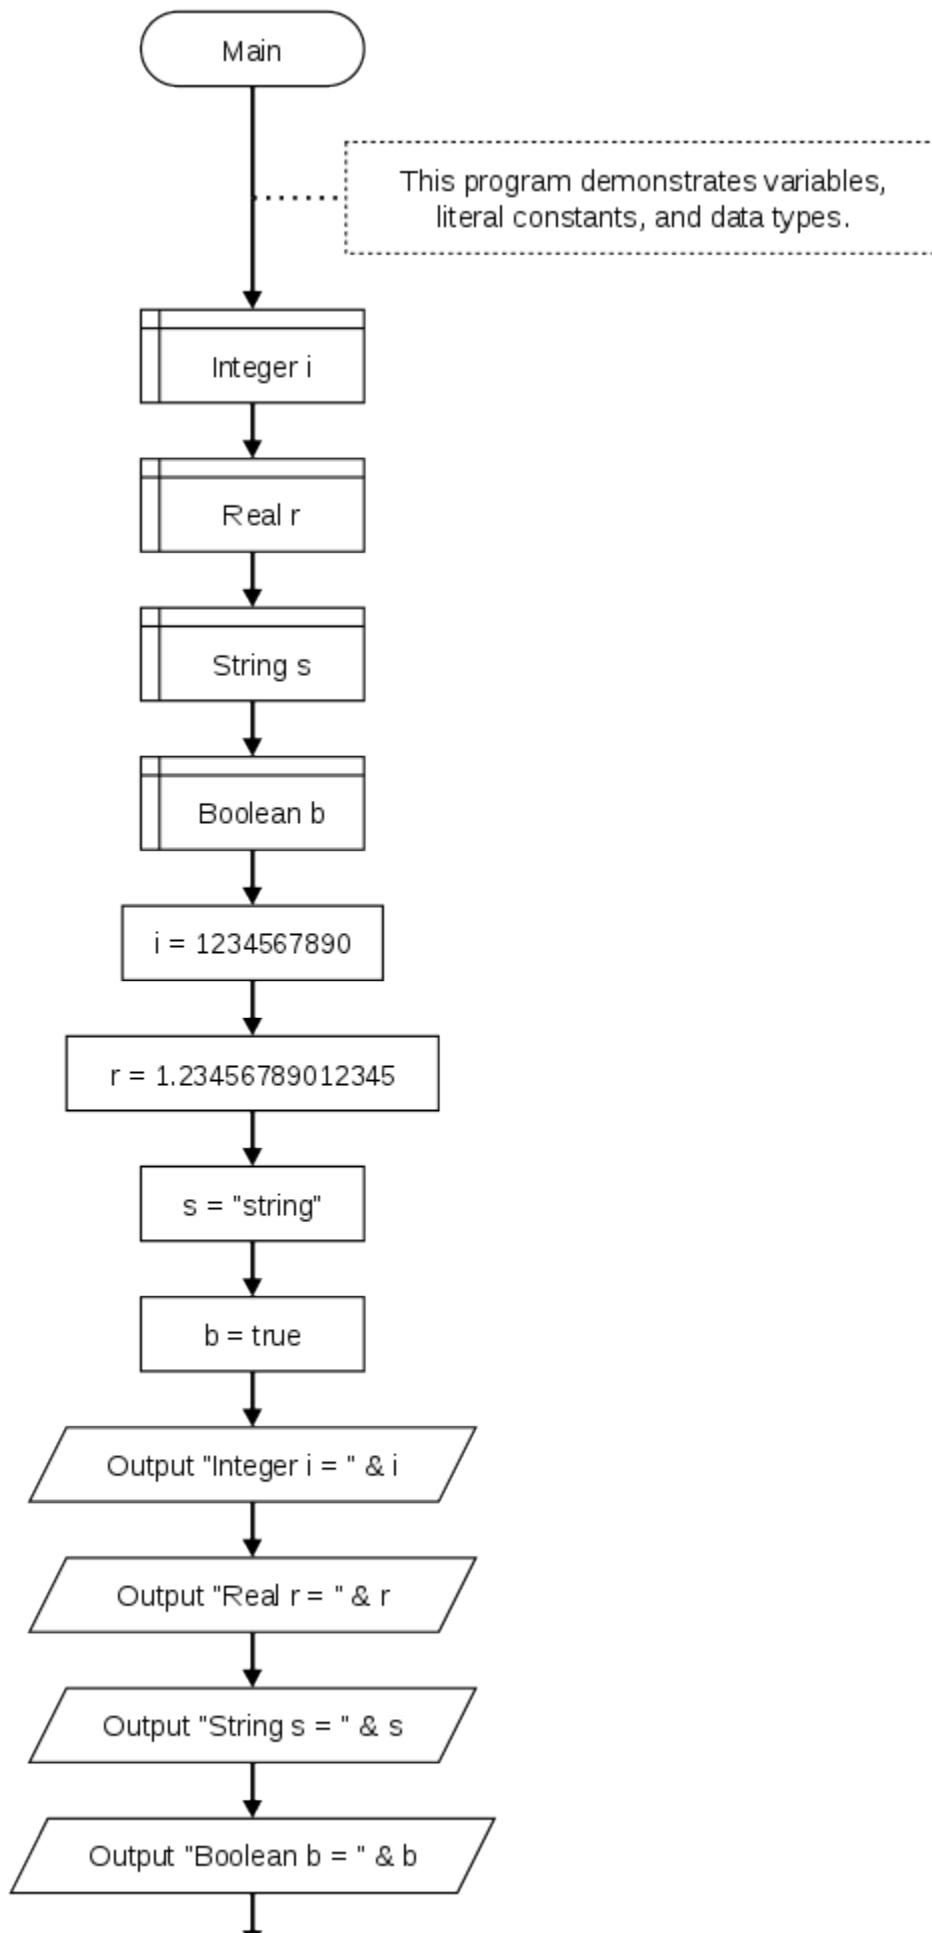

Key Terms

Boolean

A data type representing logical true or false.

data type

Defines a set of values and a set of operations that can be applied on those values.

floating point

A data type representing numbers with fractional parts.

integer

A data type representing whole numbers.

string

A data type representing a sequence of characters.

References

- [cnx.org](https://cnx.org/programming-fundamentals); Programming Fundamentals – A Modular Structured Approach using C++
- Flowgorithm – Flowchart Programming Language

Integer Data Type

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

An **integer data type** represents some range of mathematical integers. Integral data types may be of different sizes and may or may not be allowed to contain negative values. Integers are commonly represented in a computer as a group of binary digits (bits). The size of the grouping varies so the set of integer sizes available varies between different types of computers and different programming languages.¹

Discussion

The integer data type basically represents whole numbers (no fractional parts). The integer values jump from one value to another. There is nothing between 6 and 7. It could be asked why not make all your numbers floating point which allow for fractional parts. The reason is twofold. First, some things in the real world are not fractional. A dog, even with only 3 legs, is still one (1) dog not $\frac{3}{4}$ of a dog. Second, integer data type is often used to control program flow by counting, thus the need for a data type that jumps from one value to another.

The integer data type has similar attributes and acts or behaves similarly in all programming languages that support it.

1. Wikipedia: Integer (computer science)

Language	Reserved Word	Size	Range
C++	<code>short</code>	16 bits / 2 bytes	-32,768 to 32,767
C++	<code>int</code>	varies	depends on compiler
C++	<code>long</code>	32 bits / 4 bytes	-2,147,483,648 to 2,147,483,647
C++	<code>long long</code>	64 bits / 8 bytes	-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807
C#	<code>short</code>	16 bits / 2 bytes	-32,768 to 32,767
C#	<code>int</code>	32 bits / 4 bytes	-2,147,483,648 to 2,147,483,647
C#	<code>long</code>	64 bits / 8 bytes	-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807
Java	<code>short</code>	16 bits / 2 bytes	-32,768 to 32,767
Java	<code>int</code>	32 bits / 4 bytes	-2,147,483,648 to 2,147,483,647
Java	<code>long</code>	64 bits / 8 bytes	-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807
JavaScript	N/A		
Python	<code>int()</code>		no limit
Swift	<code>Int</code>	varies	depends on platform
Swift	<code>Int32</code>	32 bits / 4 bytes	-2,147,483,648 to 2,147,483,647
Swift	<code>Int64</code>	64 bits / 8 bytes	-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807

For C++ and Swift the size of a default integer varies with the compiler being used and the computer. This effect is known as being **machine dependent**. These variations of the integer data type are an annoyance for a beginning programmer. For a beginning programmer it is more important to understand the general attributes of the integer data type that apply to most programming languages.

JavaScript does not support an integer data type, but the `Math.round()` function may be used to return the value of a number rounded to the nearest integer.²

Python 3 integers are not limited, however `sys.maxsize` may be used to determine the maximum practical size of a list or string index.³

Key Terms

machine dependent

An attribute of a programming language that changes depending on the computer's CPU.

2. Mozilla: `Math.round()`

3. Python.org: Integers

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Floating-Point Data Type

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

A **floating-point data type** uses a formulaic representation of real numbers as an approximation so as to support a trade-off between range and precision. For this reason, floating-point computation is often found in systems which include very small and very large real numbers, which require fast processing times. A number is, in general, represented approximately to a fixed number of significant digits and scaled using an exponent in some fixed base.¹

Discussion

The floating-point data type is a family of data types that act alike and differ only in the size of their domains (the allowable values). The floating-point family of data types represent number values with fractional parts. They are technically stored as two integer values: a **mantissa** and an **exponent**. The floating-point family has the same attributes and acts or behaves similarly in all programming languages. They can always store negative or positive values thus they always are signed; unlike the integer data type that could be unsigned. The **domain** for floating-point data types varies because they could represent very large numbers or very small numbers. Rather than talk about the actual values, we mention the **precision**. The more bytes of storage the larger the mantissa and exponent, thus more precision.

Language	Reserved Word	Size	Precision	Range
C++	float	32 bits / 4 bytes	7 decimal digits	$\pm 3.40282347E+38$
C++	double	64 bits / 8 bytes	15 decimal digits	$\pm 1.79769313486231570E+308$
C#	float	32 bits / 4 bytes	7 decimal digits	$\pm 3.40282347E+38$
C#	double	64 bits / 8 bytes	15 decimal digits	$\pm 1.79769313486231570E+308$
Java	float	32 bits / 4 bytes	7 decimal digits	$\pm 3.40282347E+38$
Java	double	64 bits / 8 bytes	15 decimal digits	$\pm 1.79769313486231570E+308$
JavaScript	Number	64 bits / 8 bytes	15 decimal digits	$\pm 1.79769313486231570E+308$
Python	float()	64 bits / 8 bytes	15 decimal digits	$\pm 1.79769313486231570E+308$
Swift	Float	32 bits / 4 bytes	7 decimal digits	$\pm 3.40282347E+38$
Swift	Double	64 bits / 8 bytes	15 decimal digits	$\pm 1.79769313486231570E+308$

1. Wikipedia: Floating-point arithmetic

Key Terms

double

The most often used floating-point family data type used.

mantissa exponent

The two integer parts of a floating-point value.

precision

The effect on the domain of floating-point values given a larger or smaller storage area in bytes.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

String Data Type

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

A **string data type** is traditionally a sequence of characters, either as a literal constant or as some kind of variable. The latter may allow its elements to be mutated and the length changed, or it may be fixed (after creation). A string is generally considered a data type and is often implemented as an array data structure of bytes (or words) that stores a sequence of elements, typically characters, using some character encoding.¹

Discussion

Depending on programming language and precise data type used, a variable declared to be a string may either cause storage in memory to be statically allocated for a predetermined maximum length or employ dynamic allocation to allow it to hold a variable number of elements. When a string appears literally in source code, it is known as a string literal or an anonymous string.²

The **character** data type represents individual or single characters. Characters comprise a variety of symbols such as the alphabet (both upper and lower case) the numeral digits (0 to 9), punctuation, etc. All computers store character data in a one byte field as an integer value. Because a byte consists of 8 bits, this one byte field has 28 or 256 possibilities using the positive values of 0 to 255.

C++, C#, and Java differentiate between single characters and strings using single quotes and double quotes, respectively. JavaScript and Python do not differentiate between characters and strings, and use either single quotes or double quotes to define string literals.

1. Wikipedia: String (computer science)

2. Wikipedia: String (computer science)

Language	Reserved Word	Example
C++	char	'A'
C++	string	"Hello world!"
C#	char	'A'
C#	String	"Hello world!"
Java	char	'A'
Java	String	"Hello world!"
JavaScript	String	'Hello world!', "Hello world!"
Python	str()	'Hello world!', "Hello world!"
Swift	Character	"A"
Swift	String	"Hello world!"

Most computing devices use the **ASCII** (stands for American Standard Code for Information Interchange and is pronounced “ask-key”) Character Set which has established values for 0 to 127. For the values of 128 to 255 they usually use the Extended ASCII Character Set. When we hit the capital A on the keyboard, the keyboard sends a byte with the bit pattern equal to an integer 65. When the byte is sent from the memory to the monitor, the monitor converts the integer value of 65 to into the symbol of the capital A to display on the monitor.

For now, we will address only the use of strings and characters as constants. Most modern compilers that are part of an Integrated Development Environment (IDE) will color the source code to help the programmer see different features more readily. Beginning programmers will use string constants to send messages to standard output.

Key Terms

ASCII

American Standard Code for Information Interchange

character

A data type representing single text characters like the alphabet, numeral digits, punctuation, etc.

double quote marks

Used to create string type data within most programming languages.

single quote marks

Used to create character type data within languages that differentiate between string and character data types.

string

A series or array of characters as a single piece of data.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Boolean Data Type

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

A **Boolean data type** has one of two possible values (usually denoted true and false), intended to represent the two truth values of logic and Boolean algebra. It is named after George Boole, who first defined an algebraic system of logic in the mid 19th century. The Boolean data type is primarily associated with conditional statements, which allow different actions by changing control flow depending on whether a programmer-specified Boolean condition evaluates to true or false.¹

Discussion

The Boolean data type is also known as the logical data type and represents the concepts of true and false. The name “Boolean” comes from the mathematician George Boole; who in 1854 published: An Investigation of the Laws of Thought. Boolean algebra is the area of mathematics that deals with the logical representation of true and false using the numbers 0 and 1. The importance of the Boolean data type within programming is that it is used to control programming structures (if then else, while loops, etc.) that allow us to implement “choice” into our algorithms.

The Boolean data type has the same attributes and acts or behaves similarly in all programming languages. However, while all languages recognize false as 0, some languages define true as -1 rather than 1. This is the result of storing the Boolean values as an integer and using a one’s complement representation that negates all bits rather than only the rightmost bit. To simplify processing, most programming languages recognize any non-zero value as being true.

Language	Reserved Word	True	False
C++	<code>bool</code>	<code>true</code>	<code>false</code>
C#	<code>bool</code> or <code>Boolean</code>	<code>true</code>	<code>false</code>
Java	<code>bool</code>	<code>true</code>	<code>false</code>
JavaScript	<code>Boolean()</code>	<code>true</code>	<code>false</code>
Python	<code>bool()</code>	<code>True</code>	<code>False</code>
Swift	<code>Bool</code>	<code>true</code>	<code>false</code>

1. Wikipedia: Boolean data type

Key Terms

Boolean

A data type representing the concepts of true or false.

one's complement

The value obtained by inverting all the bits in the binary representation of a number (swapping 0s for 1s and vice versa).

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Nothing Data Type

DAVE BRAUNSCHWEIG

Overview

A **nothing data type** is a feature of some programming languages which allow the setting of a special value to indicate a missing or uninitialized value rather than using the value 0 (zero).¹

Discussion

Most programming languages support the use of a reserved word or words to represent missing, uninitialized, or invalid values.

Language	Reserved Word	Meaning
C++	<code>null</code>	no value
C#	<code>null</code>	no value
Java	<code>null</code>	no value
JavaScript	<code>null</code>	no value
JavaScript	<code>NaN</code>	Not a Number
Python	<code>None</code>	no value
Swift	<code>nil</code>	no value

Key Terms

NaN

Reserved word used to indicate a non-numeric value in a numeric variable.

null

Reserved word used to represent a missing value or invalid value.

1. Wikipedia: Nullable type

Order of Operations

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

The order of operations (or operator precedence) is a collection of rules that reflect conventions about which procedures to perform first in order to evaluate a given mathematical expression.¹

Discussion

Single values by themselves are important; however we need a method of manipulating values (processing data). Scientists wanted an accurate machine for manipulating values. They wanted a machine to process numbers or calculate answers (that is compute the answer). Prior to 1950, dictionaries listed the definition of computers as "humans that do computations". Thus, all of the terminology for describing data manipulation is math oriented. Additionally, the two fundamental data type families (the integer family and floating-point family) consist entirely of number values.

An Expression Example with Evaluation

Let's look at an example: $2 + 3 * 4 + 5$ is our expression but what does it equal?

1. the symbols of $+$ meaning addition and $*$ meaning multiplication are our operators
2. the values 2, 3, 4 and 5 are our operands
3. precedence says that multiplication is higher than addition
4. thus, we evaluate the $3 * 4$ to get 12
5. now we have: $2 + 12 + 5$
6. the associativity rules say that addition goes left to right, thus we evaluate the $2 + 12$ to get 14
7. now we have: $14 + 5$
8. finally, we evaluate the $14 + 5$ to get 19; which is the value of the expression

Parentheses would change the outcome. $(2 + 3) * (4 + 5)$ evaluates to 45.

Parentheses would change the outcome. $(2 + 3) * 4 + 5$ evaluates to 25.

Operator Precedence Chart

Each computer language has some rules that define precedence and associativity. They often follow rules we may have already learned. Multiplication and division come before addition and subtraction is a rule we learned in grade school. This rule still works.

Order of Operations²

1. Wikipedia: Order of operations
2. Wikipedia: Order of operations

- Parentheses
- Exponents
- Multiplication / Division
- Addition / Subtraction

A common mnemonic to remember this rule is *PEMDAS*, or *Please Excuse My Dear Aunt Sally*. Precedence rules may vary from one programming language to another. You should refer to the reference sheet that summarizes the rules for the language that you are using. It is often called an Operator Precedence, Precedence of Operators, or Order of Operations chart. You should review this chart as needed when evaluating expressions.

A valid expression consists of operand(s) and operator(s) that are put together properly. Why the (s)? Some operators are:

1. Unary – that is only have one operand
2. Binary – that is have two operands, one on each side of the operator
3. Trinary – which has two operator symbols that separate three operands

Most operators are binary, that is they require two operands. Some precedence charts indicate of which operators are unary and trinary and thus all others are binary.

Key Terms

associativity

Determines the order in which the operators of the same precedence are allowed to manipulate the operands.

evaluation

The process of applying the operators to the operands and resulting in a single value.

expression

A valid sequence of operand(s) and operator(s) that reduces (or evaluates) to a single value.

operand

A value that receives the operator's action.

operator

A language-specific syntactical token (usually a symbol) that causes an action to be taken on one or more operands.

parentheses

Change the order of evaluation in an expression. You do what's in the parentheses first.

precedence

Determines the order in which the operators are allowed to manipulate the operands.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Assignment

KENNETH LEROY BUSBEE

Overview

An **assignment** statement sets and/or re-sets the value stored in the storage location(s) denoted by a variable name; in other words, it copies a value into the variable.¹

Discussion

The assignment operator allows us to change the value of a modifiable data object (for beginning programmers this typically means a variable). It is associated with the concept of moving a value into the storage location (again usually a variable). Within most programming languages the symbol used for assignment is the equal symbol. But bite your tongue, when you see the = symbol you need to start thinking: assignment. The assignment operator has two operands. The one to the left of the operator is usually an identifier name for a variable. The one to the right of the operator is a value.

Simple Assignment

```
age = 21
```

The value 21 is moved to the memory location for the variable named: age. Another way to say it: age is assigned the value 21.

Assignment with an Expression

```
total_cousins = 4 + 3 + 5 + 2
```

The item to the right of the assignment operator is an expression. The expression will be evaluated and the answer is 14. The value 14 would be assigned to the variable named: total_cousins.

Assignment with Identifier Names in the Expression

```
students_period_1 = 25  
students_period_2 = 19  
total_students = students_period_1 + students_period_2;
```

The expression to the right of the assignment operator contains some identifier names. The program would fetch the values stored in those variables; add them together and get a value of 44; then assign the 44 to the total_students variable.

1. Wikipedia: Assignment (computer science)

Key Terms

assignment

An operator that changes the value of a modifiable data object.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Arithmetic Operators

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

The basic **arithmetic operations** are addition, subtraction, multiplication and division. Arithmetic is performed according to an order of operations.¹

Discussion

An operator performs an action on one or more operands. The common arithmetic operators are:

Action	Common Symbol
Addition	+
Subtraction	-
Multiplication	*
Division	/
Modulus (associated with integers)	%

These arithmetic operators are binary that is they have two operands. The operands may be either constants or variables.

```
age + 1
```

This expression consists of one operator (addition) which has two operands. The first is represented by a variable named age and the second is a literal constant. If age had a value of 14 then the expression would evaluate (or be equal to) 15.

These operators work as you have learned them throughout your life with the exception of division and modulus. We normally think of division as resulting in an answer that might have a fractional part (a floating-point data type). However, division when both operands are of the integer data type act differently. Please refer to the supplemental materials on “Integer Division and Modulus”.

Arithmetic Assignment Operators

Many programming languages support a combination of the assignment (=) and arithmetic operators (+ , - , * , / , %). Various textbooks call them “compound assignment operators” or “combined assignment operators”. Their usage can be explained in terms of the assignment

1. Wikipedia: Arithmetic operators

operator and the arithmetic operators. In the table we will use the variable age and you can assume that it is of integer data type.

Arithmetic assignment examples: Equivalent code:	
age += 14;	age = age + 14;
age -= 14;	age = age - 14;
age *= 14;	age = age * 14;
age /= 14;	age = age / 14;
age %= 14;	age = age % 14;

Pseudocode


```
Function Main
    ... This program demonstrates arithmetic operations.
    Declare Integer a
    Declare Integer b

    Assign a = 3
    Assign b = 2
    Output "a = " & a
    Output "b = " & b
    Output "a + b = " & a + b
    Output "a - b = " & a - b
    Output "a * b = " & a * b
    Output "a / b = " & a / b
    Output "a % b = " & a % b
End
```

Output

```
a = 3
b = 2
a + b = 5
a - b = 1
a * b = 6
a / b = 1.5
a % b = 1
```

Flowchart

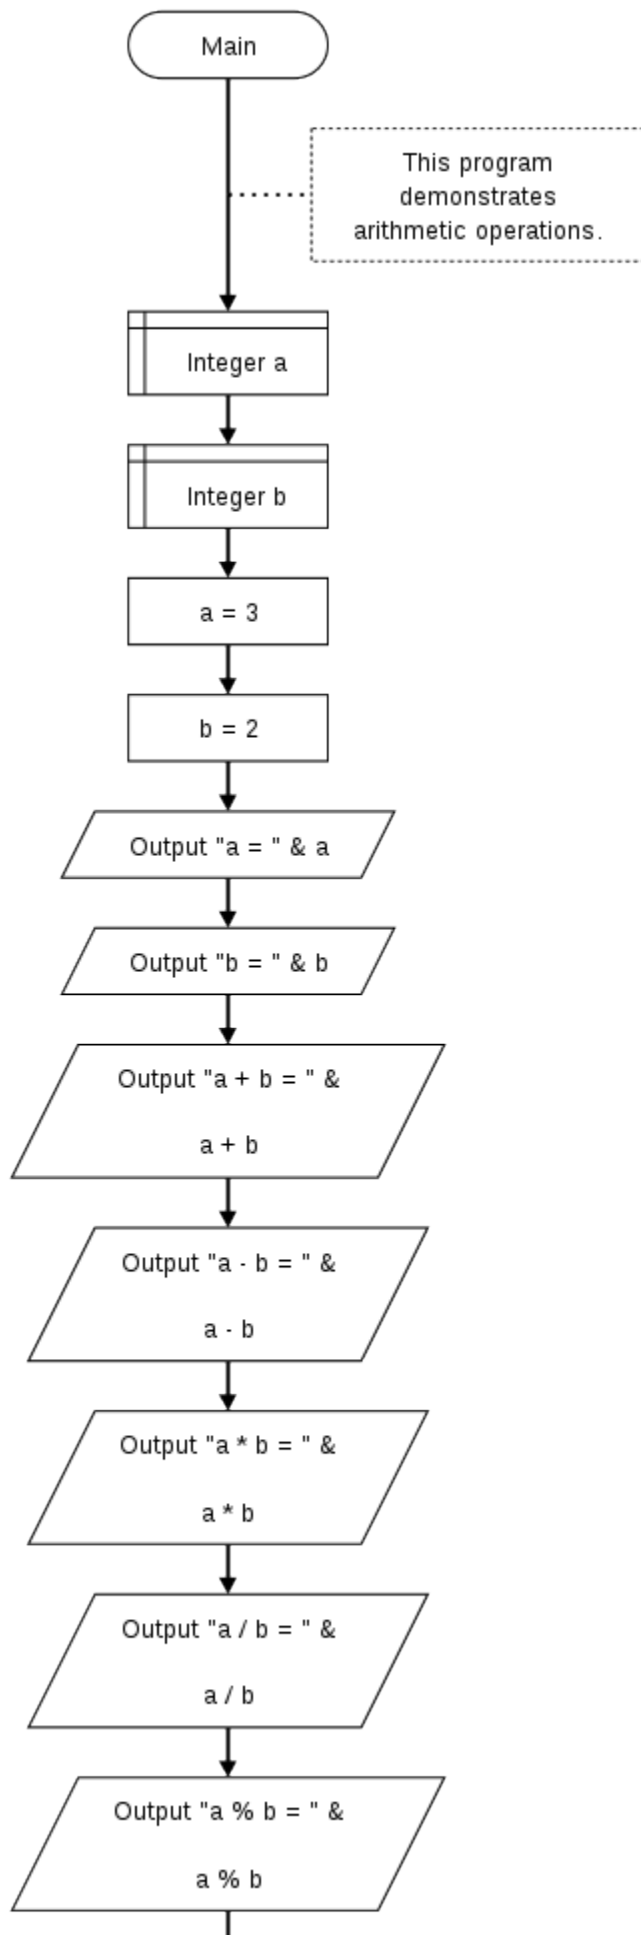

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++
- Flowgorithm – Flowchart Programming Language

Integer Division and Modulus

KENNETH LEROY BUSBEE

Overview

In **integer division** and **modulus** the dividend is divided by the divisor into an integer quotient and a remainder. The integer quotient operation is referred to as integer division, and the integer remainder operation is the modulus.¹²

Discussion

By the time we reach adulthood, we normally think of division as resulting in an answer that might have a fractional part (a floating-point data type). This type of division is known as floating-point division. However, division when both operands are of the integer data type acts differently on most computers and is called: **integer division**. Consider:

$$11 / 4$$

Because both operands are of the integer data type the evaluation of the expression (or answer) would be 2 with no fractional part (it gets thrown away). Again, this type of division is call **integer division** and it is what you learned in grade school the first time you learned about division.

$$\begin{array}{r} 2 \text{ r } 3 \\ 4 \overline{) 11} \\ \underline{- 8} \\ 3 \end{array}$$

Integer division as learned in grade school.

In the real world of data manipulation there are some things that are always handled in whole units or numbers (integer data type). **Fractions just don't exist.** To illustrate our example: I have 11 dollar coins to distribute equally to my 4 children. How many do they each get? Answer is 2 with me still having 3 left over (or with 3 still remaining in my hand). The answer is not $2\frac{3}{4}$ each or 2.75 for each child. The dollar coins are not divisible into fractional pieces. Don't try thinking out of the box and pretend you're a pirate. Using an axe and chopping the 3 remaining coins into pieces of eight. Then, giving each child 2 coins and 6 pieces of eight or $2\frac{6}{8}$ or $2\frac{3}{4}$ or 2.75. If you do think this way, I will change my example to cans of tomato soup. I dare you to try and chop up three cans of soup and

1. Wikipedia: Division (mathematics)
2. Wikipedia: Modulo operation

give each kid $\frac{3}{4}$ of a can. Better yet, living things like puppy dogs. After you divide them up with an axe, most children will not want the $\frac{3}{4}$ of a dog.

What is **modulus**? It's the other part of the answer for integer division. It's the remainder. Remember in grade school you would say, "Eleven divided by four is two remainder three." In many programming languages the symbol for the modulus operator is the percent sign (%).

```
11 % 4
```

Thus, the answer or value of this expression is 3 or the remainder part of integer division.

Many compilers require that you have integer operands on both sides of the modulus operator or you will get a compiler error. In other words, it does not make sense to use the modulus operator with floating-point operands.

Don't let the following items confuse you.

```
6 / 24 which is different from 6 % 24
```

How many times can you divide 24 into 6? Six divided by 24 is zero. This is different from: What is the remainder of 6 divided by 24? Six, the remainder part given by modulus.

Evaluate the following division expressions:

1. $14 / 4$
2. $5 / 13$
3. $7 / 2.0$

Evaluate the following modulus expressions:

1. $14 \% 4$
2. $5 \% 13$
3. $7 \% 2.0$

Key Terms

integer division

Division with no fractional parts.

modulus

The remainder part of integer division.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Unary Operations

KENNETH LEROY BUSBEE

Overview

A **unary operation** is an operation with only one operand. As unary operations have only one operand, they are evaluated before other operations containing them.¹ Common unary operators include Positive (`+`) and Negative (`-`).

Discussion

Unary positive also known as plus and unary negative also known as minus are unique operators. The plus and minus when used with a constant value represent the concept that the values are either positive or negative. Let's consider:

```
+5 + -2
```

We have three operators in this order: unary positive, addition, and unary negative. The answer to this expression is a positive 3. As you can see, one must differentiate between when the plus sign means unary positive and when it means addition. Unary negative and subtraction have the same problem. Let's consider:

```
-2 - +5
```

The expression evaluates to negative 7. Let's consider:

```
7 - -2
```

First constants that do not have a unary minus in front of them are assumed (the default) to be positive. When you subtract a negative number it is like adding, thus the expression evaluates to positive 9.

Negation – Unary Negative

The concept of negation is to take a value and change its sign, that is: flip it. If it is positive make it negative and if it is negative make it positive. Mathematically, it is the following C++ code example, given that money is an integer variable with a value of 6:

```
-money  
money * -1
```

The above two expressions evaluate to the same value. In the first line, the value in the variable money is fetched and then it's negated to a negative 6. In the second line, the value in the variable money is fetched and then it's multiplied by negative 1 making the answer a negative 6.

Unary Positive – Worthless

Simply to satisfy symmetry, the unary positive was added to the C++ programming language as on

1. Wikipedia: Unary operation

operator. However, it is a totally worthless or useless operator and is rarely used. However don't be confused the following expression is completely valid:

```
6 + +5
```

The second + sign is interpreted as unary positive. The first + sign is interpreted as addition.

```
money
```

```
+money
```

```
money * +1
```

For all three lines, if the value stored in money is 6 the value of the expression is 6. Even if the value in money was negative 77 the value of the expression would be negative 77. The operator does nothing, because multiplying anything by 1 does not change its value.

Possible Confusion

Do not confuse the unary negative operator with decrement. Decrement changes the value in the variable and thus is an Lvalue concept. Unary negative does not change the value of the variable, but uses it in an Rvalue context. It fetches the value and then negates that value. The original value in the variable does not change.

Because there is no changing of the value associated with the identifier name, the identifier name could represent a variable or named constant.

Exercises

Evaluate the following items involving unary positive and unary negative:

1. $+10 - -2$
2. $-18 + 24$
3. $4 - +3$
4. $+8 + - +5$
5. $+8 + / +5$

Key Terms

minus

Aka unary negative.

plus

Aka unary positive.

unary negative

An operator that causes negation.

unary positive

A worthless operator almost never used.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Lvalue and Rvalue

KENNETH LEROY BUSBEE

Overview

Some programming languages use the idea of **l-values** and **r-values**, deriving from the typical mode of evaluation on the left and right hand side of an assignment statement. An lvalue refers to an object that persists beyond a single expression. An rvalue is a temporary value that does not persist beyond the expression that uses it.¹

Discussion

Lvalue and Rvalue refer to the left and right side of the assignment operator. The **Lvalue** (pronounced: L value) concept refers to the requirement that the operand on the left side of the assignment operator is modifiable, usually a variable. **Rvalue** concept pulls or fetches the value of the expression or operand on the right side of the assignment operator. Some examples:

```
age = 39
```

The value 39 is pulled or fetched (Rvalue) and stored into the variable named age (Lvalue); destroying the value previously stored in that variable.

```
voting_age = 18  
age = voting_age
```

If the expression has a variable or named constant on the right side of the assignment operator, it would pull or fetch the value stored in the variable or constant. The value 18 is pulled or fetched from the variable named voting_age and stored into the variable named age.

```
age < 17
```

If the expression is a test expression or Boolean expression, the concept is still an Rvalue one. The value in the identifier named age is pulled or fetched and used in the relational comparison of less than.

```
JACK_BENNYS_AGE = 39  
JACK_BENNYS_AGE = 65;
```

1. Wikipedia: Value (computer science)

This is illegal because the identifier JACK_BENNY'S_AGE does not have Lvalue properties. It is not a modifiable data object, because it is a constant.

Some uses of the Lvalue and Rvalue can be confusing in languages that support increment and decrement operators. Consider:

```
oldest = 55  
age = oldest++
```

Postfix increment says to use my existing value then when you are done with the other operators; increment me. Thus, the first use of the oldest variable is an Rvalue context where the existing value of 55 is pulled or fetched and then assigned to the variable age; an Lvalue context. The second use of the oldest variable is an Lvalue context where in the value of oldest is incremented from 55 to 56.

Key Terms

Lvalue

The requirement that the operand on the left side of the assignment operator is modifiable, usually a variable.

Rvalue

Pulls or fetches the value stored in a variable or constant.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Data Type Conversions

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

Changing a data type of a value is referred to as “type conversion”. There are two ways to do this:

1. **Implicit** – the change is implied
2. **Explicit** – the change is explicitly done with an operator or function

The value being changed may be:

1. **Promotion** – going from a smaller domain to a larger domain
2. **Demotion** – going from a larger domain to a smaller domain

Discussion

Implicit Type Conversion

Automatic conversion of a value from one data type to another by a programming language, without the programmer specifically doing so, is called implicit type conversion. It happens whenever a binary operator has two operands of different data types. Depending on the operator, one of the operands is going to be converted to the data type of the other. It could be promoted or demoted depending on the operator.

Implicit Promotion

```
55 + 1.75
```

In this example the integer value 55 is converted to a floating-point value (most likely double) of 55.0. It was promoted.

Implicit Demotion

In programming languages that have explicit integer data types (C++, C#, Java), care must be taken to avoid implicit demotion. For example:

```
int money;  
money = 23.16;
```

In this example the variable money is an integer. We are trying to move a floating-point value 23.16 into an integer storage location. This is demotion and the floating-point value usually gets truncated to 23.

Promotion

Promotion is never a problem because the lower data type (smaller range of allowable values) is a subset of the higher data type (larger range of allowable values). Promotion often occurs with

three of the standard data types: character, integer and floating-point. The allowable values (or domains) progress from one type to another. That is the character data type values are a sub set of integer values and integer values are a sub set of floating-point values; and within the floating-point values: float values are a sub set of double. Even though character data represent the alphabetic letters, numeral digits (0 to 9) and other symbols (a period, \$, comma, etc.) their bit pattern also represent integer values from 0 to 255. This progression allows us to promote them up the chain from character to integer to float to double.

Demotion

Demotion represents a potential problem with truncation or unpredictable results often occurring. How do you fit an integer value of 456 into a character value? How do you fit the floating-point value of 45656.453 into an integer value? Most compilers give a warning if it detects demotion happening. A compiler warning does not stop the compilation process. It does warn the programmer to check to see if the demotion is reasonable.

If I calculate the number of cans of soup to buy based on the number of people I am serving (say 8) and the servings per can (say 2.3), I would need 18.4 cans. I might want to demote the 18.4 into an integer. It would truncate the 18.4 into 18 and because the value 18 is within the domain of an integer data type, it should demote with the **truncation** side effect.

If I tried demoting a double that contained the number of stars in the Milky Way galaxy into an integer, I might have a get an **unpredictable result** (assuming the number of stars is larger than allowable values within the integer domain).

Explicit Type Conversion

Most languages have a method for the programmer to change or cast a value from one data type to another; called **explicit type conversion**. Some languages support a cast operator. The cast operator is a unary operator; it only has one operand and the operand is to the right of the operator. The operator is a set of parentheses surrounding the new data type. Other languages have functions that perform explicit type conversion. In each of the following examples, the expression value would be 3.

Language	Floating-Point to Integer Type Conversion Example
C++	<code>(int) 3.14</code>
C#	<code>Convert.ToInt32(3.14)</code>
Java	<code>Math.floor(3.14)</code>
JavaScript	<code>Math.floor(3.14)</code>
Python	<code>int(3.14)</code>
Swift	<code>Int(3.14)</code>

In each of the following examples, the expression value would be 3.14.

Language	String to Floating-Point Type Conversion Example
C++	<pre>#include <string.h> std::stod("3.14")</pre>
C#	<pre>Convert.ToDouble("3.14")</pre>
Java	<pre>Double.parseDouble("3.14")</pre>
JavaScript	<pre>parseFloat("3.14")</pre>
Python	<pre>float("3.14")</pre>
Swift	<pre>Double("3.14")</pre>

Key Terms

demotion

Going from a larger domain to a smaller domain.

explicit

Changing a value's data type with the cast operator.

implicit

A value that has its data type changed automatically.

promotion

Going from a smaller domain to a larger domain.

truncation

The fractional part of a floating-point data type that is dropped when converted to an integer.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Input-Process-Output Model

DAVE BRAUNSCHWEIG

Overview

The **input-process-output (IPO) model** is a widely used approach in systems analysis and software engineering for describing the structure of an information processing program or other process. Many introductory programming and systems analysis texts introduce this as the most basic structure for describing a process.

Discussion

A computer program or any other sort of process using the input-process-output model receives inputs from a user or other source, does some computations on the inputs, and returns the results of the computations. The system divides the work into three categories:²

- A requirement from the environment (input)
- A computation based on the requirement (process)
- A provision for the environment (output)

For example, a program might be written to convert Fahrenheit temperatures into Celsius temperatures. Following the IPO model, the program must:

- Ask the user for the Fahrenheit temperature (input)
- Perform a calculation to convert the Fahrenheit temperature into the corresponding Celsius temperature (process)
- Display the Celsius temperature (output)

Pseudocode

```
Function Main
    ... This program converts an input Fahrenheit temperature to Celsius.

    Declare Real fahrenheit
    Declare Real celsius

    Output "Enter Fahrenheit temperature:"
    Input fahrenheit
```


1. Wikipedia: IPO model
2. Wikipedia: IPO model


```
Assign celsius = (fahrenheit - 32) * 5 / 9  
  
Output fahrenheit & "° Fahrenheit is " & celsius & "° Celsius"  
End
```

Output

```
Enter Fahrenheit temperature:  
100  
100° Fahrenheit is 37.777777777778° Celsius
```

Flowchart

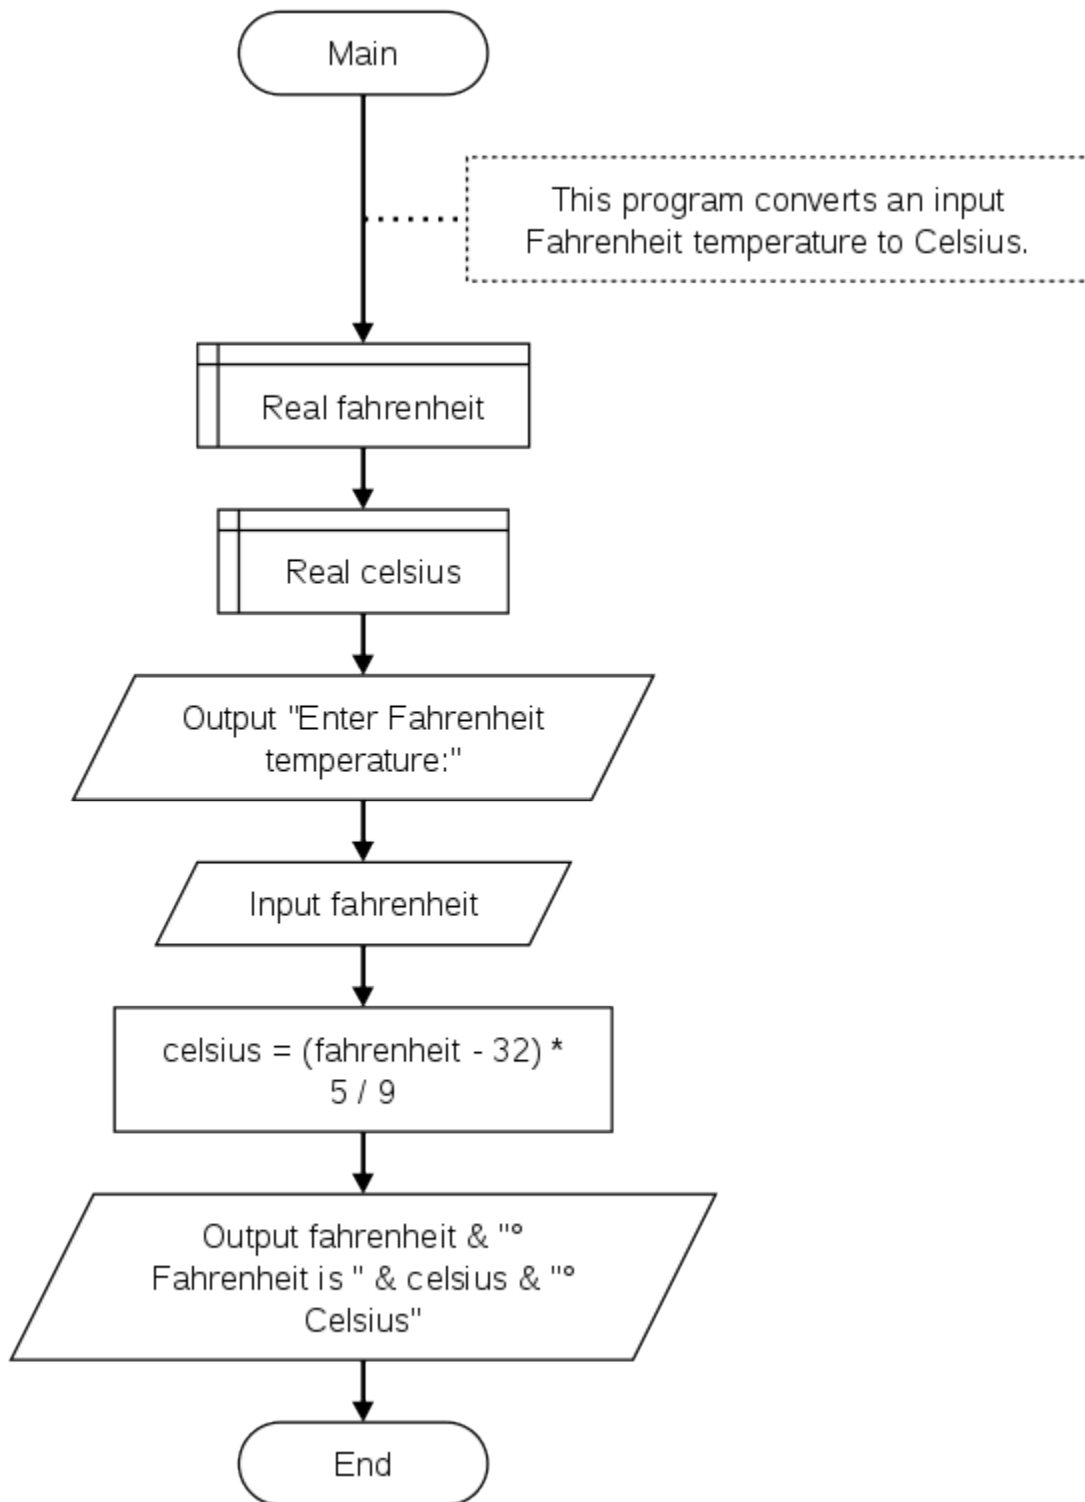

References

- Wikiversity: Computer Programming
- Flowgorithm – Flowchart Programming Language

C++ Examples

DAVE BRAUNSCHWEIG

Overview

The following examples demonstrate data types, arithmetic operations, and input in C++.

Data Types

```
// This program demonstrates variables, literal constants, and data types.

#include <iostream>
#include <sstream>

using namespace std;

int main() {
    int i;
    double d;
    string s;
    bool b;

    i = 1234567890;
    d = 1.23456789012345;
    s = "string";
    b = true;
    cout << "Integer i = " << i << endl;
    cout << "Double d = " << d << endl;
    cout << "String s = " << s << endl;
    cout << "Boolean b = " << b << endl;
    return 0;
}
```

Output

```
Integer i = 1234567890
Real r = 1.23457
String s = string
Boolean b = 1
```

Discussion

Each code element represents:

- `//` begins a comment
- `#include <iostream>` includes standard input and output streams
- `#include <sstream>` includes standard string streams
- `using namespace std` allows reference to `string`, `cout`, and `endl` without writing `std::string`, `std::cout`, and `std::endl`.
- `int main()` begins the main function, which returns an integer value
- `{` begins a block of code
- `int i` defines an integer variable named `i`
- `;` ends each line of C++ code
- `double d` defines a double floating-point variable named `d`
- `string s` defines a string variable named `s`
- `bool b` defines a Boolean variable named `b`
- `i = , d = , s = , b =` assign literal values to the corresponding variables
- `cout` is standard output
- `<<` directs the next element to standard output
- `endl` ends the current line
- `return 0` returns the value 0 from main, indicating the main function completed successfully
- `}` ends a block of code

Arithmetic

```
// This program demonstrates arithmetic operations.

#include <iostream>
#include <sstream>

using namespace std;

int main() {
    int a;
    int b;

    a = 3;
    b = 2;

    cout << "a = " << a << endl;
    cout << "b = " << b << endl;
    cout << "a + b = " << a + b << endl;
```

```

    cout << "a - b = " << a - b << endl;
    cout << "a * b = " << a * b << endl;
    cout << "a / b = " << a / b << endl;
    cout << "a % b = " << a + b << endl;
    return 0;
}

```

Output

```

a = 3
b = 2
a + b = 5
a - b = 1
a * b = 6
a / b = 1
a % b = 5

```

Discussion

Each new code element represents:

- `+`, `-`, `*`, `/`, and `%` represent addition, subtraction, multiplication, division, and modulus, respectively.

Temperature

```

// This program converts an input Fahrenheit temperature to Celsius.
//
// References:
// https://www.mathsisfun.com/temperature-conversion.html
// https://en.wikibooks.org/wiki/C%2B%2B_Programming
#include <iostream>

using namespace std;

int main() {
    double fahrenheit;
    double celsius;

    cout << "Enter Fahrenheit temperature:" << endl;
    cin >> fahrenheit;
}

```

```
    celsius = (fahrenheit - 32) * 5 / 9;

    cout << fahrenheit << "° Fahrenheit is " << celsius << "° Celsius" << endl;

    return 0;
}
```

Output

```
Enter Fahrenheit temperature:
100
100° Fahrenheit is 37.7778° Celsius
```

Discussion

Each new code element represents:

- `cin >> fahrenheit` reads the next integer from standard input and assigns the value to the fahrenheit variable

References

- Wikiversity: Computer Programming

C# Examples

DAVE BRAUNSCHWEIG

Overview

The following examples demonstrate data types, arithmetic operations, and input in C#.

Data Types

```
// This program demonstrates variables, literal constants, and data types.

using System;

public class DataTypes
{
    public static void Main(string[] args)
    {
        int i;
        double d;
        string s;
        Boolean b;

        i = 1234567890;
        d = 1.23456789012345;
        s = "string";
        b = true;

        Console.WriteLine("Integer i = " + i);
        Console.WriteLine("Double d = " + d);
        Console.WriteLine("String s = " + s);
        Console.WriteLine("Boolean b = " + b);
    }
}
```

Output

```
Integer i = 1234567890
Double d = 1.23456789012345
String s = string
```



```
Boolean b = True
```

Discussion

Each code element represents:

- `//` begins a comment
- `using System` allows references to `Boolean` and `Console` without writing `System.Boolean` and `System.Console`
- `public class DataTypes` begins the Data Types program
- `{` begins a block of code
- `public static void Main()` begins the main function
- `int i` defines an integer variable named `i`
- `;` ends each line of C# code
- `double d` defines a double floating-point variable named `d`
- `string s` defines a string variable named `s`
- `Boolean b` defines a Boolean variable named `b`
- `i = , d = , s = , b =` assign literal values to the corresponding variables
- `Console.WriteLine()` calls the standard output write line function
- `}` ends a block of code

Arithmetic

```
// This program demonstrates arithmetic operations.

using System;

public class Arithmetic
{
    public static void Main(string[] args)
    {
        int a;
        int b;

        a = 3;
        b = 2;

        Console.WriteLine("a = " + a);
        Console.WriteLine("b = " + b);
        Console.WriteLine("a + b = " + (a + b));
        Console.WriteLine("a - b = " + (a - b));
        Console.WriteLine("a * b = " + a * b);
    }
}
```

```

        Console.WriteLine("a / b = " + a / b);
        Console.WriteLine("a % b = " + (a + b));
    }
}

```

Output

```

a = 3
b = 2
a + b = 5
a - b = 1
a * b = 6
a / b = 1
a % b = 5

```

Discussion

Each new code element represents:

- `+`, `-`, `*`, `/`, and `%` represent addition, subtraction, multiplication, division, and modulus, respectively.

Temperature

```

// This program converts an input Fahrenheit temperature to Celsius.

using System;

public class Temperature
{
    public static void Main(string[] args)
    {
        double fahrenheit;
        double celsius;

        Console.WriteLine("Enter Fahrenheit temperature:");
        fahrenheit = Convert.ToDouble(Console.ReadLine());

        celsius = (fahrenheit - 32) * 5 / 9;

        Console.WriteLine(

```

```
        fahrenheit.ToString() + "° Fahrenheit is " +  
        celsius.ToString() + "° Celsius" + "\n");  
    }  
}
```

Output

```
Enter Fahrenheit temperature:  
100  
100° Fahrenheit is 37.7777777777778° Celsius
```

Discussion

Each new code element represents:

- `Console.ReadLine()` reads the next line from standard input
- `Convert.ToDouble` converts the input to a double floating-point value

References

- Wikiversity: Computer Programming

Java Examples

DAVE BRAUNSCHWEIG

Overview

The following examples demonstrate data types, arithmetic operations, and input in Java.

Data Types

```
// This program demonstrates variables, literal constants, and data types.

public class Main {
    public static void main(String[] args) {
        int i;
        double d;
        String s;
        boolean b;

        i = 1234567890;
        d = 1.23456789012345;
        s = "string";
        b = true;

        System.out.println("Integer i = " + i);
        System.out.println("Double d = " + d);
        System.out.println("String s = " + s);
        System.out.println("Boolean b = " + b);
    }
}
```

Output

```
Integer i = 1234567890
Double d = 1.23456789012345
String s = string
Boolean b = true
```

Discussion

Each code element represents:

- `//` begins a comment
- `public class DataTypes` begins the Data Types program
- `{` begins a block of code
- `public static void main(String[] args)` begins the main function
- `int i` defines an integer variable named `i`
- `;` ends each line of Java code
- `double d` defines a double floating-point variable named `d`
- `string s` defines a string variable named `s`
- `boolean b` defines a Boolean variable named `b`
- `i = , d = , s = , b =` assign literal values to the corresponding variables
- `System.out.println` calls the standard output print line function
- `}` ends a block of code

Arithmetic

```
// This program demonstrates arithmetic operations.

public class Main {
    public static void main(String[] args) {
        int a;
        int b;

        a = 3;
        b = 2;

        System.out.println("a = " + a);
        System.out.println("b = " + b);
        System.out.println("a + b = " + (a + b));
        System.out.println("a - b = " + (a - b));
        System.out.println("a * b = " + a * b);
        System.out.println("a / b = " + a / b);
        System.out.println("a % b = " + (a % b));
    }
}
```

Output

```
a = 3
```

```
b = 2
a + b = 5
a - b = 1
a * b = 6
a / b = 1
a % b = 1
```

Discussion

Each new code element represents:

- `+`, `-`, `*`, `/`, and `%` represent addition, subtraction, multiplication, division, and modulus, respectively.

Temperature

```
// This program converts an input Fahrenheit temperature to Celsius.

import java.util.*;

public class Main {
    private static Scanner input = new Scanner(System.in);

    public static void main(String[] args) {
        double fahrenheit;
        double celsius;

        System.out.println("Enter Fahrenheit temperature:");
        fahrenheit = input.nextDouble();

        celsius = (fahrenheit - 32) * 5 / 9;

        System.out.println(Double.toString(fahrenheit) + "° Fahrenheit is ")
    }
}
```

Output

```
Enter Fahrenheit temperature:
100
100° Fahrenheit is 37.777777777778° Celsius
```

Discussion

Each new code element represents:

- `private static Scanner input ...` defines an object to read from standard input
- `input.nextDouble()` reads input as a double floating-point value

References

- Wikiversity: Computer Programming

JavaScript Examples

DAVE BRAUNSCHWEIG

Overview

The following examples demonstrate data types, arithmetic operations, and input in JavaScript.

Data Types

```
// This program demonstrates variables, literal constants, and data types.

var n;
var s;
var b;

n = 1.23456789012345;
s = "string";
b = true;

output("Number n = " + n);
output("String s = " + s);
output("Boolean b = " + b);

// Check the JavaScript environment and write to the console,
// the current document, or standard output as appropriate.
// Reference: http://progopedia.com/example/hello-world/114/
function output(text) {
    if (typeof console === 'object') {
        console.log(text);
    }
    else if (typeof document === 'object') {
        document.write(text);
    }
    else {
        print(text);
    }
}
```


Output

```
Number n = 1.23456789012345
String s = string
Boolean b = true
```

Discussion

Each code element represents:

- `//` begins a comment
- `var n, s, and b` define variables
- `;` ends each line of JavaScript code
- `i = , d = , s =, b =` assign literal values to the corresponding variables
- `output()` calls the output function
- `function output(text)` defines a output function that checks the JavaScript environment and writes to the console, the current document, or standard output as appropriate.

Arithmetic

```
// This program demonstrates arithmetic operations.

var a;
var b;

a = 3;
b = 2;
output("a = " + a);
output("b = " + b);
output("a + b = " + (a + b));
output("a - b = " + (a - b));
output("a * b = " + a * b);
output("a / b = " + a / b);
output("a % b = " + (a % b));

// Checks the JavaScript environment and writes to the console,
// the current document, or standard output as appropriate.
// Reference: http://progopedia.com/example/hello-world/114/
function output(text) {
    if (typeof console === 'object') {
        console.log(text);
    }
}
```

```

    }
    else if (typeof document === 'object') {
        document.write(text);
    }
    else {
        print(text);
    }
}

```

Output

```

a = 3
b = 2
a + b = 5
a - b = 1
a * b = 6
a / b = 1.5
a % b = 1

```

Discussion

Each new code element represents:

- `+`, `-`, `*`, `/`, and `%` represent addition, subtraction, multiplication, division, and modulus, respectively.

Temperature

```

// This program converts an input Fahrenheit temperature to Celsius.

var fahrenheit;
var celsius;

output("Enter Fahrenheit temperature:");
fahrenheit = input();

celsius = (fahrenheit - 32) * 5 / 9;

output(fahrenheit.toString() + "° Fahrenheit is " + celsius + "° Celsius");

// Checks the JavaScript environment and reads from the console,

```

```

// the current document, or standard input as appropriate.
function input(text) {
  if (typeof console === 'object') {
    return prompt(text)
  }
  else {
    output(text);
    var isr = new java.io.InputStreamReader(java.lang.System.in);
    var br = new java.io.BufferedReader(isr);
    var line = br.readLine();
    return line.trim();
  }
}

// Checks the JavaScript environment and writes to the console,
// the current document, or standard output as appropriate.
// Reference: http://progopedia.com/example/hello-world/114/
function output(text) {
  if (typeof console === 'object') {
    console.log(text);
  }
  else if (typeof document === 'object') {
    document.write(text);
  }
  else {
    print(text);
  }
}

```

Output

```

Enter Fahrenheit temperature:
100
100° Fahrenheit is 37.777777777778° Celsius

```

Discussion

Each new code element represents:

- `function input(text)` defines a function that checks the JavaScript environment and reads from the console, the current document, or standard input as appropriate.

References

- Wikiversity: Computer Programming

Python Examples

DAVE BRAUNSCHWEIG

Overview

The following examples demonstrate data types, arithmetic operations, and input in Python.

Data Types

```
# This program demonstrates variables, literal constants, and data types.

i = 1234567890
f = 1.23456789012345
s = "string"
b = True

print("Integer i =", i)
print("Float f =", f)
print("String s =", s)
print("Boolean b =", b)
```

Output

```
Integer i = 1234567890
Float f = 1.23456789012345
String s = string
Boolean b = true
```

Discussion

Each code element represents:

- `#` begins a comment
- `i = , d = , s =, b =` assign literal values to the corresponding variables
- `print()` calls the print function

Arithmetic

```
# This program demonstrates arithmetic operations.

a = 3
b = 2

print("a =", a)
print("b =", b)
print("a + b =", (a + b))
print("a - b =", (a - b))
print("a * b =", a * b)
print("a / b =", a / b)
print("a % b =", (a % b))
```

Output

```
a = 3
b = 2
a + b = 5
a - b = 1
a * b = 6
a / b = 1.5
a % b = 1
```

Discussion

Each new code element represents:

- `+`, `-`, `*`, `/`, and `%` represent addition, subtraction, multiplication, division, and modulus, respectively.

Temperature

```
# This program converts an input Fahrenheit temperature to Celsius.

print("Enter Fahrenheit temperature:")
fahrenheit = float(input())

celsius = (fahrenheit - 32) * 5 / 9
```

```
print(str(fahrenheit) + "° Fahrenheit is " + str(celsius) + "° Celsius")
```

Output

```
Enter Fahrenheit temperature:
100
100.0° Fahrenheit is 37.77777777777778° Celsius
```

Discussion

Each new code element represents:

- `input()` reads the next line from standard input
- `float()` converts the input to a floating-point value

References

- Wikiversity: Computer Programming

Swift Examples

DAVE BRAUNSCHWEIG

Overview

The following examples demonstrate data types, arithmetic operations, and input in Swift.

Data Types

```
// This program demonstrates variables, literal constants, and data types.

var i: Int
var d: Double
var s: String
var b: Bool

i = 1234567890
d = 1.23456789012345
s = "string"
b = true

print("Integer i =", i)
print("Double d =", d)
print("String s =", s)
print("Boolean b =", b)
```

Output

```
Integer i = 1234567890
Double d = 1.23456789012345
String s = string
Boolean b = true
```

Discussion

Each code element represents:

- `//` begins a comment
- `var i: Int` defines an integer variable named `i`

- `var d: Double` defines a double floating-point variable named `d`
- `var s: String` defines a string variable named `s`
- `var b: Bool` defines a Boolean variable named `b`
- `i = , d = , s =, b =` assign literal values to the corresponding variables
- `print()` calls the print function

Arithmetic

```
// This program demonstrates arithmetic operations.

var a: Int
var b: Int

a = 3
b = 2

print("a =", a)
print("b =", b)
print("a + b =", (a + b))
print("a - b =", (a - b))
print("a * b =", a * b)
print("a / b =", a / b)
print("a % b =", (a % b))
```

Output

```
a = 3
b = 2
a + b = 5
a - b = 1
a * b = 6
a / b = 1
a % b = 1
```

Discussion

Each new code element represents:

- `+, -, *, /, and %` represent addition, subtraction, multiplication, division, and modulus, respectively.

Temperature

```
// This program converts a Fahrenheit temperature to Celsius.
//
// References:
//     https://www.mathsisfun.com/temperature-conversion.html
//     https://developer.apple.com/library/content/documentation/Swift/Conc

var fahrenheit: Double
var celsius: Double

print("Enter Fahrenheit temperature:")
fahrenheit = Double(readLine()!)

celsius = (fahrenheit - 32) * 5 / 9

print(String(fahrenheit) + "° Fahrenheit is " + String(celsius) + "° Celsius")
```

Output

```
Enter Fahrenheit temperature:
100
100.0° Fahrenheit is 37.777777777778° Celsius
```

Discussion

Each new code element represents:

- `readline()!` reads the next line from standard input
- `Double()!` converts the input to a double floating-point value
- `String()` converts the output numeric value to a string

References

- Wikiversity: Computer Programming

Practice: Data and Operators

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Review Questions

True or false:

1. A data type defines a set of values and the set of operations that can be applied on those values.
2. Reserved or key words can be used as identifier names.
3. The concept of precedence says that some operators (like multiplication and division) are to be executed before other operators (like addition and subtraction).
4. An operator that needs two operands, will promote one of the operands as needed to make both operands be of the same data type.
5. Parentheses change the precedence of operators.
6. Integer data types are stored with a mantissa and an exponent.
7. Strings are identified by single quote marks in most programming languages.
8. An operand is a value that receives the operator's action.
9. Arithmetic assignment is a shorter way to write some expressions.
10. Integer division is rarely used in computer programming.

Answers:

1. true
2. false
3. true
4. true
5. false – Parentheses change the order of evaluation in an expression.
6. false
7. false
8. true
9. true
10. false

Short Answer:

1. A men's clothing store that caters to the very rich wants to create a data base for its customers that records clothing measurements. They need to record information for shoes, socks, pants, dress shirts and casual shirts. HINT: You may need more than 5 data items.
2. The sequence operator can be used when declaring multiple identifier names for variables or constants of the same data type. Is this a good or bad programming habit and why?

Activities

Complete the following activities using pseudocode, a flowcharting tool, or your selected programming language. Use appropriate data types for each variable, and include separate

statements for input, processing, and output. Create test data to validate the accuracy of each program.

1. Create a program to prompt the user for hours and rate per hour and then calculate and display their weekly, monthly, and annual gross pay (hours * rate).¹.
2. Create a program that asks the user how old they are in years, and then calculate and display their approximate age in months, days, hours, and seconds. For example, a person 1 year old is 12 months old, 365 days old, etc.
3. Review MathsIsFun: US Standard Lengths. Create a program that asks the user for a distance in miles, and then calculate and display the distance in yards, feet, and inches, or ask the user for a distance in miles, and then calculate and display the distance in kilometers, meters, and centimeters.
4. Review MathsIsFun: Area of Plane Shapes. Create a program that asks the user for the dimensions of different shapes and then calculate and display the area of the shapes. Do not include shape choices. That will come later. For now, just include multiple shape calculations in sequence.
5. Create a program that calculates the area of a room to determine the amount of floor covering required. The room is rectangular with the dimensions measured in feet with decimal fractions. The output needs to be in square yards. There are 3 lineal feet to a yard.
6. Create a program that helps the user determine how much paint is required to paint a room and how much it will cost. Ask the user for the length, width, and height of a room, the price of a gallon of paint, and the number of square feet that a gallon of paint will cover. Calculate the total area of the four walls as $2 * \text{length} * \text{height} + 2 * \text{width} * \text{height}$. Calculate the the number of gallons as: $\text{total area} / \text{square feet per gallon}$. Note: You must round up to the next full gallon. To round up, add 0.9999 and then convert the resulting value to an integer. Calculate the total cost of the paint as: $\text{gallons} * \text{price per gallon}$.
7. Review MathsIsFun: Order of Operations. Create a program that demonstrates order of operations to the user. Include parentheses, exponents, multiplication, division, addition, and subtraction in your program. Use variables for the calculations and label the output. For example, part of the program might display:

```
1 + 2 * 3 = 7
(1 + 2) * 3 = 9
...
```
8. Review Wikipedia: Data type. Create a program that demonstrates integer, floating point, and character or string data, and demonstrate converting between data types. For example, user input is always a string, but adding string values of "1" + "1" is typically "11", whereas, adding numeric values of 1 + 1 is 2. Use variables for the calculations and label the output.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++
- Wikiversity: Computer Programming

1. PythonLearn: Variables, expressions, and statements

PART III

FUNCTIONS

Overview

This chapter introduces modular programming, functions, parameters, return values, and scope.

Chapter Outline

- Modular Programming
- Hierarchy or Structure Chart
- Function Examples
- Parameters and Arguments
- Call by Value vs. Call by Reference
- Return Statement
- Void Data Type
- Scope
- Programming Style
- Standard Libraries
- Code Examples
 - C++
 - C#
 - Java
 - JavaScript
 - Python
 - Swift
- Practice

Learning Objectives

1. Understand key terms and definitions.
2. Given example pseudocode, flowcharts, and source code, create a program that uses functions, parameters, and return values to solve a given problem.

Modular Programming

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

Modular programming is a software design technique that emphasizes separating the functionality of a program into independent, interchangeable modules, such that each contains everything necessary to execute only one aspect of the desired functionality.¹

Concept of Modularization

One of the most important concepts of programming is the ability to group some lines of code into a unit that can be included in our program. The original wording for this was a sub-program. Other names include: macro, sub-routine, procedure, module and function. We are going to use the term **function** for that is what they are called in most of the predominant programming languages of today. Functions are important because they allow us to take large complicated programs and to divide them into smaller manageable pieces. Because the function is a smaller piece of the overall program, we can concentrate on what we want it to do and test it to make sure it works properly. Generally functions fall into two categories:

1. **Program Control** – Functions used to simply sub-divide and control the program. These functions are unique to the program being written. Other programs may use similar functions, maybe even functions with the same name, but the content of the functions are almost always very different.
2. **Specific Task** – Functions designed to be used with several programs. These functions perform a specific task and thus are useable in many different programs because the other programs also need to do the specific task. Specific task functions are sometimes referred to as building blocks. Because they are already coded and tested, we can use them with confidence to more efficiently write a large program.

The main program must establish the existence of functions used in that program. Depending on the programming language, there is a formal way to:

1. define a function (its **definition** or the code it will execute)
2. **call** a function
3. declare a function (a **prototype** is a declaration to a compiler)

Note: Defining and calling functions are common activities across programming languages.

1. Wikipedia: Modular programming

Declaring functions with prototypes is specific to certain programming languages, including C and C++.

Program Control functions normally do not communicate information to each other but use a common area for variable storage. Specific Task functions are constructed so that data can be communicated between the calling program piece (which is usually another function) and the function being called. This ability to communicate data is what allows us to build a specific task function that may be used in many programs. The rules for how the data is communicated in and out of a function vary greatly by programming language, but the concept is the same. The data items passed (or communicated) are called parameters. Thus the wording: **parameter passing**. The four data communication options include:

1. no communication in with no communication out
2. no communication in with some communication out
3. some communication in with some communication out
4. some communication in with no communication out

Program Control Function

The main program piece in many programming languages is a special function with the **identifier name** of main. The special or uniqueness of main as a function is that this is where the program starts executing code and this is where it usually stops executing code. It is often the first function defined in a program and appears after the area used for includes, other technical items, declaration of prototypes, the listing of global constants and variables and any other items generally needed by the program. The code to define the function main is provided; however, it is not prototyped or usually called like other functions within a program.

Specific Task Function

We often have the need to perform a specific task that might be used in many programs.

General layout of a function in a statically-typed language such as C++, C#, and Java:

```
<return value data type> function identifier name(<data type> <identifier name>
    //lines of code;
    return <value>;
}
```

General layout of a function in a dynamically typed language such as JavaScript and Python:

```
function identifier name(<identifier name for input value>) {
    //lines of code;
    return <value>;
}
```



```
def function identifier name(<identifier name for input value>):  
    //lines of code  
    return <value>
```

In some programming languages, functions have a set of **braces** {} used for identifying a group or block of statements or lines of code. Other languages use indenting or some type of begin and end statements to identify a code block. There are normally several lines of code within a function.

Programming languages will either have specific task functions defined before or after the main function, depending on coding conventions for the given language.

When you call a function you use its identifier name and a set of parentheses. You place any data items you are passing inside the parentheses. After our program is compiled and running, the lines of code in the main function are executed, and when it gets to the calling of a specific task function, the control of the program moves to the function and starts executing the lines of code in the function. When it's done with the lines of code, it will return to the place in the program that called it (in our example the function main) and continue with the code in that function.

Program Layout

Most programs have several items before the functions, including:

1. Documentation – Most programs have a comment area at the start of the program with a variety of comments pertinent to the program.
2. Include or import statements used to access standard library functions.
3. Language-specific code such as namespace references or function prototypes.
4. Global or module-level constants and variables, when required.

Key Terms

braces

Used to identify a block of code in languages such as C++, C#, Java, and JavaScript.

function

What modules are called in many predominant programming languages of today.

function call

A function's using or invoking of another function.

function definition

The code that defines what a function does.

function prototype

A function's communications declaration to a compiler.

identifier name

The name given by the programmer to identify a function or other program items such as variables.

modularization

The ability to group some lines of code into a unit that can be included in our program.

parameter passing

How the data is communicated in to and out of a function.

program control

Functions used to simply sub divide and control the program.

specific task

Functions designed to be used with several programs.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++


Hierarchy or Structure Chart

KENNETH LEROY BUSBEE

Overview

The **hierarchy chart** (also known as a **structure chart**) shows the relationship of various modules. Its name comes from its general use in showing the organization (or structure) of a business. The President at the top, then vice presidents on the next level, etc. Within the context of a computer program it shows the relationship between modules (or functions). Detail logic of the program is not presented. It does represent the organization of the functions used within the program showing which functions are calling on a subordinate function. Those above are calling those on the next level down.

Hierarchy charts are created by the programmer to help document a program. They convey the big picture of the modules (or functions) used in a program.

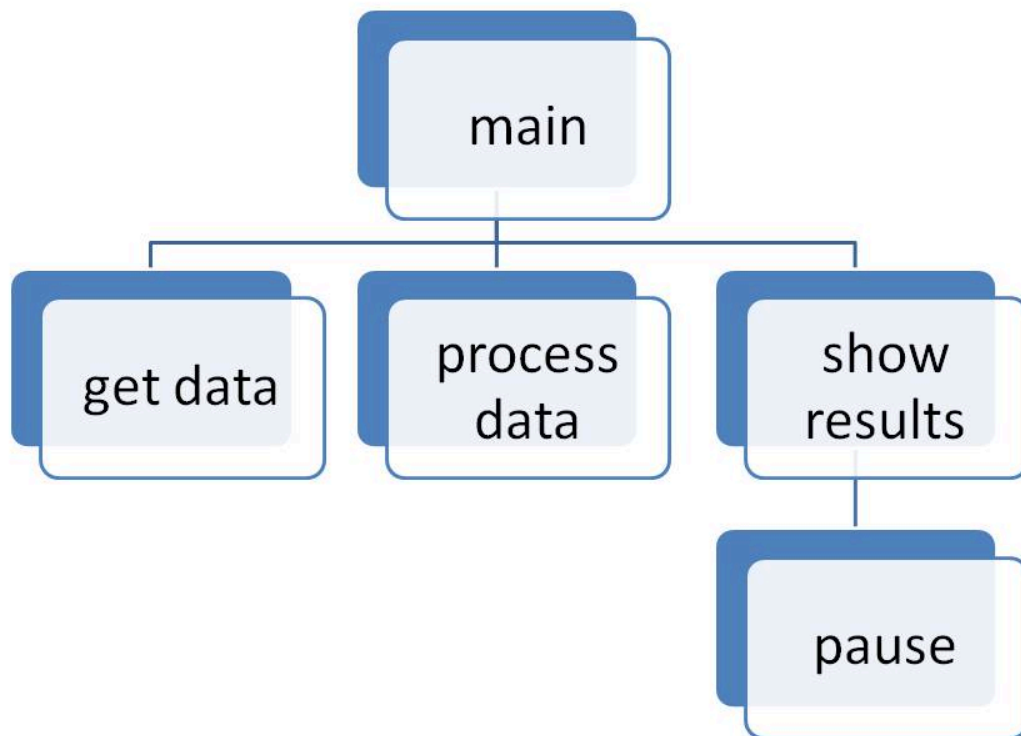

Hierarchy or Structure chart for a program that has five functions.

Key Terms

hierarchy chart

Convey the relationship or big picture of the various functions in a program.

structure chart

Another name for a hierarchy chart.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Function Examples

DAVE BRAUNSCHWEIG

Overview

The following pseudocode and flowchart examples take the Temperature program from the previous chapter and separate the functionality into independent functions for input, processing, and output, as GetFahrenheit, CalculateCelsius, and DisplayResult, respectively.

Discussion

As independent functions, each function acts as a miniature program, with its own input, processing, and output. As you review the following code, note which functions have parameters (input) and which functions have return values (output). Parameters and return values will be discussed in the next few pages.

Function	Purpose	Parameters (input)	Return Value (output)
Main	main program	none	none
GetFahrenheit	input	none	fahrenheit
CalculateCelsius	processing	fahrenheit	celsius
DisplayResult	output	fahrenheit, celsius	none

Pseudocode

```
Function Main
    ... This program asks the user for a Fahrenheit temperature,
    ... converts the given temperature to Celsius,
    ... and displays the results.

    Declare Real fahrenheit
    Declare Real celsius

    Assign fahrenheit = GetFahrenheit()
    Assign celsius = CalculateCelsius(fahrenheit)
    Call DisplayResult(fahrenheit, celsius)
End

Function GetFahrenheit
    Declare Real fahrenheit
```

```
    Output "Enter Fahrenheit temperature:"
    Input fahrenheit
Return Real fahrenheit

Function CalculateCelsius (Real fahrenheit)
    Declare Real celsius



    Assign celsius = (fahrenheit - 32) * 5 / 9
Return Real celsius


Function DisplayResult (Real fahrenheit, Real celsius)
    Output fahrenheit & "° Fahrenheit is " & celsius & "° Celsius"
End
```

Output

```
Enter Fahrenheit temperature:
100
100° Fahrenheit is 37.777777777778° Celsius
```

Flowchart

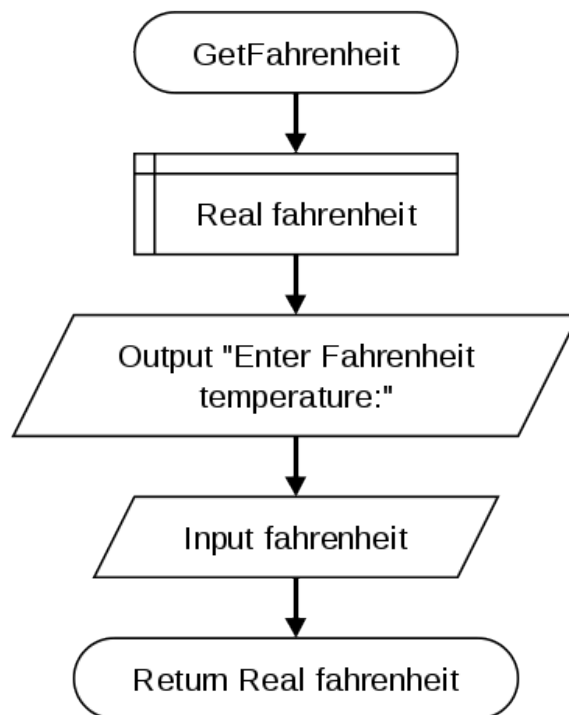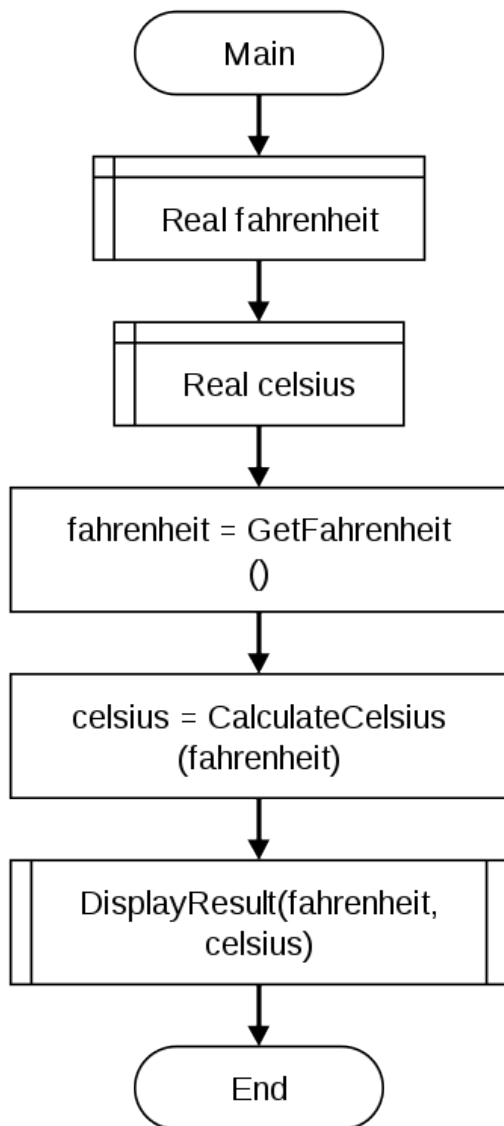

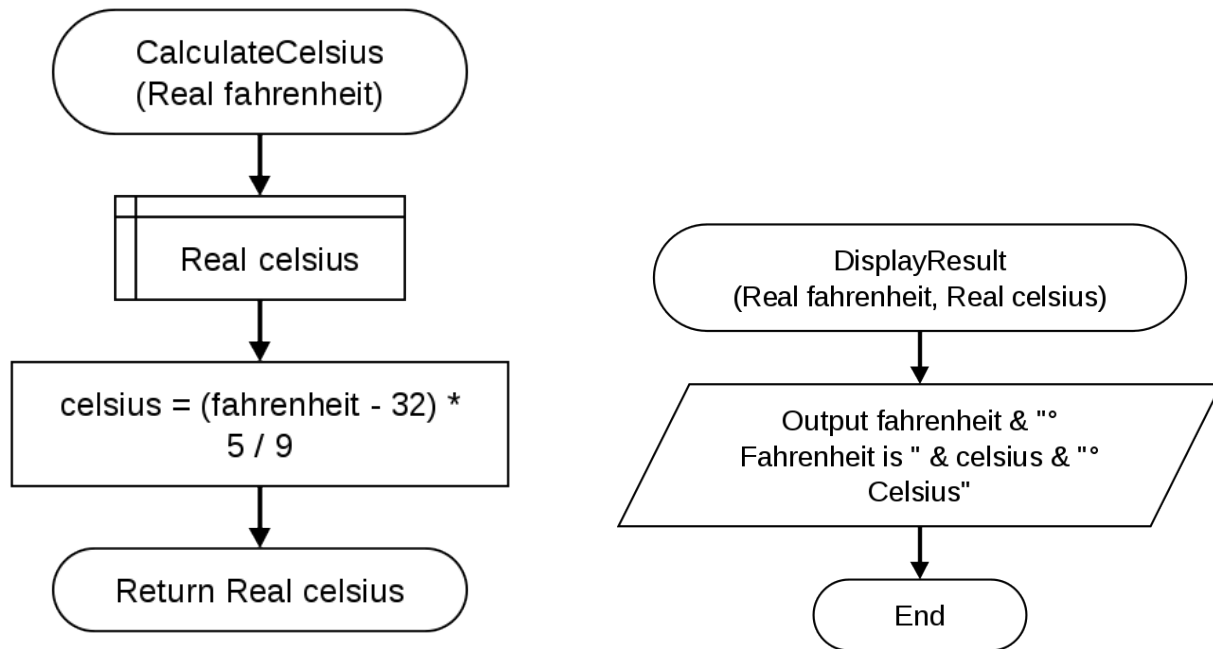

References

- Wikiversity: Computer Programming
- Flowgorithm – Flowchart Programming Language

Parameters and Arguments

DAVE BRAUNSCHWEIG

Overview

A **parameter** is a special kind of variable used in a function to refer to one of the pieces of data provided as input to the function. These pieces of data are the values of the **arguments** with which the function is going to be called/invoked. An ordered list of parameters is usually included in the definition of a function, so that, each time the function is called, its arguments for that call are evaluated, and the resulting values can be assigned to the corresponding parameters.¹

Discussion

Recall that the modular programming approach separates the functionality of a program into *independent* modules. To separate the functionality of one function from another, each function is given its own unique input variables, called parameters. The parameter values, called arguments, are passed to the function when the function is called. Consider the following function pseudocode:

```
Function CalculateCelsius (Real fahrenheit)
    Declare Real celsius

    Assign celsius = (fahrenheit - 32) * 5 / 9
Return Real celsius
```

If the `CalculateCelsius` function is called passing in the value 100, as in `CalculateCelsius(100)`, the parameter is `fahrenheit` and the argument is 100. The terms parameter and argument are often used interchangeably. However, parameter refers to the variable identifier (`fahrenheit`) while argument refers to the variable value (100).

Functions may have no parameters or multiple parameters. Consider the following function pseudocode:

```
Function DisplayResult (Real fahrenheit, Real celsius)
    Output fahrenheit & "° Fahrenheit is " & celsius & "° Celsius"
End
```

If the `DisplayResult` function is called passing in the values 98.6 and 37.0, as in `DisplayResults(98.6, 37.0)`, the argument or value for the `fahrenheit` parameter is 98.6 and the argument or value for the `celsius` parameter is 37.0. Note that the arguments are passed

1. Wikipedia: Parameter (computer programming)

positionally. Calling `DisplayResults(37.0, 98.6)` would result in incorrect output, as the value of `fahrenheit` would be 37.0 and the value of `celsius` would be 98.6.

Some programming languages, such as Python, support named parameters. When calling functions using named parameters, parameter names and values are used, and positions are ignored. When names are not used, arguments are identified by position. For example, any of the following function calls would be valid:

```
CalculateCelsius(98.6, 37.0)
CalculateCelsius(fahrenheit=98.6, celsius=37.0)
CalculateCelsius(celsius=37.0, fahrenheit=98.6)
```

Key Terms

argument

A value provided as input to a function.

parameter

A variable identifier provided as input to a function.

References

- Wikiversity: Computer Programming

Call by Value vs. Call by Reference

DAVE BRAUNSCHWEIG

Overview

In **call by value**, a parameter acts within the function as a new local variable initialized to the value of the argument (a local (isolated) copy of the argument). In **call by reference**, the argument variable supplied by the caller can be affected by actions within the called function.¹

Discussion

Call by Value

Within most current programming languages, parameters are passed by value by default, with the argument as a copy of the calling value. Arguments are isolated, and functions are free to make changes to parameter values without any risk of impact to the calling function. Consider the following pseudocode:

```
Function Main
  Declare Real fahrenheit

  Assign fahrenheit = 100
  Output "Main fahrenheit = " & fahrenheit
  Call ChangeFahrenheit(fahrenheit)
  Output "Main fahrenheit = " & fahrenheit
End

Function ChangeFahrenheit (Real fahrenheit)
  Output "ChangeFahrenheit fahrenheit = " & fahrenheit
  Assign fahrenheit = 0
  Output "ChangeFahrenheit fahrenheit = " & fahrenheit
End
```

Output

```
Main fahrenheit = 100
```

1. Wikipedia: Parameter (computer programming)

```
ChangeFahrenheit fahrenheit = 100
ChangeFahrenheit fahrenheit = 0
Main fahrenheit = 100
```

In English, the Main function assigns the value 100 to the variable fahrenheit, displays that value, and then calls ChangeFahrenheit passing a copy of that value. The called function displays the argument, changes it, and displays it again. Execution returns to the calling function, and Main displays the value of the original variable. With call by value, the variable fahrenheit in the calling function and the parameter fahrenheit in the called function refer to different memory addresses, and the called function cannot change the value of the variable in the calling function.

Call by Reference

If a programming language uses or supports call by reference, the variable in the calling function and the parameter in the called function refer to the same memory address, and the called function may change the value of the variable in the calling function. Using the same code example as above, call by reference output would change to:

```
Main fahrenheit = 100
ChangeFahrenheit fahrenheit = 100
ChangeFahrenheit fahrenheit = 0
Main fahrenheit = 0
```

Programming languages that support both call by value and call by reference use some type of key word or symbol to indicate which parameter passing method is being used.

Language	Call By Value	Call by Reference
C++	default	use <code>&parameter</code> in called function
C#	default	use <code>ref parameter</code> in calling and called functions
Java	default	applies to arrays and objects
JavaScript	default	applies to arrays and objects
Python	default	applies to arrays (lists) and mutable objects

Arrays and objects are covered in later chapters.

Key Terms

call by reference

Parameters passed by calling functions may be modified by called functions.

call by value

Parameters passed by calling functions cannot be modified by called functions.

References

- Wikiversity: Computer Programming

Return Statement

DAVE BRAUNSCHWEIG AND KENNETH LEROY BUSBEE

Overview

A **return statement** causes execution to leave the current function and resume at the point in the code immediately after where the function was called. Return statements in many languages allow a function to specify a return value to be passed back to the code that called the function.¹

Discussion

The return statement exits a function and returns to the statement where the function was called. Most programming languages support optionally returning a single value to the calling function. Consider the following pseudocode:

```
Function Main
    ...
    Assign fahrenheit = GetFahrenheit()
    ...
End

Function GetFahrenheit
    Declare Real fahrenheit

    Output "Enter Fahrenheit temperature:"
    Input fahrenheit
    Return Real fahrenheit
```

In English, the Main function calls the GetFahrenheit function, passing in no parameters. The GetFahrenheit function retrieves input from the user and returns that input back to the main function, where it is assigned to the variable fahrenheit. In this example, the Main function has no return value.

Note that functions are independent, and each function must declare its own variables. While both functions have a variable named fahrenheit, they are not the same variable. Each variable refers to a different location in memory. Just as parameters by default are passed by position rather than by name, return values are also passed by position rather than by name. The following code would generate the same results.

1. Wikipedia: Return statement

```
Function Main
    ...
    Assign fahrenheit = GetTemperature()
    ...
End

Function GetTemperature
    Declare Real temperature

    Output "Enter Fahrenheit temperature:"
    Input temperature
    Return Real temperature
```

Most programming languages support either zero or one return value from a function. There are some older programming languages where return values are not supported. In those languages, the modules are often referred to as subroutines rather than functions. There are also programming languages that support multiple return values in a single return statement, however, only single return values or no return value will be used in this book.

Key Terms

return

A branching control structure that causes a function to jump back to the function that called it.

References

- [cnx.org: Programming Fundamentals – A Modular Structured Approach using C++](https://cnx.org/content/col12071/1.10)
- [Wikiversity: Computer Programming](https://www.wikiversity.org/wiki/Computer_Programming)

Void Data Type

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

The void data type, similar to the Nothing data type described earlier, is the data type for the result of a function that returns normally, but does not provide a result value to its caller.¹

Discussion

The **void data type** has no values and no operations. It's a data type that represents the lack of a data type.

Language	Reserved Word
C++	void
C#	void
Java	void
JavaScript	void
Python	N/A
Swift	Void

Many programming languages need a data type to define the lack of return value to indicate that nothing is being returned. The void data type is typically used in the definition and prototyping of functions to indicate that either nothing is being passed in and/or nothing is being returned.

Key Terms

void data type

A data type that has no values or operators and is used to represent nothing.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

1. Wikipedia: Void type

Scope

KENNETH LEROY BUSBEE

Overview

The **scope** of an identifier name binding – an association of a name to an entity, such as a variable – is the region of a computer program where the binding is valid: where the name can be used to refer to the entity. Such a region is referred to as a scope block. In other parts of the program the name may refer to a different entity (it may have a different binding), or to nothing at all (it may be unbound).¹

Discussion

Scope is the area of the program where an item (be it variable, constant, function, etc.) that has an identifier name is recognized. In our discussion we will use a variable and the place within a program where the variable is defined determines its scope.

Global scope (and by extension global data storage) occurs when a variable is defined “outside of a function”. When compiling the program it creates the storage area for the variable within the program’s **data area as part of the object code**. The object code has a machine code piece, a data area and linker resolution instructions. Because the variable has global scope it is available to all of the functions within your source code. It can even be made available to functions in other object modules that will be linked to your code; however we will forgo that explanation now. A key wording change should be learned at this point. Although the variable has global scope, technically it is available only from **the point of definition to the end of the program source code**. That is why most variable with global scope are placed near the top of the source code before any functions. This way they are available to all of the functions.

Local scope (and by extension local data storage) occurs when a variable is defined “inside of a function”. When compiling, the compiler creates machine instructions that will direct the creation of storage locations on an area known as the **stack which is part of the computer’s memory**. These memory locations exist until the function completes its task and returns to its calling function. In assembly language we talk about items being pushed onto the stack and popped off the stack when the function terminates. Thus, the stack is a reusable area of memory being used by all functions and released as functions terminate. Although the variable has local scope, technically it is available only from **the point of definition to the end of the function**. The parameter passing of data items into a function establishes them as local variables. Additionally, any other variables or constants needed by the function usually occur near the top of the function definition so that they are available during the entire execution of the function’s code.

Scope is an important concept to modularization. Program control functions may use global scope for variables and constants placing them near the top of the program before any functions. Specific task functions use only local scope variables by passing data as needed into the function with parameter passing and creating local variables and constants as needed. Any information that needs to be communicated back to the calling function is again done via parameter passing. This **closed communications model** that passes all data into and out of a

1. Wikipedia: Scope (computer science)

function creates an important predecessor concept for **encapsulation** which is used in object oriented programming.

Key Terms

data area

A part of an object code file used for storage of data.

global scope

Data storage defined outside of a function.

local scope

Data storage defined inside of a function.

scope

The area of a source code file where an identifier name is recognized.

stack

A part of the computer's memory used for storage of data.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Programming Style

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

Programming style is a set of rules or guidelines used when writing the source code for a computer program. Following a particular programming style will help programmers read and understand source code conforming to the style, and help to avoid introducing errors.¹

Discussion

Within the programming industry there is a desire to make software programs easy to maintain. The desire centers on money. Simply put, it costs less money to maintain a well written program. One important aspect of program maintenance is making source code listings clear and as easy to read as possible. To that end we will consider the following:

1. Documentation
2. Vertical Alignment
3. Comments
4. Indentation
5. Meaningful Identifier Names Consistently Typed
6. Appropriate use of Typedef

The above items are not needed in order for the source code to compile. Technically the compiler does not read the source code the way humans read the source code. But that is exactly the point; the desire is to make the source code easier for humans to read. You should not be confused between what is possible (technically will run) and what is okay (acceptable good programming practice that leads to readable code).

For each of these items, check style guides for your selected programming language to determine standards and best practices. The following are general guidelines to consider.

Documentation

Documentation is usually placed at the top of the program using several comment lines. The amount of information would vary based on the requirements or standards of the company who is paying its employees or independent contractors to write the code.

Vertical Alignment

You see this within the documentation area. All of the items are aligned up within the same

1. Wikipedia: Programming style

column. This vertical alignment occurs again when variables are defined. When declaring variables or constants many textbooks put several items on one line; like this:

```
float  length, width, height;
```

However common this is in textbooks, it would generally not be acceptable to standards used in most companies. You should declare each item on its own line; like this:

```
float  length;  
float  width;  
float  height;
```

This method of using one item per line is more readable by humans. It is quicker to find an identifier name, because you can read the list vertically faster than searching horizontally. Some programmers list them in alphabetic order.

The lines of code inside functions are also aligned vertically and typically indented two or four spaces from the left. The indentation helps set the block off visually.

Comments

Experts have varying viewpoints on whether, and when, comments are appropriate in source code. Some assert that source code should be written with few comments, on the basis that the source code should be self-explanatory or self-documenting. Others suggest code should be extensively commented, with over 50% of the non-whitespace characters in source code being contained within comments).²

In between these views is the assertion that comments are neither beneficial nor harmful by themselves, and what matters is that they are correct and kept in sync with the source code, and omitted if they are superfluous, excessive, difficult to maintain or otherwise unhelpful.³

Indentation

For languages that use curly braces, there are two common indentation styles:

```
function(parameters) {  
    // code  
}
```

```
function(parameters)  
{  
    // code
```

2. Wikipedia: Comment (computer programming)

3. Wikipedia: Comment (computer programming)

```
}
```

In either case, it is important to maintain vertical alignment between the start of the code block and the closing curly brace.

The number of spaces used for indenting blocks of code is typically two or four spaces. Care should be taken to ensure that the IDE or code editor inserts spaces rather than tab characters for indents.

Meaningful Identifier Names Consistently Typed

As the name implies “identifier names” should clearly identify who (or what) you are talking about. Calling your spouse “Snooky” may be meaningful to only you. Others might need to see her full name (Jane Mary Smith) to appropriately identify who you are talking about. The same concept in programming is true. Variables, constants, functions, and other identifiers should use meaningful names. Additionally, those names should be typed consistently in terms of upper and lower case as they are used in the program. Don’t define a variable as: Pig and then type it later on in your program as: pig.

A good rule of thumb for identifiers in procedural programs (as opposed to object-oriented programs) is to use verb-noun combinations for function identifiers and use noun or adjective-noun combinations for constant and variable identifiers. If a function name requires two verbs or two nouns to fully describe the function, it should probably be split into separate functions.

Key Terms

braces

Used to identify a block of code in languages such as C++, C#, Java, and JavaScript.

consistent

A rule that says to type identifier names in upper and lower case consistently throughout your source code.

comments

Information inserted into a source code file for documentation of the program.

documentation

A method of preserving information useful to others in understanding an information system or part thereof.

indentation

A method used to make sections of source code more visible.

meaningful

A rule that says identifier names must be easily understood by another reading the source code.

vertical alignment

A method of listing items vertically so that they are easier to read quickly.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Standard Libraries

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

Many common or standard functions, whose definitions have already been written, are ready to be used in any program. They are organized into a group of functions (think of them as several books) and are collectively called a **standard library**. There are many function organized into several libraries For example, within most programming languages many math functions exist and have been coded (and placed into libraries). These functions were written by programmers and tested to insure that they work properly. In most cases the functions were reviewed by several people to double and triple check to insure that they did what was expected. We have the advantage of using these functions with confidence that they will work properly in our programs, thus saving us time and money.

Discussion

A main program must establish the existence of functions used in that program. Depending on the programming language, there is a formal way to:

1. define a function
2. declare a function (a prototype is a declaration to a compiler)
3. call a function

When we create functions in our program, we usually see them in the following order in our source code listing:

1. declare the function (prototype)
2. call the function
3. define the function

When we use functions created by others that have been organized into library, we include a header file in our program which contains the prototypes for the functions. Just like functions that we create, we see them in the following order in our source code listing:

1. declaring the function (prototype provided in the include file)
2. call the function (with parameter passing of values)
3. define the function (it is either defined in the header file or the linker program provides the actual object code from a Standard Library object area)

In most cases, the user can look at the prototype and understand exactly how the communications (parameter passing) into and out of the function will occur when the function is called. Let's look at the math example of absolute value.

Language	Example
C++	<pre>#include <cmath> std::abs (number);</pre>
C#	<pre>Math.Abs (number);</pre>
Java	<pre>Java.lang.Math.abs (number)</pre>
JavaScript	<pre>Math.abs (number);</pre>
Python	<pre>abs (number)</pre>
Swift	<pre>abs (number)</pre>

Not wanting to have a long function name the designers named it: **abs** instead of “absolute”. This might seem to violate the identifier naming rule of using meaningful names, however when identifier names are established for standard libraries they are often shortened to a name that is easily understood by all who would be using them. If I had two integer variables named apple and banana; and I wanted to store the absolute value of banana into apple; then a line of code to call this function would be:

```
apple = abs (banana);
```

Let’s say it in English, pass the function absolute the value stored in variable banana and assign the returning value from the function to the variable apple. Thus, if you know the prototype you can usually properly call the function and use its returning value (if it has one) without ever seeing the definition of the code (i.e. the source code that tells the function how to get the answer; that is written by someone else; and either included in the header file or compiled and placed into an object library; and linked during the linking step of the Integrated Development Environment (IDE).

Key Terms

abs

A function within a standard library which stands for absolute value.

confidence

The reliance that Standard Library functions work properly.

standard library

A set of specific task functions that have been added to the programming language for universal use.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

C++ Examples

DAVE BRAUNSCHWEIG

Temperature

```
// This program asks the user for a Fahrenheit temperature,
// converts the given temperature to Celsius,
// and displays the results.
//
// References:
// https://www.mathsisfun.com/temperature-conversion.html
// https://en.wikibooks.org/wiki/C%2B%2B_Programming

#include <iostream>

using namespace std;

double getFahrenheit();
double calculateCelsius(double);
void displayResult(double, double);

int main() {
    double fahrenheit;
    double celsius;

    fahrenheit = getFahrenheit();
    celsius = calculateCelsius(fahrenheit);
    displayResult(fahrenheit, celsius);

    return 0;
}

double getFahrenheit() {
    double fahrenheit;

    cout << "Enter Fahrenheit temperature:" << endl;
    cin >> fahrenheit;

    return fahrenheit;
}
```



```
double calculateCelsius(double fahrenheit) {
    double celsius;

    celsius = (fahrenheit - 32) * 5 / 9;

    return celsius;
}

void displayResult(double fahrenheit, double celsius) {
    cout << fahrenheit << "° Fahrenheit is "
         << celsius << "° Celsius" << endl;
}
```

Output

```
Enter Fahrenheit temperature:
100
100° Fahrenheit is 37.7778° Celsius
```

References

- Wikiversity: Computer Programming

C# Examples

DAVE BRAUNSCHWEIG

Temperature

```
// This program asks the user for a Fahrenheit temperature,
// converts the given temperature to Celsius,
// and displays the results.
//
// References:
// https://www.mathsisfun.com/temperature-conversion.html
// https://en.wikibooks.org/wiki/C_Sharp_Programming

using System;

class Temperature
{
    public static void Main (string[] args)
    {
        double fahrenheit;
        double celsius;

        fahrenheit = GetFahrenheit();
        celsius = CalculateCelsius(fahrenheit);
        DisplayResult(fahrenheit, celsius);
    }

    private static double GetFahrenheit()
    {
        string input;
        double fahrenheit;

        Console.WriteLine("Enter Fahrenheit temperature:");
        input = Console.ReadLine();
        fahrenheit = Convert.ToDouble(input);

        return fahrenheit;
    }

    private static double CalculateCelsius(double fahrenheit)
```

```
{
    double celsius;

    celsius = (fahrenheit - 32) * 5 / 9;

    return celsius;
}

private static void DisplayResult(double fahrenheit, double celsius)
{
    Console.WriteLine(fahrenheit.ToString() + "° Fahrenheit is " +
        celsius.ToString() + "° Celsius");
}
}
```

Output

```
Enter Fahrenheit temperature:
100
100° Fahrenheit is 37.777777777778° Celsius
```

References

- Wikiversity: Computer Programming

Java Examples

DAVE BRAUNSCHWEIG

Temperature

```
// This program asks the user for a Fahrenheit temperature,
// converts the given temperature to Celsius,
// and displays the results.
//
// References:
// https://www.mathsisfun.com/temperature-conversion.html
// https://en.wikibooks.org/wiki/Java_Programming

import java.util.*;

class Main {
    private static Scanner input = new Scanner(System.in);

    public static void main(String[] args) {
        double fahrenheit;
        double celsius;

        fahrenheit = getFahrenheit();
        celsius = calculateCelsius(fahrenheit);
        displayResult(fahrenheit, celsius);
    }

    private static double getFahrenheit() {
        double fahrenheit;

        System.out.println("Enter Fahrenheit temperature:");
        fahrenheit = input.nextDouble();

        return fahrenheit;
    }

    private static double calculateCelsius(double fahrenheit) {
        double celsius;

        celsius = (fahrenheit - 32) * 5 / 9;
```

```
        return celsius;
    }

    private static void displayResult(double fahrenheit, double celsius) {
        System.out.println(fahrenheit + "° Fahrenheit is " +
            celsius + "° Celsius");
    }
}
```

Output

```
Enter Fahrenheit temperature:
100
100° Fahrenheit is 37.777777777778° Celsius
```

References

- Wikiversity: Computer Programming

JavaScript Examples

DAVE BRAUNSCHWEIG

Temperature

```
// This program asks the user for a Fahrenheit temperature,
// converts the given temperature to Celsius,
// and displays the results.
//
// References:
// https://www.mathsisfun.com/temperature-conversion.html
// https://en.wikibooks.org/wiki/JavaScript

main();

function main() {
    var fahrenheit = getFahrenheit();
    var celisus = calculateCelsius(fahrenheit);
    displayResult(fahrenheit, celisus);
}

function getFahrenheit() {
    var fahrenheit = input("Enter Fahrenheit temperature:");
    return fahrenheit;
}

function calculateCelsius(fahrenheit) {
    var celisus = (fahrenheit - 32) * 5 / 9;
    return celisus;
}

function displayResult(fahrenheit, celisus) {
    output(fahrenheit + "° Fahrenheit is " +
        celisus + "° Celsius");
}

// Checks the JavaScript environment and reads from the console,
// the current document, or standard input as appropriate.
function input(text) {
    if (typeof console === "object") {
```

```

        return prompt(text);
    }
    else {
        output(text);
        var isr = new java.io.InputStreamReader(java.lang.System.in);
        var br = new java.io.BufferedReader(isr);
        var line = br.readLine();
        return line.trim();
    }
}

// Checks the JavaScript environment and writes to the console,
// the current document, or standard output as appropriate.
// Reference: http://progopedia.com/example/hello-world/114/
function output(text) {
    if (typeof console === "object") {
        console.log(text);
    }
    else if (typeof document === "object") {
        document.write(text);
    }
    else {
        print(text);
    }
}

```

Output

```

Enter Fahrenheit temperature:
100
100° Fahrenheit is 37.777777777778° Celsius

```

References

- Wikiversity: Computer Programming

Python Examples

DAVE BRAUNSCHWEIG

Temperature

```
# This program asks the user for a Fahrenheit temperature,
# converts the given temperature to Celsius,
# and displays the results.
#
# References:
# https://www.mathsisfun.com/temperature-conversion.html
# https://en.wikibooks.org/wiki/Python\_Programming

def get_fahrenheit():
    print("Enter Fahrenheit temperature:")
    fahrenheit = float(input())
    return fahrenheit

def calculate_celsius(fahrenheit):
    celsius = (fahrenheit - 32) * 5 / 9
    return celsius

def display_result(fahrenheit, celsius):
    print(str(fahrenheit) + "° Fahrenheit is " +
          str(celsius) + "° Celsius")

def main():
    fahrenheit = get_fahrenheit()
    celsius = calculate_celsius(fahrenheit)
    display_result(fahrenheit, celsius)

main()
```


Output

```
Enter Fahrenheit temperature:  
100  
100.0° Fahrenheit is 37.7777777777778° Celsius
```

References

- Wikiversity: Computer Programming

Swift Examples

DAVE BRAUNSCHWEIG

Temperature

```
// This program asks the user for a Fahrenheit temperature,
// converts the given temperature to Celsius,
// and displays the results.
//
// References:
//     https://www.mathsisfun.com/temperature-conversion.html
//     https://developer.apple.com/library/content/documentation/Swift/Conc

func getFahrenheit() -> Double {
    var fahrenheit: Double

    print("Enter Fahrenheit temperature:")
    fahrenheit = Double(readLine(strippingNewline: true)!)

    return fahrenheit
}

func calculateCelsius(fahrenheit: Double) -> Double {
    var celsius: Double

    celsius = (fahrenheit - 32) * 5 / 9

    return celsius
}

func displayResult(fahrenheit: Double, celsius: Double) {
    print(String(fahrenheit) + "° Fahrenheit is " + String(celsius) + "° Ce
}

func main() {
    var fahrenheit: Double
    var celsius: Double

    fahrenheit = getFahrenheit()
    celsius = calculateCelsius(fahrenheit:fahrenheit)
```

```
        displayResult(fahrenheit:fahrenheit, celsius:celsius)
    }

    main()
```

Output

```
Enter Fahrenheit temperature:
100
100.0° Fahrenheit is 37.777777777778° Celsius
```

References

- Wikiversity: Computer Programming

Practice: Functions

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Review Questions

True / False

1. In addition to function as the name of a sub-program, the computer industry also uses macro, procedure and module.
2. Generally functions fall into two categories: Program Control and Specific Task.
3. Hierarchy Charts and Structure Charts are basically the same thing.
4. Program Control functions are used to simply sub divide and control the program.
5. The void data type is rarely used in C++.
6. Making source code readable is only used by beginning programmers.
7. Scope refers to a brand of mouth wash.
8. User defined specific task functions are usually placed into a user defined library.
9. Local and global data storage is associated with the concept of scope.
10. Creating a header file for user defined specific task functions is a difficult task.
11. The stack is part of the computer's memory used for storage of data.
12. The standard library is a set of specific task functions that have been added to the programming language for universal use.
13. Programmers should not have confidence that standard library functions work properly.
14. It would be easier to write programs without using specific task functions.

Answers:

1. true
2. true
3. true
4. true
5. false
6. false
7. false – Although Scope is a brand of mouth wash; we are looking for the computer related definition.
8. true
9. true
10. false – It may seem difficult at first, but with a little practice it is really quite easy.
11. true
12. true
13. false
14. false

Short Answer

1. Create a hierarchy chart for the function example program found in this chapter.
2. Review programs you have already created for this course. Based on coding standards for your

selected programming language, identify some problems that make your code “undocumented”, “unreadable” or wrong in some other way.

Activities

Complete the following activities using pseudocode, a flowcharting tool, or your selected programming language. Use separate functions for input, each type of processing, and output. Avoid global variables by passing parameters and returning results. Create test data to validate the accuracy of each program.

1. Create a program to prompt the user for hours and rate per hour and then compute gross pay ($\text{hours} * \text{rate}$).¹, or create a program that asks the user for their monthly income and then calculate and display their annual income ($\text{monthly income} * 12$).
2. Create a program that asks the user how old they are in years, and then calculate and display their approximate age in months, days, hours, and seconds. For example, a person 1 year old is 12 months old, 365 days old, etc.
3. Review MathsIsFun: US Standard Lengths. Create a program that asks the user for a distance in miles, and then calculate and display the distance in yards, feet, and inches, or ask the user for a distance in miles, and then calculate and display the distance in kilometers, meters, and centimeters.
4. Review MathsIsFun: Area of Plane Shapes. Create a program that asks the user for the dimensions of different shapes and then calculate and display the area of the shapes. Do not include shape choices. That will come later. For now, just include multiple shape calculations in sequence.
5. Create a program that calculates the area of a room to determine the amount of floor covering required. The room is rectangular with the dimensions measured in feet with decimal fractions. The output needs to be in square yards. There are 3 lineal feet to a yard.
6. Create a program that helps the user determine how much paint is required to paint a room and how much it will cost. Ask the user for the length, width, and height of a room, the price of a gallon of paint, and the number of square feet that a gallon of paint will cover. Calculate the total area of the four walls as $2 * \text{length} * \text{height} + 2 * \text{width} * \text{height}$. Calculate the the number of gallons as: $\text{total area} / \text{square feet per gallon}$.
Note: You must round up to the next full gallon. To round up, add 0.9999 and then convert the resulting value to an integer. Calculate the total cost of the paint as: $\text{gallons} * \text{price per gallon}$.

References

- [cnx.org: Programming Fundamentals – A Modular Structured Approach using C++](https://cnx.org/Program/Fundamentals)
- [Wikiversity: Computer Programming](https://www.wikiversity.org/wiki/Computer_Programming)

1. PythonLearn: Variables, expressions, and statements

PART IV

CONDITIONS

Overview

This chapter introduces conditions and selection control structures.

Chapter Outline

- Structured Programming
- Selection Control Structures
- If Then Else
- Code Blocks
- Relational Operators
- Assignment vs. Equality
- Logical Operators
- Nested If Then Else
- Case Control Structure
- Condition Examples
- Code Examples
 - C++
 - C#
 - Java
 - JavaScript
 - Python
 - Swift
- Practice

Learning Objectives

1. Understand key terms and definitions.
2. Given example pseudocode, flowcharts, and source code, create a program that uses conditions and selection control structures to solve a given problem.

Structured Programming

KENNETH LEROY BUSBEE

Overview

Structured programming is a programming paradigm aimed at improving the clarity, quality, and development time of a computer program by making extensive use of the structured control flow constructs of selection (if/then/else) and repetition (while and for), block structures, and subroutines in contrast to using simple tests and jumps such as the go to statement, which can lead to “**spaghetti code**” that is potentially difficult to follow and maintain.¹

Discussion

One of the most important concepts of programming is the ability to control a program so that different lines of code are executed or that some lines of code are executed many times. The mechanisms that allow us to control the flow of execution are called **control structures**. Flowcharting is a method of documenting (charting) the flow (or paths) that a program would execute. There are four main categories of control structures:

- **Sequence** – Very boring. Simply do one instruction then the next and the next. Just do them in a given sequence or in order listed. Most lines of code are this.
- **Selection** – This is where you select or choose between two or more flows. The choice is decided by asking some sort of question. The answer determines the path (or which lines of code) will be executed.
- **Iteration** – Also known as repetition, it allows some code (one to many lines) to be executed (or repeated) several times. The code might not be executed at all (repeat it zero times), executed a fixed number of times or executed indefinitely until some condition has been met. Also known as looping because the flowcharting shows the flow looping back to repeat the task.
- **Branching** – A control structure that allows the flow of execution to jump to a different part of the program. This category is rarely used in modular structured programming.

All high-level programming languages have control structures. All languages have the first three categories of control structures (sequence, selection, and iteration). Most have the if then else structure (which belongs to the selection category) and the while structure (which belongs to the iteration category). After these two basic structures there are usually language variations.

The concept of **structured programming** started in the late 1960's with an article by Edsger Dijkstra. He proposed a “go to less” method of planning programming logic that eliminated the need for the branching category of control structures. The topic was debated for about 20 years.

1. Wikipedia: Structured programming

But ultimately – “By the end of the 20th century nearly all computer scientists were convinced that it is useful to learn and apply the concepts of structured programming.”²

Key Terms

branching

A control structure that allows the flow of execution to jump to a different part of the program.

control structures

Mechanisms that allow us to control the flow of execution within a program.

iteration

A control structure that allows some lines of code to be executed many times.

selection

A control structure where you select between two or more choices.

sequence

A control structure where you do the items in the sequence listed.

spaghetti code

*A pejorative phrase for unstructured and difficult to maintain source code.*³

structured programming

A method of planning programs that avoids the branching category of control structures.

References

- [cnx.org: Programming Fundamentals – A Modular Structured Approach using C++](https://cnx.org/content/col12071/1.10)

2. Wikipedia: Structured programming

3. Wikipedia: Spaghetti code

Selection Control Structures

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

In **selection control structures**, conditional statements are features of a programming language which perform different computations or actions depending on whether a programmer-specified Boolean condition evaluates to true or false.¹

Discussion

The basic attribute of a selection control structure is to be able to select between two or more alternate paths. This is described as either two-way selection or multi-way selection. A question using Boolean concepts usually controls which path is selected. All of the paths from a selection control structure join back up at the end of the control structure, before moving on to the next lines of code in a program.

If Then Else Control Structure

The **if then else** control structure is a two-way selection.

```
If age > 17
    Output "You can vote."
False:
    Output "You can't vote."
End
```

Language	Reserved Words
C++	if , else
C#	if , else
Java	if , else
JavaScript	if , else
Python	if , elif , else
Swift	if , else

1. Wikipedia: Conditional (computer programming)

Case Control Structure

The **case** control structure is a multi-way selection. Case control structures compare a given value with specified constants and take action according to the first expression to match.²

```
Case of age
    0 to 17    Display "You can't vote."
    18 to 64   Display "You're in your working years."
    65 +       Display "You should be retired."
End
```

Language	Reserved Words
C++	switch , case , break , default
C#	switch , case , break , default
Java	switch , case , break , default
JavaScript	switch , case , break , default
Python	N/A
Swift	switch , case , break (optional), default

Python does not support a case control structure. There are workarounds, but they are beyond the scope of this book.

Key Terms

if then else

A two-way selection control structure.

case

A multi-way selection control structure.

References

- [cnx.org: Programming Fundamentals – A Modular Structured Approach using C++](https://cnx.org/Programming_Fundamentals_-_A_Modular_Structured_Approach_using_C++)

2. Wikipedia: Conditional (computer programming)

If Then Else

KENNETH LEROY BUSBEE

Overview

The **if-then-else** construct, sometimes called if-then, is a two-way selection structure common across many programming languages. Although the syntax varies from language to language, the basic structure looks like:¹

```
If (boolean condition) Then
    (consequent)
Else
    (alternative)
End If
```

Discussion

We are going to introduce the control structure from the selection category that is available in every high level language. It is called the **if then else** structure. Asking a question that has a true or false answer controls the if then else structure. It looks like this:

```
if the answer to the question is true
    then do this
else because it is false
    do this
```

In most languages the question (called a test expression) is a Boolean expression. The Boolean data type has two values – true and false. Let's rewrite the structure to consider this:

```
if expression is true
    then do this
else because it is false
    do this
```

Some languages use reserved words of: "if", "then" and "else". Many eliminate the "then". Additionally the "do this" can be tied to true and false. You might see it as:

1. Wikipedia: Conditional (computer programming)

```
if expression is true
    action true
else
    action false
```

And most languages infer the “is true” you might see it as:

```
if expression
    action true
else
    action false
```

The above four forms of the control structure are saying the same thing. The else word is often not used in our English speaking today. However, consider the following conversation between a mother and her child.

Child asks, “Mommy, may I go out side and play?”

Mother answers, “If your room is clean then you may go outside and play or else you may go sit on a chair for five minutes as punishment for asking me the question when you knew your room was dirty.”

Let’s note that all of the elements are present to determine the action (or flow) that the child will be doing. Because the question (your room is clean) has only two possible answers (true or false) the actions are **mutually exclusive**. Either the child 1) goes outside and plays or 2) sits on a chair for five minutes. One of the actions is executed; never both of the actions.

One Choice – Implied Two Way Selection

Often the programmer will want to do something only if the expression is true, that is with no false action. The lack of a false action is also referred to as a “null else” and would be written as:

```
if expression
    action true
else
    do nothing
```

Because the “else do nothing” is implied, it is usually written in short form like:

```
if expression
    action true
```

Key Terms

if then else

A two way selection control structure.

mutually exclusive

Items that do not overlap. Example: true or false.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Code Blocks

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

A **code block**, sometimes referred to as a compound statement, is a lexical structure of source code which is grouped together. Blocks consist of one or more declarations and statements. A programming language that permits the creation of blocks, including blocks nested within other blocks, is called a block-structured programming language. Blocks are fundamental to structured programming, where control structures are formed from blocks.¹

Discussion

The Need for a Compound Statement

Within many programming languages, there can be only **one statement listed as the action part of a control structure**:

```
if (expression)
    statement
else
    statement
```

Often, we will want to do more than one statement. This problem is overcome by creating a code block or compound statement. For programming languages that use curly braces {} to designate code blocks, a compound if-then-else statement would be similar to:

```
if(expression)
{
    statement;
    statement;
}
else
{
    statement;
    statement;
}
```

1. Wikipedia: Block (programming)

Because programmers often forget that they can have **only one statement listed as the action part of a control structure**; the programming industry encourages the use of indentation (to see the action parts clearly) and the use of compound statements (braces) **always**, even when there is only one statement. Thus:

```
if (expression)
{
    statement;
}
else
{
    statement;
}
```

By writing code in this manner, if the programmer modifies the code by adding more statements to either the action true or the action false; they will not introduce either compiler or logic errors. Using indentation and braces should become standard practice for in any language that require the use of compound statements with control structures.

Indentation and End Block

Other programming languages require explicit designation of code blocks through either indentation or some type of end block statement. For example, Python uses indentation to indicate the statements in a code block:

```
if expression:
    statement
    statement
else:
    statement
    statement
```

Lua uses an end block reserved word:

```
if expression then
    statement
    statement
else
    statement
    statement
end
```

The general if-then-else structure in each of these programming languages is similar, as is the required or expected indentation. The difference is in the syntax used to designate the code blocks.

Key Terms

block

Another name for a compound statement.

compound statement

A unit of code consisting of zero or more statements.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Relational Operators

KENNETH LEROY BUSBEE

Overview

A **relational operator** is a programming language construct or operator that tests or defines some kind of relation between two entities. These include numerical equality (e.g., $5 = 5$) and inequalities (e.g., $4 \geq 3$).¹

Discussion

The relational operators are often used to create a test expression that controls program flow. This type of expression is also known as a Boolean expression because they create a Boolean answer or value when evaluated. There are six common relational operators that give a Boolean value by comparing (showing the relationship) between two operands. If the operands are of different data types, implicit promotion occurs to convert the operands to the same data type.

Operator symbols and/or names can vary with different programming languages. Most programming languages use relational operators similar to the following:

Operator	Meaning
<	less than
>	greater than
<=	less than or equal to
>=	greater than or equal to
==	equality (equal to)
!= or <>	inequality (not equal to)

Examples:

- $9 < 25$
- $9 < 3$
- $9 > 14$
- $9 \leq 17$
- $9 \geq 25$
- $9 == 13$
- $9 != 13$
- $9 !< 25$

1. Wikipedia: Relational operator

- `9 <> 25`

Note: Be careful. In math you are familiar with using the symbol `=` to mean equal and `≠` to mean not equal. In many programming languages the `≠` is not used and the `=` symbol means assignment.

Key Terms

relational operator

An operator that gives a Boolean value by evaluating the relationship between two operands.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Assignment vs Equality

KENNETH LEROY BUSBEE

Overview

Assignment sets and/or re-sets the value stored in the storage location denoted by a variable name.¹ **Equality** is a relational operator that tests or defines the relationship between two entities.²

Discussion

Most control structures use a test expression that executes either selection (as in the: if then else) or iteration (as in the while; do while; or for loops) based on the truthfulness or falseness of the expression. Thus, we often talk about the Boolean expression that is controlling the structure. Within many programming languages, this expression must be a Boolean expression and is governed by a tight set of rules. However, in many programming languages each data type can be used as a Boolean expression, because each data type can be demoted into a Boolean value by using the rule/concept that zero and nothing represent false and all non-zero values represent true.

Within various languages we have the potential added confusion of the equals symbol `=` as an operator that does not represent the normal math meaning of equality that we have used for most of our life. The equals symbol typically means: assignment. To get the equality concept of math we often use two equal symbols to represent the relational operator of equality. Let's consider:

```
If (pig = 'y')
    Output "Pigs are good"
Else
    Output "Pigs are bad."
```

The test expression of the control structure will always be true, because the expression is an assignment (not the relational operator of `==`). It assigns the 'y' to the variable pig, then looks at the value in pig and determines that it is not zero; therefore the expression is true. And it will always be true and the else part will never be executed. This is not what the programmer had intended. The correct syntax for a Boolean expression is:

```
If (pig == 'y')
    Output "Pigs are good"
Else
    Output "Pigs are bad."
```

1. Wikipedia: Assignment (computer science)
2. Wikipedia: Relational operator

This example reminds you that you must be careful in creating your test expressions so that they are indeed a question, usually involving the relational operators. Some programming languages will generate a warning or an error when assignment is used in a Boolean expression, and some do not. Don't get caught using assignment for equality.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Logical Operators

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

A **logical operator** is a symbol or word used to connect two or more expressions such that the value of the compound expression produced depends only on that of the original expressions and on the meaning of the operator.¹ Common logical operators include AND, OR, and NOT.

Discussion

Within most languages, expressions that yield Boolean data type values are divided into two groups. One group uses the relational operators within their expressions and the other group uses logical operators within their expressions.

The logical operators are often used to help create a test expression that controls program flow. This type of expression is also known as a Boolean expression because they create a Boolean answer or value when evaluated. There are three common logical operators that give a Boolean value by manipulating other Boolean operand(s). Operator symbols and/or names vary with different programming languages:

Language	AND	OR	NOT
C++	&&		!
C#	&&		!
Java	&&		!
JavaScript	&&		!
Python	and	or	not
Swift	&&		!

The vertical dashes or piping symbol is found on the same key as the backslash \. You use the SHIFT key to get it. It is just above the Enter key on most keyboards. It may be a solid vertical line on some keyboards and show as a solid vertical line on some print fonts.

In most languages there are strict rules for forming proper logical expressions. An example is:

```
6 > 4 && 2 <= 14
6 > 4 and 2 <= 14
```

This expression has two relational operators and one logical operator. Using the precedence of operator rules the two “relational comparison” operators will be done before the “logical and” operator. Thus:

1. Wikipedia: Logical connective

```
true && true
```

```
True and True
```

The final evaluation of the expression is: true.

We can say this in English as: It is true that six is greater than four and that two is less than or equal to fourteen.

When forming logical expressions programmers often use parentheses (even when not technically needed) to make the logic of the expression very clear. Consider the above complex Boolean expression rewritten:

```
(6 > 4) && (2 <= 14)
```

```
(6 > 4) and (2 <= 14)
```

Most programming languages recognize any non-zero value as true. This makes the following a valid expression:

```
6 > 4 && 8
```

```
6 > 4 and 8
```

But remember the order of operations. In English, this is six is greater than four and eight is not zero. Thus,

```
true && true
```

```
True and True
```

To compare 6 to both 4 and 8 would instead be written as:

```
6 > 4 && 6 > 8
```

```
6 > 4 and 6 > 8
```

This would evaluate to false as:

```
true && false
```

```
True and False
```

Truth Tables

A common way to show logical relationships is in truth tables.

Logical and (&&)

x	y	x and y
false	false	false
false	true	false
true	false	false
true	true	true

Logical or (||)

x	y	x or y
false	false	false
false	true	true
true	false	true
true	true	true

Logical not (!)

x	not x
false	true
true	false

Examples

I call this example of why I hate “and” and love “or”.

Everyday as I came home from school on Monday through Thursday; I would ask my mother, “May I go outside and play?” She would answer, “If your room is clean and your homework is done then you may go outside and play.” I learned to hate the word “and”. I could manage to get one of the tasks done and have some time to play before dinner, but both of them... well, I hated “and”.

On Friday my mother took a more relaxed view point and when asked if I could go outside and play she responded, “If your room is clean or your homework is done then you may go outside and play.” I learned to clean my room quickly on Friday afternoon. Well needless to say, I loved “or”.

For the next example, just imagine a teenager talking to their mother. During the conversation mom says, “After all, your Dad is reasonable!” The teenager says, “Reasonable. (short pause) Not.”

Maybe college professors will think that all their students studied for the exam. Ha ha! Not. Well, I hope you get the point.

Examples:

- $25 < 7 \parallel 15 > 36$
- $15 > 36 \parallel 3 < 7$
- $14 > 7 \ \&\& \ 5 \leq 5$
- $4 > 3 \ \&\& \ 17 \leq 7$
- `! false`
- `! (13 != 7)`
- $9 \neq 7 \ \&\& \ ! 0$
- $5 > 1 \ \&\& \ 7$

More examples:

- $25 < 7 \text{ or } 15 > 36$
- $15 > 36 \text{ or } 3 < 7$
- $14 > 7 \text{ and } 5 \leq 5$
- $4 > 3 \text{ and } 17 \leq 7$

- not False
- not (13 != 7)
- 9 != 7 and not 0
- 5 > 1 and 7

Key Terms

logical operator

An operator used to create complex Boolean expressions.

truth tables

A common way to show logical relationships.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Nested If Then Else

KENNETH LEROY BUSBEE

Overview

Two-way selection structures may be **nested** inside other two-way selection structures, resulting in **multi-way selection**.

Discussion

We are going to first introduce the concept of nested control structures. Nesting is a concept that places one item inside of another. Consider:

```
if expression
    true action
else
    false action
```

This is the basic form of the if then else control structure. Now consider:

```
if age is less than 18
    you can't vote
    if age is less than 16
        you can't drive
    else
        you can drive
else
    you can vote
    if age is less than 21
        you can't drink
    else
        you can drink
```

As you can see we simply included as part of the “true action” a statement and another if then else control structure. We did the same (nested another if then else) for the “false action”. In our example we nested if then else control structures. Nesting could have an if then else within a while loop. Thus, the concept of nesting allows the mixing of the different categories of control structures.

Multiway Selection

One of the drawbacks of two way selection is that we can only consider two choices. But what do you do if you have more than two choices. Consider the following which has four choices:

```
if age equal to 18
    you can now vote
else
    if age equal to 39
        you are middle aged
    else
        if age equal to 65
            you can consider retirement
        else
            your age is unimportant
```

You get an appropriate message depending on the value of age. The last item is referred to as the default. If the age is not equal to 18, 39 or 65 you get the default message. To simplify the code structure, this is most often written as:

```
if age equal to 18
    you can now vote
else if age equal to 39
    you are middle aged
else if age equal to 65
    you can consider retirement
else
    your age is unimportant
```

Key Terms

multiway selection

Using control structures to be able to select from more than two choices.

nested control structures Placing one control structure inside of another.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Case Control Structure

KENNETH LEROY BUSBEE

Overview

A **case** or switch statement is a type of selection control mechanism used to allow the value of a variable or expression to change the control flow of program execution via a multiway branch.¹


Discussion

One of the drawbacks of two way selection is that we can only consider two choices. But what do you do if you have more than two choices. Consider the following which has four choices:

```
if age equal to 18
    you can vote
else if age equal to 39
    you're middle aged
else if age equal to 65
    consider retirement
else
    age is un-important
```

You get an appropriate message depending on the value of age. The last item is referred to as the default. If the age is not equal to 18, 39 or 65 you get the default message. In some situations there is no default action. Consider this flowchart example:

1. Wikipedia: Switch statement

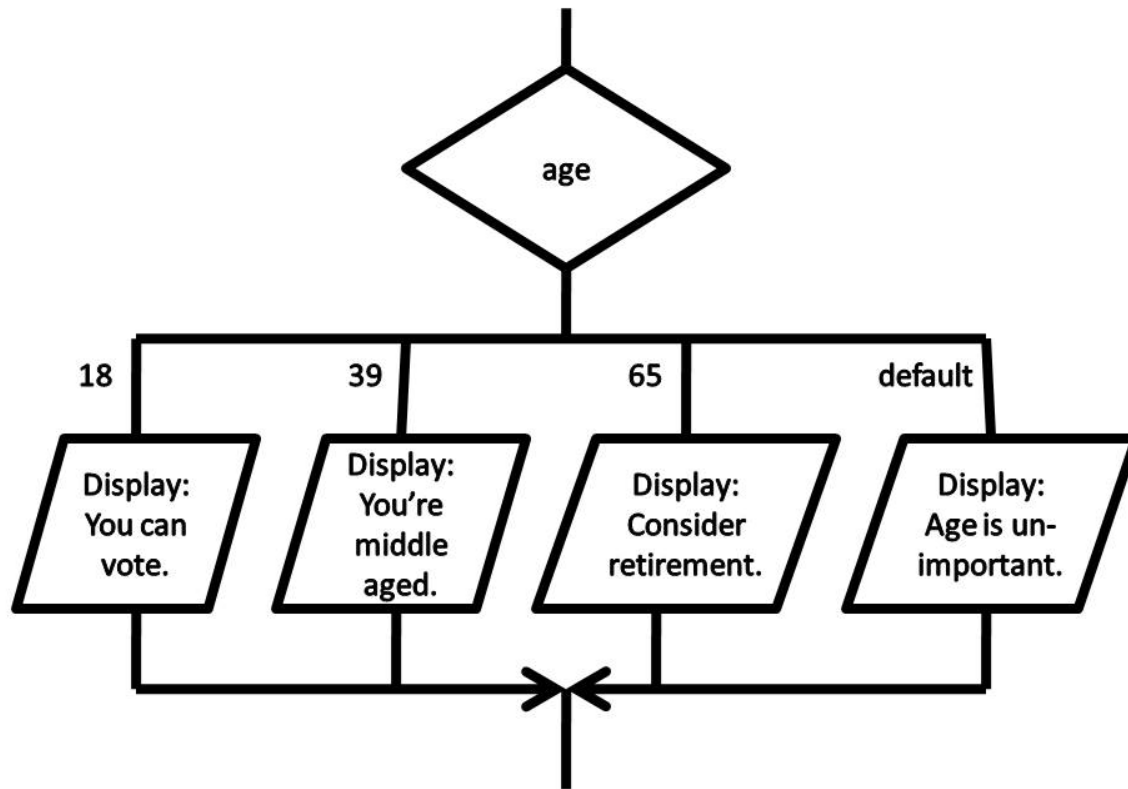

This flowchart is of the case control structure and is used for multiway selection. The decision box holds the variable age. The logic of the case is one of equality where the value in the variable age is compared to the listed values in order from left to right. Thus, the value stored in age is compared to 18 or is “age equal to 18”. If it is true, the logic flows down through the action and drops out at the bottom of the case structure. If the value of the test expression is false, it moves to the next listed value to the right and makes another comparison. It works exactly the same as our nested if then else structure.

Code to Accomplish Multiway Selection

Python does not support a case control structure. But using the same example as above, here is C++ / C# / Java / JavaScript / Swift code to accomplish the case control structure.

```
switch (age)
{
    case 18:
        message = "You can vote.";
        break;
    case 39:
        message = "You're middle aged.";
```

```

        break;
    case 65:
        message = "Consider retirement.";
        break;
    default:
        message = "Age is un-important.";
        break;
}

```

The value in the variable `age` is compared to the first “case”, which is the value 18 (also called the listed value) using an equality comparison or is “age equal to 18”. If it is true, the message is assigned the value “You can vote.” and the next line of code (the `break`) is done (which jumps us to the end of the control structure). If it is false, it moves on to the next case for comparison.

Many programming languages require the listed values for the case control structure be of the integer family of data types. This basically means either an integer or character data type. Consider this example that uses character data type (choice is a character variable):


```

switch (choice)
{
    case 'A':
        message = "You are an A student.";
        break;
    case 'B':
        message = "You are a B student.";
        break;
    case 'C':
        message = "You are a C student.";
        break;
    default:
        message = "Maybe you should study harder.";
        break;
}

```

Limitations of the Case Control Structure

Most programming languages do not allow ranges of values for case like structures. Consider this flowcharting example that used ranges:

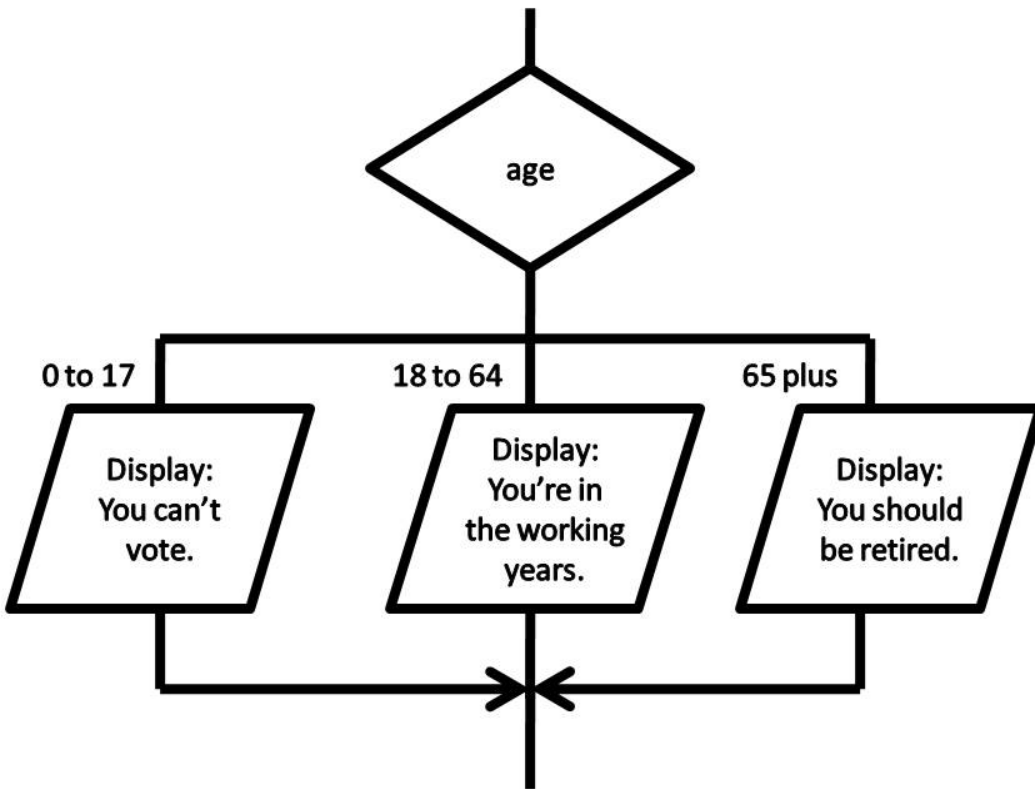

Consider also the following pseudocode for the same logic:

```
Case of age
  0 to 17    Display "You can't vote."
  18 to 64   Display "You're in your working years."
  65 +      Display "You should be retired."
End
```

Using the case control structure when using non integer family or ranges of values is allowed when designing a program and documenting that design with pseudocode or flowcharting. However, the implementation in most languages would follow a nested if then else approach with complex Boolean expressions. The logic of the above examples would look like this:

```
if age > 0 and age <= to 17
  display You can't vote.
else if age is >= 18 and age <= 64
  display You're in your working years.
else
  display You should be retired.
```


Good Structured Programming Methods

Most textbook authors confirm that good structured programming techniques and habits are more important than concentrating on the technical possibilities and capabilities of the language that you are using to learn programming skills. Remember, this module is concentrating on programming fundamentals and concepts to build our initial programming skills. It is not created with the intent to cover programming languages in detail, despite the fact that at times we have to cover language mechanics.

Key Terms

case

A control structure that does mulitway selection.

switch

A control structure that can be made to act like a case control structure.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Condition Examples

DAVE BRAUNSCHWEIG

Temperature

Pseudocode

```
Function Main
    Declare String choice

    Assign choice = GetChoice()
    If Choice = "C" Or Choice = "c"
        Call ProcessCelsius()
    False:
        If Choice = "F" Or Choice = "f"
            Call ProcessFahrenheit()
        False:
            Output "You must enter C to convert to Celsius or F to convert to Fahrenheit"
        End
    End
End

Function CalculateCelsius (Real fahrenheit)
    Declare Real celsius

    Assign celsius = (fahrenheit - 32) * 5 / 9
    Return Real celsius

Function CalculateFahrenheit (Real celsius)
    Declare Real fahrenheit

    Assign fahrenheit = celsius * 9 / 5 + 32
    Return Real fahrenheit

Function DisplayResult (Real temperature, String fromScale, Real result, String toScale)
    Output temperature & "° " & fromScale & " is " & result & "° " & toScale
End

Function GetChoice
    Declare String choice
```

```

        Output "Enter F to convert to Fahrenheit or C to convert to Celsius:"
        Input Choice
Return String choice

Function GetTemperature (String scale)
    Declare Real temperature

    Output "Enter " & scale & " temperature:"
    Input temperature
Return Real temperature

Function ProcessCelsius
    Declare Real temperature
    Declare Real result

    Assign temperature = GetTemperature("Celsius")
    Assign result = CalculateCelsius(temperature)
    Call DisplayResult(temperature, "Fahrenheit", result, "Celsius")
End

Function ProcessFahrenheit
    Declare Real temperature
    Declare Real result

    Assign temperature = GetTemperature("Fahrenheit")
    Assign result = CalculateFahrenheit(temperature)
    Call DisplayResult(temperature, "Celsius", result, "Fahrenheit")
End

```

Output

```

Enter C to convert to Celsius or F to convert to Fahrenheit:
c
Enter Fahrenheit temperature:
100
100° Fahrenheit is 37.777777777778° Celsius

Enter C to convert to Celsius or F to convert to Fahrenheit:
f
Enter Celsius temperature:
100

```


100° Celsius is 212° Fahrenheit





Enter C to convert to Celsius or F to convert to Fahrenheit:


x

You must enter C to convert to Celsius or F to convert to Fahrenheit.

Flowchart

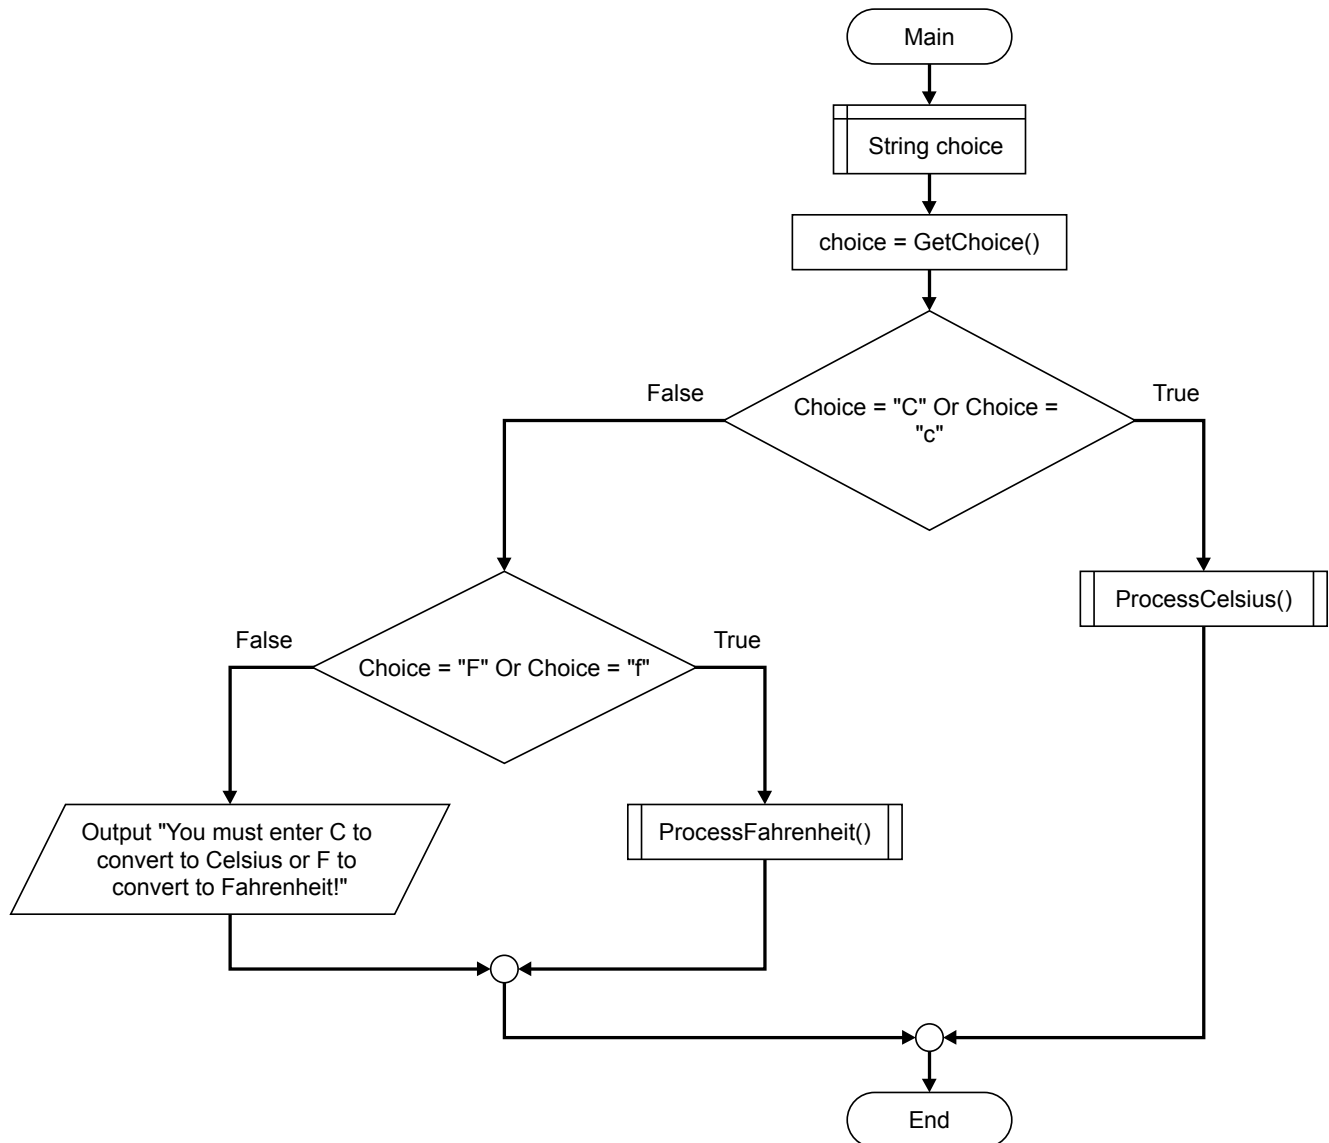

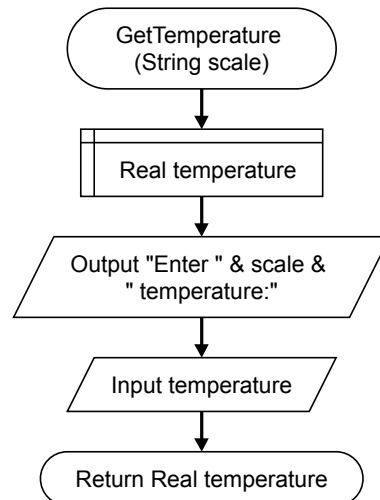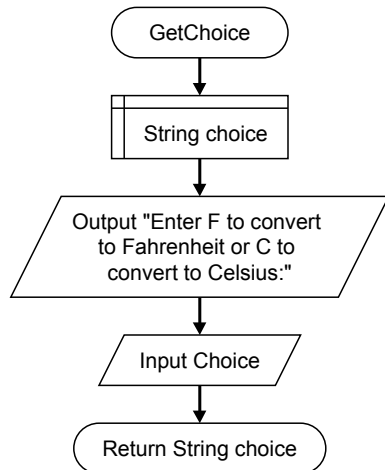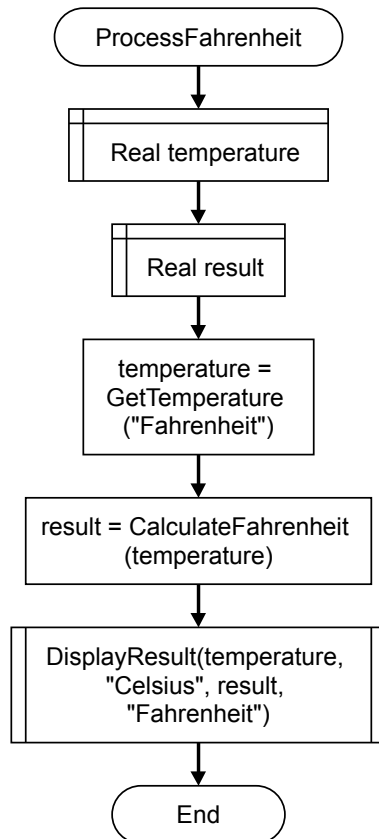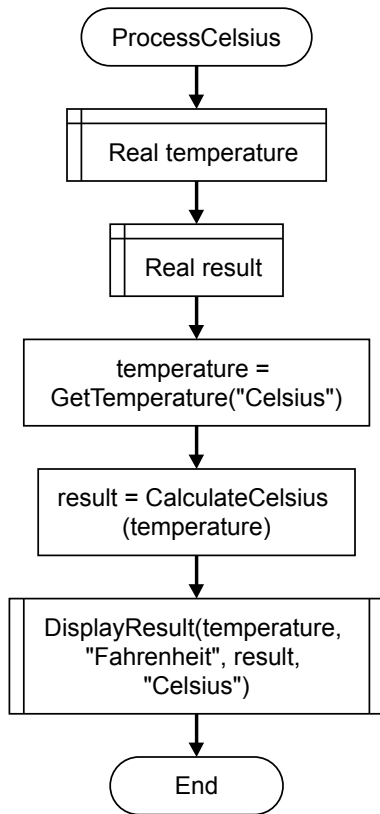

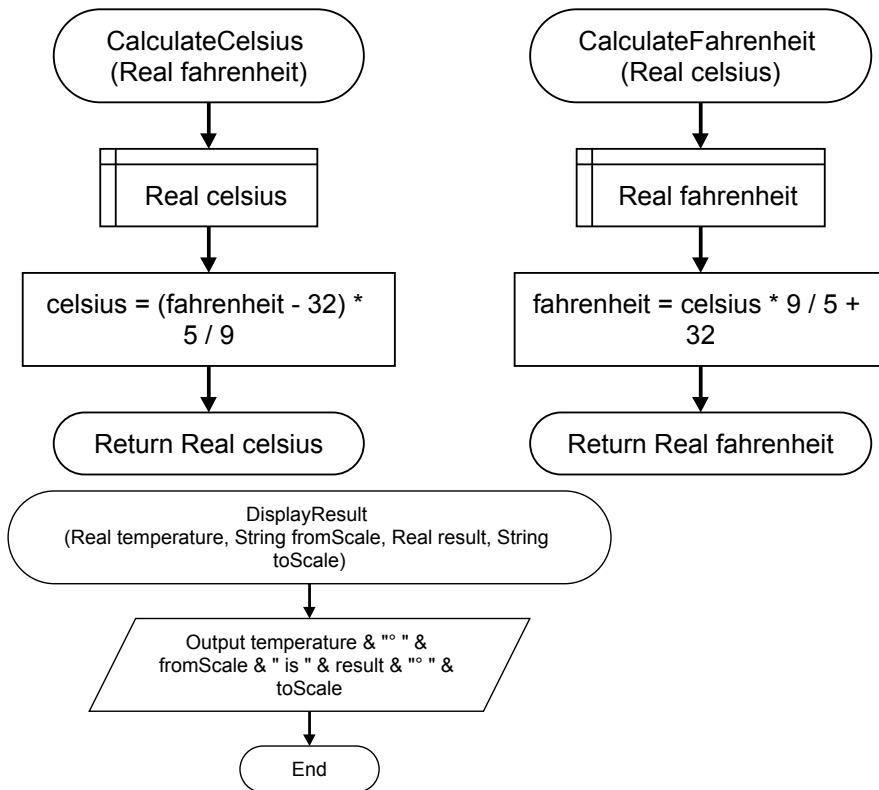

References

- Wikiversity: Computer Programming

C++ Examples

DAVE BRAUNSCHWEIG

Temperature

The temperature program main function is listed twice, once using if-then-else and once using switch, followed by the supporting functions.

If Then Else

```
// This program asks the user to select Fahrenheit or Celsius conversion
// and input a given temperature. Then the program converts the given
// temperature and displays the result.
//
// References:
//     https://www.mathsisfun.com/temperature-conversion.html
//     https://en.wikibooks.org/wiki/C%2B%2B_Programming

#include

using namespace std;

char getChoice();
void toCelsius();
void toFahrenheit();
double getTemperature(string scale);
double calculateCelsius(double fahrenheit);
double calculateFahrenheit(double celsius);
void displayResult(double temperature, string fromScale, double result, string toScale)

int main() {
    char choice;

    choice = getChoice();
    if (choice == 'C' || choice == 'c') {
        toCelsius();
    }
    else if (choice == 'F' || choice == 'f') {
        toFahrenheit();
    }
}
```

```

    else {
        cout << "You must enter C to convert to Celsius or F to convert to F";
    }
    return 0;
}

```

Switch

```

int main() {
    char choice;

    choice = getChoice();
    switch(choice) {
        case 'C':
        case 'c':
            toCelsius();
            break;
        case 'F':
        case 'f':
            toFahrenheit();
            break;
        default:
            cout << "You must enter C to convert to Celsius or F to convert to F";
    }
    return 0;
}

```

Supporting Functions

```

char getChoice() {
    char choice;

    cout << "Enter C to convert to Celsius or F to convert to Fahrenheit:";

    return choice;
}

void toCelsius() {
    double temperature;
    double result;
}

```



```

        temperature = getTemperature("Fahrenheit");
        result = calculateCelsius(temperature);
        displayResult(temperature, "Fahrenheit", result, "Celsius");
    }

void toFahrenheit() {
    double temperature;
    double result;

    temperature = getTemperature("Celsius");
    result = calculateFahrenheit(temperature);
    displayResult(temperature, "Celsius", result, "Fahrenheit");
}

double getTemperature(string scale) {
    double temperature;

    cout << "Enter " << scale << " temperature:" << endl; cin >> temperature;

    return temperature;
}

double calculateCelsius(double fahrenheit) {
    double celsius;

    celsius = (fahrenheit - 32) * 5 / 9;

    return celsius;
}

double calculateFahrenheit(double celsius) {
    double fahrenheit;

    fahrenheit = celsius * 9 / 5 + 32;

    return fahrenheit;
}

void displayResult(double temperature, string fromScale, double result, string toScale) {
    cout << temperature << "° " << fromScale << " is " << result << "° " << toScale << endl;
}

```

Output

```
Enter C to convert to Celsius or F to convert to Fahrenheit:
c
Enter Fahrenheit temperature:
100
100° Fahrenheit is 37.7778° Celsius

Enter C to convert to Celsius or F to convert to Fahrenheit:
f
Enter Celsius temperature:
100
100° Celsius is 212° Fahrenheit

Enter C to convert to Celsius or F to convert to Fahrenheit:
x
You must enter C to convert to Celsius or F to convert to Fahrenheit.
```

References

- Wikiversity: Computer Programming

C# Examples

DAVE BRAUNSCHWEIG

Temperature

The temperature program main function is listed twice, once using if-then-else and once using switch, followed by the supporting functions.

If Then Else

```
// This program asks the user to select Fahrenheit or Celsius conversion
// and input a given temperature. Then the program converts the given
// temperature and displays the result.
//
// References:
//     https://www.mathsisfun.com/temperature-conversion.html
//     https://en.wikibooks.org/wiki/C_Sharp_Programming

using System;

public class Temperature
{
    public static void Main(string[] args)
    {
        string choice;

        choice = GetChoice();
        if (choice == "C" || choice == "c")
        {
            ToCelsius();
        }
        else if (choice == "F" || choice == "f")
        {
            ToFahrenheit();
        }
        else
        {
            Console.WriteLine("You must enter C to convert to Celsius or F");
        }
    }
}
```

Switch

```
public static void Main(string[] args)
{
    string choice;

    choice = GetChoice();
    switch (choice)
    {
        case "C":
        case "c":
            ToCelsius();
            break;
        case "F":
        case "f":
            ToFahrenheit();
            break;
        default:
            Console.WriteLine("You must enter C to convert to Celsius o
            break;
    }
}
```

Supporting Functions

```
public static string GetChoice()
{
    string choice;

    Console.WriteLine("Enter C to convert to Celsius or F to convert to
    choice = Console.ReadLine();

    return choice;
}

public static void ToCelsius()
{
    double temperature;
    double result;

    temperature = GetTemperature("Fahrenheit");
    result = CalculateCelsius(temperature);
}
```

```

        DisplayResult(temperature, "Fahrenheit", result, "Celsius");
    }

    public static void ToFahrenheit()
    {
        double temperature;
        double result;

        temperature = GetTemperature("Celsius");
        result = CalculateFahrenheit(temperature);
        DisplayResult(temperature, "Celsius", result, "Fahrenheit");
    }

    public static double GetTemperature(string scale)
    {
        double temperature;

        Console.WriteLine("Enter " + scale + " temperature:");
        temperature = Convert.ToDouble(Console.ReadLine());

        return temperature;
    }

    public static double CalculateCelsius(double fahrenheit)
    {
        double celsius;

        celsius = (fahrenheit - 32) * 5 / 9;

        return celsius;
    }

    public static double CalculateFahrenheit(double celsius)
    {
        double fahrenheit;

        fahrenheit = celsius * 9 / 5 + 32;

        return fahrenheit;
    }

    public static void DisplayResult(double temperature, string fromScale,
    {

```

```
        Console.WriteLine(temperature + "° " + fromScale + " is " + result + "° " + toScale);  
    }  
}
```

Output

```
Enter C to convert to Celsius or F to convert to Fahrenheit:  
C  
Enter Fahrenheit temperature:  
100  
100° Fahrenheit is 37.777777777778° Celsius  
  
Enter C to convert to Celsius or F to convert to Fahrenheit:  
f  
Enter Celsius temperature:  
100  
100° Celsius is 212° Fahrenheit  
  
Enter C to convert to Celsius or F to convert to Fahrenheit:  
x  
You must enter C to convert to Celsius or F to convert to Fahrenheit.
```

References

- Wikiversity: Computer Programming

Java Examples

DAVE BRAUNSCHWEIG

Temperature

The temperature program main function is listed twice, once using if-then-else and once using switch, followed by the supporting functions.

If Then Else

```
// This program asks the user to select Fahrenheit or Celsius conversion
// and input a given temperature. Then the program converts the given
// temperature and displays the result.
//
// References:
//     https://www.mathsisfun.com/temperature-conversion.html
//     https://en.wikibooks.org/wiki/Java_Programming

import java.util.*;

public class Main {
    private static Scanner input = new Scanner(System.in);

    public static void main(String[] args) {
        String choice;

        choice = getChoice();
        if (choice.equals("C") || choice.equals("c")) {
            toCelsius();
        }
        else if (choice.equals("F") || choice.equals("f")) {
            toFahrenheit();
        }
        else {
            System.out.println("You must enter C to convert to Celsius or F");
        }
    }
}
```

Switch

```
public static void main(String[] args) {
    String choice;

    choice = getChoice();
    switch (choice) {
        case "C":
        case "c":
            toCelsius();
            break;
        case "F":
        case "f":
            toFahrenheit();
            break;
        default:
            System.out.println("You must enter C to convert to Celsius or F to convert to Fahrenheit");
    }
}
```

Supporting Functions

```
public static String getChoice() {
    String choice;

    System.out.println("Enter C to convert to Celsius or F to convert to Fahrenheit");
    choice = input.nextLine();

    return choice;
}

public static void toCelsius() {
    double temperature;
    double result;

    temperature = getTemperature("Fahrenheit");
    result = calculateCelsius(temperature);
    displayResult(temperature, "Fahrenheit", result, "Celsius");
}

public static void toFahrenheit() {
    double temperature;
```



```

        double result;

        temperature = getTemperature("Celsius");
        result = calculateFahrenheit(temperature);
        displayResult(temperature, "Celsius", result, "Fahrenheit");
    }

    public static double getTemperature(String scale) {
        double temperature;

        System.out.println("Enter " + scale + " temperature:");
        temperature = input.nextDouble();

        return temperature;
    }

    public static double calculateCelsius(double fahrenheit) {
        double celsius;

        celsius = (fahrenheit - 32) * 5 / 9;

        return celsius;
    }

    public static double calculateFahrenheit(double celsius) {
        double fahrenheit;

        fahrenheit = celsius * 9 / 5 + 32;

        return fahrenheit;
    }

    public static void displayResult(double temperature, String fromScale,
        System.out.println(Double.toString(temperature) + "° " + fromScale
    }
}

```

Output

```

Enter C to convert to Celsius or F to convert to Fahrenheit:
C
Enter Fahrenheit temperature:

```

```
100
100.0° Fahrenheit is 37.7777777777778° Celsius

Enter C to convert to Celsius or F to convert to Fahrenheit:
f
Enter Celsius temperature:
100
100.0° Celsius is 212.0° Fahrenheit

Enter C to convert to Celsius or F to convert to Fahrenheit:
x
You must enter C to convert to Celsius or F to convert to Fahrenheit.
```

References

- Wikiversity: Computer Programming

JavaScript Examples

DAVE BRAUNSCHWEIG

Temperature

The temperature program main function is listed twice, once using if-then-else and once using switch, followed by the supporting functions.

If Then Else

```
// This program asks the user to select Fahrenheit or Celsius conversion
// and input a given temperature. Then the program converts the given
// temperature and displays the result.
//
// References:
//   https://www.mathsisfun.com/temperature-conversion.html
//   https://en.wikibooks.org/wiki/JavaScript

main();

function main() {
    var choice;

    choice = getChoice();
    if (choice == "C" || choice == "c") {
        toCelsius();
    }
    else if (choice == "F" || choice == "f") {
        toFahrenheit();
    }
    else {
        output("You must enter C to convert to Celsius or F to convert to F");
    }
}
```

Switch

```
function main() {
    var choice;
```

```

choice = getChoice();
switch(choice)
{
    case 'C':
    case 'c':
        toCelsius();
        break;
    case 'F':
    case 'f':
        toFahrenheit();
        break;
    default:
        output("You must enter C to convert to Celsius or F to convert
}
}

```

Supporting Functions

```

function getChoice() {
    var choice;

    output("Enter C to convert to Celsius or F to convert to Fahrenheit:");
    choice = input();

    return choice;
}

function toCelsius() {
    var temperature;
    var result;

    temperature = getTemperature("Fahrenheit");
    result = calculateCelsius(temperature);
    displayResult(temperature, "Fahrenheit", result, "Celsius");
}

function toFahrenheit() {
    var temperature;
    var result;

    temperature = getTemperature("Celsius");

```

```

        result = calculateFahrenheit(temperature);
        displayResult(temperature, "Celsius", result, "Fahrenheit");
    }

function getTemperature(scale) {
    var temperature;

    output("Enter " + scale + " temperature:");
    temperature = input();

    return temperature;
}

function calculateCelsius(fahrenheit) {
    var celsius;

    celsius = (fahrenheit - 32) * 5 / 9;

    return celsius;
}

function calculateFahrenheit(celsius) {
    var fahrenheit;

    fahrenheit = celsius * 9 / 5 + 32;

    return fahrenheit;
}

function displayResult(temperature, fromScale, result, toScale) {
    output(temperature.toString() + "° " + fromScale + " is " + result + "°");
}

// Checks the JavaScript environment and reads from the console,
// the current document, or standard input as appropriate.
function input(text) {
    if (typeof console === "object") {
        return prompt(text);
    }
    else {
        output(text);
        var isr = new java.io.InputStreamReader(java.lang.System.in);
        var br = new java.io.BufferedReader(isr);
    }
}

```

```

        var line = br.readLine();
        return line.trim();
    }
}

// Checks the JavaScript environment and writes to the console,
// the current document, or standard output as appropriate.
// Reference: http://progopedia.com/example/hello-world/114/
function output(text) {
    if (typeof console === "object") {
        console.log(text);
    }
    else if (typeof document === "object") {
        document.write(text);
    }
    else {
        print(text);
    }
}

```

Output

```

Enter C to convert to Celsius or F to convert to Fahrenheit:
c
Enter Fahrenheit temperature:
100
100° Fahrenheit is 37.7777777777778° Celsius

Enter C to convert to Celsius or F to convert to Fahrenheit:
f
Enter Celsius temperature:
100
100° Celsius is 212° Fahrenheit

Enter C to convert to Celsius or F to convert to Fahrenheit:
x
You must enter C to convert to Celsius or F to convert to Fahrenheit.

```

References

- Wikiversity: Computer Programming

Python Examples

DAVE BRAUNSCHWEIG

Temperature

```
# This program asks the user to select Fahrenheit or Celsius conversion
# and input a given temperature. Then the program converts the given
# temperature and displays the result.
#
# References:
#     https://www.mathsisfun.com/temperature-conversion.html
#     https://en.wikibooks.org/wiki/Python_Programming

def get_choice():
    print("Enter C to convert to Celsius or F to convert to Fahrenheit:")
    choice = input()
    return choice

def to_celsius():
    temperature = get_temperature("Fahrenheit")
    result = calculate_celsius(temperature)
    display_result (temperature, "Fahrenheit", result, "Celsius")

def to_fahrenheit():
    temperature = get_temperature("Celsius")
    result = calculate_fahrenheit(temperature)
    display_result (temperature, "Celsius", result, "Fahrenheit")

def get_temperature(scale):
    print("Enter " + scale + " temperature:")
    temperature = float(input())
    return temperature

def calculate_celsius(fahrenheit):
    celsius = (fahrenheit - 32) * 5 / 9
```

```

        return celsius

def calculate_fahrenheit(celsius):
    fahrenheit = celsius * 9 / 5 + 32
    return fahrenheit

def display_result(temperature, fromScale, result, toScale):
    print(str(temperature) + str("° ") + fromScale + " is " + str(result) + str("° ") + toScale)

def main():
    choice = get_choice()
    if choice == "C" or choice == "c":
        to_celsius ()
    elif choice == "F" or choice == "f":
        to_fahrenheit ()
    else:
        print("You must enter C to convert to Celsius or F to convert to Fahrenheit.")

main()

```

Output

```

Enter C to convert to Celsius or F to convert to Fahrenheit:
c
Enter Fahrenheit temperature:
100
100.0° Fahrenheit is 37.77777777777778° Celsius

Enter C to convert to Celsius or F to convert to Fahrenheit:
f
Enter Celsius temperature:
100
100.0° Celsius is 212.0° Fahrenheit

Enter C to convert to Celsius or F to convert to Fahrenheit:
x
You must enter C to convert to Celsius or F to convert to Fahrenheit.

```


References

- Wikiversity: Computer Programming

Swift Examples

DAVE BRAUNSCHWEIG

Temperature

The temperature program main function is listed twice, once using if-then-else and once using switch, followed by the supporting functions.

If Then Else

```
// This program asks the user for a Fahrenheit temperature,
// converts the given temperature to Celsius,
// and displays the results.
//
// References:
//     https://www.mathsisfun.com/temperature-conversion.html
//     https://developer.apple.com/library/content/documentation/Swift/Conc

func main() {
    var choice: String

    choice = getChoice()
    if choice == "C" || choice == "c" {
        toCelsius()
    }
    else if choice == "F" || choice == "f" {
        toFahrenheit()
    }
    else {
        print("You must enter C to convert to Celsius or F to convert to Fa
    }
}

main()
```

Switch

```
func main() {
    var choice: String
```

```

        choice = getChoice()
        switch choice {
            case "C", "c":
                toCelsius()
            case "F", "f":
                toFahrenheit()
            default:
                print("You must enter C to convert to Celsius or F to convert to Fahrenheit")
        }
    }
}

```

Supporting Functions

```

func getChoice() -> String {
    var choice: String

    print("Enter C to convert to Celsius or F to convert to Fahrenheit:")
    choice = readLine(strippingNewline: true)!

    return choice
}

func toCelsius() {
    var temperature: Double
    var result: Double

    temperature = getTemperature(scale:"Fahrenheit")
    result = calculateCelsius(fahrenheit:temperature)
    displayResult(temperature:temperature, fromScale:"Fahrenheit", result:result)
}

func toFahrenheit() {
    var temperature: Double
    var result: Double

    temperature = getTemperature(scale:"Celsius")
    result = calculateFahrenheit(celsius:temperature)
    displayResult(temperature:temperature, fromScale:"Celsius", result:result)
}

func getTemperature(scale: String) -> Double {

```

```

    var temperature: Double

    print("Enter " + scale + " temperature:")
    temperature = Double(readLine(strippingNewline: true)!)

    return temperature
}

func calculateCelsius(fahrenheit: Double) -> Double {
    var celsius: Double

    celsius = (fahrenheit - 32) * 5 / 9

    return celsius
}

func calculateFahrenheit(celsius: Double) -> Double {
    var fahrenheit: Double

    fahrenheit = celsius * 9 / 5 + 32

    return fahrenheit
}

func displayResult(temperature: Double, fromScale: String, result: Double,
    print(String(temperature) + "° " + fromScale + " is " + String(result))
}

```

Output

```

Enter C to convert to Celsius or F to convert to Fahrenheit:
C
Enter Fahrenheit temperature:
100
100.0° Fahrenheit is 37.7777777777778° Celsius

Enter C to convert to Celsius or F to convert to Fahrenheit:
f
Enter Celsius temperature:
100
100.0° Celsius is 212.0° Fahrenheit

```

```
Enter C to convert to Celsius or F to convert to Fahrenheit:
x
You must enter C to convert to Celsius or F to convert to Fahrenheit.
```

References

- Wikiversity: Computer Programming

Practice: Conditions

KENNETH LEROY BUSBEE

Review Questions

True / False

1. There are only two categories of control structures.
2. Branching control structures are rarely used in good structured programming.
3. If then else is a multiway selection control structure.
4. The while control structure is part of the branching category.
5. Pseudocode is better than flowcharting.

Answers:

1. false
2. true
3. false
4. false
5. false

Expressions

Evaluate the following Boolean expressions:

1. $25 < 7$
2. $3 < 7$
3. $14 > 7$
4. $17 \leq 7$
5. $25 \geq 7$
6. $13 == 7$
7. $9 != 7$
8. $5 !> 7$
9. $25 > 39 \parallel 15 > 36$
10. $19 > 26 \parallel 13 < 17$
11. $14 < 7 \ \&\& \ 6 \leq 6$
12. $4 > 3 \ \&\& \ 17 \geq 7$
13. $! \text{true}$
14. $! (13 == 7)$
15. $9 != 7 \ \&\& \ !1$
16. $6 < \&\& \ 8$

Answers:

1. 0
2. 1

3. 1
4. 0
5. 1
6. 0
7. 1
8. Error, the “not greater than” is not a valid operator.
9. 0
10. 1
11. 0
12. 1
13. 0
14. 1
15. 0
16. Error, there needs to be an operand between the operators < and &&.

Short Answer

1. List the four categories of control structures and provide a brief description of each category.
2. Create a table with the six relational operators and their meanings.

Activities

Complete the following activities using pseudocode, a flowcharting tool, or your selected programming language. Use separate functions for input, each type of processing, and output. Avoid global variables by passing parameters and returning results. Create test data to validate the accuracy of each program.

1. Create a program to prompt the user for hours and rate per hour and then compute gross pay (hours * rate). Include a calculation to give 1.5 times the hourly rate for any overtime (hours worked above 40 hours).¹
2. Create a program that asks the user how old they are in years. Then ask the user if they would like to know how old they are in (M)onths, (D)ays, (H)ours, or (S)econds. Use if/else conditional statements to calculate and display their approximate age in the selected timeframe. Do not perform any unnecessary calculations.
3. Review MathsIsFun: US Standard Lengths. Create a program that asks the user for a distance in miles, and then ask the user if they want the distance in US measurements (yards, feet, and inches) or in metric measurements (kilometers, meters, and centimeters). Use if/else conditional statements to determine their selection and then calculate and display the results.
4. Review MathsIsFun: Area of Plane Shapes. Create a program that asks the user what shape they would like to calculate the area for. Use if/else conditional statements to determine their selection and then gather the appropriate input and calculate and display the area of the shape.
5. Create a program that helps the user determine what sock size to order based on their shoe size:

`< 4 = extra small`

`4 to 6 = small`

1. PythonLearn: Variables, expressions, and statements

```
7 to 9 = medium  
10 to 12 = large  
13+ = extra large
```

Use if/else conditional statements to determine their selection and then display the results. Round half-sizes up to the next whole size. One option for rounding is to add 0.5 and then convert to an integer.

6. If your programming language supports it, update one or more of the programs above to replace the if/else conditional statements with case/select conditional statements.
7. Review Wikipedia: Is functions. If your programming language supports it, update one or more of the programs above to include input validation for all numeric input.
8. If your programming language supports it, extend one or more of the programs above by adding structured exception handling statements (try-catch, try-except, etc.) to handle any runtime errors caused by the user entering invalid values for the input.

References

- [cnx.org: Programming Fundamentals – A Modular Structured Approach using C++](https://cnx.org/Content/col12072/1.10)
- [Wikiversity: Computer Programming](https://www.wikiversity.org/wiki/Computer_Programming)

PART V

LOOPS

Overview

This chapter introduces loops and iteration control structures.

Chapter Outline

- Iteration Control Structures
- While Loop
- Do While Loop
- Flag Concept
- For Loop
- Branching Control Structures
- Increment and Decrement Operators
- Integer Overflow
- Nested For Loops
- Loop Examples
- Code Examples
 - C++
 - C#
 - Java
 - JavaScript
 - Python
 - Swift
- Practice

Learning Objectives

1. Understand key terms and definitions.
2. Identify control structures based on test before iteration, test after iteration, and counting, and when to use each type.
3. Given example pseudocode, flowcharts, and source code, create a program that uses loops and iteration control structures to solve a given problem.

Iteration Control Structures

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

In **iteration control structures**, a statement or block is executed until the program reaches a certain state, or operations have been applied to every element of a collection. This is usually expressed with keywords such as `while`, `repeat`, `for`, or `do..until`¹.

Discussion

The basic attribute of an iteration control structure is to be able to repeat some lines of code. The visual display of iteration creates a circular loop pattern when flowcharted, thus the word “loop” is associated with iteration control structures. Iteration can be accomplished with test before loops, test after loops, and counting loops. A question using Boolean concepts usually controls how often the loop will execute.

Iteration (Repetition) Control Structures

pseudocode: While

```
count assigned zero
While count < 5
    Display "I love computers!"
    Increment count
End
```

pseudocode: Do While

```
count assigned five
Do
    Display "Blast off is soon!"
    Decrement count
While count > zero
```

pseudocode: Repeat Until

1. Wikipedia: Structured programming

```
count assigned five
Repeat
    Display "Blast off is soon!"
    Decrement count
Until count < one
```

pseudocode: For

```
For x starts at 0, x < 5, increment x
    Display "Are we having fun?"
End
```

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

While Loop

KENNETH LEROY BUSBEE

Overview

A **while loop** is a control flow statement that allows code to be executed repeatedly based on a given Boolean condition. The while loop can be thought of as a repeating if statement.¹

Discussion

Introduction to Test Before Loops

There are two commonly used test before loops in the iteration (or repetition) category of control structures. They are: while and for. This module covers the: while.

Understanding Iteration in General – while

The concept of iteration is connected to possibly wanting to repeat an action. Like all control structures we ask a question to control the execution of the loop. The term loop comes from the circular looping motion that occurs when using flowcharting. The basic form of the while loop is as follows:

```
initialization of the flag
while the answer to the question is true then do
    some statements or action
    some statements or action
    some statements or action
    update the flag
```

In most programming languages the question (called a test expression) is a Boolean expression. The Boolean data type has two values – true and false. Let's rewrite the structure to consider this:

```
initialization of the flag
while the expression is true then do
    some statements or action
    some statements or action
    some statements or action
```

1. Wikipedia: While loop

```
update the flag
```

Within the while control structure there are four attributes to a properly working loop. They are:

- Initializing the flag
- Test expression
- Action or actions
- Update of the flag

The initialization of the flag is not technically part of the control structure, but a necessary item to occur before the loop is started. The English phrasing is, “While the expression is true, do the following actions”. This is looping on the true. When the test expression is false, you stop the loop and go on with the next item in the program. Notice, because this is a test before loop the action **might not happen**. It is called a test before loop because the test comes before the action. It is also sometimes called a pre-test loop, meaning the test is pre (or Latin for before) the action and update.

Human Example of the while Loop

Consider the following one-way conversation from a mother to her child.

Child: The child says nothing, but mother knows the child had Cheerios for breakfast and history tells us that the child most likely spilled some Cheerios on the floor.

Mother says: “While it is true that you see (As long as you can see) a Cheerio on floor, pick it up and put it in the garbage.”

Note: All of the elements are present to determine the action (or flow) that the child will be doing (in this case repeating). Because the question (can you see a Cheerios) has only two possible answers (true or false) the action will continue while there are Cheerios on the floor. Either the child 1) never picks up a Cheerio because they never spilled any or 2) picks up a Cheerio and keeps picking up Cheerios one at a time while he can see a Cheerio on the floor (that is until they are all picked up).

Infinite Loops

At this point it is worth mentioning that good programming always provides for a method to insure that the loop question will eventually be false so that the loop will stop executing and the program continues with the next line of code. However, if this does not happen then the program is in an infinite loop. Infinite loops are a bad thing. Consider the following code:

C++ source code: infinite loop

```
loop_response = 'y'
While loop_response == 'y'
    Output "What is your age? "
    Input user_age
    Output "What is your friend's age? "
    Input friend_age
    Output "Together your ages add up to: "
```

```
Output user_age + friend_age
```

The programmer assigned a value to the flag before the loop which is correct. However, they forgot to update the flag. Every time the test expression is asked it will always be true. Thus, an infinite loop because the programmer did not provide a way to exit the loop (he forgot to update the flag). Consider the following code:

```
loop_response = 'y';
While loop_response = 'y'
    Output "What is your age? "
    Input user_age
    Output "What is your friend's age? "
    Input friend_age
    Output "Together your ages add up to: "
    Output user_age + friend_age
    Output "Do you want to try again? y or n "
    Input loop_response
```

No matter what the user replies during the flag update, the test expression does not do a relational comparison but does an assignment. It assigns 'y' to the variable and asks if 'y' is true? Since all non-zero values are treated as representing true, the answer to the test expression is true. Viola, you have an infinite loop.

Counting Loops

The examples above are for an event controlled loop. The flag updating is an event where someone decides if they want the loop to execute again. Often the initialization sets the flag so that the loop will execute at least once.

Another common usage of the while loop is as a counting loop. Consider:

```
counter = 0
While counter < 5
    Output "I love ice cream!"
    counter += 1
```

The variable counter is said to be controlling the loop. It is set to zero (called initialization) before entering the while loop structure and as long as it is less than 5 (five); the loop action will be executed. But part of the loop action uses the increment operator to increase counter's value by one. After executing the loop five times (once for counter's values of: 0, 1, 2, 3 and 4) the expression will be false and the next line of code in the program will execute. A counting loop is designed to execute the action (which could be more than one statement) a set of given number of times. In our example, the message is displayed five times on the monitor. It is accomplished by making sure all four attributes of the while control structure are present and working properly. The attributes are:

- Initializing the flag

- Test expression
- Action or actions
- Update of the flag

Missing an attribute might cause an infinite loop or give undesired results (does not work properly).

Infinite Loops

Consider:

```
counter = 0;
while counter < 5
    Output "I love ice cream!"
```

Missing the flag update usually causes an infinite loop.

Variations on Counting

In the following example, the integer variable age is said to be controlling the loop (that is the flag). We can assume that age has a value provided earlier in the program. Because the while structure is a test before loop; it is possible that the person's age is 0 (zero) and the first time we test the expression it will be false and the action part of the loop would never be executed.

```
While 0 < age
    Output "I love candy!"
    age -= 1
```

Consider the following variation assuming that age and counter are both integer data type and that age has a value:

```
counter = 0;
While counter < age
    Output "I love corn chips!"
    counter += 1
```

This loop is a counting loop similar to our first counting loop example. The only difference is instead of using a literal constant (in other words 5) in our expression, we used the variable age (and thus the value stored in age) to determine how many times to execute the loop. However, unlike our first counting loop example which will always execute exactly 5 times; it is possible that the person's age is 0 (zero) and the first time we test the expression it will be false and the action part of the loop would never be executed.

Key Terms

counting controlled

Using a variable to count up or down to control a loop.

event controlled

Using user input to control a loop.

initialize item

An attribute of iteration control structures.

loop attributes

Items associated with iteration or looping control structures.

might not happen

Indicating that test before loops might not execute the action.

while

A test before iteration control structure.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Do While Loop

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

A **do while loop** is a control flow statement that executes a block of code at least once, and then repeatedly executes the block, or not, depending on a given boolean condition at the end of the block.¹

Some languages may use a different naming convention for this type of loop. For example, the Pascal language has a **repeat until loop**, which continues to run until the control expression is true (and then terminates) — whereas a “while” loop runs while the control expression is true (and terminates once the expression becomes false).²

Discussion

Introduction to Test After Loops

There are two commonly used test after loops in the iteration (or repetition) category of control structures. They are: do while and repeat until. This module covers both.

Understanding Iteration in General – do while

The concept of iteration is connected to possibly wanting to repeat an action. Like all control structures we ask a question to control the execution of the loop. The term loop comes from the circular looping motion that occurs when using flowcharting. The basic form of the do while loop is as follows:

```
do
    some statements or action
    some statements or action
    some statements or action
    update the flag
while the answer to the question is true
```

In most programming languages the question (called a test expression) is a Boolean expression. The Boolean data type has two values – true and false. Let’s rewrite the structure to consider this:

1. Wikipedia: Do while loop
2. Wikipedia: Do while loop

```
do
    some statements or action
    some statements or action
    some statements or action
    update the flag
while expression is true
```

Within the do while control structure there are three attributes of a properly working loop. They are:

- Action or actions
- Update of the flag
- Test expression

The English phrasing is, “You do the action while the expression is true”. This is looping on the true. When the test expression is false, you stop the loop and go on with the next item in the program. Notice, because this is a test after loop the action will always happen **at least once**. It is called a test after loop because the test comes after the action. It is also sometimes called a post-test loop, meaning the test is post (or Latin for after) the action and update.

Understanding Iteration in General – repeat until

The concept of iteration is connected to possibly wanting to repeat an action. Like all control structures we ask a question to control the execution of the loop. The term loop comes from the circular looping motion that occurs when using flowcharting. The basic form of the repeat until loop is as follows:

```
repeat
    some statements or action
    some statements or action
    some statements or action
    update the flag
until the answer to the question becomes true
```

In most programming languages the question (called a test expression) is a Boolean expression. The Boolean data type has two values – true and false. Let’s rewrite the structure to consider this:

```
repeat
    some statements or action
    some statements or action
    some statements or action
    update the flag
until expression becomes true
```

Within the repeat until control structure there are three attributes of a properly working loop. They are:

- Action or actions
- Update of the flag
- Test expression

The English phrasing is, “You repeat the action until the expression becomes true”. This is looping on the false. When the test expression becomes true, you stop the loop and go on with the next item in the program. Notice, because this is a test after loop the action will always happen **at least once**. It is called a “test after loop” because the test comes after the action. It is also sometimes called a post-test loop, meaning the test is post (or Latin for after) the action and update.

An Example

```
Do
    Output "What is your age? "
    Input user_age
    Output "What is your friend's age? "
    Input friend_age
    Output "Together your ages add up to: "
    Output age_user + friend_age
    Output "Do you want to try it again? y or n "
    Input loop_response
While loop_response == 'y'
```

The three attributes of a test after loop are present. The action part consists of the 6 lines that prompt for data and then displays the total of the two ages. The update of the flag is the displaying the question and getting the answer for the variable loop_response. The test is the equality relational comparison of the value in the flag variable to the lower case character of y.

This type of loop control is called an event controlled loop. The flag updating is an event where someone decides if they want the loop to execute again.

Using indentation with the alignment of the loop actions and flag update is normal industry practice.

Infinite Loops

At this point it is worth mentioning that good programming always provides for a method to insure that the loop question will eventually be false so that the loop will stop executing and the program continues with the next line of code. However, if this does not happen then the program is in an infinite loop. Infinite loops are a bad thing. Consider the following code:

```
loop_response = 'y'
Do
    Output "What is your age? "
    Input user_age
    Output "What is your friend's age? "
    Input friend_age
```

```
Output "Together your ages add up to: "  
Output user_age + friend_age  
While loop_response == 'y'
```

The programmer assigned a value to the flag before the loop and forgot to update the flag. Every time the test expression is asked it will always be true. Thus, an infinite loop because the programmer did not provide a way to exit the loop (he forgot to update the flag).

Consider the following code:

```
do  
    Output "What is your age? "  
    Input user_age  
    Output "What is your friend's age? "  
    Input friend_age  
    Output "Together your ages add up to: "  
    Output age_user + friend_age  
    Output "Do you want to try it again? y or n "  
    Input loop_response  
While loop_response = 'y'
```

No matter what the user replies during the flag update, the test expression does not do a relational comparison but does an assignment. It assigns 'y' to the variable and asks if 'y' is true? Since all non-zero values are treated as representing true, the answer to the text question is true. Viola, you have an infinite loop.

Key Terms

action item

An attribute of iteration control structures.

at least once

Indicating that test after loops execute the action at least once.

do while

A test after iteration control structure.

infinite loop

No method of exit, thus a bad thing.

repeat until

A test after iteration control structure alternative available in some programming languages.

test item

An attribute of iteration control structures.

update item

An attribute of iteration control structures.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Flag Concept

KENNETH LEROY BUSBEE


Overview

Flags are commonly used to control or to indicate the intermediate state or outcome of particular operations.¹

Discussion

For centuries flags have been used as a signal to let others know something about the group or individual that is displaying, flying or waving the flag. There are country flags and state flags. Ships at sea flew the flag of their country. Pirates flew the skull and cross bones. A yellow flag was used for quarantine, usually the plague. Even pirates stayed away. Today, some people might recognize the flag used by scuba divers. The Presidents of most countries have a flag. At a race car event they use the checkered flag to indicate the race is over.

1. Wikipedia: Bit field

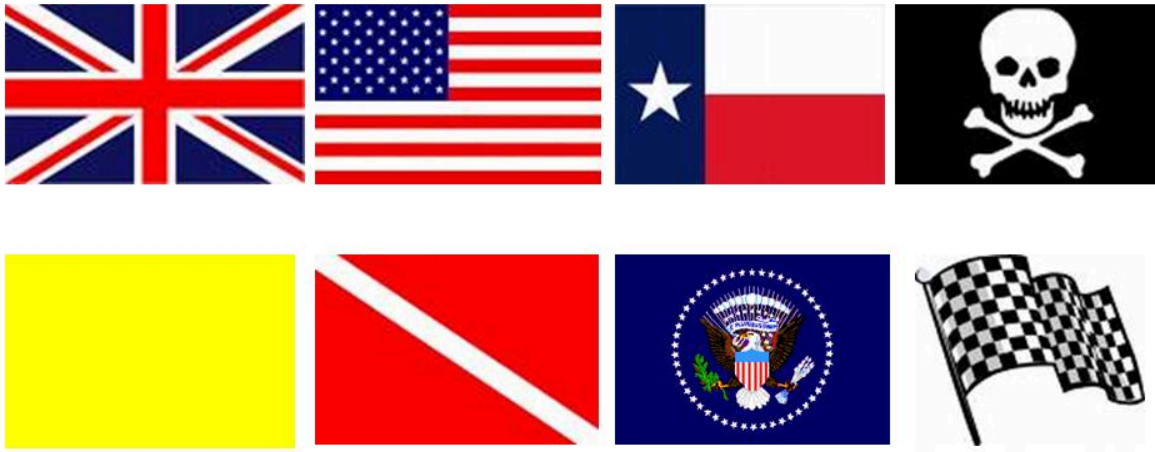

Various Flags

Computer programming uses the concept of a flag in the same way that physical flags are used. A flag is anything that signals some information to the person looking at it.

Computer Implementation

Any variable or constant that holds data can be used as a flag. You can think of the storage location as a flag pole. The value stored within the variable conveys some meaning and you can think of it as being the flag. An example might be a variable named: gender which is of the character data type. The two values normally stored in the variable are: 'F' and 'M' meaning female and male. Then, somewhere within a program we might look at the variable to make a decision:

flag controlling an if then control structure

```
if gender equals 'F'  
    display "Are you pregnant?"  
    get answer from user store in pregnant variable
```

Looking at the flag implies comparing the value in the variable to another value (a constant or the value in another variable) using a relational operator (in our above example: equality).

Control structures are “controlled” by using a **test expression** which is usually a **Boolean expression**. Thus, the flag concept of “looking” at the value in the variable and comparing it to another value is fundamental to understanding how all control structures work.

Two Flags with the Same Meaning

Sometimes we will use an iteration control structure of do while to allow us to decide if we want to do the loop action again. A variable might be named “loop_response” with the user prompted for their answer of ‘y’ for yes or ‘n’ for no. Once the answer is retrieved from the keyboard and stored in our flag variable of “loop_response” the test expression to control the loop might be:

simple flag comparison

```
loop_response equals 'y'
```

This is fine but what if the user accidentally has on the caps lock. Then the response of ‘Y’ would not have the control structure loop and perform the action again. The solution lies in looking at the flag twice. Consider:

complex flag comparison

```
loop_response equals 'y' or loop_response equals 'Y'
```

We look to see if the flag is either a lower case y or an upper case Y by using a more complex Boolean expression with both relational and logical operators.

Multiple Flags in One Byte

Within assembly language programming and in many technical programs that control special devices; the use of a single byte to represent several flags is common. This is accomplished by having each one of the 8 bits that make up the byte represent a flag. Each bit has a value of either 1 or 0 and can represent true and false, on or off, yes or no, etc.

Key Terms

flag

A variable or constant used to store information that will normally be used to control the program.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

For Loop

KENNETH LEROY BUSBEE

Overview

A **for loop** is a control flow statement for specifying iteration, which allows code to be executed repeatedly. A for loop has two parts: a header specifying the iteration, and a body which is executed once per iteration. The header often declares an explicit loop counter or loop variable, which allows the body to know which iteration is being executed. For-loops are typically used when the number of iterations is known before entering the loop. For-loops can be thought of as shorthands for while-loops which increment and test a loop variable.¹

Discussion

Introduction to Test Before Loops

There are two commonly used test before loops in the iteration (or repetition) category of control structures. They are: while and for. This module covers the: for.

Understanding Iteration in General – for

In many programming languages the for loop is used exclusively for counting; that is to repeat a loop action as it either counts up or counts down. There is a starting value and a stopping value. The question that controls the loop is a test expression that compares the starting value to the stopping value. This expression is a Boolean expression and is usually using the relational operators of either less than (for counting up) or greater than (for counting down). The term loop comes from the circular looping motion that occurs when using flowcharting. The basic form of the for loop (counting up) is as follows:

```
for
    initialization of the starting value
    starting value is less than the stopping value
    some statements or action
    some statements or action
    some statements or action
    increment the starting value
```

It might be best to understand the for loop by understanding a while loop acting like a counting loop. Let's consider;

1. Wikipedia: For loop

```
initialization of the starting value
while the starting value is less than the stopping value
    some statements or action
    some statements or action
    some statements or action
    increment the starting value
```

Within the for control structure there are four attributes to a properly working loop. They are:

- Initializing the flag – done once
- Test expression
- Action or actions
- Update of the flag

The initialization of the flag is not technically part of the while control structure, but it is usually part of the for control structure. The English phrasing is, “For x is 1; x less than 3; do the following actions; increment x; loop back to the test expression”. This is doing the action on the true. When the test expression is false, you stop the loop and go on with the next item in the program. Notice, because this is a test before loop the action **might not happen**. It is called a test before loop because the test comes before the action. It is also sometimes called a pre-test loop, meaning the test is pre (or Latin for before) the action and update.

An Example

```
For counter = 0, counter < 5, counter += 1
    Output "I love ice cream!"
```

The four attributes of a test before loop (remember the for loop is one example of a test before loop) are present.

- The initialization of the flag to a value of 0.
- The test is the less than relational comparison of the value in the flag variable to the constant value of 5.
- The action part consists of the 1 line of output.
- The update of the flag is done with the increment operator.

Using indentation with the alignment of the loop actions is normal industry practice.

Infinite Loops

At this point it is worth mentioning that good programming always provides for a method to insure that the loop question will eventually be false so that the loop will stop executing and the program continues with the next line of code. However, if this does not happen then the program is in an infinite loop. Infinite loops are a bad thing. Consider the following code:

```
For counter = 0, counter < 5  
    Output "I love ice cream!"
```

The programmer assigned a value to the flag during the initialization step which is correct. However, they forgot to update the flag (the update step is missing). Every time the test expression is asked it will always be true. Thus, an infinite loop because the programmer did not provide a way to exit the loop (he forgot to update the flag).

Key Terms

for

A test before iteration control structure typically used for counting.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Branching Control Structures

KENNETH LEROY BUSBEE

Overview

A branch is an instruction in a computer program that can cause a computer to begin executing a different instruction sequence and thus deviate from its default behavior of executing instructions in order.¹ Common branching statements include `break`, `continue`, `return`, and `goto`.

Discussion

The branching control structures allow the flow of execution to jump to a different part of the program. The common branching control structures that are used with other control structures are: `break`, `continue`, `return`, and `goto`. The `goto` is rarely used in modular structured programming. Additionally, we will add to our list of branching items a pre-defined function commonly used in programming languages of: `exit`.

Examples

break

The `break` is used in one of two ways; with a switch to make it act like a case structure or as part of a looping process to break out of the loop. The following gives the appearance that the loop will execute 8 times, but the `break` statement causes it to stop during the fifth iteration.

```
counter = 0;
While counter < 8
    Output counter
    If counter == 4
        break
    counter += 1
```

continue

The following gives the appearance that the loop will print to the monitor 8 times, but the `continue` statement causes it not to print number 4.

1. Wikipedia: Branch (computer science)

```
For counter = 0, counter < 8, counter += 1
    If counter == 4
        continue
    Output counter
```

return

The return statement exits a function and returns to the statement where the function was called.

```
Function DoSomething
    statements
Return <optional return value>
```

goto

The goto structure is typically not accepted in good structured programming. However, some programming languages allow you to create a label with an identifier name followed by a colon. You use the command word `goto` followed by the label.

```
some lines of code;
goto label;                // jumps to the label
some lines of code;
some lines of code;
some lines of code;
label: some statement;     // Declared label
some lines of code;
```

exit

Although exit is technically a pre-defined function, it is covered here because of its common usage in programming. A good example is the opening a file and then testing to see if the file was actually opened. If not, we have an error that usually indicates that we want to pre-maturely stop the execution of the program. The exit function terminates the running of the program and in the process returns an integer value back to the operating system. It fits the definition of branching which is to jump to some other place in the program.

Key Terms

branching control structures

Allow the flow of execution to jump to a different part of the program.

break

A branching control structure that terminates the existing structure.

continue

A branching control structure that causes a loop to stop its current iteration and begin the next one.

exit

A pre-defined function used to prematurely stop a program and jump to the operating system.

goto

A branching control structure that causes the logic to jump to a different place in the program.

return

A branching control structure that causes a function to jump back to the function that called it.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Increment and Decrement Operators

KENNETH LEROY BUSBEE

Overview

Increment and decrement operators are unary operators that add or subtract one from their operand, respectively. They are commonly implemented in imperative programming languages.¹

Discussion

The idea of increment or decrement is to either add or subtract 1 from a variable that is usually acting as a flag. Using a variable named counter; in generic terms, for example:

```
increment the counter
```

The concept is:

```
counter is assigned counter + 1
```

That is you fetch the existing value of the counter and add one then store the answer back into the variable counter. Many programming languages allow their increment and decrement operators to only be used with the integer data type. Programmers will sometimes use inc and dec as abbreviations for increment and decrement respectively.

Operator symbols and/or names vary with different programming languages. Several programming languages support increment and decrement operators:

Operator	Meaning
++	increment, two plus signs
--	decrement, two minus signs

Code Examples

Basic Concept

Within C++, C#, Java, and JavaScript programming languages, the increment and decrement operators are often used in this simple generic way. The operator of increment is represented by two plus signs in a row. Examples:

```
counter = counter + 1;  
counter += 1;
```

1. Wikipedia: Increment and decrement operators

```
counter++;  
++counter;
```

As statements, the four examples all do the same thing. They add 1 to the value of whatever is stored in counter. The decrement operator is represented by two minus signs in a row. They would subtract 1 from the value of whatever was in the variable being decremented. The precedence of increment and decrement depends on if the operator is attached to the right of the operand (postfix) or to the left of the operand (prefix). Note that postfix and prefix do not have the same precedence.

Postfix Increment

Postfix increment says to use my existing value then when you are done with the other operators; increment me. An example:

```
int oldest = 44;  
age = oldest++;
```

The first use of the oldest variable is an Rvalue context where the existing value of 44 is pulled or fetched and then assigned to the variable age; then the variable oldest is incremented with its value changing from 44 to 45. This seems to be a violation of precedence because increment is higher precedence than assignment. But that is how postfix increment works.

Prefix Increment

Prefix increment says to increment me now and use my new value in any calculation. An example:

```
int oldest = 44;  
age = ++oldest;
```

The variable oldest is incremented with the new value changing it from 44 to 45; then the new value is assigned to age.

In postfix age is assigned 44 in prefix age is assigned 45. One way to help remember the difference is to think of postfix as being polite (use my existing value and return to increment me after the other operators are done) where as prefix has an ego (I am important so increment me first and use my new value for the rest of the evaluations).

Allowable Data Types

Within some programming languages, increment and decrement can be used only on the integer data type. Other languages expand this not only to all of the integer family but also to the floating-point family (float and double). Incrementing 3.87 will change the value to 4.87. Decrementing 'C' will change the value to 'B'. Remember the ASCII character values are really one byte unsigned integers (domain from 0 to 255).

Exercises

Evaluate the following items using increment or decrement:

1. True or false: $x = x + 1$ and $x += 1$ and $x++$ all accomplish increment?
2. Given: `int y = 19;` and `int z;` what values will y and z have after: `z = y--;`
3. Given: `double x = 7.77;` and `int y;` what values will x and y have after: `y = ++x;`
4. Is this ok? Why or why not? `6 * ++(age - 3)`

Key Terms

decrement

Subtracting one from the value of a variable.

increment

Adding one to the value of a variable.

postfix

Placing the increment or decrement operator to the right of the operand.

prefix

Placing the increment or decrement operator to the left of the operand.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Integer Overflow

KENNETH LEROY BUSBEE

Overview

Integer overflow occurs when an arithmetic operation attempts to create a numeric value that is outside of the range that can be represented with a given number of bits – either larger than the maximum or lower than the minimum representable value.¹

The most common result of an overflow is that the least significant representable bits of the result are stored; the result is said to wrap around the maximum (i.e. modulo power of two). An overflow condition may give results leading to unintended behavior. In particular, if the possibility has not been anticipated, overflow can compromise a program's reliability and security.²


Discussion

There are times when character and integer data types are lumped together because they both act the same (often called the integer family). Maybe we should say they act differently than the floating-point data types. The integer family values jump from one value to another. There is nothing between 6 and 7 nor between 'A' and 'B'. It could be asked why not make all your numbers floating-point data types. The reason is twofold. First, some things in the real world are not fractional. A dog, even with only 3 legs, is still one dog not three fourths of a dog. Second, the integer data type is often used to control program flow by counting (counting loops). The integer family has a circular wrap around feature. Using a two byte integer, the next number bigger than 32767 is negative 32768 (character acts the same way going from 255 to 0. We could also reverse that to be the next smaller number than negative 32768 is positive 32767. This can be shown by using a normal math line, limiting the domain and then connecting the two ends to form a circle.


1. Wikipedia: Integer overflow

2. Wikipedia: Integer overflow


Math Number Line



Two Byte Integer Domain




Circular Concept



This circular nature of the integer family works for both integer and character data types. In theory, it should work for the Boolean data type as well; but in most programming languages it does not for various technical reasons.

“In mathematics, modular arithmetic (sometimes called clock arithmetic) is a system of arithmetic for integers where numbers “wrap around” after they reach a certain value — the modulus. ...

A familiar use of modular arithmetic is its use in the 12 hour clock the arithmetic of time-keeping in which the day is divided into two 12 hour periods. If the time is 7:00 now, then 8 hours later it will be 3:00. Usual addition would suggest that the later time should be $7 + 8 = 15$, but this is not the answer because clock time “wraps around” every 12 hours; there is no “15 o'clock”. Likewise, if the clock starts at 12:00 (noon) and 21 hours elapse, then the time will be 9:00 the next day, rather than 33:00. Since the hour number starts over when it reaches 12, this is arithmetic modulo 12.

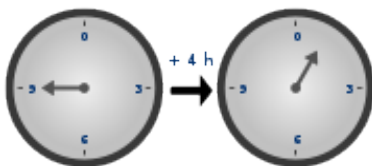

Time-keeping on a clock gives an example of modular arithmetic.” (Modular arithmetic from Wikipedia)

The use of the modulus operator in integer division is tied to the concepts used in modular arithmetic.

Implications When Executing Loops

If a programmer sets up a counting loop incorrectly, usually one of three things happen:

- Infinite loop – usually caused by missing update attribute.
- Loop never executes – usually the test expression is wrong with the direction of the less than or greater than relationship needing to be switched.
- Loop executes more times than desired – update not properly handled. Usually the direction of counting (increment or decrement) need to be switched.

Let's give an example of the loop executing for what appears to be for infinity (the third item on our list).

```
for int x = 0, x < 10, x--  
    Output x
```

The above code accidentally decrements and the value of x goes in a negative way towards -2147483648 (the largest negative value in a normal four byte signed integer data type). It might take a while (thus it might appear to be in an infinite loop) for it to reach the negative 2 billion plus value, before finally decrementing to positive 2147483647 which would, incidentally, stop the loop execution.

Key Terms

circular nature

Connecting the negative and positive ends of the domain of an integer family data type.

loop control

Making sure the attributes of a loop are properly handled.

modular arithmetic

A system of arithmetic for integers where numbers "wrap around".

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Nested For Loops

KENNETH LEROY BUSBEE

Overview

Nested for loops places one for loop inside another for loop. The inner loop is repeated for each iteration of the outer loop.

Discussion

Nested Control Structures

We are going to first introduce the concept of nested control structures. Nesting is a concept that places one item inside of another. Consider:

```
if expression
    true action
else
    false action
```

This is the basic form of the if then else control structure. Now consider:

```
if age is less than 18
    you can't vote
    if age is less than 16
        you can't drive
    else
        you can drive
else
    you can vote
    if age is less than 21
        you can't drink
    else
        you can drink
```

As you can see we simply included as part of the “true action” a statement and another if then else control structure. We did the same (nested another if then else) for the “false action”. In our example we nested if then else control structures. Nesting could have an if then else within a while loop. Thus, the concept of nesting allows the mixing of the different categories of control structures.

Many complex logic problems require using nested control structures. By nesting control structures (or placing one inside another) we can accomplish almost any **complex logic** problem.

An Example – Nested for loops

Here is an example of a 10 by 10 multiplication table:

	1	2	3	4	5	6	7	8	9	10
1	1	2	3	4	5	6	7	8	9	10
2	2	4	6	8	10	12	14	16	18	20
3	3	6	9	12	15	18	21	24	27	30
4	4	8	12	16	20	24	28	32	36	40
5	5	10	15	20	25	30	35	40	45	50
6	6	12	18	24	30	36	42	48	54	60
7	7	14	21	28	35	42	49	56	63	70
8	8	16	24	32	40	48	56	64	72	80
9	9	18	27	36	45	54	63	72	81	90
10	10	20	30	40	50	60	70	80	90	100

We might also see that the answers could be designed as a collection of cells (each cell being exactly six spaces wide). The pseudocode to produce part of the table is:

```
For row = 1, row <= 3, row += 1
    For column = 1, column <= 3, column += 1
        Output row * column
        Output "\t"
    Output "\n"
```

Key Terms

complex logic

Often solved with nested control structures.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Loop Examples

DAVE BRAUNSCHWEIG

Temperature

Pseudocode

```
Function Main
    Call WhileLoop
    Call DoLoop
    Call ForLoop
End

Function WhileLoop
    Declare Real fahrenheit
    Declare Real celsius

    Assign fahrenheit = 0
    Call DisplayHeading()
    While fahrenheit <= 100
        Assign celsius = CalculateCelsius(fahrenheit)
        Call DisplayResult(fahrenheit, celsius)
        Assign fahrenheit = fahrenheit + 10
    End
End

Function DoLoop
    Declare Real fahrenheit
    Declare Real celsius

    Call DisplayHeading()
    Assign fahrenheit = 0
    Loop
        Assign celsius = CalculateCelsius(fahrenheit)
        Call DisplayResult(fahrenheit, celsius)
        Assign fahrenheit = fahrenheit + 10
    Do fahrenheit <= 100
End

Function ForLoop
```

```

    Declare Real fahrenheit
    Declare Real celsius

    Call DisplayHeading()
    For fahrenheit = 0 to 100 step 10
        Assign celsius = CalculateCelsius(fahrenheit)
        Call DisplayResult(fahrenheit, celsius)
    End
End

Function DisplayHeading
    Output "F°"    "C°"
End

Function CalculateCelsius (Real fahrenheit)
    Declare Real celsius

    Assign celsius = (fahrenheit - 32) * 5 / 9
Return Real celsius

Function DisplayResult (Real fahrenheit, Real celsius)
    Output fahrenheit & " = " & celsius
End

```

Output


F°	C°
0	-17.77777777777778
10	-12.22222222222222
20	-6.66666666666667
30	-1.11111111111111
40	4.44444444444444
50	10
60	15.55555555555556
70	21.11111111111111
80	26.66666666666667
90	32.22222222222222
100	37.77777777777778


F°	C°
0	-17.77777777777778
10	-12.22222222222222

20	-6.666666666666667
30	-1.111111111111111
40	4.444444444444444
50	10
60	15.555555555555556
70	21.11111111111111
80	26.666666666666667
90	32.22222222222222
100	37.77777777777778

F°	C°
0	-17.77777777777778
10	-12.22222222222222
20	-6.666666666666667
30	-1.111111111111111
40	4.444444444444444
50	10
60	15.555555555555556
70	21.11111111111111
80	26.666666666666667
90	32.22222222222222
100	37.77777777777778

Flowchart

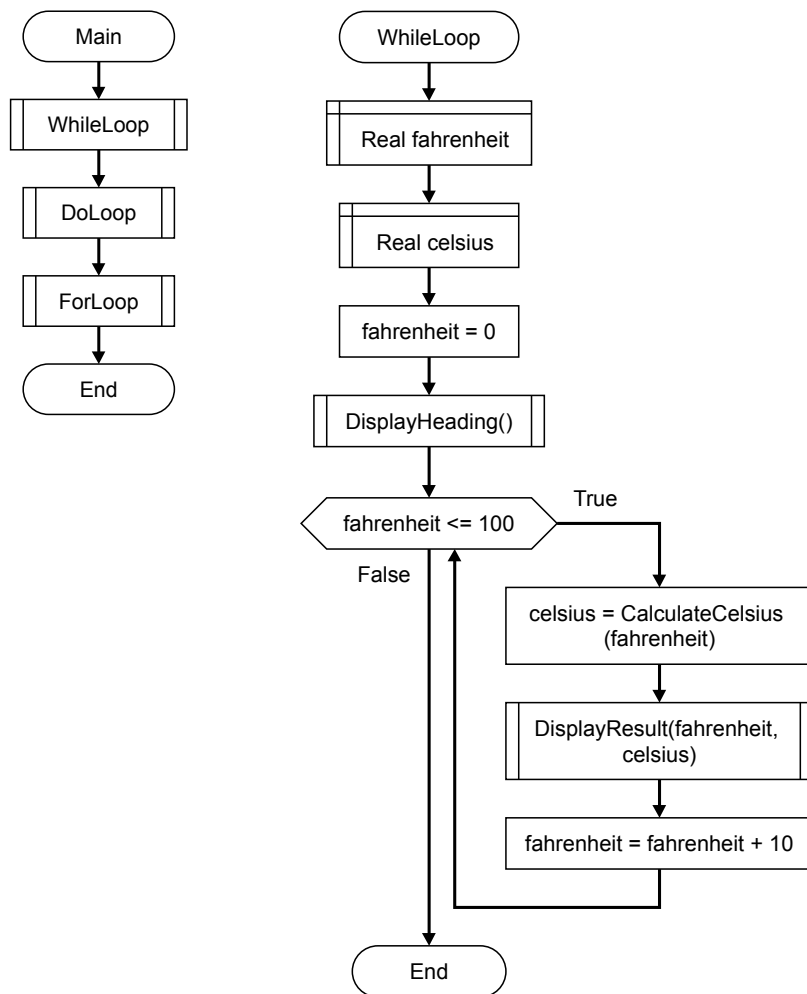

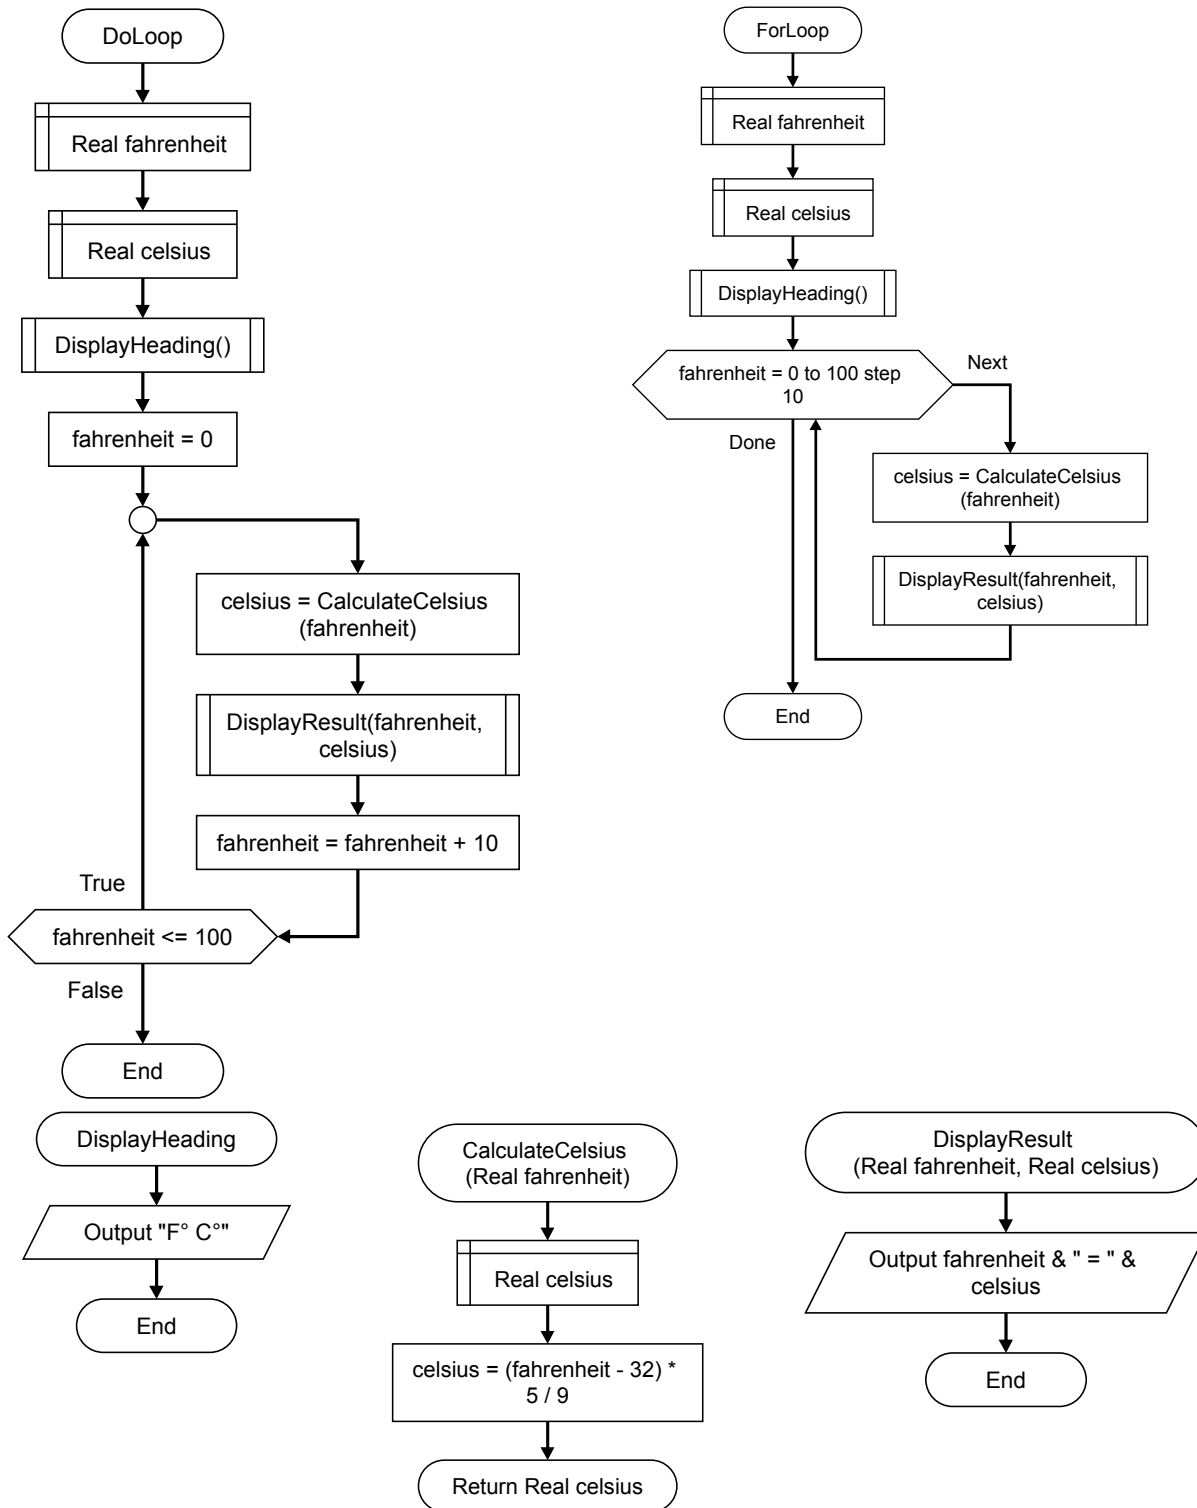

References

- Wikiversity: Computer Programming

C++ Examples

DAVE BRAUNSCHWEIG

Temperature

```
// This program displays a temperature conversion table showing Fahrenheit
// temperatures from 0 to 100, in increments of 10, and the corresponding
// Celsius temperatures using While, Do While, and For loops.
//
// References:
//      https://www.mathsisfun.com/temperature-conversion.html
//      https://en.wikibooks.org/wiki/C%2B%2B_Programming

#include

using namespace std;

void whileLoop();
void doLoop();
void forLoop();
void displayHeading();
double calculateCelsius(double);
void displayResult(double, double);

int main() {
    whileLoop();
    doLoop();
    forLoop();
}

void whileLoop() {
    double fahrenheit;
    double celsius;

    displayHeading();
    fahrenheit = 0;
    while (fahrenheit <= 100) {
        celsius = calculateCelsius(fahrenheit);
        displayResult(fahrenheit, celsius);
        fahrenheit += 10;
    }
}
```

```

    }
    cout << endl;
}

void doLoop() {
    double fahrenheit;
    double celsius;

    displayHeading();
    fahrenheit = 0;
    do {
        celsius = calculateCelsius(fahrenheit);
        displayResult(fahrenheit, celsius);
        fahrenheit += 10;
    } while (fahrenheit <= 100);
    cout << endl;
}

void forLoop() {
    double fahrenheit;
    double celsius;

    displayHeading();
    for (fahrenheit = 0 ; fahrenheit <= 100 ; fahrenheit += 10) {
        celsius = calculateCelsius(fahrenheit);
        displayResult(fahrenheit, celsius);
    }
    cout << endl;
}

void displayHeading() {
    cout << "F°\tC°" << endl;
}

double calculateCelsius(double fahrenheit) {
    double celsius;

    celsius = (fahrenheit - 32) * 5 / 9;

    return celsius;
}

void displayResult(double fahrenheit, double celsius) {

```

```
    cout << fahrenheit << "\\t" << celsius;  
    cout << endl;  
}
```

Output

F°	C°
0	-17.7778
10	-12.2222
20	-6.66667
30	-1.11111
40	4.44444
50	10
60	15.5556
70	21.1111
80	26.6667
90	32.2222
100	37.7778

F°	C°
0	-17.7778
10	-12.2222
20	-6.66667
30	-1.11111
40	4.44444
50	10
60	15.5556
70	21.1111
80	26.6667
90	32.2222
100	37.7778

F°	C°
0	-17.7778
10	-12.2222
20	-6.66667
30	-1.11111
40	4.44444
50	10
60	15.5556
70	21.1111
80	26.6667

90	32.2222
100	37.7778

References

- Wikiversity: Computer Programming

C# Examples

DAVE BRAUNSCHWEIG

Temperature

```
// This program displays a temperature conversion table showing Fahrenheit
// temperatures from 0 to 100, in increments of 10, and the corresponding
// Celsius temperatures using While, Do While, and For loops.
//
// References:
//      https://www.mathsisfun.com/temperature-conversion.html
//      https://en.wikibooks.org/wiki/C_Sharp_Programming

using System;

public class Temperature
{
    public static void Main(String[] args)
    {
        WhileLoop();
        DoLoop();
        ForLoop();
    }

    private static void WhileLoop()
    {
        double fahrenheit;
        double celsius;

        DisplayHeading();
        fahrenheit = 0;
        while (fahrenheit <= 100)
        {
            celsius = CalculateCelsius(fahrenheit);
            DisplayResult(fahrenheit, celsius);
            fahrenheit += 10;
        }
        Console.WriteLine();
    }
}
```



```

private static void DoLoop()
{
    double fahrenheit;
    double celsius;

    DisplayHeading();
    fahrenheit = 0;
    do
    {
        celsius = CalculateCelsius(fahrenheit);
        DisplayResult(fahrenheit, celsius);
        fahrenheit += 10;
    } while (fahrenheit <= 100);
    Console.WriteLine();
}

private static void ForLoop()
{
    double fahrenheit;
    double celsius;

    DisplayHeading();
    for (fahrenheit = 0 ; fahrenheit <= 100 ; fahrenheit += 10)
    {
        celsius = CalculateCelsius(fahrenheit);
        DisplayResult(fahrenheit, celsius);
    }
    Console.WriteLine();
}

private static void DisplayHeading()
{
    Console.WriteLine("F°\tC°");
}

public static double CalculateCelsius(double fahrenheit)
{
    double celsius;

    celsius = (fahrenheit - 32) * 5 / 9;

    return celsius;
}

```

```

private static void DisplayResult(double fahrenheit, double celsius)
{
    Console.WriteLine(fahrenheit.ToString() + "\t" + celsius.ToString())
}
}

```

Output

F°	C°
0	-17.7777777777778
10	-12.2222222222222
20	-6.6666666666667
30	-1.1111111111111
40	4.4444444444444
50	10
60	15.5555555555556
70	21.1111111111111
80	26.6666666666667
90	32.2222222222222
100	37.7777777777778

F°	C°
0	-17.7777777777778
10	-12.2222222222222
20	-6.6666666666667
30	-1.1111111111111
40	4.4444444444444
50	10
60	15.5555555555556
70	21.1111111111111
80	26.6666666666667
90	32.2222222222222
100	37.7777777777778

F°	C°
0	-17.7777777777778
10	-12.2222222222222
20	-6.6666666666667
30	-1.1111111111111
40	4.4444444444444
50	10

60	15.55555555555556
70	21.11111111111111
80	26.66666666666667
90	32.22222222222222
100	37.77777777777778

References

- Wikiversity: Computer Programming

Java Examples

DAVE BRAUNSCHWEIG

Temperature

```
// This program displays a temperature conversion table showing Fahrenheit
// temperatures from 0 to 100, in increments of 10, and the corresponding
// Celsius temperatures using While, Do While, and For loops.
//
// References:
//      https://www.mathsisfun.com/temperature-conversion.html
//      https://en.wikibooks.org/wiki/Java_Programming

import java.util.*;

class Main
{
    public static void main(String[] args) {
        whileLoop();
        doLoop();
        forLoop();
    }

    private static void whileLoop() {
        double fahrenheit;
        double celsius;

        displayHeading();
        fahrenheit = 0;
        while (fahrenheit <= 100) {
            celsius = calculateCelsius(fahrenheit);
            displayResult(fahrenheit, celsius);
            fahrenheit += 10;
        }
        System.out.println();
    }

    private static void doLoop() {
        double fahrenheit;
        double celsius;
```

```

        displayHeading();
        fahrenheit = 0;
        do {
            celsius = calculateCelsius(fahrenheit);
            displayResult(fahrenheit, celsius);
            fahrenheit += 10;
        } while (fahrenheit <= 100);
        System.out.println();
    }

    private static void forLoop() {
        double fahrenheit;
        double celsius;

        displayHeading();
        for (fahrenheit = 0 ; fahrenheit <= 100 ; fahrenheit += 10) {
            celsius = calculateCelsius(fahrenheit);
            displayResult(fahrenheit, celsius);
        }
        System.out.println();
    }

    private static void displayHeading() {
        System.out.println("F°\tC°");
    }

    private static double calculateCelsius(double fahrenheit) {
        double celsius;

        celsius = (fahrenheit - 32) * 5 / 9;

        return celsius;
    }

    private static void displayResult(double fahrenheit, double celsius) {
        System.out.println(String.valueOf(fahrenheit) + "\t" + String.v
    }
}

```

Output

F°	C°
0.0	-17.77777777777778
10.0	-12.222222222222221
20.0	-6.666666666666667
30.0	-1.1111111111111112
40.0	4.444444444444445
50.0	10.0
60.0	15.555555555555555
70.0	21.11111111111111
80.0	26.666666666666668
90.0	32.22222222222222
100.0	37.77777777777778

F°	C°
0.0	-17.77777777777778
10.0	-12.222222222222221
20.0	-6.666666666666667
30.0	-1.1111111111111112
40.0	4.444444444444445
50.0	10.0
60.0	15.555555555555555
70.0	21.11111111111111
80.0	26.666666666666668
90.0	32.22222222222222
100.0	37.77777777777778

F°	C°
0.0	-17.77777777777778
10.0	-12.222222222222221
20.0	-6.666666666666667
30.0	-1.1111111111111112
40.0	4.444444444444445
50.0	10.0
60.0	15.555555555555555
70.0	21.11111111111111
80.0	26.666666666666668
90.0	32.22222222222222
100.0	37.77777777777778

JavaScript Examples

DAVE BRAUNSCHWEIG

Temperature

```
// This program displays a temperature conversion table showing Fahrenheit
// temperatures from 0 to 100, in increments of 10, and the corresponding
// Celsius temperatures using While, Do While, and For loops.
//
// References:
//   https://www.mathsisfun.com/temperature-conversion.html
//   https://en.wikibooks.org/wiki/JavaScript

main();

function main() {
    whileLoop();
    doLoop();
    forLoop();
}

function whileLoop() {
    var fahrenheit;
    var celsius;

    displayHeading();
    fahrenheit = 0;
    while (fahrenheit <= 100) {
        celsius = calculateCelsius(fahrenheit);
        displayResult(fahrenheit, celsius);
        fahrenheit += 10;
    }
    output("");
}

function doLoop() {
    var fahrenheit;
    var celsius;

    displayHeading();
```

```

    fahrenheit = 0;
    do {
        celsius = calculateCelsius(fahrenheit);
        displayResult(fahrenheit, celsius);
        fahrenheit += 10;
    } while (fahrenheit <= 100);
    output("");
}

function forLoop() {
    var fahrenheit;
    var celsius;

    displayHeading();
    for (fahrenheit = 0 ; fahrenheit <= 100 ; fahrenheit += 10) {
        celsius = calculateCelsius(fahrenheit);
        displayResult(fahrenheit, celsius);
    }
    output("");
}

function displayHeading() {
    output("F°\tC°");
}

function calculateCelsius(fahrenheit) {
    var celsius;

    celsius = (fahrenheit - 32) * 5 / 9;

    return celsius;
}

function displayResult(fahrenheit, celsius) {
    output(fahrenheit.toString() + "\t" + celsius.toString());
}

// Checks the JavaScript environment and writes to the console,
// the current document, or standard output as appropriate.
// Reference: http://progopedia.com/example/hello-world/114/
function output(text) {
    if (typeof console === 'object') {
        console.log(text);
    }
}

```



```

    }
    else if (typeof document === 'object') {
        document.write(text);
    }
    else {
        print(text);
    }
}

```

Output

F°	C°
0	-17.77777777777778
10	-12.222222222222221
20	-6.666666666666667
30	-1.1111111111111112
40	4.444444444444445
50	10
60	15.555555555555555
70	21.111111111111111
80	26.666666666666668
90	32.22222222222222
100	37.77777777777778

F°	C°
0	-17.77777777777778
10	-12.222222222222221
20	-6.666666666666667
30	-1.1111111111111112
40	4.444444444444445
50	10
60	15.555555555555555
70	21.111111111111111
80	26.666666666666668
90	32.22222222222222
100	37.77777777777778

F°	C°
0	-17.77777777777778
10	-12.222222222222221
20	-6.666666666666667
30	-1.1111111111111112

40	4.4444444444444445
50	10
60	15.555555555555555
70	21.111111111111111
80	26.666666666666668
90	32.222222222222222
100	37.777777777777778

References

- Wikiversity: Computer Programming

Python Examples

DAVE BRAUNSCHWEIG

Temperature

```
# This program displays a temperature conversion table showing Fahrenheit
# temperatures from 0 to 100, in increments of 10, and the corresponding
# Celsius temperatures using While, Do While, and For loops.
#
# References:
#     https://www.mathsisfun.com/temperature-conversion.html
#     https://en.wikibooks.org/wiki/Python\_Programming

def while_loop():
    display_heading()
    fahrenheit = 0
    while fahrenheit <= 100:
        celsius = calculate_celsius(fahrenheit)
        display_result(fahrenheit, celsius)
        fahrenheit += 10
    print()

def do_loop():
    display_heading()
    fahrenheit = 0
    while True:
        celsius = calculate_celsius(fahrenheit)
        display_result(fahrenheit, celsius)
        fahrenheit += 10
        if not(fahrenheit <= 100):
            break
    print()

def for_loop():
    display_heading()
    for fahrenheit in range(0, 101, 10):
        celsius = calculate_celsius(fahrenheit)
```

```

        display_result(fahrenheit, celsius)
    print()

def display_heading():
    print("F°\tC°")

def calculate_celsius(fahrenheit):
    celsius = (fahrenheit - 32) * 5 / 9
    return celsius

def display_result(fahrenheit, celsius):
    print(str(fahrenheit) + "\t" + str(celsius))

def main():
    while_loop()
    do_loop()
    for_loop()

main()

```

Output

```

F°          C°
0           -17.77777777777778
10          -12.222222222222221
20          -6.666666666666667
30          -1.1111111111111112
40           4.444444444444445
50           10.0
60           15.555555555555555
70           21.111111111111111
80           26.666666666666668
90           32.222222222222222
100          37.77777777777778

F°          C°
0           -17.77777777777778

```

```

10      -12.222222222222221
20      -6.666666666666667
30      -1.1111111111111112
40      4.444444444444445
50      10.0
60      15.555555555555555
70      21.111111111111111
80      26.666666666666668
90      32.222222222222222
100     37.777777777777778

```

```

F°      C°
0      -17.777777777777778
10     -12.222222222222221
20     -6.666666666666667
30     -1.1111111111111112
40     4.444444444444445
50     10.0
60     15.555555555555555
70     21.111111111111111
80     26.666666666666668
90     32.222222222222222
100    37.777777777777778

```

References

- Wikiversity: Computer Programming

Swift Examples

DAVE BRAUNSCHWEIG

Temperature

```
// This program displays a temperature conversion table showing Fahrenheit
// temperatures from 0 to 100, in increments of 10, and the corresponding
// Celsius temperatures using While, For, and Do loops.
//
// References:
// https://www.mathsisfun.com/temperature-conversion.html
// https://developer.apple.com/library/content/documentation/Swift/Conceptu

func whileLoop() {
    var fahrenheit: Double
    var celsius: Double

    displayHeading()
    fahrenheit = Double(0)
    while fahrenheit <= 100 {
        celsius = calculateCelsius(fahrenheit:fahrenheit)
        displayResult(fahrenheit:fahrenheit, celsius:celsius)
        fahrenheit += 10
    }
    print()
}

func doLoop()
{
    var fahrenheit: Double
    var celsius: Double

    displayHeading()
    fahrenheit = Double(0)
    repeat
    {
        celsius = calculateCelsius(fahrenheit:fahrenheit)
        displayResult(fahrenheit:fahrenheit, celsius:celsius)
        fahrenheit += 10
    } while fahrenheit <= 100
}
```

```

        print()
    }

    func forLoop() {
        var celsius: Double

        displayHeading()
        for fahrenheit in stride(from: 0.0, through: 100.0, by: 10.0) {
            celsius = calculateCelsius(fahrenheit:fahrenheit)
            displayResult(fahrenheit:fahrenheit, celsius:celsius)
        }
        print()
    }

    func displayHeading() {
        print("F°\tC°")
    }

    func calculateCelsius(fahrenheit: Double) -> Double {
        var celsius: Double

        celsius = (fahrenheit - 32) * 5 / 9

        return celsius
    }

    func displayResult(fahrenheit: Double, celsius: Double) {
        print(String(fahrenheit) + "\t" + String(celsius))
    }

    func main()
    {
        whileLoop()
        doLoop()
        forLoop()
    }

    main()

```

Output

```

F°          C°

```

0	-17.77777777777778
10	-12.22222222222221
20	-6.66666666666667
30	-1.111111111111112
40	4.444444444444445
50	10.0
60	15.55555555555555
70	21.11111111111111
80	26.66666666666668
90	32.22222222222222
100	37.77777777777778

F°	C°
0	-17.77777777777778
10	-12.22222222222221
20	-6.66666666666667
30	-1.111111111111112
40	4.444444444444445
50	10.0
60	15.55555555555555
70	21.11111111111111
80	26.66666666666668
90	32.22222222222222
100	37.77777777777778

F°	C°
0	-17.77777777777778
10	-12.22222222222221
20	-6.66666666666667
30	-1.111111111111112
40	4.444444444444445
50	10.0
60	15.55555555555555
70	21.11111111111111
80	26.66666666666668
90	32.22222222222222
100	37.77777777777778

References

- Wikiversity: Computer Programming

Practice: Loops

KENNETH LEROY BUSBEE

Review Questions

True / False

1. The do while and repeat until structure act exactly the same.
2. Students sometimes confuse assignment and equality.
3. The repeat until looping control structure is available in all programming languages.
4. Because flags are often used, they are usually a special data type.
5. The do while is a test before loop.
6. Only for loops can be counting loops.
7. The integer data type has modular arithmetic attributes.
8. The escape code of `\n` is part of formatting output.
9. Nested for loops is not allowed in the C++ programming language.
10. Counting loops use all four of the loop attributes.

Answers:

1. false
2. true
3. false
4. false
5. false
6. false
7. true
8. true
9. false
10. true

Activities

Complete the following activities using pseudocode, a flowcharting tool, or your selected programming language. Use separate functions for input, each type of processing, and output. Avoid global variables by passing parameters and returning results. Create test data to validate the accuracy of each program.

1. Review MathsIsFun: Definition of Average. Create a program that asks the user to enter grade scores. Start by asking the user how many scores they would like to enter. Then use a loop to request each score and add it to a total. Finally, calculate and display the average for the entered scores. In a single program, use separate functions to implement the loop control structure based on a while loop in one function and a for loop in the other function. Show you can implement the same logic using both loop structures.
2. Create a program that uses a loop to generate a list of multiplication expressions for a given

value. Ask the user to enter the value and the number of expressions to be displayed. For example, a list of three expressions for the value 1 would be:

```
1 * 1 = 1
1 * 2 = 2
1 * 3 = 3
```

A list of five expressions for the value 3 would be:

```
3 * 1 = 3
3 * 2 = 6
3 * 3 = 9
3 * 4 = 12
3 * 5 = 15
```

In a single program, use separate functions to implement the loop control structure based on a while loop in one function and a for loop in the other function. Show you can implement the same logic using both loop structures.

3. Review MathsIsFun: 10x Printable Multiplication Table. Create a program that uses nested loops to generate a multiplication table. Rather than simply creating a 10 by 10 table, ask the user to enter the starting and ending values. Include row and column labels. For example, the output from 1 to 3 might look like:

```
    1    2    3
1    1    2    3
2    2    4    6
3    3    6    9
```

The output from 3 to 5 might look like:

```
    3    4    5
3    9   12   15
4   12   16   20
5   15   20   25
```

4. Review MathsIsFun: Pi. Write a program that uses the Nilakantha series to calculate Pi based on a given number of iterations entered by the user.
5. Review Khan Academy: A guessing game. Write a program that allows the user to think of a number between 0 and 100, inclusive. Then have the program try to guess the user's number. Start at the midpoint (50) and ask the user if their number is (h)igher, (l)ower, or (e)qual to the guess. If they indicate lower, guess the new midpoint (25). If they indicate higher, guess the new midpoint (75). Continue efficiently guessing higher or lower until they indicate equal, then print the number of guesses required to guess their number and end the program.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++
- [Wikiversity](https://www.wikiversity.org/wiki/Computer_Programming): Computer Programming

PART VI

ARRAYS AND LISTS

Overview

This chapter introduces arrays, which may be referred to as lists in some programming languages.

Chapter Outline

- Arrays and Lists
- Index Notation
- Displaying Array Members
- Arrays and Functions
- Math Statistics with Arrays
- Searching Arrays
- Sorting Arrays
- Parallel Arrays
- Multidimensional Arrays
- Dynamic Arrays
- Code Examples
 - C++
 - C#
 - Java
 - JavaScript
 - Python
 - Swift
- Practice

Learning Objectives

1. Understand key terms and definitions.
2. Identify static and dynamic arrays and the code structures necessary to process each type.
3. Identify single-dimension arrays and multi-dimensional arrays and the code structures necessary to process each type.
4. Given example pseudocode, flowcharts, and source code, create a program that uses arrays or lists to solve a given problem.

Arrays and Lists

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

An array is a data structure consisting of a collection of elements (values or variables), each identified by at least one array index or key.¹

Depending on the language, array types may overlap (or be identified with) other data types that describe aggregates of values, such as lists and strings. Array types are often implemented by array data structures, but sometimes by other means, such as hash tables, linked lists, or search trees.² In Python, the built-in array data structure is a list.

Discussion

An array is a sequenced collection of elements of the same data type with a single identifier name. Python lists are similar to arrays in other languages, but are not restricted to a single data type. The term ‘array’ as used in this chapter will generally also apply to Python lists unless otherwise noted.

Arrays can have multiple axes (more than one axis). Each axis is a **dimension**. Thus a single dimension array is also known as a **list**. A two dimension array is commonly known as a **table** (a spreadsheet like Excel is a two dimension array). In real life there are occasions to have data organized into multiple dimensioned arrays. Consider a theater ticket with section, row and seat (three dimensions). This module will only cover the single dimension array. Most single dimension arrays are visualized vertically and are often called a list.

Most programmers are familiar with a special type of array called a string. Strings are basically a single dimension array of characters. Unlike other single dimension arrays, we usually envision a string as a horizontal stream of characters and not vertically as a list.

We refer to the individual values as members (or elements) of the array. Programming languages implement the details of arrays differently. Because there is only one identifier name assigned to the array, we have operators that allow us to reference or access the individual members of an array. The operator commonly associated with referencing array members is the **index** operator. It is important to learn how to define an array and initialize its members.

1. Wikipedia: Array data structure

2. Wikipedia: Array data type

Defining an Array

Language	Example
C++	<code>int ages[] = {49, 48, 26, 19, 16};</code>
C#	<code>int[] ages = {49, 48, 26, 19, 16};</code>
Java	<code>int[] ages = {49, 48, 26, 19, 16};</code>
JavaScript	<code>var ages = [49, 48, 26, 19, 16];</code>
Python	<code>ages = [49, 48, 26, 19, 16]</code>
Swift	<code>var ages:[Int] = [49, 48, 26, 19, 16]</code>

This is the **defining of storage space**. The square brackets `[]` are used here to create the array with five integer members and the identifier name of ages. The assignment with braces (that is a block) establishes the initial values assigned to the members of the array. Note the use of the sequence or comma operator. We could have also done something similar to:

Language	Example	Initial Values
C++	<code>int ages[5];</code>	undefined
C#	<code>int[] ages = new int[5];</code>	0
Java	<code>int[] ages = new int[5];</code>	0
JavaScript	<code>var ages = Array(5);</code>	undefined
Python	<code>ages = [None] * 5</code>	None

This would have declared the storage space of five integers with the identifier name of ages but their initial values would have been unknown values or initialized as indicated, depending on the programming language. We could assign values later in our program by doing the following (leaving off the semicolons in Python):

```
ages[0] = 49;
ages[1] = 48;
ages[2] = 26;
ages[3] = 19;
ages[4] = 16;
```

Note: The members of the array go from 0 to 4; **NOT** 1 to 5. This is explained in more detail on the next page.

Key Terms

dimension

An axis of an array.

list

A single dimension array.

table

A two dimension array.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Index Notation

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

Index notation is used to specify the elements of an array.¹ Most current programming languages use square brackets `[]` as the array index operator. Older programming languages, such as FORTRAN, COBOL, and BASIC, often use parentheses `()` as the array index operator.

Discussion

Example:

Language	Example
C++	<pre>int ages[] = {49, 48, 26, 19, 16}; int myAge = ages[2];</pre>
C#	<pre>int[] ages = {49, 48, 26, 19, 16}; int myAge = ages[2];</pre>
Java	<pre>int[] ages = {49, 48, 26, 19, 16}; int myAge = ages[2];</pre>
JavaScript	<pre>var ages = [49, 48, 26, 19, 16]; int myAge = ages[2];</pre>
Python	<pre>ages = [49, 48, 26, 19, 16] my_age = ages[2]</pre>
Swift	<pre>var ages:[Int] = [49, 48, 26, 19, 16] var my_age = ages[2]</pre>

As an operator, square brackets either provide the value held by the member of the array (Rvalue) or change the value of member (Lvalue). In the above example the member that is two offsets from the front of the array (the value 26) is assigned to variable named myAge. The dereference operator of `[2]` means to go the 2nd **offset** from the front of the ages array and get the value stored there. In this case the value would be 26. In most current programming languages, the array members (or elements) are referenced starting at **zero**. The more common way for people to reference a list is by starting with position **one**. Consider:

1. Wikipedia: Index notation

Position	Index	Miss America	Other Contests
zero offsets from the front	ages [0]	Winner	1 st Place
one offset from the front	ages [1]	1 st Runner Up	2 nd Place
two offsets from the front	ages [2]	2 nd Runner Up	3 rd Place
three offsets from the front	ages [3]	3 rd Runner Up	4 th Place
four offsets from the front	ages [4]	4 th Runner Up	5 th Place

Saying that my cousin is the 2nd Runner Up in the Miss America contest sounds so much better than saying that she was in 3rd Place. We would be talking about the same position in the array of the five finalists.

```
ages [ 3 ] = 20;
```

This is an example of changing an array's value by assigning 20 to the 4th member of the array and replacing the value 19 with 20. This is an Lvalue context because the array is on the left side of the assignment operator.

Key Terms

array member

An element or value in an array.

index

An operator that allows us to reference a member of an array.

offset

The method of referencing array members by starting at zero.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Displaying Array Members

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

To **display** all **array members**, visit each element using a `for` loop and output the element using index notation and the loop control variable.

Discussion

Accessing Array Members

Assume an integer array named `ages` with five values of 49, 48, 26, 19, and 16, respectively. In pseudocode, this might be written as:

```
Declare Integer Array ages[5]
Assign ages = [49, 48, 26, 19, 16]
```

To display all elements of the array in order, we might write:

```
Output ages[0]
Output ages[1]
Output ages[2]
Output ages[3]
Output ages[4]
```

While this works for short arrays, it is not very efficient, and quickly becomes overwhelming for longer arrays. One of the principles of software development is **don't repeat yourself (DRY)**. Violations of the DRY principle are typically referred to as WET solutions, which is commonly taken to stand for either “write everything twice”, “we enjoy typing” or “waste everyone’s time”.¹

Rather than repeating ourselves, we can use a `for` loop to visit each element of the array and use the loop control variable as the array index. Consider the following pseudocode:

```
Declare Integer Array ages[5]
Declare Integer index

Assign ages = [49, 48, 26, 19, 16]

For index = 0 to 4
    Output ages[index]
End
```

1. Wikipedia: Don't repeat yourself

This approach is much more efficient from a programming perspective, and also results in a smaller program. But there is still one more opportunity for improvement. Most programming languages support a built-in method for determining the size of an array. To reduce potential errors and required maintenance, the loop control should be based on the size of the array rather than a hard-coded value. Consider:

```
Declare Integer Array ages[5]
Declare Integer index

Assign ages = [49, 48, 26, 19, 16]

For index = 0 to Size(ages) - 1
    Output ages[index]
End
```

This method allows for **flexible coding**. By writing the for loop in this fashion, we can change the declaration of the array by adding or subtracting members and we don't need to change our for loop code.

Key Terms

don't repeat yourself

A principle of software development aimed at reducing repetition of software patterns, replacing it with abstractions, or repetition of the same data, using data normalization to avoid redundancy.²

flexible coding Using the size of an array to determine the number of loop iterations required.

References

- [cnx.org: Programing Fundamentals – A Modular Structured Approach using C++](https://cnx.org/ProgramingFundamentals)
- [Wikiversity: Computer Programming](https://www.wikiversity.org/wiki/Computer_Programming)

2. Wikipedia: Don't repeat yourself

Arrays and Functions

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

In modular programming, specific task functions are often created and used or reused for array processing. Array processing functions are usually passed the array and any data necessary to process the array for the given task.

It should be noted that arrays are passed by reference in most current programming languages. Array processing functions must take care not to alter the array unless intended.

Discussion

Arrays are an important complex data type used in almost all programming. We continue to concentrate on simple one dimension arrays also called a list. Most programmers develop a series of user defined specific task functions that can be used with an array for normal processing. These functions are usually passed the array along with the number of elements within the array. Some of functions also pass another piece of data needed for that particular function's task.

This module covers the displaying the array members on the monitor via calling an **array function** dedicated to that task.

Pseudocode

```
Function Main
    Declare Integer Array ages[5]

    Assign ages = [49, 48, 26, 19, 16]
    Call DisplayArray(ages)
End

Function DisplayArray (Integer Array array)
    Declare Integer index

    For index = 0 to Size(array) - 1
        Output array[index]
    End
End
```

Output

```
49
48
26
19
16
```

Key Terms

array function

A user defined specific task function designed to process an array.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++
- [Wikiversity](https://www.wikiversity.org/wiki/Computer_Programming): Computer Programming

Math Statistics with Arrays

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

Statistics is a branch of mathematics dealing with the collection, organization, analysis, interpretation, and presentation of data. Common statistical methods include mean (or average) and standard deviation.¹

Discussion

Arrays are an important complex data type used in almost all programming. We continue to concentrate on simple one dimension arrays also called a list. Most programmers develop a series of user defined specific task functions that can be used with an array for normal processing. These functions are usually passed the array along with the number of elements within the array. Some of functions also pass another piece of data needed for that particular functions task.

This module covers the totaling of the members of an integer array member. The Latin name for totaling is summa sometimes shortened to the word **sum**. The **array function** is often called "sum" and it does some parameter passing. It passes into the function the common two items of the array: its name along with the number of elements; but it also returns a value representing sum or total of the values within the array. You need to study this module in conjunction with the demo file provided.

Other mathematical functions often associated with statistics such as: average, count, minimum, maximum, standard deviation, etc. are often developed for processing arrays.

Pseudocode

```
Function Main
    Declare Integer Array ages[5]
    Declare Integer total

    Assign ages = [49, 48, 26, 19, 16]

    Assign total = sum(ages)

    Output "Total age is: " & total
End

Function sum (Integer Array array)
```

1. Wikipedia: Statistics

```
Declare Integer total
Declare Integer index

Assign total = 0
For index = 0 to Size(array) - 1
    Assign total = total + array[index]
End
Return Integer total
```

Output

```
Total age is: 158
```

Key Terms

sum

Latin for summa or a total.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Searching Arrays

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

Linear search or sequential search is a method for finding a target value within a list. It sequentially checks each element of the list for the target value until a match is found or until all the elements have been searched.¹

Discussion

Finding a specific member of an array means searching the array until the member is found. It's possible that the member does not exist and the programmer must handle that possibility within the logic of his or her algorithm.

"The linear search is a very simple algorithm. Sometimes called a sequential search, it uses a loop to sequentially step through an array, starting with the first element. It compares each element with the value being search for, and stops when either the value is found or the end of the array is encountered. If the value being searched for is not in the array, the algorithm will search to the end of the array."²

Two specific linear searches can be made for the maximum (largest) value in the array or the minimum (smallest) value in the array. Maximum and minimum are also know as max and min. Note that the following max and min functions assume an array size ≥ 1 .

Pseudocode

```
Function Main
    Declare Integer Array ages[5]
    Declare Integer maximum
    Declare Integer minimum

    Assign ages = [49, 48, 26, 19, 16]

    Assign maximum = max(ages)
    Assign minimum = min(ages)

    Output "Maximum age is: " & maximum
```

1. Wikipedia: Linear search

2. Tony Gaddis, Judy Walters and Godfrey Muganda, [Starting Out with C++ Early Objects Sixth Edition](#) (United States of America: Pearson – Addison Wesley, 2008) 559.


```

    Output "Minimum age is: " & minimum
End

Function max (Integer Array array)
    Declare Integer maximum
    Declare Integer index

    Assign maximum = array[0]
    For index = 1 to Size(array) - 1
        If maximum < array[index]
            Assign maximum = array[index]
        End
    End
End
Return Integer maximum

Function min (Integer Array array)
    Declare Integer minimum
    Declare Integer index

    Assign minimum = array[0]
    For index = 1 to Size(array) - 1
        If minimum > array[index]
            Assign minimum = array[index]
        End
    End
End
Return Integer minimum

```

Output

```

Maximum age is: 49
Minimum age is: 16

```

Key Terms

linear search

Using a loop to sequentially step through an array.

maximum

Aka max or the largest member of an array.

minimum

Aka min or the smallest member of an array.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++
- Wikiversity: Computer Programming

Sorting Arrays

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

A sorting algorithm is an algorithm that puts elements of a list in a certain order. The most frequently used orders are numerical order and lexicographical order.¹ Most current programming languages include built-in or standard library functions for **sorting arrays**.

Discussion

Sorting is the process through which data are arranged according to their values. The following examples show standard library and / or built-in array sorting methods for different programming languages.

Language	Sort Example
C++	<pre>#include <algorithm> sort(array, array + sizeof(array) / sizeof(int));</pre>
C#	<pre>System.Array.Sort(array)</pre>
Java	<pre>import java.util.Arrays; Arrays.sort(array);</pre>
JavaScript	<pre>array.sort();</pre>
Python	<pre>array.sort()</pre>
Swift	<pre>array.sort()</pre>

Key Terms

sorting
Arranging data according to their values.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

1. Wikipedia: Sorting algorithm

Parallel Arrays

DAVE BRAUNSCHWEIG

Overview

A group of **parallel arrays** is a form of implicit data structure that uses multiple arrays to represent a singular array of records. It keeps a separate, homogeneous data array for each field of the record, each having the same number of elements. Then, objects located at the same index in each array are implicitly the fields of a single record.¹

Discussion

A data structure is a data organization and storage format that enables efficient access and modification. More precisely, a data structure is a collection of data values, the relationships among them, and the functions or operations that can be applied to the data. Data structure options include arrays, linked lists, records, and classes.²

Parallel arrays use two or more arrays to represent a collection of data where each corresponding array index is a matching field for a given record. For example, if there are two arrays, one for names and one for ages, the array elements at names[2] and ages[2] would describe the name and age of the third person.

Pseudocode

```
Function Main
    Declare String Array names[5]
    Declare Integer Array ages[5]

    Assign names = ["Lisa", "Michael", "Ashley", "Jacob", "Emily"]
    Assign ages = [49, 48, 26, 19, 16]

    DisplayArrays(names, ages)
End

Function DisplayArrays (String Array names, Integer Array ages)
    Declare Integer index

    For index = 0 to Size(array) - 1
```

1. Wikipedia: Parallel array
2. Wikipedia: Data structure

```
        Output names[index] & " is " & ages[index] & " years old"
    End
End
```

Output

```
Lisa is 49 years old
Michael is 48 years old
Ashley is 26 years old
Jacob is 19 years old
Emily is 16 years old
```

Key Terms

parallel array

An implicit data structure that uses multiple arrays to represent a singular array of records.

References

Multidimensional Arrays

KENNETH LEROY BUSBEE

Overview

The number of indices needed to specify an element is called the dimension or dimensionality of the array. A two-dimensional array, or table, may be stored as a one-dimensional array of one-dimensional arrays (rows of columns) and accessed double indexing (`array[row][column]` in typical notation).¹

Discussion

An array is a sequenced collection of elements of the same data type with a single identifier name. As such, the array data type belongs to the “Complex” category or family of data types. Arrays can have multiple axes (more than one axis). Each axis is a **dimension**. Thus a single dimension array is also known as a **list**. A two dimension array is commonly known as a **table** (a spreadsheet like Excel is a two dimension array). In real life there are occasions to have data organized into multiple dimensioned arrays. Consider a theater ticket with section, row and seat (three dimensions).

We refer to the individual values as members (or elements) of the array. Multidimensional arrays use one set of square brackets per dimension or axis of the array. For example a table which has two dimensions would use two sets of square brackets to define the array variable and two sets of square brackets for the index operators to access the members of the array. Programming languages implement the details of arrays differently. The total number of dimensions allowed in an array is language-specific, and also limited by available memory.

Pseudocode

```
Function Main
    Declare String Array game[3][3]

    Assign game = [ ["X", "O", "X"], ["O", "O", "O"], ["X", "O", "X"] ]

    DisplayGame(game)
End

Function DisplayGame (String Array game)
    Declare Integer row
    Declare Integer column
```

1. Wikipedia: Array data type

```

    Output "Tic-Tac-Toe"
    For row = 0 to 2
        For column = 0 to 2
            Output game[row][column]
            If column < 2 Then
                Output " | "
            End
        End
    End
End

```

Output

```

Tic-Tac-Toe
X | O | X
O | O | O
X | O | X

```

Key Terms

array member

An element or value in an array.

dimension

An axis of an array.

index

An operator that allows us to reference a member of an array.

list

A single dimension array.

offset

The method of referencing array members by starting at zero.

table

A two dimension array.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Dynamic Arrays

DAVE BRAUNSCHWEIG

Overview

A **dynamic array** is a random access, variable-size list data structure that allows elements to be added or removed. It is supplied with standard libraries in many modern programming languages. Dynamic arrays overcome a limit of static arrays, which have a fixed capacity that needs to be specified at allocation.¹

Discussion

A limitation of the static arrays discussed so far is that the array size is determined when the array is created and / or allocated. Dynamic arrays allow elements to be added and removed at runtime. Most current programming languages include built-in or standard library functions for creating and managing dynamic arrays.

Language	Class	Add	Remove
C++	<code>#include <list></code> <code>std::list</code>	<code>insert</code>	<code>erase</code>
C#	<code>System.Collections.Generic.List</code>	<code>Add</code>	<code>Remove</code>
Java	<code>java.util.ArrayList</code>	<code>add</code>	<code>remove</code>
JavaScript	<code>Array</code>	<code>push</code> , <code>splice</code>	<code>pop</code> , <code>splice</code>
Python	<code>list</code>	<code>append</code>	<code>remove</code>
Swift	<code>Array</code>	<code>append</code>	<code>remove</code>

Key Terms

dynamic array

A data structure consisting of a collection of elements that allows individual elements to be added or removed.

References

1. Wikipedia: Dynamic array

C++ Examples

DAVE BRAUNSCHWEIG

Arrays

```
// This program demonstrates array processing, including:
// display, total, max, min, parallel arrays, sort
// multidimensional arrays, and dynamic arrays.

#include
#include
#include
#include
#include

using namespace std;

void displayArray(int [], int);
int sum(int [], int);
int max(int [], int);
int min(int [], int);
void displayParallel(string [], int [], int);
void displayMultidimensional();
void dynamicArray();

int main() {
    string names[] = {"Lisa", "Michael", "Ashley", "Jacob", "Emily"};
    int ages[] = {49, 48, 26, 19, 16};

    displayArray(ages, sizeof(ages) / sizeof(int));

    int total = sum(ages, sizeof(ages) / sizeof(int));
    int maximum = max(ages, sizeof(ages) / sizeof(int));
    int minimum = min(ages, sizeof(ages) / sizeof(int));

    cout << "total: " << total << endl;
    cout << "maximum: " << maximum << endl;
    cout << "minimum: " << minimum << endl;

    displayParallel(names, ages, sizeof(ages) / sizeof(int));
}
```

```

    sort(ages, ages + sizeof(ages) / sizeof(int));
    displayArray(ages, sizeof(ages) / sizeof(int));

    displayMultidimensional();
    dynamicArray();

    return 0;
}

void displayArray(int array[], int size) {
    for (int index = 0; index < size; index++) {
        cout << "array[" << index << "] = " << array[index] << endl;
    }
}

int sum(int array[], int size) {
    int total = 0;
    for (int index = 0; index < size; index++) {
        total += array[index];
    }
    return total;
}

int max(int array[], int size) {
    int maximum = array[0];
    for (int index = 1; index < size; index++) {
        if (maximum < array[index]) {
            maximum = array[index];
        }
    }
    return maximum;
}

int min(int array[], int size) {
    int minimum = array[0];
    for (int index = 1; index < size; index++) { if (minimum > array[index])
        minimum = array[index];
    }
    return minimum;
}

```

```

void displayParallel(string names[], int ages[], int size) {
    for (int index = 0; index < size; index++) {
        cout << names[index] << " is " << ages[index] << " years old" << endl;
    }
}

void displayMultidimensional() {
    string game[3][3] = {
        {"X", "O", "X"},
        {"O", "O", "O"},
        {"X", "O", "X"} };

    for (int row = 0; row < 3; row++) {
        for (int column = 0; column < 3; column++) {
            cout << (game[row][column]);
            if (column < 2) {
                cout << " | ";
            }
        }
        cout << endl;
    }
}

void dynamicArray() {
    list<int> array;
    srand (time(NULL));
    for (int index = 0; index < 5; index++) {
        int number = rand() % 100;
        array.push_back(number);
    }

    for (list<int>::iterator it = array.begin(); it != array.end(); it++) {
        cout << *it << endl;
    }
}

```

Output

```

array[0] = 49
array[1] = 48
array[2] = 26
array[3] = 19

```

```
array[4] = 16
total: 158
maximum: 49
minimum: 16
Lisa is 49 years old
Michael is 48 years old
Ashley is 26 years old
Jacob is 19 years old
Emily is 16 years old
array[0] = 16
array[1] = 19
array[2] = 26
array[3] = 48
array[4] = 49
X | O | X
O | O | O
X | O | X
38
65
20
8
30
```

References

- [cnx.org: Programming Fundamentals – A Modular Structured Approach using C++](https://cnx.org/content/col12071/1.1)

C# Examples

DAVE BRAUNSCHWEIG

Arrays

```
// This program demonstrates array processing, including:
// display, total, max, min, parallel arrays, sort
// multidimensional arrays, and dynamic arrays.

using System;
using System.Collections.Generic;

class Arrays {
    public static void Main (string[] args)
    {
        String[] names = {"Lisa", "Michael", "Ashley", "Jacob", "Emily"};
        int[] ages = {49, 48, 26, 19, 16};

        DisplayArray(ages);

        int total = sum(ages);
        int maximum = max(ages);
        int minimum = min(ages);

        Console.WriteLine("total: " + total);
        Console.WriteLine("maximum: " + maximum);
        Console.WriteLine("minimum: " + minimum);

        DisplayParallel(names, ages);

        System.Array.Sort(ages);
        DisplayArray(ages);

        DisplayMultidimensional();
        DynamicArray();
    }

    public static void DisplayArray(int[] array)
    {
        for (int index = 0; index < array.Length; index++)
```

```

        {
            Console.WriteLine("array[" + index + "] = " + array[index]);
        }
    }

    public static int sum(int[] array)
    {
        int total = 0;
        for (int index = 0; index < array.Length; index++)
        {
            total += array[index];
        }
        return total;
    }

    public static int max(int[] array)
    {
        int maximum = array[0];
        for (int index = 1; index < array.Length; index++)
        {
            if (maximum < array[index])
            {
                maximum = array[index];
            }
        }
        return maximum;
    }

    public static int min(int[] array)
    {
        int minimum = array[0];
        for (int index = 1; index < array.Length; index++) { if (minimum >
            {
                minimum = array[index];
            }
        }
        return minimum;
    }

    public static void DisplayParallel(String[] names, int[] ages)
    {
        for (int index = 0; index < names.Length; index++)
        {

```

```

        Console.WriteLine(names[index] + " is " +
            ages[index] + " years old");
    }
}

public static void DisplayMultidimensional()
{
    String[,] game = new String[,]
    {
        {"X", "O", "X"},
        {"O", "O", "O"},
        {"X", "O", "X"}
    };

    for (int row = 0; row < 3; row++)
    {
        for (int column = 0; column < 3; column++)
        {
            Console.Write(game[row, column]);
            if (column < 2)
            {
                Console.Write(" | ");
            }
        }
        Console.WriteLine();
    }
}

public static void DynamicArray()
{
    List<int> array = new List<int>();

    Random random = new Random();
    for (int index = 0; index < 5; index++)
    {
        int number = random.Next(0, 100);
        array.Add(number);
    }
    for (int index = 0; index < array.Count; index++)
    {
        Console.WriteLine("array[" + index + "] = " + array[index]);
    }
}

```

```
}
```

Output

```
array[0] = 49
array[1] = 48
array[2] = 26
array[3] = 19
array[4] = 16
total: 158
maximum: 49
minimum: 16
Lisa is 49 years old
Michael is 48 years old
Ashley is 26 years old
Jacob is 19 years old
Emily is 16 years old
array[0] = 16
array[1] = 19
array[2] = 26
array[3] = 48
array[4] = 49
X | O | X
O | O | O
X | O | X
array[0] = 85
array[1] = 75
array[2] = 54
array[3] = 66
array[4] = 36
```

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Java Examples

DAVE BRAUNSCHWEIG

Arrays

```
// This program demonstrates array processing, including:
// display, total, max, min, parallel arrays, sort
// multidimensional arrays, and dynamic arrays.

import java.util.*;

class Main {
    public static void main(String[] args) {
        String[] names = {"Lisa", "Michael", "Ashley", "Jacob", "Emily"};
        int[] ages = {49, 48, 26, 19, 16};

        displayArray(ages);

        int total = sum(ages);
        int maximum = max(ages);
        int minimum = min(ages);

        System.out.println("total: " + total);
        System.out.println("maximum: " + maximum);
        System.out.println("minimum: " + minimum);

        displayParallel(names, ages);

        Arrays.sort(ages);
        displayArray(ages);

        displayMultidimensional();
        dynamicArray();
    }

    public static void displayArray(int[] array) {
        for (int index = 0; index < array.length; index++) {
            System.out.println("array[" + index + "] = " + array[index]);
        }
    }
}
```

```

public static int sum(int[] array) {
    int total = 0;
    for (int index = 0; index < array.length; index++) {
        total += array[index];
    }
    return total;
}

public static int max(int[] array) {
    int maximum = array[0];
    for (int index = 1; index < array.length; index++) {
        if (maximum < array[index]) {
            maximum = array[index];
        }
    }
    return maximum;
}

public static int min(int[] array) {
    int minimum = array[0];
    for (int index = 1; index < array.length; index++) { if (minimum >
        minimum = array[index];
    }
    return minimum;
}

public static void displayParallel(String[] names, int[] ages) {
    for (int index = 0; index < names.length; index++) {
        System.out.println(names[index] + " is " +
            ages[index] + " years old");
    }
}

public static void displayMultidimensional() {
    String[][] game = {
        {"X", "O", "X"},
        {"O", "O", "O"},
        {"X", "O", "X"} };

    for (int row = 0; row < 3; row++) {
        for (int column = 0; column < 3; column++) {

```

```

        System.out.print(game[row][column]);
        if (column < 2) {
            System.out.print(" | ");
        }
    }
    System.out.println();
}

public static void dynamicArray() {
    ArrayList<Integer> array = new ArrayList<Integer>();

    for (int index = 0; index < 5; index++) {
        int number = (int) Math.floor(Math.random() * 100);
        array.add(number);
    }
    System.out.println(array);
}
}

```

Output

```

array[0] = 49
array[1] = 48
array[2] = 26
array[3] = 19
array[4] = 16
total: 158
maximum: 49
minimum: 16
Lisa is 49 years old
Michael is 48 years old
Ashley is 26 years old
Jacob is 19 years old
Emily is 16 years old
array[0] = 16
array[1] = 19
array[2] = 26
array[3] = 48
array[4] = 49
X | O | X
O | O | O

```

```
X | O | X  
[49, 83, 75, 13, 17]
```

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

JavaScript Examples

DAVE BRAUNSCHWEIG

Arrays

```
// This program demonstrates array processing, including:
// display, total, max, min, parallel arrays, sort
// multidimensional arrays, and dynamic arrays.

main()

function main() {
    var names = ['Lisa', 'Michael', 'Ashley', 'Jacob', 'Emily'];
    var ages = [49, 48, 26, 19, 16];

    displayArray(names);
    displayArray(ages);

    var total = sum(ages);
    var maximum = max(ages);
    var minimum = min(ages);

    output('total: ' + total);
    output('maximum: ' + maximum);
    output('minimum: ' + minimum);

    displayParallel(names, ages);

    ages.sort();
    displayArray(ages);

    displayMultidimensional();
    dynamicArray();
}

function displayArray(array) {
    for (var index = 0; index < array.length; index++) {
        output('array[' + index + '] = ' + array[index]);
    }
}
```

```

function sum(array) {
    var total = 0;
    for (var index = 0; index < array.length; index++) {
        total += array[index];
    }
    return total;
}

function max(array) {
    var maximum = array[0];
    for (var index = 1; index < array.length; index++) {
        if (maximum < array[index]) {
            maximum = array[index];
        }
    }
    return maximum;
}

function min(array) {
    var minimum = array[0];
    for (var index = 1; index < array.length; index++) { if (minimum > array[index]) {
        minimum = array[index];
    }
    }
    return minimum;
}

function displayParallel(names, ages) {
    for (var index = 0; index < names.length; index++) {
        output(names[index] + ' is ' + ages[index] + ' years old');
    }
}

function displayMultidimensional() {
    var game = [
        ['X', 'O', 'X'],
        ['O', 'O', 'O'],
        ['X', 'O', 'X'] ];

    for (var row = 0; row < 3; row++) {
        var line = '';
        for (var column = 0; column < 3; column++) {

```

```

        line += game[row][column];
        if (column < 2) {
            line += ' | ';
        }
    }
    output(line);
}

function dynamicArray() {
    var array = []

    for (var index = 0; index < 5; index++) {
        var number = Math.floor(Math.random() * 100);
        array.push(number);
    }
    displayArray(array);
}

// Checks the JavaScript environment and writes to the console,
// the current document, or standard output as appropriate.
// Reference: http://progopedia.com/example/hello-world/114/
function output(text) {
    if (typeof console === 'object') {
        console.log(text);
    }
    else if (typeof document === 'object') {
        document.write(text);
    }
    else {
        print(text);
    }
}

```

Output

```

array[0] = Lisa
array[1] = Michael
array[2] = Ashley
array[3] = Jacob
array[4] = Emily
array[0] = 49

```

```
array[1] = 48
array[2] = 26
array[3] = 19
array[4] = 16
total: 158
maximum: 49
minimum: 16
Lisa is 49 years old
Michael is 48 years old
Ashley is 26 years old
Jacob is 19 years old
Emily is 16 years old
array[0] = 16
array[1] = 19
array[2] = 26
array[3] = 48
array[4] = 49
X | O | X
O | O | O
X | O | X
array[0] = 30
array[1] = 97
array[2] = 87
array[3] = 42
array[4] = 40
```

References

- [cnx.org: Programming Fundamentals – A Modular Structured Approach using C++](https://cnx.org/programming-fundamentals)

Python Examples

DAVE BRAUNSCHWEIG

Arrays

```
# This program demonstrates array processing, including:
# display, total, max, min, parallel arrays, sort
# multidimensional arrays, and dynamic arrays.

def display_array(array):
    for index in range(len(array)):
        print('array[' + str(index) + '] = ' +
              str(array[index]))

def sum(array):
    total = 0
    for index in range(len(array)):
        total += array[index]
    return total

def max(array):
    maximum = array[0]
    for index in range(1, len(array)):
        if maximum < array[index]: maximum = array[index]
        minimum = array[index]
    return minimum

def display_parallel(names, ages):
    for index in range(len(names)):
        print(names[index] + ' is ' +
              str(ages[index]) + ' years old')

def display_multidimensional():
    game = [
        ['X', 'O', 'X'],
```

```

        ['O', 'O', 'O'],
        ['X', 'O', 'X'] ]

for row in range (0, 3):
    for column in range(0, 3):
        print(game[row][column], end='')
        if column < 2:
            print(' | ', end='')
    print()

def dynamic_array():
    import random

    array = []
    for index in range(5):
        array.append(random.randint(0, 100))
    display_array(array)

def main():
    names = ['Lisa', 'Michael', 'Ashley', 'Jacob', 'Emily']
    ages = [49, 48, 26, 19, 16]

    display_array(names)
    display_array(ages)

    total = sum(ages)
    maximum = max(ages)
    minimum = min(ages)

    print('total: ' + str(total))
    print('maximum: ' + str(maximum))
    print('minimum: ' + str(minimum))

    display_parallel(names, ages)

    ages.sort()
    display_array(ages)

    display_multidimensional()
    dynamic_array()

```

```
main()
```

Output

```
array[0] = Lisa
array[1] = Michael
array[2] = Ashley
array[3] = Jacob
array[4] = Emily
array[0] = 49
array[1] = 48
array[2] = 26
array[3] = 19
array[4] = 16
total: 158
nmaximum: 49
minimum: 16
Lisa is 49 years old
Michael is 48 years old
Ashley is 26 years old
Jacob is 19 years old
Emily is 16 years old
array[0] = 16
array[1] = 19
array[2] = 26
array[3] = 48
array[4] = 49
X | O | X
O | O | O
X | O | X
array[0] = 71
array[1] = 39
array[2] = 80
array[3] = 35
array[4] = 40
```

References

- [cnx.org: Programming Fundamentals – A Modular Structured Approach using C++](https://cnx.org/content/col12071/1.1)

Swift Examples

DAVE BRAUNSCHWEIG

Arrays

```
// This program demonstrates array processing, including:
// display, total, max, min, parallel arrays, sort
// multidimensional arrays, and dynamic arrays.
//
// References:
//     https://www.mathsisfun.com/temperature-conversion.html
//     https://developer.apple.com/library/content/documentation/Swift/Conc

import Foundation

func displayArray(array: [Int]) {
    for index in 0...array.count - 1 {
        print("array[" + String(index) + "] = " + String(array[index]))
    }
}

func displayParallel(names:[String], ages:[Int]) {
    for index in 0...names.count - 1 {
        print(names[index] + " is " + String(ages[index]))
    }
}

func displayMultidimensional() {
    var game: [[String]]

    game = [
        ["X", "O", "X"],
        ["O", "X", "O"],
        ["X", "O", "X"]
    ]

    for row in 0...2 {
        for column in 0...2 {
            print(game[row][column], terminator:"")
            if column < 2 {
```

```

        print(" | ", terminator:"")
    }
}
print()
}
}

func dynamicArray() {
    var array: [Int] = []

    srand(UInt32(time(nil)))
    for _ in 0...4 {
        array.append(random() % 100)
    }
    print(array)
}

func main() {
    var names: [String]
    var ages: [Int]
    var total: Int
    var maximum: Int
    var minimum: Int

    names = ["Lisa", "Michael", "Ashley", "Jacob", "Emily"]
    ages = [49, 48, 26, 19, 16]

    displayArray(array:ages)
    total = ages.reduce(0, +)
    maximum = ages.max()!
    minimum = ages.min()!

    print("total:", total)
    print("maximum:", maximum)
    print("minimum:", minimum)

    displayParallel(names:names, ages:ages)

    ages.sort()
    displayArray(array:ages)

    displayMultidimensional()
    dynamicArray()
}

```

```
}  
  
main()
```

Output

```
array[0] = 49  
array[1] = 48  
array[2] = 26  
array[3] = 19  
array[4] = 16  
total: 158  
maximum: 49  
minimum: 16  
Lisa is 49  
Michael is 48  
Ashley is 26  
Jacob is 19  
Emily is 16  
array[0] = 16  
array[1] = 19  
array[2] = 26  
array[3] = 48  
array[4] = 49  
X | O | X  
O | X | O  
X | O | X  
[93, 3, 7, 35, 59]
```

References

- [cnx.org: Programing Fundamentals – A Modular Structured Approach using C++](https://cnx.org/ProgramingFundamentals)
- [Wikiversity: Computer Programming](https://www.wikiversity.org/wiki/Computer_Programming)

Practice: Arrays and Lists

KENNETH LEROY BUSBEE

Review Questions

True / False

1. The array data type is one of the standard data types in C++.
2. Arrays can have more than one dimension.
3. For loops are often used to display the members of an array.
4. When defining an array, it is preferable to specify how many members are in the array.
5. Arrays are rarely used to represent data.
6. Linear searches require complex algorithms.
7. Functions are often created for searching for the max and min values in an array.
8. The bubble sort is an easy way to arrange data an array.
9. There is only one method of bubble sorting.
10. Sorting an array is frequently done.

Answers:

1. false
2. true
3. true
4. false
5. false
6. false
7. true
8. true
9. false
10. true

Short Answer

1. Briefly explain what an array is and list the two common operators used with arrays.
2. Give a short explanation of bubble sorting.

Activities

Complete the following activities using pseudocode, a flowcharting tool, or your selected programming language. Use separate functions for input, each type of processing, and output. Avoid global variables by passing parameters and returning results. Create test data to validate the accuracy of each program.

1. Review MathsIsFun: Definition of Average. Create a program that asks the user to enter grade

scores. Start by asking the user how many scores they would like to enter. Then use a loop to request each score and add it to a static (fixed-size) array. After the scores are entered, calculate and display the high, low, and average for the entered scores.

2. Review MathsIsFun: Leap Years. Create a program that asks the user for a year, and then calculate whether or not the given year is a leap year. Build an array where each entry is the number of days in the corresponding month (January = 31, February = 28 or 29 depending on year, March = 31, etc.). Build a parallel string array with the names of each month. Then ask the user to enter a month number, and look up the corresponding month name and number of days and display the information. Continue accepting input and displaying results until the user enters a number less than 1 or greater than 12.
3. Review Wikipedia: Zeller's congruence. Create a program that asks the user for their birthday (year, month, and day) and then calculate and display the day of the week on which they were born. Use an array lookup to convert the numeric day of the week to the correct string representation (Monday, Tuesday, Wednesday, etc.).
4. Review Khan Academy: A guessing game. Write a program that allows the user to think of a number between 0 and 100, inclusive. Then have the program try to guess their number. Start at the midpoint (50) and ask the user if their number is (h)igher, (l)ower, or (e)qual to the guess. If they indicate lower, guess the new midpoint (25). If they indicate higher, guess the new midpoint (75). Record each guess in an array and continue efficiently guessing higher or lower until they indicate equal, then display the list of guesses required to guess their number and end the program.
5. Review Wikipedia: Monty Hall problem. Create a program that uses an array to simulate the three doors. Use 0 (zero) to indicate goats and 1 (one) to indicate the car. Clear each "door" and then use a random number function to put the number 1 in one of the array elements. Then use the random number function to randomly select one of the three elements. Run the simulation in a loop 100 times to confirm a 1/3 chance of winning. Then run the simulation again, this time switching the selection after a 0 (goat) is removed from the remaining choices. Run the simulation in a loop 100 times to confirm a 2/3 chance of winning by switching.
6. If your programming language supports it, use a built-in sort function to sort the grade scores from the activity above and display the array in order from highest score to lowest score.
7. If your programming language supports it, update one or more of the programs above to replace the static array with a dynamic array, and extend the array as each item is added to the array.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++
- [Wikiversity](https://www.wikiversity.org/wiki/Computer_Programming): Computer Programming

PART VII

STRINGS AND FILES

Overview

This chapter introduces string and file processing.

Chapter Outline

- Strings
- String Functions
- String Formatting
- File Input and Output
- Loading an Array from a File
- Code Examples
 - C++
 - C#
 - Java
 - JavaScript
 - Python
 - Swift
- Practice

Learning Objectives

1. Understand key terms and definitions.
2. Given example pseudocode, flowcharts, and source code, create a program that processes strings to solve a given problem.
3. Given example pseudocode, flowcharts, and source code, create a program that processes a text file to solve a given problem.

Strings

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

A **string** is traditionally a sequence of characters, either as a literal constant or as some kind of variable. The latter may allow its elements to be mutated and the length changed, or it may be fixed (after creation). A string is generally considered a data type and is often implemented as an array data structure of bytes (or words) that stores a sequence of elements, typically characters, using some character encoding.¹

Discussion

Recall from String Data Type earlier in the book that, depending on programming language and precise data type used, a variable declared to be a string may either cause storage in memory to be statically allocated for a predetermined maximum length or employ dynamic allocation to allow it to hold a variable number of elements. When a string appears literally in source code, it is known as a string literal or an anonymous string.²

Most data is more complex than just one character, integer, etc. Programming languages develop other methods to represent and store data that are more complex. A complex data type of array is the first most students encounter. An array is a sequenced collection of elements of the same data type with a single identifier name. This definition perfectly describes our string data type concept. The simplest array is called a one-dimensional array; also known as a list because we usually list the members or elements vertically. However, strings are viewed as a one-dimensional array that visualize as listed horizontally. Strings are an array of character data.

In the “C” programming language all strings were handled as an array of characters that end in an ASCII null character (the value 0 or the first character in the ASCII character code set). This approach required programmers to manually process string length and manage string storage. Buffer overflows were common. A **buffer overflow**, or buffer overrun, is an anomaly where a program, while writing data to a buffer, overruns the buffer’s boundary and overwrites adjacent memory locations.³

Most current programming languages implement strings as a data type or class where strings are stored as a length controlled array. String length and storage are handled by the compiler or interpreter, reducing program errors.

1. Wikipedia: String (computer science)

2. Wikipedia: String (computer science)

3. Wikipedia: Buffer overflow

Language	Reserved Word
C++	<code>string</code>
C#	<code>String</code>
Java	<code>String</code>
JavaScript	<code>String</code>
Python	<code>str()</code>
Swift	<code>String</code>

Key Terms

array

A sequenced collection of elements of the same data type with a single identifier name.

buffer overflow

An anomaly where a program overruns a memory storage location and overwrites adjacent memory locations.

concatenation

Combining two strings into one string.

string class

A complex data item that uses object oriented programming.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

String Functions

DAVE BRAUNSCHWEIG

Overview

String functions are used in computer programming languages to manipulate a string or query information about a string.¹

Discussion

Most current programming languages include built-in or library functions to process strings. Common examples include case conversion, comparison, concatenation, find, join, length, reverse, split, substring, and trim.

Function	C++	C#	Java
case	<code>tolower()</code> , <code>toupper()</code> , etc.	<code>ToLower()</code> , <code>ToUpper()</code> , etc.	<code>toLowerCase()</code> , <code>toUpperCase()</code> , etc.
comparison	<code><</code> , <code>></code> , <code>==</code> , etc.	<code><</code> , <code>></code> , <code>==</code> , etc.	<code><</code> , <code>></code> , <code>==</code> , etc.
concatenation	<code>+</code> , <code>+=</code>	<code>+</code> , <code>+=</code>	<code>+</code> , <code>+=</code>
find	<code>find()</code>	<code>IndexOf()</code>	<code>indexOf()</code>
join	N/A	<code>Join()</code>	<code>join()</code>
length	<code>length()</code>	<code>Length</code>	<code>length()</code>
replace	<code>replace()</code>	<code>Replace()</code>	<code>replace()</code>
reverse	<code>reverse()</code>	<code>Reverse()</code>	N/A
split	<code>strtok()</code>	<code>Split()</code>	<code>split()</code>
substring	<code>substr()</code>	<code>Substring()</code>	<code>substring()</code>
trim	N/A	<code>Trim()</code>	<code>trim()</code>

1. Wikipedia: Comparison of programming languages (string functions)

Function	JavaScript	Python	Swift
case	<code>toLowerCase()</code> , <code>toUpperCase()</code> , etc.	<code>lower()</code> , <code>upper()</code> , etc.	<code>lowercased()</code> , <code>uppercased()</code>
comparison	<code><</code> , <code>></code> , <code>==</code> , etc.	<code><</code> , <code>></code> , <code>==</code> , etc.	<code><</code> , <code>></code> , <code>==</code> , etc.
concatenation	<code>+</code> , <code>+=</code>	<code>+</code> , <code>+=</code>	<code>+</code> , <code>+=</code>
find	<code>indexOf()</code>	<code>find()</code>	<code>firstIndex()</code>
join	<code>join()</code>	<code>join()</code>	<code>joined()</code>
length	<code>length</code>	<code>len()</code>	<code>count</code>
replace	<code>replace()</code>	<code>replace()</code>	<code>replacingOccurrences()</code>
reverse	N/A	<code>string[::-1]</code>	<code>reversed()</code>
split	<code>split()</code>	<code>split()</code>	<code>split()</code>
substring	<code>substring()</code>	<code>string[start:end]</code>	<code>string[start...end]</code>
trim	<code>trim()</code>	<code>strip()</code>	<code>trimmingCharacters()</code>

Key Terms

concatenate

*Join character strings end-to-end.*²

References

2. *Wikipedia: Concatenation*

String Formatting

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

String formatting uses a process of string interpolation (variable substitution) to evaluate a string literal containing one or more placeholders, yielding a result in which the placeholders are replaced with their corresponding values.¹

Discussion

Most current programming languages provide one or more string formatting functions that use a template string with placeholders and optional alignment, width, and precision indicators to generate formatted output.

Language	Function	Examples
C++	<code>snprintf()</code>	<pre>snprintf(str, sizeof(str), "Hello %s!", name); snprintf(str, sizeof(str), "\$%.2f", value);</pre>
C#	<code>Format()</code>	<pre>String.Format("Hello {0}!", name); String.Format("{0:\$0.00}", value);</pre>
Java	<code>format()</code>	<pre>String.format("Hello %s!", name); String.format("\$%.2f", value);</pre>
JavaScript	template literal	<pre>`Hello \${name}`; `\${value.toFixed(2)}`;</pre>
Python	<code>format()</code>	<pre>"Hello {}".format(name) "\${:.2f}".format(value)</pre>
Swift	interpolation <code>String()</code>	<pre>"Hello \(name)!" String(format:"%.2f", value)</pre>

String interpolation, like string concatenation, may lead to security problems. If user input data is improperly escaped or filtered, the system may be exposed to code injection.²

1. Wikipedia: String interpolation

2. Wikipedia: String interpolation

Key Terms

code injection

The exploitation of a computer bug that is caused by processing invalid data.³

formatting

Modifying the way the output is displayed.

string interpolation

Evaluating a string literal containing one or more placeholders, yielding a result in which the placeholders are replaced with their corresponding values.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

3. Wikipedia: Code injection

File Input and Output

KENNETH LEROY BUSBEE

Overview

A computer file is a computer resource for recording data discretely in a computer storage device. Just as words can be written to paper, so can information be written to a computer file.

There are different types of computer files, designed for different purposes. A file may be designed to store a picture, a written message, a video, a computer program, or a wide variety of other kinds of data. Some types of files can store several types of information at once.

By using computer programs, a person can open, read, change, and close a computer file. Computer files may be reopened, modified, and copied an arbitrary number of times.¹

Discussion

In computer programming, standard **streams** are pre-connected input and output communication channels between a computer program and its environment when it begins execution. The three input/output (I/O) connections are called standard input (**stdin** – keyboard), standard output (**stdout** – originally a printer) and standard error (**stderr** – monitor). Streams may be redirected to other devices and/or files. In current environments, stdout is usually redirected to the monitor.²

Computer files are stored on secondary storage devices and used to maintain program data over time. Most programming languages have built-in functions or libraries to support processing files as text streams. We need to understand how to open, read, write and close text files. The following File Input/Output terms are explained:

Text File – A file consisting of characters from the ASCII character code set. Text files (also known as ASCII text files) contain character data. When we create a text file we usually think of it consisting of a series of lines. On each line are several characters (including spaces, punctuation, etc.) and we generally end the line with a return (a character within the ASCII character code set). The return is also known as the new line character. You are most likely already familiar with the escape code of `\n` which is used within many programming languages to indicate a return character when used within a literal string.

A typical text file consisting of lines can be created by text editors (Notepad) or word processing programs (Microsoft Word). When using a word processor you must usually specify the output file as text (.txt) when saving it. Most source code files are ASCII text files with a unique file extension; such as C++ using .cpp, C# using .cs, Python using .py, etc. Thus, most compiler/Integrated Development Environment software packages can be used to create ASCII text files.

Filename – The name and its extension. Most operating systems have restrictions on which characters can be used in filenames. Example Lab_05.txt

Because some operating systems do not allow spaces, we suggest that you use the underscore where needed for spacing in a filename.

Path (Filespec) – The location of a file along with its filename. Filespec is short for file specification. Most operating systems have a set of rules on how to specify the drive and directory

1. Wikipedia: Computer file

2. Wikipedia: Standard streams

(or path through several directory levels) along with the filename. Example: C:\myfiles\cosc_1436\Lab_05.txt

Because some operating systems do not allow spaces, we suggest that you use the **underscore** where needed when creating folders or sub-directories.

Open – Your program requesting the operating system to let it have access to an existing file or to open a new file. In most current programming languages, a file data type exists and is used for file processing. A file variable will be used to store the device token that the operating system assigns to the file being opened. An open function or method is used to retrieve the device token, and typically requires at least two parameters: the path and the mode (read, write, append, or a combination thereof). Corresponding pseudocode would be:

```
Declare File datafile  
  
datafile = open(filespec, mode)
```

The open function provides a return value of a **device token** from the operating system and it is stored in the variable named data.

It is considered good programming practice to determine if the file was opened properly. The reason the operating system usually can't open a file is because the filespec is wrong (misspelled or not typed case consistent in some operating systems) or the file is not stored in the location specified. Accessing files stored on a network or the Internet may fail due to a network error.

Verifying that a file was opened properly is processed with a condition control structure. That structure may be either be an if-then-else statement or a try-catch / try-except error handler, depending on the programming language used.

Read – Moving data from a device that has been opened into a memory location defined in your program. For example:

```
text = read(datafile)
```

or

```
text = datafile.read()
```

Write – Moving data from a memory location defined in your program to a device that has been opened. For example:

```
write(datafile, text)
```

or

```
datafile.write(text)
```

Close – Your program requesting the operating system to release a file that was previously opened. There are two reasons to close a file. First, it releases the file and frees up the associated operation system resources. Second, if closing a file that was opened for output; it will clear the out the operating system's buffer and ensure that all of the data is physically stored in the output file. For example:

```
close(datafile)
```

or

```
datafile.close()
```

Key Terms

close

Your program requesting the operating system to release a file that was previously opened.

device token

A key value provided by the operating system to associate a device to your program.

filename

The name and its extension.

filespec

The location of a file along with its filename.

open

Your program requesting the operating system to let it have access to an existing file or to open a new file.

read

Moving data from a device that has been opened into a memory location defined in your program.

stream

A sequence of data elements made available over time.³

stdin

Standard input stream, typically the keyboard.⁴

stderr

Standard output error stream, typically the monitor.⁵

stdout

Standard output stream, originally a printer, but now typically the monitor.⁶

text file

A file consisting of characters from the ASCII character code set.

write

Moving data from a memory location defined in your program to a device that has been opened.

References

- [cnx.org: Programming Fundamentals – A Modular Structured Approach using C++](#)

3. *Wikipedia: Stream (computing)*

4. *Wikipedia: Standard streams*

5. *Wikipedia: Standard streams*

6. *Wikipedia: Standard streams*

Loading an Array from a Text File

KENNETH LEROY BUSBEE AND DAVE BRAUNSCHWEIG

Overview

Loading an array from a text file requires several steps, including: opening the file, reading the records, parsing (splitting) the records into fields, adding the fields to an array, and closing the file. The file may be read all at once and then parsed, or processed line by line. The array must either be at least as large as the number of records in the file, or must be generated dynamically.

Discussion

Loading an array from a file presents an interesting dilemma. The problem resolves around how many elements you should plan for in the array. Let's say 100, but what if the file has fewer or more than 100 values. How can the program handle it correctly?

Either:

1. Read the file and count the number of records.
2. Create a static array of that size.
3. Read the file again and add each record to the array.

Or:

1. Read the file and dynamically add the records to the array.

Processing Records

There are two options for file processing:

1. Read the entire file into memory, split the records and then process each record.
2. Read the file line by line and process one record at a time.

Which of these approaches is better will depend on the size of the file and the types of file and string processing supported by your programming language. Reading the entire file at once may be faster for small files. Very large files must be processed line by line.

Processing Fields

Processing fields requires splitting records based on the given file format. For example, a comma-separated-values file might be formatted as:

```
Celsius,Fahrenheit
```

```
0.0,32.0
1.0,33.8
2.0,35.6
```

The first line contains field names separated by commas. Following lines contain a value for each of the fields, separated by commas. Note that all text file input is strings. Each line must be split on the field separator (comma), and then numeric fields must be converted to integer or floating point values for processing.

Pseudocode

Static Array Processing

```
Open file
Read header
While Not End-Of-File
    Read line
    Increment record count
Close file

Declare array with length based on record count
Read Header
While Not End-Of-File
    Read line
    Split line into field(s)
    Convert numeric values to numeric data types
    Add field(s) to array or parallel arrays
Close file
```

Dynamic Array Processing

```
Declare empty array
Open file
Read Header
While Not End-Of-File
    Read line
    Split line into field(s)
    Convert numeric values to numeric data types
    Add field(s) to array or parallel arrays
Close file
```

Key Terms

dynamic memory

Aka stack created memory associated with local scope.

static memory

Aka data area memory associated with global scope.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

C++ Examples

DAVE BRAUNSCHWEIG

Strings

```
#include <algorithm>
#include <iostream>
#include <string>

using namespace std;

string toLower(string);
string toUpper(string);

int main() {
    string str = "Hello";

    cout << "string: " << str << endl;
    cout << "tolower: " << toLower(str) << endl;
    cout << "toupper: " << toUpper(str) << endl;
    cout << "string.find('e'): " << str.find('e') << endl;
    cout << "string.length(): " << str.length() << endl;
    cout << "string.replace(0, 1, \"j\") : " << str.replace(0, 1, "j") << endl;
    cout << "string.substr(2, 2): " << str.substr(2, 2) << endl;

    string name = "Bob";
    double value = 123.456;
    cout << name << " earned $" << fixed << setprecision (2) << value << endl;
}

string toLower(string str) {
    transform(str.begin(), str.end(), str.begin(), ::tolower);

    return str;
}

string toUpper(string str) {
    transform(str.begin(), str.end(), str.begin(), ::toupper);
}
```

```
        return str;
    }
```

Output

```
string: Hello
tolower: hello
toupper: HELLO
string.find('e'): 1
string.length(): 5
string.replace(0, 1, "j"): jello
string.substr(2, 2): ll
Bob earned $123.46
```

Files

```
// This program creates a file, adds data to the file, displays the file,
// appends more data to the file, displays the file, and then deletes the f
// It will not run if the file already exists.
//
// References:
//     https://www.mathsisfun.com/temperature-conversion.html
//     https://en.wikibooks.org/wiki/C%2B%2B\_Programming

#include <fstream>
#include <iomanip>
#include <iostream>
#include <string>

using namespace std;

double calculateFahrenheit(double celsius);
void createFile(string);
void readFile(string);
void appendFile(string);
void deleteFile(string);
int fileExists(string);

int main() {
    string FILENAME = "~file.txt";
```



```

    if(fileExists(FILENAME)) {
        cout << "File already exists." << endl;
    } else {
        createFile(FILENAME);
        readFile(FILENAME);
        appendFile(FILENAME);
        readFile(FILENAME);
        deleteFile(FILENAME);
    }
}

double calculateFahrenheit(double celsius) {
    double fahrenheit;

    fahrenheit = celsius * 9 / 5 + 32;
    return fahrenheit;
}

void createFile(string filename) {
    fstream file;
    float celsius;
    float fahrenheit;

    file.open(filename, fstream::out);
    if (file.is_open()) {
        file << "Celsius,Fahrenheit\n";
        for(celsius = 0; celsius <= 50; celsius++) {
            fahrenheit = calculateFahrenheit(celsius);
            file << fixed << setprecision (1) << celsius << "," << fahrenheit
        }
        file.close();
    } else {
        cout << "Error creating " << filename << endl;
    }
}

void readFile(string filename)
{
    fstream file;
    string line;

    file.open(filename, fstream::in);

```

```

    if (file.is_open()) {
        while (getline(file, line))
        {
            cout << line << endl;
        }
        file.close();
        cout << endl;
    } else {
        cout << "Error reading " << filename << endl;
    }
}

void appendFile(string filename)
{
    fstream file;
    float celsius;
    float fahrenheit;

    file.open(filename, fstream::out | fstream::app);
    if (file.is_open()) {
        for(celsius = 51; celsius <= 100; celsius++) {
            fahrenheit = calculateFahrenheit(celsius);
            file << fixed << setprecision (1) << celsius << "," << fahrenheit
        }
        file.close();
    } else {
        cout << "Error appending to " << filename << endl;
    }
}

void deleteFile(string filename)
{
    remove(filename.c_str());
}

int fileExists(string filename)
{
    FILE *file;

    file = fopen (filename.c_str(), "r");
    if (file != NULL)
    {
        fclose (file);
    }
}

```

```
    }  
    return (file != NULL);  
}
```

Output

```
Celsius,Fahrenheit  
0.0,32.0  
1.0,33.8  
2.0,35.6  
...  
98.0,208.4  
99.0,210.2  
100.0,212.0
```

References

- Wikiversity: Computer Programming

C# Examples

DAVE BRAUNSCHWEIG

Strings

```
// This program demonstrates string functions.

using System;

class Strings
{
    public static void Main (string[] args)
    {
        String str = "Hello";

        Console.WriteLine("string: " + str);
        Console.WriteLine("string.ToLower(): " + str.ToLower());
        Console.WriteLine("string.ToUpper(): " + str.ToUpper());
        Console.WriteLine("string.IndexOf('e'): " + str.IndexOf('e'));
        Console.WriteLine("string.Length: " + str.Length);
        Console.WriteLine("string.Replace('H', 'j'): " + str.Replace('H', 'j'));
        Console.WriteLine("string.Substring(2, 2): " + str.Substring(2, 2));
        Console.WriteLine("string.Trim(): " + str.Trim());

        String name = "Bob";
        double value = 123.456;
        Console.WriteLine(String.Format("{0} earned {1:$0.00}", name, value));
    }
}
```

Output

```
string: Hello
string.ToLower(): hello
string.ToUpper(): HELLO
string.IndexOf('e'): 1
string.Length: 5
string.Replace('H', 'j'): jello
string.Substring(2, 2): ll
```

```
string.Trim(): Hello  
Bob earned $123.46
```

Files

```
// This program creates a file, adds data to the file, displays the file,  
// appends more data to the file, displays the file, and then deletes the f  
// It will not run if the file already exists.  
//  
// References:  
//     https://www.mathsisfun.com/temperature-conversion.html  
//     https://en.wikibooks.org/wiki/C_Sharp_Programming  
  
using System;  
  
public class Files  
{  
    public static void Main(String[] args)  
    {  
        string FILENAME = "~file.txt";  
  
        if(System.IO.File.Exists(FILENAME))  
        {  
            System.Console.WriteLine("File already exists.\n");  
        }  
        else  
        {  
            CreateFile(FILENAME);  
            ReadFile(FILENAME);  
            AppendFile(FILENAME);  
            ReadFile(FILENAME);  
            DeleteFile(FILENAME);  
        }  
    }  
  
    private static double CalculateFahrenheit(double celsius)  
    {  
        double fahrenheit;  
  
        fahrenheit = celsius * 9 / 5 + 32;  
        return fahrenheit;  
    }  
}
```

```

}

private static void CreateFile(string filename)
{
    System.IO.StreamWriter file;
    double celsius;
    double fahrenheit;

    try
    {
        file = System.IO.File.CreateText(filename);
        file.WriteLine("Celsius,Fahrenheit");
        for(celsius = 0; celsius <= 50; celsius++)
        {
            fahrenheit = CalculateFahrenheit(celsius);
            file.WriteLine(String.Format("{0:F1},{1:F1}", celsius, fahr
        }
        file.Close();
    }
    catch(Exception exception)
    {
        Console.WriteLine("Error creating " + filename);
        Console.WriteLine(exception.Message);
    }
}

private static void ReadFile(string filename)
{
    System.IO.StreamReader file;
    string line;

    try
    {
        file = System.IO.File.OpenText(filename);
        while (true)
        {
            line = file.ReadLine();
            if (line == null)
            {
                break;
            }
            Console.WriteLine(line);
        }
    }
}

```

```

        file.Close();
        Console.WriteLine("");
    }
    catch(Exception exception)
    {
        Console.WriteLine("Error reading " + filename);
        Console.WriteLine(exception.Message);
    }
}

private static void AppendFile(string filename)
{
    System.IO.StreamWriter file;
    double celsius;
    double fahrenheit;

    try
    {
        file = System.IO.File.AppendText(filename);
        for(celsius = 51; celsius <= 100; celsius++)
        {
            fahrenheit = CalculateFahrenheit(celsius);
            file.WriteLine(String.Format("{0:F1},{1:F1}", celsius, fahr
        }
        file.Close();
    }
    catch(Exception exception)
    {
        Console.WriteLine("Error appending to " + filename);
        Console.WriteLine(exception.Message);
    }
}

private static void DeleteFile(string filename)
{
    try
    {
        System.IO.File.Delete(filename);
    }
    catch(Exception exception)
    {
        Console.WriteLine("Error deleting " + filename);
        Console.WriteLine(exception.Message);
    }
}

```

```
        }  
    }  
}
```

Output

```
Celsius,Fahrenheit  
0.0,32.0  
1.0,33.8  
2.0,35.6  
...  
98.0,208.4  
99.0,210.2  
100.0,212.0
```

References

- [Wikiversity: Computer Programming](#)

Java Examples

DAVE BRAUNSCHWEIG

Strings

```
// This program demonstrates string functions.

class Main {
    public static void main(String[] args) {
        String str = "Hello";

        System.out.println("string: " + str);
        System.out.println("string.toLowerCase(): " + str.toLowerCase());
        System.out.println("string.toUpperCase(): " + str.toUpperCase());
        System.out.println("string.indexOf('e'): " + str.indexOf('e'));
        System.out.println("string.length(): " + str.length());
        System.out.println("string.replace('H', 'j'): " + str.replace('H', 'j'));
        System.out.println("string.substring(2,4): " + str.substring(2, 4));
        System.out.println("string.trim(): " + str.trim());

        String name = "Bob";
        double value = 123.456;
        System.out.println(String.format("%s earned $%.2f", name, value));
    }
}
```

Output

```
string: Hello
string.toLowerCase(): hello
string.toUpperCase(): HELLO
string.indexOf('e'): 1
string.length(): 5
string.replace('H', 'j'): jello
string.substring(2,4): llo
string.trim(): Hello
Bob earned $123.46
```

Files

```
// This program creates a file, adds data to the file, displays the file,
// appends more data to the file, displays the file, and then deletes the f
// It will not run if the file already exists.
//
// References:
//     https://www.mathsisfun.com/temperature-conversion.html
//     https://en.wikibooks.org/wiki/Java_Programming

import java.util.*;

class Main {
    public static void main(String[] args) {
        String FILENAME = "~file.txt";

        if(fileExists(FILENAME)) {
            System.out.println("File already exists.\n");
        } else {
            createFile(FILENAME);
            readFile(FILENAME);
            appendFile(FILENAME);
            readFile(FILENAME);
            deleteFile(FILENAME);
        }
    }

    private static double calculateFahrenheit(double celsius) {
        double fahrenheit;

        fahrenheit = celsius * 9 / 5 + 32;
        return fahrenheit;
    }

    private static void createFile(String filename) {
        try {
            java.io.File file = new java.io.File(filename);
            java.io.BufferedWriter writer =
                new java.io.BufferedWriter(new java.io.FileWriter(file));
            double celsius;
            double fahrenheit;

            writer.write("Celsius,Fahrenheit\n");
        }
    }
}
```

```

        for(celsius = 0; celsius <= 50; celsius++) {
            fahrenheit = calculateFahrenheit(celsius);
            writer.write(celsius + "," + fahrenheit + "\n");
        }
        writer.close();
    } catch(Exception exception) {
        System.out.println("Error creating " + filename);
        exception.printStackTrace();
    }
}

private static void readFile(String filename) {
    try {
        java.io.File file = new java.io.File(filename);
        java.io.BufferedReader reader =
            new java.io.BufferedReader(new java.io.FileReader(file));
        String line;

        while(true) {
            line = reader.readLine();
            if (line == null) {
                break;
            }
            System.out.println(line);
        }
        reader.close();
        System.out.println("");
    } catch(Exception exception) {
        System.out.println("Error reading " + filename);
        exception.printStackTrace();
    }
}

private static void appendFile(String filename)
{
    try {
        java.io.File file = new java.io.File(filename);
        java.io.BufferedWriter writer =
            new java.io.BufferedWriter(new java.io.FileWriter(file, true));
        double celsius;
        double fahrenheit;

        for(celsius = 51; celsius <= 100; celsius++) {

```

```

        fahrenheit = calculateFahrenheit(celsius);
        writer.write(celsius + "," + fahrenheit + "\n");
    }
    writer.close();
} catch (Exception exception) {
    System.out.println("Error appending to " + filename);
    exception.printStackTrace();
}
}

private static void deleteFile(String filename) {
    java.io.File file;

    try {
        file = new java.io.File(filename);
        file.delete();
    } catch (Exception exception) {
        System.out.println("Error deleting " + filename);
        exception.printStackTrace();
    }

}

private static boolean fileExists(String filename) {
    java.io.File file;

    file = new java.io.File(filename);
    return file.exists();
}
}

```

Output

```

Celsius,Fahrenheit
0.0,32.0
1.0,33.8
2.0,35.6
...
98.0,208.4
99.0,210.2
100.0,212.0

```

References

- Wikiversity: Computer Programming

JavaScript Examples

DAVE BRAUNSCHWEIG

Strings

```
// This program demonstrates string functions.

main();

function main()
{
    var str = "Hello";

    output("string: " + str);
    output("string.toLowerCase(): " + str.toLowerCase());
    output("string.toUpperCase(): " + str.toUpperCase());
    output("string.indexOf('e'): " + str.indexOf('e'));
    output("string.length: " + str.length);
    output("string.replace('H', 'j'): " + str.replace('H', 'j'));
    output("string.substring(2,4): " + str.substring(2, 4));
    output("string.trim(): " + str.trim());

    var name = "Bob";
    var value = 123.456;
    output(`string.format(): ${name} earned $$${value.toFixed(2)}`);
}

// Checks the JavaScript environment and writes to the console,
// the current document, or standard output as appropriate.
// Reference: http://progopedia.com/example/hello-world/114/
function output(text) {
    if (typeof console === "object") {
        console.log(text);
    }
    else if (typeof document === "object") {
        document.write(text);
    }
    else {
        print(text);
    }
}
```

```
}
```

Output

```
string: Hello
string.toLowerCase(): hello
string.toUpperCase(): HELLO
string.indexOf('e'): 1
string.length: 5
string.replace('H', 'j'): jello
string.substring(2,4): ll
string.trim(): Hello
string.format(): Bob earned $123.46
```

Files

Note: For security reasons, JavaScript in a browser requires the user to select the file to be processed. This example is based on node.js rather than browser-based JavaScript.

```
// This program creates a file, adds data to the file, displays the file,
// appends more data to the file, displays the file, and then deletes the f
// It will not run if the file already exists.

function calculateFahrenheit(celsius) {
    fahrenheit = celsius * 9 / 5 + 32
    return fahrenheit
}

function createFile(filename) {
    var fs = require('fs')

    fs.writeFile(filename, "Celsius,Fahrenheit\n", function(err) {
        if (err) return console.error(err);
    });

    for(var celsius = 0; celsius <= 50; celsius++) {
        var fahrenheit = calculateFahrenheit(celsius);
        fs.appendFile(filename, celsius.toFixed(1) + "," +
            fahrenheit.toFixed(1) + "\n", function (err) {
            if (err) {
                return console.error(err);
            }
        });
    }
}
```

```

        }
    });
}

function readFile(filename) {
    var file = require('readline').createInterface( {
        input: require('fs').createReadStream(filename)
    });

    file.on('line', function (line) {
        console.log(line);
    });
}

function appendFile(filename) {
    var fs = require('fs')

    for(var celsius = 51; celsius <= 100; celsius++) {
        var fahrenheit = calculateFahrenheit(celsius);
        fs.appendFile(filename, celsius.toFixed(1) + "," +
            fahrenheit.toFixed(1) + "\n", function (err) {
            if (err) {
                return console.error(err);
            }
        });
    }
}

function deleteFile(filename) {
    var fs = require("fs");

    fs.unlink(filename, function(err) {
        if (err) {
            return console.error(err);
        }
    });
}

function fileExists(filename) {
    var fs = require('fs');
    return fs.existsSync(filename);
}

```



```
function main() {  
    var filename = "~file.txt";  
  
    if(fileExists(filename)) {  
        console.log("File already exists.")  
    } else {  
        createFile(filename);  
        readfile(filename);  
        appendFile(filename);  
        readfile(filename);  
        deleteFile(filename);  
    }  
}  
  
main();
```

Output

```
Celsius,Fahrenheit  
0.0,32.0  
1.0,33.8  
2.0,35.6  
...  
98.0,208.4  
99.0,210.2  
100.0,212.0
```

References

- Wikiversity: Computer Programming

Python Examples

DAVE BRAUNSCHWEIG

Strings

```
# This program demonstrates string functions.

def main():
    string = "Hello"

    print("string: " + string)
    print("string.lower(): " + string.lower())
    print("string.upper(): " + string.upper())
    print("string.find('e'): " + str(string.find('e')))
    print("len(string): " + str(len(string)))
    print("string.replace('H', 'j'): " + string.replace('H', 'j'))
    print("string[::-1]: " + string[::-1])
    print("string[2:4]: " + string[2:4])
    print("string.strip('H'): " + string.strip('H'))

    name = "Bob"
    value = 123.456
    print("string.format(): {0} earned ${1:.2f}".format(name, value))

main()
```

Output

```
string: Hello
string.lower(): hello
string.upper(): HELLO
string.find('e'): 1
len(string): 5
string.replace('H', 'j'): jello
string[::-1]: olleH
string[2:4]: ll
string.strip('H'): ello
```

```
string.format(): Bob earned $123.46
```

Files

```
# This program creates a file, adds data to the file, displays the file,
# appends more data to the file, displays the file, and then deletes the fi
# It will not run if the file already exists.
#
# References:
#     https://www.mathsisfun.com/temperature-conversion.html
#     https://en.wikibooks.org/wiki/Python\_Programming

import os
import sys

def calculate_fahrenheit(celsius):
    fahrenheit = celsius * 9 / 5 + 32
    return fahrenheit

def create_file(filename):
    try:
        file = open(filename, "w")
        file.write("Celsius,Fahrenheit\n")
        for celsius in range(0, 51):
            fahrenheit = calculate_fahrenheit(celsius)
            file.write("{:.1f},{:.1f}\n".format(celsius, fahrenheit))
        file.close()
    except:
        print("Error creating", filename)
        print(sys.exc_info()[1])

def read_file(filename):
    try:
        file = open(filename, "r")
        for line in file:
            line = line.strip()
            print(line)
```

```

        file.close()
        print()
    except:
        print("Error reading", filename)
        print(sys.exc_info()[1])

def append_file(filename):
    try:
        file = open(filename, "a")
        for celsius in range(51, 101):
            fahrenheit = calculate_fahrenheit(celsius)
            file.write("{:.1f},{:.1f}\n".format(celsius, fahrenheit))
        file.close()
    except:
        print("Error appending to", filename)
        print(sys.exc_info()[1])

def delete_file(filename):
    try:
        os.remove(filename)
    except:
        print("Error deleting", filename)
        print(sys.exc_info()[1])

def main():
    filename = "~file.txt"

    if os.path.isfile(filename):
        print("File already exists.")
    else:
        create_file(filename)
        read_file(filename)
        append_file(filename)
        read_file(filename)
        delete_file(filename)

main()

```

Output

```
Celsius,Fahrenheit
0.0,32.0
1.0,33.8
2.0,35.6
3.0,37.4
...
98.0,208.4
99.0,210.2
100.0,212.0
```

References

- Wikiversity: Computer Programming

Swift Examples

DAVE BRAUNSCHWEIG

Strings

```
// This program demonstrates string functions.

import Foundation

func main() {
    let string:String = "Hello"

    print("string: " + string)
    print("string.lowercased(): " + string.lowercased())
    print("string.uppercased(): " + string.uppercased())
    print("find(string, \"e\"): " + String(find(string:string, character:"e")))
    print("string.characters.count: " + String(string.characters.count))
    print("string.replacingOccurrences(of:\"H\", with:\"j\"): " + string.replacingOccurrences(of:"H", with:"j"))
    print("string.characters.reversed(): " + String(string.characters.reversed()))
    print("substring(2, 2): " + substring(string:string, start:2, length:2))
    print("string.trimmingCharacters(\"H\"): " + string.trimmingCharacters(with:"H"))

    let name:String = "Bob"
    let value:Double = 123.456
    print("\(name) earned $" + String(format:"%.2f", value))
}

func find(string:String, character:Character) -> Int {
    var result: Int

    if let index = string.characters.index(of:character) {
        result = string.characters.distance(from: string.startIndex, to: index)
    } else {
        result = -1
    }
    return result
}

func substring(string:String, start:Int, length:Int) -> String {
    let range = string.index(string.startIndex, offsetBy: start)...string.index(string.startIndex, offsetBy: start + length)
    return string[range]
}
```

```

        return string[range]
    }

    main()

```

Output

```

string: Hello
string.lowercased(): hello
string.uppercased(): HELLO
find(string, "e"): 1
string.characters.count: 5
string.replacingOccurrences(of:"H", with:"j"): jello
string.characters.reversed(): olleH
substring(2, 2): ll
string.trimmingCharacters("H"): ello
Bob earned $123.46

```

Files

```

// This program creates a file, adds data to the file, displays the file,
// appends more data to the file, displays the file, and then deletes the f
// It will not run if the file already exists.
//
// References:
//     https://www.mathsisfun.com/temperature-conversion.html
//     https://developer.apple.com/library/content/documentation/Swift/Conc

import Foundation

func fileExists\(filename:String\) -> Bool {
    let fileManager = FileManager.default
    return fileManager.fileExists\(atPath:filename\)
}

func calculateFahrenheit\(celsius:Double\) -> Double {
    var fahrenheit: Double
    fahrenheit = celsius \* 9 / 5 + 32
    return fahrenheit
}

```

```

func createFile(filename:String) {
    var text: String
    var fahrenheit: Double

    text = "Celsius,Fahrenheit\n"
    for celsius in stride(from: 0.0, through: 50.0, by: 1.0) {
        fahrenheit = calculateFahrenheit(celsius:celsius)
        text += String(celsius) + "," + String(fahrenheit) + "\n"
    }

    do {
        try text.write(toFile: filename, atomically: true, encoding: .utf8)
    } catch {
        print("Error creating ", filename)
        print(error.localizedDescription)
    }
}

func readFile(filename:String) {
    var text = ""

    do {
        text = try String(contentsOfFile: filename, encoding: .utf8)

        let lines = text.components(separatedBy:"\n")
        for line in lines {
            print(line)
        }
    } catch {
        print("Error reading " + filename)
        print(error.localizedDescription)
    }
}

func appendFile(filename:String) {
    var text: String
    var fahrenheit: Double

    do {
        text = try String(contentsOfFile: filename, encoding: .utf8)

        for celsius in stride(from: 51.0, through: 100.0, by: 1.0) {

```



```

        fahrenheit = calculateFahrenheit(celsius:celsius)
        text += String(celsius) + "," + String(fahrenheit) + "\n"
    }

    try text.write(toFile: filename, atomically: true, encoding: .utf8)
} catch {
    print("Error appending to ", filename)
    print(error.localizedDescription)
}

func deleteFile(filename:String) {
    do {
        let fileManager = FileManager.default
        try fileManager.removeItem(atPath:filename)
    } catch {
        print("Error deleting", filename)
        print(error.localizedDescription)
    }
}

func main() {
    let filename:String = "~file.txt"

    if (fileExists(filename:filename)) {
        print("File already exists.")
    }
    else {
        createFile(filename:filename)
        readFile(filename:filename)
        appendFile(filename:filename)
        readFile(filename:filename)
        deleteFile(filename:filename)
    }
}

main()

```

Output

```

Celsius,Fahrenheit
0.0,32.0

```

```
1.0, 33.8
2.0, 35.6
3.0, 37.4
...
98.0, 208.4
99.0, 210.2
100.0, 212.0
```

References

- Wikiversity: Computer Programming

Practice: Strings and Files

KENNETH LEROY BUSBEE

Review Questions

True / False

1. The character data type in C++ uses the double quote marks, like: `char grade = "A";`
2. `Sizeof` is an operator that tells you how many bytes a data type occupies in storage.
3. `Typedef` helps people who can't hear and is one of the standard accommodation features of a programming language for people with a learning disability.
4. The sequence operator should be used when defining variables in order to save space.
5. Programming can be both enjoyable and frustrating.
6. Text files are hard to create.
7. A `filespec` refers to a very small (like a spec dust) file.
8. A device token is a special non zero value the operating system gives your program and is associated with the file that you requested to be opened.
9. Programmers should not worry about closing a file.
10. Where you define an item, that is global or local scope, is rarely important.

Answers:

1. false
2. true
3. false
4. false
5. true
6. false
7. false
8. true
9. false
10. false

Short Answer

1. Describe the normal operations allowed with the string data type.
2. Describe why unary positive is worthless.
3. Describe how unary negative works.

Activities

Complete the following activities using pseudocode, a flowcharting tool, or your selected programming language. Use separate functions for input, each type of processing, and output. Avoid global variables by passing parameters and returning results. Create test data to validate the accuracy of each program.

String Activities

1. Create a program that asks the user for a line of text containing a first name and last name, such as `Firstname Lastname`. Use string functions/methods to parse the line and print out the name in the form last name, first initial, such as `Lastname, F.` Include a trailing period after the first initial. Handle invalid input errors, such as extra spaces or missing name parts.
2. Create a program that asks the user for a line of text. Use string functions/methods to delete leading and trailing spaces, and then print the line of text backwards. For example:

```
the cat in the hat  
tah eht ni tac eht
```
3. Create a program that asks the user for a line of comma-separated-values. It could be a sequence of test scores, names, or any other values. Use string functions/methods to parse the line and print out each item on a separate line. Remove commas and any leading or trailing spaces from each item when printed.
4. Create a program that asks the user for a line of text. Then ask the user for the number of characters to print in each line, the number of lines to be printed, and a scroll direction, right or left. Using the given line of text, duplicate the text as needed to fill the given number of characters per line. Then print the requested number of lines, shifting the entire line's content by one character, left or right, each time the line is printed. The first or last character will be shifted / appended to the other end of the string. For example:

```
Repeat this. Repeat this.  
epeat this. Repeat this. R  
peat this. Repeat this. Re
```

File Activities

1. Using a text editor or IDE, create a text file of names and grade scores to use for testing based on the following format:

```
Larry Fine: 80  
Curly Howard: 70  
Moe Howard: 90
```

Using the file above, create a program that displays high, low, and average scores based on input from the file. Verify that the file exists and then use string functions/methods to parse the file content and display the high, low, and average score. Note that the program must work for any given number of scores in the file. Do not assume there will only be three scores.
2. Using the file above, create a program that displays high, low, and average scores based on input from the file. Verify that the file exists and then use string functions/methods to parse the file content and add each score to an array. Display the array contents and then calculate and display the high, low, and average score. Note that the program must work for any given number of scores in the file. Do not assume there will only be three scores.
3. Using the file above, create a program that displays high, low, and average scores based on input from the file. Verify that the file exists and then use string functions/methods to parse the file content and add each score to an array. Display the array contents and then calculate and display the high, low, and average score. Include error handling in case the file is formatted incorrectly. Note that the program must work for any given number of scores in the file. Do not assume there will only be three scores.
4. Create a program that asks the user for the name of a text/HTML file that contains HTML tags, such as:

```
<p><strong>This is a bold paragraph.</strong></p>
```

Verify that the file exists and then use string methods to search for and remove all HTML tags from the text, saving each removed tag in an array. Display the untagged text and then display the array of removed tags. For example:

```
This is a bold paragraph.
```

```
<p>
```

```
<strong>
```

```
</strong>
```

```
</p>
```

5. Using a text editor or IDE, create a text file of names and addresses to use for testing based on the following format:

```
Firstname Lastname
```

```
123 Any Street
```

```
City, State/Province/Region PostalCode
```

Include a blank line between addresses, and include at least three addresses in the file. Create a program that verifies that the file exists, and then processes the file and displays each address as a single line of comma-separated values in the form:

```
Lastname, Firstname, Address, City, State/Province/Region,  
PostalCode
```

References

- [cnx.org: Programming Fundamentals – A Modular Structured Approach using C++](https://cnx.org/content/col12071/1.1)
- [Wikiversity: Computer Programming](https://www.wikiversity.org/wiki/Computer_Programming)

PART VIII

OBJECT-ORIENTED PROGRAMMING

Note to Reviewers:

Current progress on 2nd edition edits ends in this chapter.

- Objects and Classes
- Encapsulation
- Inheritance
- Polymorphism
- Code Examples
 - C++
 - C#
 - Java
 - JavaScript
 - Python
 - Swift
- Practice

Objects and Classes

DAVE BRAUNSCHWEIG

Encapsulation

DAVE BRAUNSCHWEIG

Inheritance

DAVE BRAUNSCHWEIG

Polymorphism

DAVE BRAUNSCHWEIG

C++ Examples

DAVE BRAUNSCHWEIG

Objects

```
#include

using namespace std;

// This class converts temperature between Celsius and Fahrenheit.
// It may be used by assigning a value to either Celsius or Fahrenheit
// and then retrieving the other value, or by calling the ToCelsius or
// ToFahrenheit methods directly.
//
// References:
//     https://www.mathsisfun.com/temperature-conversion.html
//     https://en.wikibooks.org/wiki/C%2B%2B\_Programming

class Temperature {
public:
    double getCelsius(void);
    void setCelsius(double value);
    double getFahrenheit(void);
    void setFahrenheit(double value);
    double toCelsius(double fahrenheit);
    double toFahrenheit(double celsius);

private:
    double celsius;
    double fahrenheit;
};

double Temperature::getCelsius(void) {
    return celsius;
}

void Temperature::setCelsius(double value) {
    celsius = value;
    fahrenheit = toFahrenheit(celsius);
}
```

```

double Temperature::getFahrenheit(void) {
    return fahrenheit;
}

void Temperature::setFahrenheit(double value) {
    fahrenheit = value;
    celsius = toCelsius(fahrenheit);
}

double Temperature::toCelsius(double fahrenheit) {
    return (fahrenheit - 32) * 5 / 9;
}

double Temperature::toFahrenheit(double celsius) {
    return celsius * 9 / 5 + 32;
}

// This program creates instances of the Temperature class to convert Cesium
// and Fahrenheit temperatures.
//
// References:
//     https://www.mathsisfun.com/temperature-conversion.html
//     https://en.wikibooks.org/wiki/C%2B%2B\_Programming

int main() {
    Temperature temp1;
    temp1.setCelsius(100.0);
    cout << "temp1.celsius = " << temp1.getCelsius() << endl;
    cout << "temp1.fahrenheit = " << temp1.getFahrenheit() << endl;
    cout << endl;

    Temperature temp2;
    temp2.setFahrenheit(100.0);
    cout << "temp2.fahrenheit = " << temp2.getFahrenheit() << endl;
    cout << "temp2.celsius = " << temp2.getCelsius() << endl;
}

```

Output

```

temp1.celsius = 100
temp1.fahrenheit = 212

```

```
temp2.fahrenheit = 100  
temp2.celsius = 37.7778
```

References

- Wikiversity: Computer Programming

C# Examples

DAVE BRAUNSCHWEIG

Objects

```
// This program creates instances of the Temperature class to convert Celsius
// and Fahrenheit temperatures.
//
// References:
//     https://www.mathsisfun.com/temperature-conversion.html
//     https://en.wikibooks.org/wiki/C_Sharp_Programming

using System;

public class Objects
{
    public static void Main(String[] args)
    {
        Temperature temp1 = new Temperature(celsius: 0);
        Console.WriteLine("temp1.Celsius = " + temp1.Celsius.ToString());
        Console.WriteLine("temp1.Fahrenheit = " + temp1.Fahrenheit.ToString());
        Console.WriteLine("");

        temp1.Celsius = 100;
        Console.WriteLine("temp1.Celsius = " + temp1.Celsius.ToString());
        Console.WriteLine("temp1.Fahrenheit = " + temp1.Fahrenheit.ToString());
        Console.WriteLine("");

        Temperature temp2 = new Temperature(fahrenheit: 0);
        Console.WriteLine("temp2.Fahrenheit = " + temp2.Fahrenheit.ToString());
        Console.WriteLine("temp2.Celsius = " + temp2.Celsius.ToString());
        Console.WriteLine("");

        temp2.Fahrenheit = 100;
        Console.WriteLine("temp2.Fahrenheit = " + temp2.Fahrenheit.ToString());
        Console.WriteLine("temp2.Celsius = " + temp2.Celsius.ToString());
    }
}

// This class converts temperature between Celsius and Fahrenheit.
```



```

// It may be used by assigning a value to either Celsius or Fahrenheit
// and then retrieving the other value, or by calling the ToCelsius or
// ToFahrenheit methods directly.

public class Temperature
{
    double _celsius;
    double _fahrenheit;

    public double Celsius
    {
        get
        {
            return _celsius;
        }

        set
        {
            _celsius = value;
            _fahrenheit = ToFahrenheit(value);
        }
    }

    public double Fahrenheit
    {
        get
        {
            return _fahrenheit;
        }

        set
        {
            _fahrenheit = value;
            _celsius = ToCelsius(value);
        }
    }

    public Temperature(double? celsius = null, double? fahrenheit = null)
    {
        if (celsius.HasValue)
        {
            this.Celsius = Convert.ToDouble(celsius);
        }
    }
}

```

```

        if (fahrenheit.HasValue)
        {
            this.Fahrenheit = Convert.ToDouble(fahrenheit);
        }
    }

    public double ToCelsius(double fahrenheit)
    {
        return (fahrenheit - 32) * 5 / 9;
    }

    public double ToFahrenheit(double celsius)
    {
        return celsius * 9 / 5 + 32;
    }
}

```

Output

```

temp1.Celsius = 0
temp1.Fahrenheit = 32

temp1.Celsius = 100
temp1.Fahrenheit = 212

temp2.Fahrenheit = 0
temp2.Celsius = -17.7777777777778

temp2.Fahrenheit = 100
temp2.Celsius = 37.7777777777778

```

References

- Wikiversity: Computer Programming

Java Examples

DAVE BRAUNSCHWEIG

Objects

```
// This program creates instances of the Temperature class to convert Celsius
// and Fahrenheit temperatures.
//
// References:
//     https://www.mathsisfun.com/temperature-conversion.html
//     https://en.wikibooks.org/wiki/Java_Programming

import java.util.*;

class Main {
    public static void main(String[] args) {
        Temperature temp1 = new Temperature();
        temp1.setCelsius(100.0);
        System.out.println("temp1.celsius = " + temp1.getCelsius().toString());
        System.out.println("temp1.fahrenheit = " + temp1.getFahrenheit().toString());
        System.out.println("");

        Temperature temp2 = new Temperature();
        temp2.setFahrenheit(100.0);
        System.out.println("temp2.fahrenheit = " + temp2.getFahrenheit().toString());
        System.out.println("temp2.celsius = " + temp2.getCelsius().toString());
    }
}

// This class converts temperature between Celsius and Fahrenheit.
// It may be used by assigning a value to either Celsius or Fahrenheit
// and then retrieving the other value, or by calling the ToCelsius or
// ToFahrenheit methods directly.

class Temperature {
    Double celsius;
    Double fahrenheit;

    public Double getCelsius() {
        return celsius;
    }
}
```

```

    }

    public void setCelsius(Double value) {
        celsius = value;
        fahrenheit = toFahrenheit(celsius);
    }

    public Double getFahrenheit() {
        return fahrenheit;
    }

    public void setFahrenheit(Double value) {
        fahrenheit = value;
        celsius = toCelsius(fahrenheit);
    }

    public Double toCelsius(Double fahrenheit) {
        return (fahrenheit - 32) * 5 / 9;
    }

    public Double toFahrenheit(Double celsius) {
        return celsius * 9 / 5 + 32;
    }
}

```

Output

```

temp1.celsius = 100.0
temp1.fahrenheit = 212.0

temp2.fahrenheit = 100.0
temp2.celsius = 37.77777777777778

```

References

- Wikiversity: Computer Programming

JavaScript Examples

DAVE BRAUNSCHWEIG

Objects

```
// This class converts temperature between Celsius and Fahrenheit.
// It may be used by assigning a value to either Celsius or Fahrenheit
// and then retrieving the other value, or by calling the ToCelsius or
// ToFahrenheit methods directly.

class Temperature {
  constructor() {
    this._celsius = 0;
    this._fahrenheit = 32;
  }

  get celsius() {
    return this._celsius;
  }

  set celsius(value) {
    this._celsius = value;
    this._fahrenheit = this.toFahrenheit(value);
  }

  get fahrenheit() {
    return this._fahrenheit;
  }

  set fahrenheit(value) {
    this._fahrenheit = value;
    this._celsius = this.toCelsius(value);
  }

  toCelsius(fahrenheit) {
    return (fahrenheit - 32) * 5 / 9
  }

  toFahrenheit(celsius) {
    return celsius * 9 / 5 + 32
  }
}
```

```

    }
}

// This program creates instances of the Temperature class to convert Celsius
// and Fahrenheit temperatures.
//
// References:
//     https://www.mathsisfun.com/temperature-conversion.html
//     https://en.wikibooks.org/wiki/JavaScript

main()

function main() {
    var temp1 = new Temperature();
    temp1.celsius = 0
    output("temp1.celsius = " + temp1.celsius);
    output("temp1.fahrenheit = " + temp1.fahrenheit);
    output("");

    temp1.celsius = 100;
    output("temp1.celsius = " + temp1.celsius);
    output("temp1.fahrenheit = " + temp1.fahrenheit);
    output("");

    var temp2 = new Temperature();
    temp2.fahrenheit = 0
    output("temp2.fahrenheit = " + temp2.fahrenheit);
    output("temp2.celsius = " + temp2.celsius);
    output("");

    temp2.fahrenheit = 100;
    output("temp2.fahrenheit = " + temp2.fahrenheit);
    output("temp2.celsius = " + temp2.celsius);
}

// Checks the JavaScript environment and writes to the console,
// the current document, or standard output as appropriate.
// Reference: http://progopedia.com/example/hello-world/114/
function output(text) {
    if (typeof console === 'object') {
        console.log(text);
    }
    else if (typeof document === 'object') {

```

```
        document.write(text);
    }
    else {
        print(text);
    }
}
```

Output

```
temp1.celsius = 0
temp1.fahrenheit = 32

temp1.celsius = 100
temp1.fahrenheit = 212

temp2.fahrenheit = 0
temp2.celsius = -17.77777777777778

temp2.fahrenheit = 100
temp2.celsius = 37.77777777777778
```

References

- Wikiversity: Computer Programming

Python Examples

DAVE BRAUNSCHWEIG

Objects

```
# This class converts temperature between Celsius and Fahrenheit.
# It may be used by assigning a value to either Celsius or Fahrenheit
# and then retrieving the other value, or by calling the to_celsius or
# to_fahrenheit methods directly.
#
# References:
#     https://www.mathsisfun.com/temperature-conversion.html
#     https://en.wikibooks.org/wiki/Python_Programming

class Temperature:
    _celsius = None
    _fahrenheit = None

    @property
    def celsius(self):
        return self._celsius

    @celsius.setter
    def celsius(self, value):
        self._celsius = float(value)
        self._fahrenheit = self.to_fahrenheit(self._celsius)

    @property
    def fahrenheit(self):
        return self._fahrenheit

    @fahrenheit.setter
    def fahrenheit(self, value):
        self._fahrenheit = float(value)
        self._celsius = self.to_celsius(self._fahrenheit)

    def __init__(self, celsius=None, fahrenheit=None):
        if celsius != None:
            self._celsius = celsius
            self._fahrenheit = self.to_fahrenheit(celsius)
```



```

        if fahrenheit != None:
            self._fahrenheit = fahrenheit
            self._celsius = self.to_celsius(fahrenheit)

    def to_celsius(self, fahrenheit):
        return (fahrenheit - 32) * 5 / 9

    def to_fahrenheit(self, celsius):
        return celsius * 9 / 5 + 32

# This program creates instances of the Temperature class to convert Cesium
# and Fahrenheit temperatures.

def main():
    temp1 = Temperature(celsius=0)
    print("temp1.celsius =", temp1.celsius)
    print("temp1.fahrenheit =", temp1.fahrenheit)
    print("")

    temp1.celsius = 100
    print("temp1.celsius =", temp1.celsius)
    print("temp1.fahrenheit =", temp1.fahrenheit)
    print("")

    temp2 = Temperature(fahrenheit=0)
    print("temp2.fahrenheit =", temp2.fahrenheit)
    print("temp2.celsius =", temp2.celsius)
    print("")

    temp2.fahrenheit = 100
    print("temp2.fahrenheit =", temp2.fahrenheit)
    print("temp2.celsius =", temp2.celsius)

main()

```

Output

```

temp1.celsius = 0
temp1.fahrenheit = 32.0

temp1.celsius = 100.0

```

```
temp1.fahrenheit = 212.0

temp2.fahrenheit = 0
temp2.celsius = -17.77777777777778

temp2.fahrenheit = 100.0
temp2.celsius = 37.77777777777778
```

References

- Wikiversity: Computer Programming

Swift Examples

DAVE BRAUNSCHWEIG

Objects

```
// This class converts temperature between Celsius and Fahrenheit.
// It may be used by assigning a value to either Celsius or Fahrenheit
// and then retrieving the other value, or by calling the ToCelsius or
// ToFahrenheit methods directly.

class Temperature {
    var _celsius:Double = 0
    var _fahrenheit:Double = 32

    init(celsius:Double?=nil, fahrenheit:Double?=nil) {
        if celsius != nil {
            self.celsius = celsius!
        }

        if fahrenheit != nil {
            self.fahrenheit = fahrenheit!
        }
    }

    var celsius: Double {
        get {
            return self._celsius
        }
        set {
            self._celsius = newValue
            self._fahrenheit = toFahrenheit(celsius:self._celsius)
        }
    }

    var fahrenheit: Double {
        get {
            return self._fahrenheit
        }
        set {
            self._fahrenheit = newValue
        }
    }
}
```

```

        self._celsius = toCelsius(fahrenheit:self._fahrenheit)
    }
}

func getCelsius() -> Double {
    return self.celsius
}

func setCelsius(celsius:Double) {
    self.celsius = celsius
    self.fahrenheit = toFahrenheit(celsius:celsius)
}

func getFahrenheit() -> Double {
    return self.fahrenheit
}

func setFahrenheit(fahrenheit:Double) {
    self.fahrenheit = fahrenheit
    self.celsius = toCelsius(fahrenheit:fahrenheit)
}

func toCelsius(fahrenheit:Double) -> Double {
    return (fahrenheit - 32) * 5 / 9
}

func toFahrenheit(celsius:Double) -> Double {
    return celsius * 9 / 5 + 32
}
}

// This program creates instances of the Temperature class to convert Celsius
// and Fahrenheit temperatures.
//
// References:
//     https://www.mathsisfun.com/temperature-conversion.html
//     https://developer.apple.com/library/content/documentation/Swift/Concept

func main() {
    let temp1 = Temperature(celsius:0);
    print("temp1.celsius = " + String(temp1.celsius));
    print("temp1.fahrenheit = " + String(temp1.fahrenheit));
    print("");
}

```

```

    temp1.celsius = 100;
    print("temp1.celsius = " + String(temp1.celsius));
    print("temp1.fahrenheit = " + String(temp1.fahrenheit));
    print("");

    let temp2 = Temperature(fahrenheit:0);
    print("temp2.fahrenheit = " + String(temp2.fahrenheit));
    print("temp2.celsius = " + String(temp2.celsius));
    print("");

    temp2.fahrenheit = 100;
    print("temp2.fahrenheit = " + String(temp2.fahrenheit));
    print("temp2.celsius = " + String(temp2.celsius));
}

main()

```

Output

```

temp1.celsius = 0.0
temp1.fahrenheit = 32.0

temp1.celsius = 100.0
temp1.fahrenheit = 212.0

temp2.fahrenheit = 0.0
temp2.celsius = -17.7777777777778

temp2.fahrenheit = 100.0
temp2.celsius = 37.7777777777778

```

References

- Wikiversity: Computer Programming

Practice

KENNETH LEROY BUSBEE

Learning Objectives

1. Understand key terms and definitions as listed in the modules associated with this chapter.
2. Gain an exposure to object-oriented programming.
3. Gain an exposure to high performance computing.
4. Given general instructions, write the C++ code for a program that includes a general review of the textbook/collection/course.

Review Questions

Answer the following statements as either true or false:

1. Procedural programming and object-oriented programming cannot be done with the same compiler/IDE.
2. Object-oriented programming encapsulates data and functions.
3. High Performance Computing is a new topic on the computer scene.
4. The concepts and examples of High Performance Computer are difficult to explain.
5. All programmers will need to know about parallel programming in the near future.

Answers:

1. false
2. true
3. false
4. false
5. true

Activities

Creating a Folder or Sub-Folder for Chapter 24 Files

Depending on your compiler/IDE, you should decide where to download and store source code files for processing. Prudence dictates that you create these folders as needed prior to downloading source code files. A suggested sub-folder for the Bloodshed Dev-C++ 5 compiler/IDE might be named:

- Chapter_24 within the folder named: Cpp_Source_Code_Files

If you have not done so, please create the folder(s) and/or sub-folder(s) as appropriate.

Download the Lab File(s)

Download and store the following file(s) to your storage device in the appropriate folder(s). You may need to right click on the link and select “Save Target As” in order to download the file.

Download from Connexions: Lab_24_Narrative_Description.txt

Detailed Lab Instructions

Read and follow the directions below carefully, and perform the steps in the order listed.

- Create a source code file following the directions in the Lab_24_Narrative_Description.txt file.
Name it: Lab_24.cpp
- Build (compile and run) your program.
- After you have successfully written this program, if you are taking this course for college credit, follow the instructions from your professor/instructor for submitting it for grading.

Problems

Problem 24a – Instructions

Describe the fundamental differences between procedural (modular structured) programming and object-oriented programming.

Problem 24b – Instructions

Explain why High Performance Computing is needed to predict tomorrow's weather.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

PART IX

REVIEW MATERIALS

Note to Reviewers:

Is an end-of-text review chapter necessary, or can students review content chapter by chapter?

- Review: Foundation Topics Group: 1-5
- Review: Modular Programming Group: 6-9
- Review: Structured Programming Group: 10-16
- Review: Intermediate Topics Group: 17-21
- Review: Advanced Topics Group: 22-24

Review: Foundation Topics Group: 1-5

KENNETH LEROY BUSBEE

Strategy Discussion

Exams vary depending on your instructor. Many will use the following:

1. Definitions
2. Self-grading questions including true/false, multiple choice, short answer, etc.
3. Problems

The materials in this textbook/collection have covered these items at the end of every chapter within the **Practice** module for that chapter. We suggest the following test preparation strategies:

1. If your professor is testing the definitions and expecting you to have them memorized, you should review the “Using the Flash Card Activity” within the “Study Habits that Build the Brain” module within the Appendix materials. Practice writing your definitions using the Flash Card Activity in the Memory Building Activities (MBAs) available within the **Practice** modules or in the Memory Building Activities within this **Review** module.
2. Do a quick review of any exercises within the Connexions modules or the **Practice** modules. Also review quizzes or exams that you have taken and pay special attention to making sure you understand why you missed a question.
3. If your professor has indicated that they might include a few of the problems presented within the **Practice** modules, make sure you have formulated a good answer for each problem. If authorized, collaborate with other students to improve your answers to the problems. Spend a moderate amount of time reviewing each problem with its answer before the exam.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Review: Modular Programming

Group: 6-9

KENNETH LEROY BUSBEE

Strategy Discussion

Exams vary depending on your instructor. Many will use the following:

1. Definitions
2. Self-grading questions including true/false, multiple choice, short answer, etc.
3. Problems

The materials in this textbook/collection have covered these items at the end of every chapter within the **Practice** module for that chapter. We suggest the following test preparation strategies:

1. If your professor is testing the definitions and expecting you to have them memorized, you should review the “Using the Flash Card Activity” within the “Study Habits that Build the Brain” module within the Appendix materials. Practice writing your definitions using the Flash Card Activity in conjunction with the Memory Building Activities (MBAs) available within the **Practice** modules or in the Memory Building Activities within this **Review** module.
2. Do a quick review of any exercises within the Connexions modules or the **Practice** modules. Also review quizzes or exams that you have taken and pay special attention to making sure you understand why you missed a question.
3. If your professor has indicated that they might include a few of the problems presented within the **Practice** modules, make sure you have formulated a good answer for each problem. If authorized, collaborate with other students to improve your answers to the problems. Spend a moderate amount of time reviewing each problem with its answer before the exam.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Review: Structured Programming

Group: 10-16

KENNETH LEROY BUSBEE

Strategy Discussion

Exams vary depending on your instructor. Many will use the following:

1. Definitions
2. Self-grading questions including true/false, multiple choice, short answer, etc.
3. Problems

The materials in this textbook/collection have covered these items at the end of every chapter within the **Practice** module for that chapter. We suggest the following test preparation strategies:

1. If your professor is testing the definitions and expecting you to have them memorized, you should review the “Using the Flash Card Activity” within the “Study Habits that Build the Brain” module within the Appendix materials. Practice writing your definitions using the Flash Card Activity in conjunction with the Memory Building Activities (MBAs) available within the **Practice** modules or in the Memory Building Activities within this **Review** module.
2. Do a quick review of any exercises within the Connexions modules or the **Practice** modules. Also review quizzes or exams that you have taken and pay special attention to making sure you understand why you missed a question.
3. If your professor has indicated that they might include a few of the problems presented within the **Practice** modules, make sure you have formulated a good answer for each problem. If authorized, collaborate with other students to improve your answers to the problems. Spend a moderate amount of time reviewing each problem with its answer before the exam.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Review: Intermediate Topics Group: 17-21

KENNETH LEROY BUSBEE

Strategy Discussion

Exams vary depending on your instructor. Many will use the following:

1. Definitions
2. Self-grading questions including true/false, multiple choice, short answer, etc.
3. Problems

The materials in this textbook/collection have covered these items at the end of every chapter within the **Practice** module for that chapter. We suggest the following test preparation strategies:

1. If your professor is testing the definitions and expecting you to have them memorized, you should review the “Using the Flash Card Activity” within the “Study Habits that Build the Brain” module within the Appendix materials. Practice writing your definitions using the Flash Card Activity in conjunction with the Memory Building Activities (MBAs) available within the **Practice** modules or in the Memory Building Activities within this **Review** module.
2. Do a quick review of any exercises within the Connexions modules or **Practice** modules. Also review quizzes or exams that you have taken and pay special attention to making sure you understand why you missed a question.
3. If your professor has indicated that they might include a few of the problems presented within the **Practice** modules, make sure you have formulated a good answer for each problem. If authorized, collaborate with other students to improve your answers to the problems. Spend a moderate amount of time reviewing each problem with its answer before the exam.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Review: Advanced Topics Group: 22-24

KENNETH LEROY BUSBEE

Strategy Discussion

Exams vary depending on your instructor. Many will use the following:

1. Definitions
2. Self-grading questions including true/false, multiple choice, short answer, etc.
3. Problems

The materials in this textbook/collection have covered these items at the end of every chapter within the **Practice** module for that chapter. We suggest the following test preparation strategies:

1. If your professor is testing the definitions and expecting you to have them memorized, you should review the “Using the Flash Card Activity” within the “Study Habits that Build the Brain” module within the Appendix materials. Practice writing your definitions using the Flash Card Activity in conjunction with the Memory Building Activities (MBAs) available within the **Practice** modules or in the Memory Building Activities within this **Review** module.
2. Do a quick review of any exercises within the Connexions modules or the **Practice** modules. Also review quizzes or exams that you have taken and pay special attention to making sure you understand why you missed a question.
3. If your professor has indicated that they might include a few of the problems presented within the **Practice** modules, make sure you have formulated a good answer for each problem. If authorized, collaborate with other students to improve your answers to the problems. Spend a moderate amount of time reviewing each problem with its answer before the exam.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

PART X

APPENDIX

Note to Reviewers:

The Appendix currently contains pages from the first edition that haven't found a home yet in this edition. Feel free to leave comments on any page that you believe belongs in this edition and include suggestions of where and how to integrate the page. Thanks!

- Abbreviated Precedence Chart for C++ Operators
- C++ Reserved Keywords
- ASCII Character Set
- Show Hide File Extensions
- Academic or Scholastic Dishonesty
- Successful Learning Skills
- Study Habits that Build the Brain

Conditional Operator

KENNETH LEROY BUSBEE

Overview

The conditional operator is unique in that it has three operands separated by two unconnected operator symbols. All other C++ operators are either unary (one operator and one operand) or binary (one operator and two operands). On the “Abbreviated Precedence Chart for C++ Operators” the conditional operator has the word “trinary” in the comments column. This prefix “tri” means three, thus three operands.

C++ Operator	Meaning	Comments
?:	conditional	trinary – three operands with two operators

As an operator it produces a value for the expression. An easy way to explain the conditional operator is to convert an “if then else” control structure to an expression using the conditional operator.

if then else

```
if (age > 17)
{
    cout << "You can vote.";
}
else
{
    cout << "You can't vote.";
}
```

conditional = option 1

```
age > 17 ? cout << "You can vote." : cout << "You can't vote.";
```

conditional = option 2

```
cout << (age > 17 ? "You can vote." : "You can't vote.");
```

The use of parentheses is needed because of the precedence of operators. The conditional expression is of lower precedence than the insertion (writing) operator.

The first operand is a **test expression** similar to those that control program flow in control structures. This type of expression is also known as a **Boolean expression** because they create a Boolean answer of true or false. If the test is true the second operand becomes the value of the

expression. If false, the third operand becomes the value of the expression. The operators of the question mark and colon separate the three operands.

general format

```
test expression ? expression true : expression false
```

Key Terms

conditional

A trinary C++ operator that acts like an if then else control structure.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Versatile Code with Typedef

KENNETH LEROY BUSBEE

Overview

Everyone seeks of ways to be more efficient in what they do. A farmer uses a tractor instead of a horse. A construction worker uses an air powered nail gun instead of a hammer. Programmers are no different than others, in that they are constantly improving their ability to produce correctly working programs. Some aspect of this is the use of modular/structured programming, proper documentation and following industry rules for a specific programming language. One example of efficient coding is letting the computer count the number of elements in an array. If we define an array:

```
int ages[] = {33,32,10,3};
```

We can use the following expression to calculate the number of members in the array:

```
sizeof ages / sizeof ages[0]
```

This type of **flexible coding** allows us to change the members of the array by adding or subtracting a values, like this:

```
int ages[] = {57,33,32,3,1};
```

Thus, we don't have to modify our code that uses the expression that calculates the number of member in the array.

One use of the **typedef** is to allow us to write code that can be quickly changed to handle different data types. There are several integer and floating-point data types that all store number values with different domains. If we write our code using some typedef statement, then our code becomes **versatile**. By changing only our typedef commands, our code can be used to process data of a different data type. This is demonstrated within the demo file provided, thus you need to study this material in conjunction with the demo program.

Demonstration Program in C++

Creating a Folder or Sub-Folder for Source Code Files

Depending on your compiler/IDE, you should decide where to download and store source code files for processing. Prudence dictates that you create these folders as needed prior to downloading source code files. A suggested sub-folder for the Bloodshed Dev-C++ 5 compiler/IDE might be named:

- Demo_Programs

If you have not done so, please create the folder(s) and/or sub-folder(s) as appropriate.

Download the Demo Program

Download and store the following file(s) to your storage device in the appropriate folder(s). Following the methods of your compiler/IDE, compile and run the program(s). Study the source

code file(s) in conjunction with other learning materials. You may need to right click on the link and select “Save Target As” in order to download the file.

Download from Connexions: Demo_Versatile_Array_Functions.cpp

Download from Connexions: Demo_Farm_Acres_Input.txt

Download from Connexions: Demo_Deposit_Checks_Input.txt

Key Terms

flexible coding

Using the sizeof operator to calculate the number of members in an array.

typedef

Allows the programmer to create an alias, or synonym, for an existing data type.

versatile

Easily modifying code to handle another data type.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Address Operator

KENNETH LEROY BUSBEE

Address Operator in C++

“Every variable is assigned a memory location whose address can be retrieved using the address operator &. The address of a memory location is called a pointer. Every variable in an executing program is allocated a section of memory large enough to hold a value of that variable’s type.”¹ Thus, whether the variables are global scope and use the data area for storage or local scope and use the stack for storage; you can ask the question at what address in the memory does this variable exist. Given an integer variable named age:

```
int age = 47;
```

We can use the **address operator** [which is the ampersand or &] to determine where it exists (or its address) in the memory by:

```
&age
```

This expression is a **pointer** data type. The concept of an address and a pointer are one in the same. A pointer points to the location in memory because the value of a pointer is the address where the data item resides in the memory.

The address operator is commonly used in two ways:

1. To do parameter passing by reference
2. To establish the value of pointers

Both of these items are covered in the supplemental links to this module.

You can print out the value of the address with the following code:

```
cout << &age;
```

This will by default print the value in hexadecimal. Some people prefer an integer value and to print it as an integer you will need to cast the address into a long data type:

```
cout << long (&age) ;
```

One additional tidbit, an array’s name is by definition a pointer to the array’s first element. Thus:

```
int iqs[] = {122, 105, 131, 97};
```

establishes “iqs” as a pointer to the array.

Key Terms

address operator

The ampersand or &.

pointer

A variable that holds an address as its value.

Footnotes

- 1 Tony Gaddis, Judy Walters and Godfrey Muganda, Starting Out with C++ Early Objects Sixth Edition (United States of America: Pearson – Addison Wesley, 2008) 597.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Conditional Compilation

KENNETH LEROY BUSBEE

Overview

As you proceed in your programming career, the problems/tasks that need solving become more complex. The documentation of the algorithm done in pseudo code (or some other method) will still need to be converted into a programming solution. Inevitably, when writing that source code mistakes will be introduced. When learning the syntax of a new programming language, programmers sometimes automatically think in their old language syntax, and make mistakes that are sometimes hard to detect.

The concept of using a flag to either activate or have remain dormant certain lines of code designed solely to help with the debugging of a program has existed since almost the beginning of modern computer programming (1950's). One of the debugging tools available within C++ is **conditional compilation**. For our flag, we would use a defined constant like:

```
#define DEBUG 1
```

Then using another compiler directive pair, the `#if` and `#endif`, we can have the compiler during the pre-processor either include or not include one or more lines of code.

```
#if DEBUG
    cout << "\n***** DEBUG Code ** Hi mom!";
#endif
```

Of course saying "Hi mom!" is not very useful for debugging your code. However, you can use test data with conditional compilation. A series of input data values and a series of output predictors can be placed in the program. Then you can turn on the debug feature or turn them off with your debugging flag.

You should study the demonstration program in conjunction with this module.

Demonstration Program in C++

Creating a Folder or Sub-Folder for Source Code Files

Depending on your compiler/IDE, you should decide where to download and store source code files for processing. Prudence dictates that you create these folders as needed prior to downloading source code files. A suggested sub-folder for the Bloodshed Dev-C++ 5 compiler/IDE might be named:

- Demo_Programs

If you have not done so, please create the folder(s) and/or sub-folder(s) as appropriate.

Download the Demo Program

Download and store the following file(s) to your storage device in the appropriate folder(s). Following the methods of your compiler/IDE, compile and run the program(s). Study the source code file(s) in conjunction with other learning materials. You may need to right click on the link and select “Save Target As” in order to download the file.

Download from Connexions: Demo_Conditional_Compliation.cpp

Key Terms

conditional compilation

A compiler directive that includes or excludes lines of code based on a Boolean expression.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Bloodshed Dev-C++ 5 Compiler/IDE

KENNETH LEROY BUSBEE

Introduction

Microsoft and Borland are the two reputable names within the programming world for compilers. They sell compiler software for many programming languages. For the C++ programming language, the Microsoft Visual Studio which includes C++ and Borland C++ Builder are excellent compilers. Often with textbooks or free via the internet; you can get Microsoft's Visual C++ Express or Borland's Personal Edition version of a compiler. However, installing either of these compilers can be complex. Microsoft's Visual Studio compiler often creates a variety of installation problems (such as making sure the operating system and .net components are current) thus making it difficult for students to install at home. These compilers require you to build a project to encompass every program. Using a commercially sold compiler that professional programmers would consider using for project development is fine for professionals but often confusing to beginners. Eventually, if you are going to become a professional programmer, you will need to become familiar with the commercially sold compilers.

We suggest that beginning students consider one of the easier to install compiler software packages for use in a programming fundamentals course. The best option we have found is an **open source** compiler/IDE (Integrated Development Environment) named: Bloodshed Dev-C++ 5 compiler/IDE.

open source

Group development of source code for software that is made available to the public at no cost.

Bloodshed Dev-C++ 5 compiler/IDE

Advantages: Can be installed on Windows 95/98/NT/2000/XP operating systems. I have it installed on Windows Vista operating system, thus it can work with slower processors and almost any Windows operating system. It only requires about 80 MB of storage space (usually enough for the compiler with all of its files and storage room for several of your programs). It is very easy to install and easy to use. Does not require the use of a "project"; thus individual source code files can be easily compiled.

Disadvantages: Would not normally be used by professional programmers, but is sufficient for a beginning computer programming course and is a full-featured compiler/IDE.

Unique Advantage: Can be installed and run on a flash drive, thus giving the student the ability to work on their lab assignments on any computer that has a USB port. This can give the student **portability**, being able to do lab assignments at home, work, library, open lab, classroom, friend's house, etc.

portability

The ability to transport software on a flash drive and thus use it on various machines.

Preparation before Installation

Creating the Needed Folders and Sub-Folders

You need to get the **software** and a C++ **source code** program that has been tested and is error free. You will need about 80MB of storage space. We suggest that you create **two folders** on your hard drive or flash drive depending on which installation you choose. If on a flash drive create them at the root level of the drive. If on your home machine, you can use the folder area set up by the operating system for you as a user. Name them:

- Cpp_Software_Download
- Cpp_Source_Code_Files

Within the Cpp_Source_Code_Files folder, create a sub-folder named:

- Compiler_Test

To help you keep files organized, you will want to create other sub-folders for storing source code files. We suggest you create at least two other sub-folder to be used with Connexions' related modules. Within the Cpp_Source_Code_Files, create sub-folders named:

- Demo_Programs
- Monitor_Header

folder

A named area for storage of documents or other files on a disk drive or flash drive.

source code

Any collection of statements or declarations written in some human-readable computer programming language.

Getting the Software

The full version of the software is named: Dev-C++ 5.0 beta 9.2 (4.9.9.2) (9.0 MB) with Mingw/GCC 3.4.2 You can either download it from Bloodshed or download the version as of 12/8/2008 that is stored on the Connexions web site. Store it in the Cpp_Software_Download folder you created. The software is approximately 9.1 MB and will take several minutes to download if you are using a dial-up modem connection.

The software has not significantly changed since 2007 and the Connexions version will be sufficient for most users. The Bloodshed link requires some additional navigation to get to the software download. Thus, because it is significantly easier, we recommend that you download the software from the Connections web site.

Link to Bloodshed: <http://www.bloodshed.net/dev/devcpp.html>

Download from Connexions: devcpp-4.9.9.2_setup.exe

Getting a C++ Source Code File

Listed below is a C++ source code file titled: Compiler_Test.cpp It has been prepared for Connexions

web delivery. Download and store it in the Compiler_Test sub-folder you created. You may need to right click on the link and select "Save Target As" in order to download the file.

Download from Connexions: Compiler_Test.cpp

Installation Instructions for Bloodshed Dev-C++ 5 compiler/IDE

The Version 5 which is well tested (don't let the beta release scare you) and should work on a variety of machines and various Microsoft Operating systems including Windows 98, Windows 2000, Windows XP and Windows Vista. Below are installation instructions for installing it on a machine or installing it on a flash drive. We don't suggest trying to switch between the machine drive and flash drive. If it is installed on the machine drive and you try installing it on a flash drive, it creates problems and will not work properly. Either install it on the flash drive to gain your portability or install it on your machine.

Computer Installation Instructions

1. Navigate to the Cpp_Software_Download folder and run the devcpp-4.9.9.2_setup.exe software by double clicking on the filename.
2. Use common sense and answer the installation prompts. NOTE THE FOLLOWING TWO ITEMS:
3. When it gets to the "Choose Install Location" use the default software location of: C:\Dev-Cpp\ (or select the location you want to store the installed program but use the default unless you are familiar with installing software).
4. When it asks: "Do you want to install Dev C++ for all users on this computer?" answer "Yes".
5. After it installs, it will ask some "first time configuration" questions. Again, use common sense and answer the questions. NOTE THE FOLLOWING ITEM:
6. Answer "No" to the retrieve information from header files.
7. It will start your compiler/IDE with a "Tip of the day". We suggest you check the box in the lower left and select "Close".
8. Close your compiler/IDE by using the normal red "X" box. We want to show you how to start your compiler normally.
9. You start your compiler software similar to starting any software loaded on your machine ("Start" then "All Programs" then "Bloodshed Dev-C++" then "Dev-C++").
10. On the menus at the top – Select "File" then "Open project or file" then navigate to where your source code file (Compiler_Test.cpp) is stored on your hard drive. See the suggested folder name above. Select the source code file and open it.
11. You should see the source code listing. Press F9 key or select the "Execute" then "Compile & Run" from the menus at the top. A black screen box should appear and you answer questions appropriately to run the program. When you are done running your program the black screen box goes away.

Flash Drive Installation Instructions

1. Navigate to the Cpp_Software_Download folder and run the devcpp-4.9.9.2_setup.exe software by double clicking on the filename.
2. Use common sense and answer the installation prompts. NOTE THE FOLLOWING TWO ITEMS:
3. When it gets to the "Choose Install Location" you can see that the default software location of: C:\Dev-Cpp\ however, it needs to be changed. Change the "Destination Directory" by selecting changing the default software location from: C:\Dev-Cpp\ to DriveLetter:\Dev-Cpp\ (where the DriveLetter is the drive that represents your flash drive).

4. When it asks: “Do you want to install Dev C++ for all users on this computer?” answer “No”.
5. After it installs, it will ask some “first time configuration” questions. Again, use common sense and answer the questions. NOTE THE FOLLOWING ITEM:
6. Answer “No” to the retrieve information from header files.
7. It will start your compiler/IDE with a “Tip of the day”. We suggest you check the box in the lower left and select “Close”.
8. Close your compiler/IDE by using the normal red “X” box. We want to show you how to start your compiler normally.
9. To start your compiler software you navigate to the “Dev-Cpp” folder on your flash drive and select the “devcpp.exe” application. NOTE: When using the flash drive you should not try starting the compiler by double clicking on a C++ source code file. This method works on a machine installation but does not work on a flash drive installation.
10. On the menus at the top – Select “File” then “Open project or file” then navigate to where your source code file (Compiler_Test.cpp) is stored on your flash drive. See the suggested folder name above. Select the source code file and open it.
11. You should see the source code listing. Press F9 key or select the “Execute” then “Compile & Run” from the menus at the top. A black screen box should appear and you answer questions appropriately to run the program. When you are done running your program the black screen box goes away.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Recursion vs Iteration

KENNETH LEROY BUSBEE

Overview

Discussion

Repetitive Algorithms

"In general, there are two approaches to writing repetitive algorithms. One uses loops; the other uses recursion. **Recursion** is a repetitive process in which a function calls itself. Both approaches provide repetition, and either can be converted to the other's approach."¹ Iteration is one of the categories of control structures. It allows for the processing of some action zero to many times. Iteration is also known as looping and repetition. The math term "to iterate" means to perform the statement parts of the loop. Many problems/tasks require the use of repetitive algorithms. With most programming languages this can be done with either:

1. looping control structures, specifically the for loop (an iterative approach)
2. recursive calling of a function

Using repetitive algorithms as the solution method occurs in many mathematical oriented problems. These include factorial, Fibonacci numbers, and the Towers of Hanoi problem. Solutions to these problems are often only presented in terms of using the recursive method. However, "... you should understand the two major limitations of recursion. First, recursive solutions may involve extensive overhead because they use function calls. Second, each time you make a call you use up some of your memory allocation. If the recursion is deep – that is, if there is a large number of recursive calls – then you may run out of memory. Both the factorial and Fibonacci numbers solutions are better developed iteratively."²

Understanding how recursion or the iterative approaches work will be left to others. They are usually covered in detail as part of studying data structures. Our goal in covering them is to:

1. Provide you with a definition of recursion
2. Introduce the alternate solution approach of iteration

The following demonstration program shows both solutions for 8! (eight factorial).

Demonstration Program in C++

Creating a Folder or Sub-Folder for Source Code Files

Depending on your compiler/IDE, you should decide where to download and store source code files for processing. Prudence dictates that you create these folders as needed prior to downloading source code files. A suggested sub-folder for the Bloodshed Dev-C++ 5 compiler/IDE might be named:

- Demo_Programs

If you have not done so, please create the folder(s) and/or sub-folder(s) as appropriate.

Download the Demo Program

Download and store the following file(s) to your storage device in the appropriate folder(s). Following the methods of your compiler/IDE, compile and run the program(s). Study the source code file(s) in conjunction with other learning materials.

Download from Connexions: Demo_Factorial.cpp

Key Terms

factorial

A math problem that often is solved using recursion.

recursion

A repetitive process in which a function calls itself.

Footnotes

- 1 Behrouz A. Forouzan and Richard F. Gilberg, Computer Science A Structured Approach using C++ Second Edition (United States of America: Thompson – Brooks/Cole, 2004) 265.
- 2 Behrouz A. Forouzan and Richard F. Gilberg, Computer Science A Structured Approach using C++ Second Edition (United States of America: Thompson – Brooks/Cole, 2004) 272.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Practice

KENNETH LEROY BUSBEE

Learning Objectives

1. Understand key terms and definitions as listed in the modules associated with this chapter.
2. Understand how typedef is used within C++ source code be able make the code versatile that is easy to change for different data types.

Review Questions

Answer the following statements as either true or false:

1. Most programmers rarely worry about efficiency.
2. Modular/structured programming helps improve efficiency.
3. Flexible coding helps improve efficiency.
4. Who cares about indentation and alignment within source code. It's a waste of time.
5. Versatile code is a concept that is easy to understand.

Answers:

1. false – Efficiency of code execution, no; efficiency of code production and maintenance, yes.
2. true
3. true
4. false
5. maybe true and maybe false – It does require some effort to catch on to how it works.

Activities

Creating a Folder or Sub-Folder for Chapter 18 Files

Depending on your compiler/IDE, you should decide where to download and store source code files for processing. Prudence dictates that you create these folders as needed prior to downloading source code files. A suggested sub-folder for the Bloodshed Dev-C++ 5 compiler/IDE might be named:

- Chapter_21 within the folder named: Cpp_Source_Code_Files

If you have not done so, please create the folder(s) and/or sub-folder(s) as appropriate.

Download the Lab File(s)

Download and store the following file(s) to your storage device in the appropriate folder(s). You may need to right click on the link and select “Save Target As” in order to download the file.

Download from Connexions: Lab_21_Narrative_Description.txt

Download from Connexions: Lab_21_Input.txt

Detailed Lab Instructions

Read and follow the directions below carefully, and perform the steps in the order listed.

- Create a source code file following the directions in the Lab_21_Narrative_Description.txt file.
Name it: Lab_21.cpp
- Build (compile and run) your program.
- After you have successfully written this program, if you are taking this course for college credit, follow the instructions from your professor/instructor for submitting it for grading.

Problems

Problem 21a – Instructions

Explain the difference between flexible coding and versatile coding.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Parameter Passing by Reference

KENNETH LEROY BUSBEE

Overview

When we pass parameters to functions we usually pass by value; that is the calling function provides several values to the called function as needed. The called function takes these values which have local scope and stores them on the stack using them as needed for whatever processing the functions accomplishes. This is the preferred method when calling user defined specific task functions. The called function passes back a single value as the return item if needed. This has the advantage of a closed communications model with everything being neatly passed in as values and any needed item returned back as a parameter.

By necessity there are two exceptions to this closed communications model:

1. When we need more than one item of information returned by the function
2. When a copy of an argument cannot reasonably or correctly be made (example: file stream objects).

These exceptions are handled by parameter passing by reference instead of passing a value. The item passed is called a **reference variable** and it represents a concept of an alias for the variable. Any change made to the reference variable is actually performed on the variable that it represents. The symbol of the ampersand is used to designate the reference variable (and it is associated with the address operator).

parameter passing by reference

```
// prototype
void process_values(int qty_dimes, int qty_quarters, double &value_dimes, d

// variable definitions
int      dimes = 45;
int      quarters = 33;
double   value_dimes;
double   value_quarters;

// somewhere in the function main
process_values(dimes, quarters, value_dimes, value_quarters);

// definition of the function
void process_values(int qty_dimes, int qty_quarters, double &value_dimes, d
{
    value_dimes = dimes * 0.10;
    value_quarters = quarters * 0.25;
}
```

The ampersand must appear in both the prototype and the function definition but it does not appear in the function call.

The above example shows the basic mechanics of parameter passing by reference. You should study the demonstration program in conjunction with this module.

Key Terms

reference variable

Used with parameter passing by reference.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Practice

KENNETH LEROY BUSBEE

Learning Objectives

1. Understand key terms and definitions as listed in the modules associated with this chapter.
2. Have an exposure to multidimensional arrays.
3. Understand conditional compilation as a testing technique.
4. When supplied with test data, add conditional compilation lines to an existing C++ source code.

Review Questions

Answer the following statements as either true or false:

1. Very few arrays need more than one axis.
2. Multidimensional arrays use multiple square brackets, one set per axis.
3. Using a flag to activate debugging lines of code has been around since the 1950s.
4. Within C++ we can use the conditional compilation compiler directives to implement debugging line of code.

Answers:

1. false
2. true
3. true
4. true

Activities

Creating a Folder or Sub-Folder for Chapter 23 Files

Depending on your compiler/IDE, you should decide where to download and store source code files for processing. Prudence dictates that you create these folders as needed prior to downloading source code files. A suggested sub-folder for the Bloodshed Dev-C++ 5 compiler/IDE might be named:

- Chapter_23 within the folder named: Cpp_Source_Code_Files

If you have not done so, please create the folder(s) and/or sub-folder(s) as appropriate.

Download the Lab File(s)

Download and store the following file(s) to your storage device in the appropriate folder(s). You may need to right click on the link and select “Save Target As” in order to download the file.

Download from Connexions: Lab_23a.cpp

Detailed Lab Instructions

Read and follow the directions below carefully, and perform the steps in the order listed.

- Compile and run the Lab_23a.cpp source code file. Understand how it works.
- Copy the source code file Lab_23a.cpp naming it: Lab_23b.cpp
- Add conditional compilation statements similar to the demonstration program used in the Conditional Compilation Connexions module. Specifically use: 157 pennies, 92 nickels, 23 dimes and 31 quarters as your test data.
- Build (compile and run) your program.
- After you have successfully written this program, if you are taking this course for college credit, follow the instructions from your professor/instructor for submitting it for grading.

Problems

Problem 23a – Instructions

Give three examples in the real world where data might be structured into a multidimensional array. One example (and you can't count it) is a theatre ticket which might have a section, row and seat number on it.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Abbreviated Precedence Chart for C++ Operators

KENNETH LEROY BUSBEE

An operator is a language-specific syntactical token (one or more symbols) that causes an action to be taken on one or more operands. The following item provides an abbreviated list of those C++ operators that are typically taught in a programming fundamentals course that teaches modular structured programming concepts.

The first column shows the precedence (the higher precedence is 1 or it goes first) and operators that have the same precedence also have the same associativity (the associativity is only listed once for the group of operators). Decrement is two minus signs, but some word processing software programs might have problems printing two minus signs and convert it to a double dash. Insertion (two < signs) and extraction (two > signs) might also have printing problems. These printing problems are noted in the comments with **emphasized** text.

PR	OPERATOR NAME	SYMBOL(S)	COMMENTS	ASSOCIATIVITY	CONNEXIONSMODULE
1	function call	()		Left to Right	m19145
1	index	[]	aka array index		m21316
2	class member	.	a period	Right to Left	m20796
2	postfix increment	++	unary		m20499
2	postfix decrement	—	unary, two minus signs		m20499
3	indirection	*	unary, aka dereference	Right to Left	m22152
3	address	&	unary		m22148
3	unary positive	+	unary, aka plus		m20501
3	unary negative	—	unary, aka minus		m20501
3	prefix increment	++	unary		m20499
3	prefix decrement	—	unary, two minus signs		m20499
3	cast	(type)	unary		m18744
3	sizeof	sizeof (type)	unary		m18736
3	logical NOT	!	unary		m19847
4	multiply	*		Left to Right	m18706
4	divide	/			m18706
4	modulus	%	remainder		m18706
5	add	+		Left to Right	m18706
5	subtract	—			m18706
6	insertion	<<	writing, two less than signs	Left to Right	m18835
6	extraction	>>	reading, two greater than signs		m18835
7	less than	<		Left to Right	m19549
7	greater than	>			m19549
7	less than or equal to	<=			m19549
7	greater than or equal to	>=			m19549
8	equality	==	equal to	Left to Right	m19549
8	inequality	!=	not equal to		m19549
9	logical AND	&&		Left to Right	m19847
10	logical OR			Left to Right	m19847
11	conditional	? :	ternary	Left to Right	m20811
12	assignment	=		Right to Left	m18725

12	addition assignment	+=		m18743
12	subtraction assignment	-=		m18743
12	multiplication assignment	*=		m18743
12	division assignment	/=		m18743
12	modulus assignment	%=		m18743
13	sequence or comma	,	Left to Right	m18690

References

- [cnx.org: Programming Fundamentals – A Modular Structured Approach using C++](https://cnx.org/Programming-Fundamentals-A-Modular-Structured-Approach-using-C++)

Practice

KENNETH LEROY BUSBEE

Learning Objectives

1. Understand key terms and definitions as listed in the modules associated with this chapter.
2. Understand the conditional operator and how it works.
3. Understand recursion as a problem solving technique.
4. When feasible, be able to convert C++ source code from a conditional expression to an if then else and vice versa.

Review Questions

Answer the following statements as either true or false:

1. The conditional expression acts like a case structure.
2. The conditional operator is a two part operator with three operands.
3. Recursion is one method of implementing a repetitive algorithm.
4. Recursion is always preferred over an iterative approach to a repetitive problem.
5. Factorial is usually demonstrated with an iterative approach.

Answers:

1. false
2. true
3. true
4. false
5. false

Activities

Creating a Folder or Sub-Folder for Chapter 17 Files

Depending on your compiler/IDE, you should decide where to download and store source code files for processing. Prudence dictates that you create these folders as needed prior to downloading source code files. A suggested sub-folder for the Bloodshed Dev-C++ 5 compiler/IDE might be named:

- Chapter_17 within the folder named: Cpp_Source_Code_Files

If you have not done so, please create the folder(s) and/or sub-folder(s) as appropriate.

Download the Lab File(s)

Download and store the following file(s) to your storage device in the appropriate folder(s). You may need to right click on the link and select "Save Target As" in order to download the file.

Download from Connexions: Lab_17a.cpp

Detailed Lab Instructions

Read and follow the directions below carefully, and perform the steps in the order listed.

- Compile and run the Lab_17a.cpp source code file. Understand how it works.
- Copy the source code file Lab_17a.cpp naming it: Lab_17b.cpp
- Convert the code that is using the if then else to a conditional expression.
- Convert the code that is using the conditional expression to an if then else.
- Build (compile and run) your program.
- After you have successfully written this program, if you are taking this course for college credit, follow the instructions from your professor/instructor for submitting it for grading.

Problems

Problem 17a – Instructions

Using proper C++ syntax, convert the following if then else to a conditional expression.
if then else

```
if (x == y)
{
    z = 14;
}
else
{
    z++;
}
```

Problem 17b – Instructions

Using proper C++ syntax, convert the following conditional expression to an if then else.
conditional

```
answer = y < z ? 47 : 92;
```

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Pointer Data Type

KENNETH LEROY BUSBEE

Pointer Data Type in C++

A **pointer** variable is a variable that holds the address of a memory location. “Every variable is assigned a memory location whose address can be retrieved using the address operator &. The address of a memory location is called a pointer.”¹ The **pointer data type** allows us to designate a variable to hold an address or a pointer. The concept of an address and a pointer are one in the same. A pointer points to the location in memory because the value of a pointer is the address where the data item resides in the memory. Given an integer variable named age:

```
int age = 47;
```

We can create a pointer variable and establish its value which would be the done using the address operator [which is the ampersand or &] by:

```
int * int_pointer = &age;
```

The asterisk is used to designate that the variable int_pointer is an integer pointer [int *]. This means that whenever we use the variable int_pointer that the compiler will know that it is a pointer that points to an integer.

In order to use pointers you will need to understand the indirection operator which is covered a supplemental link.

Key Terms

pointer

A variable that holds an address as its value.

Footnotes

- 1 Tony Gaddis, Judy Walters and Godfrey Muganda, Starting Out with C++ Early Objects Sixth Edition (United States of America: Pearson – Addison Wesley, 2008) 597.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

C++ Reserved Keywords

KENNETH LEROY BUSBEE

All programming languages have “reserved words”. There are usually less than 50 of these reserved words in any given programming language. They are reserved because they have been pre-assigned a specific meaning within that programming language, thus the compiler recognizes those words to mean a specific thing or action. Within C++ the reserved words are also known as “keywords”.

Programmers use identifier names for a variety of items, to include: functions, variables, named constants, alias names, etc. But, they can’t use as identifier names the words that are “reserved to the language”.

For the C++ language all “reserved keywords” are typed in lower case. The list that follows includes the American National Standards Institute (ANSI) and the International Organization for Standardization (ISO) lists of reserved words for the C++ programming language. The ISO reserved words may not be implemented in the compiler that you are using, however they may be adopted in future releases of C++ compilers. Wisdom dictates to avoid using them at this point so that there will not be a problem compiling your source code in future releases of compilers. There has been no distinction made in the ANSI or ISO reserved word lists. A search of the Internet for C++ reserved words will reveal several different lists. Some are more unique to a specific compiler. Some will be incomplete because the list has been enlarged. The table that follows should work for any beginning programming course using C++. The reserved keywords are:

and	double	not_eq	throw
and_eq	dynamic_cast	operator	true
asm	else	or	try
auto	enum	or_eq	typedef
bitand	explicit	private	typeid
bitor	extern	protected	typename
bool	false	public	union
break	float	register	unsigned
case	for	reinterpret_cast	using
catch	friend	return	virtual
char	goto	short	void
class	if	signed	volatile
compl	inline	sizeof	wchar_t
const	int	static	while
const_cast	long	static_cast	xor
continue	mutable	struct	xor_eq
default	namespace	switch	
delete	new	template	
do	not	this	

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Indirection Operator

KENNETH LEROY BUSBEE

Indirection Operator in C++

When we pass parameters to functions we usually pass by value; that is the calling function provides several values to the called function as needed. The called function takes these values which have local scope and stores them on the stack using them as needed for whatever processing the functions accomplishes. This is the preferred method when calling user defined specific task functions. The called function passes back a single value as the return item if needed. This has the advantage of a closed communications model with everything being neatly passed in as values and any needed item returned back as a parameter.

By necessity there are two exceptions to this closed communications model:

1. When we need more than one item of information returned by the function
2. When a copy of an argument cannot reasonably or correctly be made (example: file stream objects).

These exceptions could be handled by parameter passing by reference instead of passing a value. Although different syntax than parameter passing when using a reference variable; using a pointer variable and the **indirection operator** can accomplish the same effect. The indirection operator is the asterisk or the character that we also use for multiplication. The concept of indirection is also known as **dereferencing**, meaning that we are not interested in the pointer but want the item to which the address is referring or referencing.

parameter passing with pointers

```
// prototype
void process_values(int qty_dimes, int qty_quarters, double * ptr_value_dim

// variable definitions
int      dimes = 45;
int      quarters = 33;
double   value_dimes;
double   value_quarters;
double * ptr_value_dimes = &value_dimes;
double * ptr_value_quarters = &value_quarters;

// somewhere in the function main
process_values(dimes, quarters, ptr_value_dimes, ptr_value_quarters);

// definition of the function
void process_values(int qty_dimes, int qty_quarters, double * ptr_value_dim
{
    * ptr_value_dimes = dimes * 0.10;
```



```
* ptr_value_quarters = quarters * 0.25;
}
```

The asterisk and must appear in both the prototype and the function definition when defining the pointer variables but it does not appear in the function call when the pointers are passed into the function.

The above example shows the basic mechanics of the indirection operator.

The use of pointers with indirection is often preferred for processing arrays. The **array index operator** is also known as the **array method of dereferencing**. The following couts are equivalent:

```
int ages[] = {47, 45, 18, 11, 9};
cout << ages[3];
cout << *(ages + 3);
```

Both say, “The name of an array is a pointer; take the pointer and calculate a new address that points to the 3rd offset by adding the correct number of bytes onto the pointer (integer data type is normally 4 bytes long – 3 offsets times 4 bytes is 12 bytes); then dereference that pointer (since this is an Rvalue context – fetch me the value that you are pointing at) and send it to the standard output device.”

You should study the demonstration programs in conjunction with this module.

Demonstration Program in C++

Creating a Folder or Sub-Folder for Source Code Files

Depending on your compiler/IDE, you should decide where to download and store source code files for processing. Prudence dictates that you create these folders as needed prior to downloading source code files. A suggested sub-folder for the Bloodshed Dev-C++ 5 compiler/IDE might be named:

- Demo_Programs

If you have not done so, please create the folder(s) and/or sub-folder(s) as appropriate.

Download the Demo Program

Download and store the following file(s) to your storage device in the appropriate folder(s). Following the methods of your compiler/IDE, compile and run the program(s). Study the source code file(s) in conjunction with other learning materials. You may need to right click on the link and select “Save Target As” in order to download the file.

Download from Connexions: Demo_Pointer_Passing.cpp

Download from Connexions: Demo_Array_Pointer_Processing.cpp

Key Terms

dereferencing

The concept of using the item to which a pointer or address is pointing at.

indirection operator

The asterisk used for dereferencing a pointer.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

ASCII Character Set

KENNETH LEROY BUSBEE

ASCII stands for American Standard Code for Information Interchange (pronounced “ask-key”). Computers can only understand numbers, so an ASCII code is the numerical representation of a character such as ‘a’ or ‘@’ or an action of some sort. ASCII was developed a long time ago and now the non-printing characters are rarely used for their original purpose. The first 32 values (0 to 31) and the last value (127) are the non-printing characters.

Several software products can be used to create an ASCII text file.

- Notepad within Windows OS and it uses by default the .txt extension.
- Microsoft Word by saving the file as ‘text only’ and it uses by default the .txt extension.
- Integrated Development Environment (IDE) compilers for most programming languages usually save source code as ASCII text files but they will use an extension that describes the content of the text file. Example: C++ usually uses .cpp as the extension.

The following web links provide more information and tables listing the ASCII Character Set:

- <http://asciiset.com/>
- <http://www.asciitable.com/>
- <http://en.wikipedia.org/wiki/ASCII>

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Typedef - An Alias

KENNETH LEROY BUSBEE

Overview

Discussion

The typedef statement allows the programmer to create an alias, or synonym, for an existing data type. This can be useful in documenting a program. The C++ programming language syntax is:

```
typedef <the real data type> <the alias identifier name>;
```

Let's say a programmer is using a double data type to store the amount of money that is being used for various purposes in a program. They might define the variables as follows:

Regular Definition of Variables

```
double  income;  
double  rent;  
double  vacation;
```

However, they might use the typedef statement and define the variables as follows:

Using typedef when Defining Variables

```
typedef double cash;  
the typedef must be defined before its use  
cash  income;  
cash  rent;  
cash  vacation;
```

The typedef statement is not used very often by beginning programmers. It usually creates more confusion than needed, thus stick to using the normal data types at first.

Key Terms

typedef

Allows the programmer to create an alias, or synonym, for an existing data type.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Practice

KENNETH LEROY BUSBEE

Learning Objectives

1. Understand key terms and definitions as listed in the modules associated with this chapter.
2. Acquire a general understanding of the pointer data type, the address and indirection operators, the concept of dereferencing.
3. Given pseudocode, write the C++ code for a program that uses reference variables.

Review Questions

Answer the following statements as either true or false:

1. The address operator is the @ symbol.
2. Passing by reference should be used when there is only one item to be modified.
3. Variables of pointer data type are defined using an asterisk.
4. Using pointers with the indirection operator can be used instead of passing variables by reference.
5. There are two kinds of dereferencing – one with the indirection operator and the other with the index operator.

Answers:

1. false
2. false
3. true
4. true
5. true

Activities

Creating a Folder or Sub-Folder for Chapter 22 Files

Depending on your compiler/IDE, you should decide where to download and store source code files for processing. Prudence dictates that you create these folders as needed prior to downloading source code files. A suggested sub-folder for the Bloodshed Dev-C++ 5 compiler/IDE might be named:

- Chapter_22 within the folder named: Cpp_Source_Code_Files

If you have not done so, please create the folder(s) and/or sub-folder(s) as appropriate.

Download the Lab File(s)

Download and store the following file(s) to your storage device in the appropriate folder(s). You may need to right click on the link and select “Save Target As” in order to download the file.

Download from Connexions: Lab_22_Pseudocode.txt

Detailed Lab Instructions

Read and follow the directions below carefully, and perform the steps in the order listed.

- Create a source code file from the Lab_22_Pseudocode.txt file. Name it: Lab_22.cpp
- Build (compile and run) your program.
- After you have successfully written this program, if you are taking this course for college credit, follow the instructions from your professor/instructor for submitting it for grading.

Problems

Problem 22a – Instructions

Give a general explanation of the pointer data type and the use of addresses and dereferencing. Include both the indirection operator and the index operator in your discussion.

References


- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Show Hide File Extensions

KENNETH LEROY BUSBEE

By default, file extensions for known file types are hidden in Windows operating systems. However, you can change this setting so that file extensions are shown for all file types. Being able to see file extensions can be very helpful for students taking computer courses because those course instructions often refer to file extensions.

All Windows operating systems navigate you to the “Folder Options” menu, then have you select the “View” tab. Indeed the box is identical in Windows XP, Windows Vista and Windows 7.

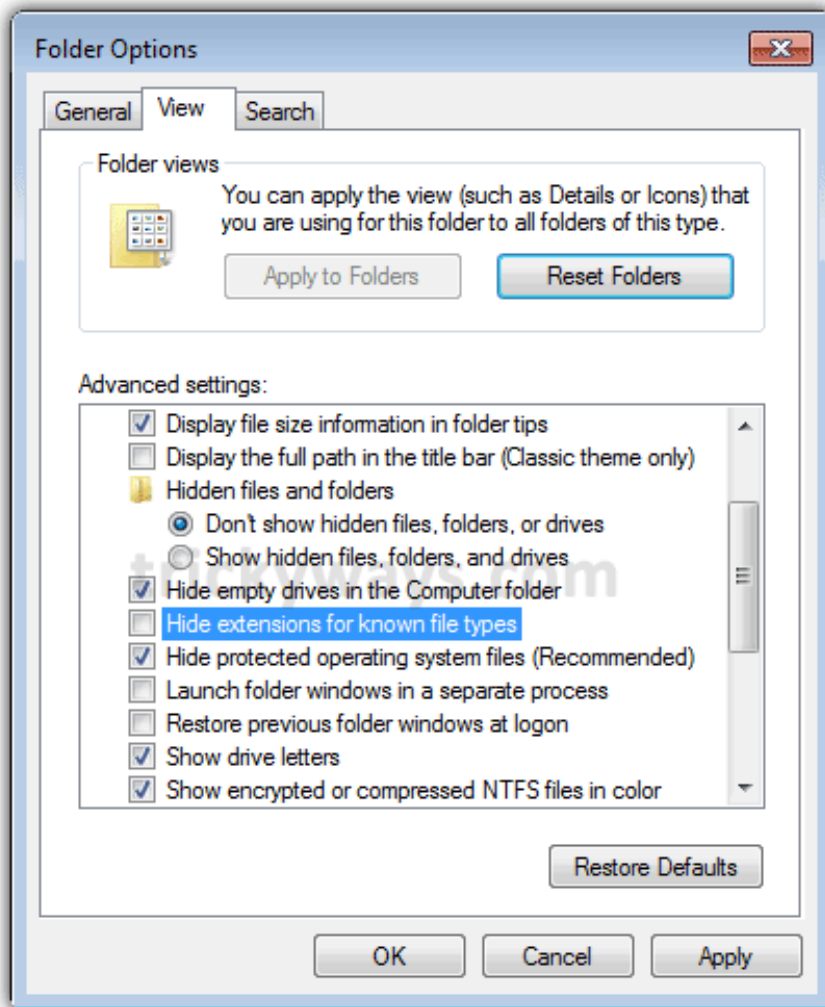

The check in the box acts like a toggle switch. With a check present, it will hide known file types. Without the check present, it will show all file types. Click on the box to make the check appear [hide file extensions] or disappear [show file extensions] and then select “OK”.

Instructions for navigating to the “Folder Options” for various Windows operating systems along with an Internet link for additional help are provided below.

Windows XP

With the Windows Explorer open, select the “Tools” tab and then “Folder Options”.

Link for additional help: <http://www.fileinfo.net/help/windows-show-extensions.html> or <http://dotwhat.net/page/displayextensions/>

Windows Vista

Select the “Start” button, then “Control Panel”, then “Appearance and Personalization” and then “Folder Options”.

Link for additional help: <http://windows.microsoft.com/en-us/windows-vista/Show-or-hide-file-name-extensions>

Windows 7

Select the “Start” button, then “Control Panel” and then “Folder Options”.

Link for additional help: <http://maximumpcguides.com/windows-7/hide-file-extensions/>

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Understanding High Performance Computing

KENNETH LEROY BUSBEE

Preface – November 13, 2009

This module was created as an entry for the **2008-'09 Open Education Cup: High Performance Computing** competition. The competition was supervised by Dr. Jan Erik Odegard, Executive Director of the Ken Kennedy Institute for Information Technology at Rice University. It was submitted to the “Parallel Algorithms and Applications” category and specifically designed as an introduction to the subject targeting intermediate grade school students to collegiate undergraduates who have little knowledge of High Performance Computing (HPC).

This module received the “**Best Module**” award for the “Parallel Algorithms and Applications” category which included a US \$500 prize.

Those who reviewed the entries for the competition made some suggestions for improvement and most have been incorporated into this revised edition of the module. As always; my thanks to them and all others who make suggestions for improving educational materials.

Kenneth Leroy Busbee

Introduction to High Performance Computing

Grouping multiple computers or multiple computer processors to accomplish a task quicker is referred to as **High Performance Computing** (HPC). We want to explain how this is accomplished using parallel programming algorithms or concepts.

The Shift from a Single Processor to Parallel

We are going to start our explanation by giving two simple examples.

After eating all you can, you toss your chicken leg bone out of the car window (shame on you for trashing up the highway), but in short order an ant finds your tossed chicken bone. One single ant could bite off the left over on the bone and transport it to the colony, one bite at a time; but, it might take him 1 whole day (24 hours) of work. But, what if she gets help? She signals some friends and being a small colony of ants they allocate a total of 10 ants to do the task. Ten times the workers take one tenth the time. The ten ants do the task in 2 hours and 24 minutes.

I toss another bone out the window. An ant finds it and the colony allocates 50 ants to do the task of picking the bone clean. In less than 30 minutes (28.8 to be exact) the 50 ants working in parallel complete the task.

One painter might take 8 hours to paint the exterior of an average sized house. But, if they can put a crew of 10 painters working simultaneously (or in other words in parallel) it takes only 48 minutes. What about a crew of 50 painters assuming that they can do work and not get in the way of each other; well how about less than 10 minutes (9.6 to be exact).

Now let's make sure we understand that the same amount of work was done in the examples given. The work was only completed in a shorter amount of time because we put more workers on the task. Not all tasks can be divided up in this way, but when it can be divided between multiple

workers, we can take advantage of the workers doing their sub part of the task in parallel. Let's look at another example.

I want to drive from Houston, Texas to Dallas, Texas; a distance of about 250 miles. For easy calculations let's say I can travel 50 miles in one hour. It would take me 5 hours. Well, I could divide the task between 5 cars and have each car travel 50 miles and arrive in Dallas in 1 hour. Right?

Well, wrong. The task of driving from Houston to Dallas cannot be divided into tasks that can be done in parallel. The task can only be done by one person driving in a line from Houston to Dallas in 5 hours. I used the word "line" because it helps connect us to the word: **linear**. A linear task cannot be broken-up into smaller tasks to be done in parallel by multiple workers. Within the computer world, the word associated with linear concept is **sequential processing**. I must drive one mile at a time in sequence to get to Dallas.

Our natural tendency is to share the work that is to work in parallel whenever it is possible. As a group we can accomplish many tasks that can be done in parallel in less time.

The Birth of Computers – A "Parallel" to Central Processing Unit (CPU) Story

"ENIAC, short for Electronic Numerical Integrator And Computer, was the first general-purpose electronic computer (July 1946). It was the first Turing-complete, digital computer capable of being reprogrammed to solve a full range of computing problems. ENIAC had twenty ten-digit signed accumulators which used ten's complement representation and could perform 5,000 simple addition or subtraction operations between any of them and a source (e.g., another accumulator, or a constant transmitter) every second. It was possible to connect several accumulators to run simultaneously, so the peak speed of operation was potentially much higher due to parallel operation." (ENIAC from Wikipedia)

Often not understood by many today, the first computer used base 10 arithmetic in the electronics and was a **parallel processing** machine by using several accumulators to improve the speed. However, this did not last for long. During its construction:

"The First Draft of a Report (commonly shortened to First Draft) on the EDVAC – Electronic Discrete Variable Automatic Computer was an incomplete 101 page document written by John von Neumann and distributed on June 30, 1945 by Herman Goldstine, security officer on the classified ENIAC project. It contains the first published description of the logical design of a computer using the stored-program concept, which has come to be known as the von Neumann architecture." (First Draft of a Report on the EDVAC from Wikipedia)

"The von Neumann architecture is a design model for a stored-program digital computer that uses a [central] processing [unit] and a single separate storage structure to hold both instructions and data. It is named after the mathematician and early computer scientist John von Neumann. Such computers implement a universal Turing machine and have a sequential architecture." (Von Neumann architecture from Wikipedia)

Von Neumann also proposed using a binary (base 2) numbering system for the electronics. One of the characteristics of the von Neumann architecture was the trade off of multiple processors using base 10 electronics to a single central processor using base 2 (or digital) electronics. To compare to our ant example, the idea was to use one real fast ant versus 10 slow ants. If one real fast ant can do 1,000 tasks in an hour; it would be more powerful (be able to do more tasks) than 10 ants doing 10 tasks an hour or the equivalent of 100 tasks per hour.

The rest is history – most commercially built computers for about the first forty years (1951 to 1991) followed the von Neumann architecture. The electronic engineers keep building more reliable and faster electronics. From vacuum tube, to transistor, to integrated circuit to what we call today "chip" technology. This transformation made computers break down less frequently (they were more reliable), physically smaller, needing less electric power and faster. Personal computers were introduced in the late 1970's and within ten years became more commonly available and used.

One short coming was that most programming efforts were towards improving the linear (or sequential) way of thinking or solving a problem. After all, the computer electronic engineers

would be making a faster computer next year. Everyone understood that the computer had only one **central processing unit** (CPU). Right?

The Need for Power

Well, wrong. Computer scientists and electronic engineers had been **experimenting** with multi-processor computers with parallel programming since 1946. But it is not until the 1980's that we see the first parallel processing computers (built by Cray and other computer companies) being sold as commercial built computers. It's time for another example.

The circus traveling by train from one city to the next has an elephant that dies. They decide to toss the elephant off the train (shame on them for trashing up the country side), but in short order a "super" ant (faster than most regular ants) finds the elephant. This project is much larger than your tossed chicken bone. One single "super" ant could do the task (bite off a piece of the elephant and transport it to the colony, one bite at a time); but, it might take one whole year. After all this requires a lot more work than a chicken bone. But, what if she gets help? She signals some friends and being a large colony of "super" ants they allocate a total of 2,190 ants to do the task. Wow, they devour the elephant in six hours.

This elephant example is exactly where the computer scientists had arrived. The electronic engineers were going to continue to make improvements in the speed of a single central processing unit computer, but not soon enough to satisfy the "need for power" to be able to solve tasks requiring **immense computing power**. Some of the new tasks that would require immense computer power included the human genome project, searching for oil and gas by creating 3 dimensional images of geological formations and the study of gravitational forces in the universe; just to mention a few. The solution: parallel processing to the rescue. Basically the only way to get this immense computer power was to implement parallel processing techniques. During the late 1970's and early 1980's scientists saw the need to explore the parallel processing paradigm more fully and thus the birth of High Performance Computing. Various national and international conferences started during the 1980's to be able to further the cause of High Performance Computing. For example in November of 2008 the "SC08" supercomputing conference celebrated their 20th anniversary.

The predicting of the weather is a good example for the need of High Performance Computing. Using the fastest central processing unit computer it might take a year to predict tomorrow's weather. The information would be correct but 365 days late. Using parallel processing techniques and a powerful "high performance computer", we might be able to predict tomorrow's weather in 6 hours. Not only correct, but in time to be useful.

Measuring Computer Power

Most people are familiar with the giga hertz (billions of instructions per second) measure to describe how fast a single CPU's processor is running. Most microcomputers of today are running around 3 GHz or 3 billion instructions a second. Although 3 billion sounds fast, many of these instructions are simple operations.

Supercomputing uses a measurement involving floating point arithmetic calculations as the benchmark for comparing computer power. "In computing, **FLOPS** (or **flops** or **flop/s**) is an acronym meaning **FL**loating point **O**perations **P**er **S**econd." and again "On May 25, 2008, an American military supercomputer built by IBM, named 'Roadrunner', reached the computing milestone of one petaflop by processing more than 1.026 quadrillion calculations per second." (FLOPS from Wikipedia) For those of us not familiar:

Getting a Sense of Power

```
3 billion or 3 GHz is: 3,000,000,000
1 quadrillion or 1 pedaflop is: 1,000,000,000,000,000
```

You also should realize that your personal computer is not doing 3 gigaflop worth of calculations, but something slower when using the FLOPS measurement.

High Performance Computing Made Personal

It took several years (about 30) to get computers to a personal level (1951 to 1981). It took about twenty years (late 1980's to present 2009) to get multi-processor computers to the personal level. Currently available to the general public are computers with “duo core” and “quad core” processors. In the near future, micro computers will have 8 to 16 core processors. People ask, “Why would I need that much computer power?” There are dozens of applications, but I can think of a least one item that almost everyone wants: high quality voice recognition. That's right! I want to talk to my computer. Toss your mouse, toss your keyboard, no more touch pad – talk to it.

Again, one short coming is that most programming efforts have been towards teaching and learning the sequential processing way of thinking or solving a problem. Educators will now need to teach and programmers will now need to develop skills in programming using parallel concepts and algorithms.

Summary

We have bounced you back and forth between sequential and parallel concepts. We covered our natural tendency to do work in parallel. But with the birth of computers the parallel concepts were set to the side and the computer industry implemented a faster single processor approach (sequential). We explained the limitations of sequential processing and the need for computing power. Thus, the birth of High Performance Computing. Parallel processing computers are migrating into our homes. With that migration, there is a great need to educate the existing generation and develop the next generation of scientists and programmers to be able to take advantage of High Performance Computing.

Learner Appropriate Activities

High Performance Computing is impacting how we do everything. Learning, working, even our relaxation and entertainment are impacted by HPC. To help more people understand HPC, I have listed appropriate activities based on where a learner is in relation to their programming skills.

Computer Literacy but No Programming Skills

We have provided two computer programs that help students see the impact of parallel processing. The first is a “Linear to Parallel Calculator” where the student enters how long it would take one person to complete a task, asks how many people will work as a group on the task, then calculates how long it will take the group to complete the task. The second is a “Parallel Speed Demonstration Program” that simulates parallel processing. It displays to the monitor the first 60 factorial numbers in 60 seconds, then shows as if 10 processors are doing it in 6 seconds, then as if 100 processors are doing it in less than 1 second. Both are compiled and ready for use on an Intel CPU machine (compiled for use on Windows OS).

Download the executable file from Connexions: Linear to Parallel Calculator

Download the executable file from Connexions: Parallel Speed Demonstration Program

An interesting activity would be to join a group that is using thousands of personal microcomputers via Internet connections for parallel processing. Several distributed processing projects are listed in the “FLOPS” article on Wikipedia. One such group is the “Great Internet Mersenne Prime Search – GIMPS”.

A link to the GIMPS web site is: <http://www.mersenne.org/>

Another activity is to “Google” some keywords. Be careful – “Googling” can be confusing and often can be difficult to focus on the precise subject that you want.

- high performance computing
- computational science
- supercomputing
- distributed processing

Learning Programming Fundamentals

Students learning to program that are currently taking courses in Modular/Structured programming and/or Object Oriented programming might want to review the source code files for the demonstration programs listed above. These programs do not do parallel programming, but the student could modify or improve them to better explain parallel programming concepts.

You may need to right click on the link and select “Save Target As” in order to download these source code files.

Download the source code file from Connexions: Linear to Parallel Calculator

Download the source code file from Connexions: Parallel Speed Demonstration Program

Another appropriate activity is to “Google” some of the key words listed above. With your fundamental understanding of programming, you will understand more of the materials than those with no programming experience. You should get a sense that parallel programming is becoming a more important part of a computer professional's work and career.

Review the “Top 500 Super Computers” at: <http://www.top500.org/>

Look at the source code listings provided in the next section, but remember, you cannot compile or run these on your normal computer.

Upper Division Under-Graduate College Students

The challenge is to try parallel computing, not just talk about it.

During the week of May 21st to May 26th in 2006, this author attended a workshop on Parallel and Distributed Computing. The workshop was given by the National Computational Science Institute and introduced **parallel programming** using multiple computers (a group of micro computers grouped or clustered into a super-micro computer). The conference emphasized several important points related to the computer industry:

1. During the past few years super-micro computers have become more powerful and more available.
2. Desk top computers are starting to be built with multiple processors (or cores) and we will have multiple (10 to 30) core processors within a few years.
3. Use of super-micro computing power is wide spread and growing in all areas: scientific research, engineering applications, 3D animation for computer games and education, etc.
4. There is a shortage of educators, scientific researchers, and computer professionals that know how to manage and utilize this developing resource. Computer professionals needed include:

Technicians that know how to create and maintain a super-micro computer;
and **Programmers that know how to create computer applications that use parallel programming concepts.**

This last item was emphasized to those of you beginning a career in computer programming that as you progress in your education, you should be aware of the changing nature of computer programming as a profession. Within a few years **all professional programmers will have to be familiar with parallel programming.**

During the conference this author wrote a program that sorts an array of 150,000 integers using two different approaches. The first way was without parallel processing. When it was compiled and executed using a single machine, it took 120.324 seconds to run (2 minutes). The second way was to redesign the program so parts of it could be run on several processors at the same time. When it was compiled and executed using 11 machines within a cluster of micro-computers, it took 20.974 seconds to run. That's approximately 6 times faster. Thus, **parallel programming will become a necessity to be able to utilize the multi-processor hardware of the near future.**

A distributed computing environment was set up in a normal computer lab using a Linux operating system stored on a CD. After booting several computers with the CD, the computers can communicate with each other with the support of "Message Passing Interface" or MPI commands. This model known as the Bootable Cluster CD (BCCD) is available from:

Bootable Cluster CD – University of Northern Iowa at: <http://www.bccd.net/>

The source code files used during the above workshop were modified to a version 8, thus an 8 is in the filename. The non-parallel processing "super" code was named: nonps8.cpp with the parallel processing "super" code named: ps8.cpp (Note: The parallel processing code contains some comments that describe that part of the code being run by a machine identified as the "SERVER_NODE" with a part of the code being run by the 10 other machines (the Clients). The client machines communicate critical information to the server node using "Message Passing Interface" or MPI commands.)

You may need to right click on the link and select "Save Target As" in order to download these source code files.

Download the source code file from Connexions: nonps8.cpp

Download the source code file from Connexions: ps8.cpp

Two notable resources with super computer information were provided by presenters during the workshop:

Oklahoma University – Supercomputing Center for Education & Research at: <http://www.oscer.ou.edu/education.php>

Contra Costa College – High Performance Computing at: <http://contracosta.edu/hpc/resources/presentations/>

You can also "Google" the topic's key words and spend several days reading and experimenting with High Performance Computing.

Consider reviewing the "Educator Resources" links provided in the next section.

Educator Resources

There are many sites that provide materials and assistance to those teaching the many aspects of High Performance Computing. A few of them are:

Shodor – A National Resource for Computational Science Education at: <http://www.shodor.org/home/>

CSERD – Computational Science Education Reference Desk at: <http://www.shodor.org/refdesk/>

National Computational Science Institute at: <http://www.computationalscience.org/>

Association of Computing Machinery at: <http://www.acm.org/>

Super Computing – Education at: <http://sc09.sc-education.org/about/index.php>

Simple Definitions

high performance computing

Grouping multiple computers or multiple computer processors to accomplish a task in less time.

sequential processing

Using only one processor and completing the tasks in a sequential order.

parallel processing

Dividing a task into parts that can utilize more than one processor.

central processing unit

The electronic circuitry that actually executes computer instructions.

parallel programming

Involves developing programs that utilize parallel processing algorithms that take advantage of multiple processors.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Academic or Scholastic Dishonesty

KENNETH LEROY BUSBEE

Introduction

The relationship between faculty and students has always been one of open and honest communication. The faculty member carries the responsibility of presenting course materials via reading assignments, lectures, labs, etc. The student is to learn and understand these materials. Additionally, the faculty members employ various methods to assess the student's mastery of the course materials. Frequently this is done via quizzes, tests, writing assignments, the completion of lab materials, etc. Academic dishonesty (sometimes called "Scholastic Dishonesty") is the violation of that trust.

Cheating on quizzes and tests as well as plagiarism is usually well understood by students before arriving at the collegiate level of education. Most colleges include adequate explanation in their student handbook explaining well what constitutes cheating on exams and plagiarism. Academic dishonesty often carries some stiff penalties. Usually, the student receives the grade of "F" from the professor in the course in which he or she is enrolled. The student might be expelled from all of their classes for which they are currently enrolled ("F" in all of your classes) and expelled from the institution (may not register for classes in the future). Sounds harsh, but it is a violation of the **bond of trust** between the student and the educational institution.

Collusion

Another category of academic dishonesty is collusion which is the unauthorized collaboration with another person in preparing written work (including lab assignments) offered for credit (counting towards your grade calculation). To better understand collusion, students need to realize that as part of the learning and evaluation of that learning, many professors use group projects; a directed or authorized collaboration. Often students are encouraged to form study groups to help discuss the course materials thus improving the learning process. These authorized and sometimes directed activities are not collusion.

The following discussion is to help the student understand collusion (unauthorized collaboration) with specific reference to courses that use computers. This is not an all inclusive list, but will cover the common situations that faculty have encountered over the years. Unless your specific professor informs you differently, you are to assume that the following items discussed are collusion.

Type it Yourself

Lab assignments are to be your own personal typing efforts. That is you are to type them or make the modifications yourself to the files (documents, spreadsheets, databases, programming source code, etc.) If your course is a programming subject, you are to run the source code file on your compiler, making corrections as need to complete the lab assignment. If the directions for an assignment include starting a new file then don't use an existing file and modify it to complete the assignment. **Unless specifically authorized by your professor, students should not complete computerized course work as a team or group and then share the final completed product.**

Students have said that they worked as a team or group and that all participated and all learned the materials. Don't try this excuse because professors don't buy it. Here is the problem: Part of the learning process is in you doing it yourself. Example: I ask two students to make me some pancakes

for breakfast; I expect two individually prepared plates of pancakes (one from each of them) for my breakfast. The professor really does not want to eat two plates of pancakes (or 50 to 100 plates of pancakes, depending on how many students they are teaching), but part of your directed learning activity for the course is to demonstrate that you can make pancakes (not watch someone else make pancakes or participate as a group to make pancakes).

Control Access to Your Files

Controlling the files you create (or are directed to modify) means that others will not have access to copy your work. In other words, don't share your files.

Students have said that they shared the file so they the other student could see how the completed assignment should look. Don't try this excuse because professors don't buy it. Here is the problem: When you share the file you share your typing efforts (or your original work and your efforts to create that original work). Back to our pancake example: "I only gave the other student a plate of completed pancakes, so they could see what the end product should be." All the other student does is add some blue berries and whip cream. If a student makes minor modifications to your work (changes the spots where his name is at) and turns it in as his work – you will be included in the charge of academic dishonesty. **Unless specifically authorized by your professor, don't share any files that you create or modify with another student – ever, not now and not in the future.**

Here are two suggestions for controlling access to your files:

When using a course delivery software product or learning system, such as BlackBoard Vista, **don't give another person your password.** With the password, they will have access to your submitted assignments including the files that you created.

Don't leave your files on a machine where others may have access to them. If multiple students are using or have access to the same machine (often happens with students living in the same household – husband/wife, siblings or roommates) or in an on-campus course where many students will have access to the machine – **store your files on a flash drive.** Physically control who gets access to your flash drive.

Ask for a Clarification of the Collaboration

If you have any question about an activity that might be construed as unauthorized collaboration, ask your professor. They will provide clarification and direction to you about the activity.

Students have said that they did not understand or think that it was unauthorized collaboration. Don't try this excuse because professors don't buy it. Here is the problem: We can't, and won't list every minor way in which students can collude. **The burden is for you to ask for any clarification for the specific course from your professor.** Don't assume that what another instructor allowed in another course will be allowed by this professor in this course.

Detecting Academic Dishonesty

Professors weren't born yesterday. The faculty members of most institutions have individually years and collectively thousands of years at understanding academic dishonesty. Cheating on tests, plagiarism and collusion are not new to us. We share our expertise with each other at detecting academic dishonesty. Additionally, the years of technical computer experience of professors who teach using computers in lab settings is often astounding.

Students have said that they did not think they could be detected or that academic dishonesty could not be proved. Don't try this approach because professors believe that they are slightly smarter. Actually, we know that we are a lot smarter. It amazes us that student don't realize

that professors are a formidable force. **Don't gamble that you can beat us at the "Academic Dishonesty Game"**. Please don't take this as a challenge and use it as an excuse to see if you can be academically dishonest and not get caught. We are warning you, not challenging you.

Serious Consequences

The consequences will vary from instructor to instructor and from institution to institution. They range from a simple slap on the hand (don't do it again) to complete expulsion from the institution (expelled from all of your courses). Because the **bond of trust** is broken, many instructors will simply expel you from the course you are taking. As an example: Within the BCIS1405 course at Houston Community College, we expelled 8 students (along with giving them the grade of "F") from Distance Educations sections during the Spring 2008 term for Academic Dishonesty.

Be ready for what ever the consequences your instructor will deliver if you are dishonest.

Summary

- The ethics of academic honesty; there is a bond of trust that whatever the student does in relationship to the evaluation process are their own work and efforts.
- Collusion is the unauthorized collaboration of students on work submitted for evaluation.
- First directive: Type if yourself
- Second directive: Don't share your files
- Seek clarification from your professor if you have any doubt that the collaborative activity might be considered collusion.
- Professors are very capable at detecting academic dishonesty.
- There are usually consequences to your dishonest behavior.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Sizeof Operator

KENNETH LEROY BUSBEE

Overview

Discussion

Every data item, constants and variables, not only have a data type, but the data type determines how many bytes the item will use in the memory of the computer. The size of each data type varies with the compiler being used and the computer. This effect is known as being machine dependent. Additionally, there have been some size changes with upgrades to the language. In “C” the int data type was allocated 2 bytes of memory storage on an Intel compatible central processing unit (cpu) machine. In “C++” an int is allocated 4 bytes.

There is an operator named “sizeof (...)” that is a unary operator, that is it has only one operand. The operand is to the right of the operator and is placed within the parentheses if it is a data type. The operand may be any data type (including those created by typedef). If the operand is an identifier name it does not need to go inside a set of parentheses. It works for both variable and memory constant identifier names. This operator is unique in that it performs its calculation at compile time for global scoped items and at run time for local scoped items. Examples:

```
cout << "The size of an integer is: " << sizeof (int);
```

The compiler would determine the byte size of an integer on the specific machine and in essence replaces the sizeof operator with a value. Integers are usually 4 bytes long, thus the line of code would be changed to:

```
cout << "The size of an integer is: " << 4;
```

If you place an identifier name that represents a data storage area (variable or memory constant), it looks at the definition for the identifier name. NOTE: the parentheses are not needed and often not included for an identifier name.

sizeof with a Variable

```
double money;      // variable set up with initialization
    then later on in the program
cout << "The size of money is: " << sizeof money;
```

The compiler would determine the byte size of money by looking at the definition where it indicates that the data type is double. The double data type on the specific machine (usually 8 bytes) would replace the code and it would become:

```
cout << "The size of money is: " << 8;
```

Key Terms

sizeof

An operator that tells you how many bytes a data type occupies in storage.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Successful Learning Skills

KENNETH LEROY BUSBEE

Realize the Time Commitment

College computer courses often are listed in the catalog of courses with both lecture and lab hours. But unlike the natural and biological sciences (chemistry, physics and biology) that must meet in a specific lab room designed for those courses, students can usually complete their lab portions at a variety of locations (the college's computer lab, home, work, public library, friend's house, etc.).

The normal rule of thumb is 1 to 1.5 hours out of class studying for every hour in class and for computer courses this normally means both the lecture and lab hours. Students with learning disabilities or those whose primary language is not English will want to plan for more study time and should use a larger ratio. Thus, you should calculate the weekly hours of commitment needed for a course depending on your circumstances. Example:

If a student is taking a 4 credit hour computer course that the college catalog says contains a combination of 6 hours (adding your lecture and lab hours) during a regular 16 week semester; the weekly classroom and study time for that course would be 12 to 15 hours a week.

But many students take courses at a faster pace by either taking a course between semesters in a very concentrated mode, starting a course after the regular start of a semester or during the summer. To calculate the weekly study time needed you will need to calculate the total regular semester instructional time and divide by the number of weeks in the faster pace delivery. Example:

Our 4 credit hour course is to be taken during a summer term that has 9 weeks of instruction time. The total regular semester time would be 15 times the normal semester commitment (180 to 225 hours). Dividing it by 9 would mean 20 to 25 hours per week.

Understand Your Capacity to Concentrate

You cannot expect to spend long periods of time working on computer course materials. After 3 to 4 hours of working on course materials, your ability to learn drops significantly (and for most to near zero). This problem is compounded by the nature of the material which is cumulative in nature. This means that you must understand item a before you try to learn item b. All of the math and sciences courses of study are of this nature.

Plan Regular Study Times

The combination of the time commitment and your ability to concentrate leads to the conclusion that you cannot cram your study time into a week-end of concentrated study. You must break up your study time into 3 to 4 hour study periods doing only one study period per day. You must establish a regular routine for each week. Students taking a regular semester course on-campus will count their class (lecture and lab) time and plan 2 to 3 additional study periods.

If taking a course via distance education, students need to plan for all of the course time, thus during a regular semester term, our 4 credit hour course example would require 3 to 4 study periods with 3 to 4 hours for each study period per week. If taking the course at **faster pace** (9 week summer term) you will need to schedule more study times. This may mean a **3 to 4 hour study period daily for 6 days a week** (with only one day off as a day of rest).

You need to stay on top of a course to successfully complete it. Pacing yourself with multiple study

times allows for effective learning. Students who procrastinate until close to an exam and then try cramming through course materials are rarely “A” students.

Learning Requires Variety and Repetition

Variety comes in many forms and includes lecture, lab assignments, studying textbooks, multi-media materials, quizzes, writing a research papers, learning activities such as group discussions, crossword puzzles, flash cards, etc. This variety actually helps our brain to understand and build memory. In addition to variety, repetition (exposure over multiple study periods) is essential for our brains to be able to learn and recall the course materials. Again, this understanding and recall are essential to courses that require cumulative learning (you must understand item a before you can learn item b).

Textbooks and professors break-up course materials into chapters or learning modules often with learning objectives first and review items at the end of each unit. Each chapter or module might have any of the above mentioned items. But doing things and study are different. You can't just show up to class and listen, you can't just read stuff, you need to study. Study requires a variety of activities. Ask yourself:

- Do you understand each learning objective?
- Can you explain or formulate an answer for each learning objective?
- If you did not understand the reading materials, did you re-read it?
- Do the review items (especially questions).
- Take lecture notes.
- Do the lecture notes or handouts give you a better understanding than the textbook?
- Often the problems or lab assignments are to be studied in conjunction with and reinforce the study materials. Have you tried to do and understand the problems or lab assignments?
- Are there any learning activities available and if yes, did you do them.
- Did you consider using 3×5 cards to study definitions and vocabulary?
- Did you review the learning objectives before taking any quizzes?
- If the quizzes are computerized, did you study your quiz results?
- After reviewing quiz results and re-study, did you retake the quiz again if available?

All of this requires time and effort on your part as the student in any course (distance education or on-campus). You need several study periods a week to learn the materials in any course. The purpose of a quiz is for you to self assess your understanding of the materials. If your learning is not complete, **change or modify your learning habits.**

Interact with the Other Students

In a normal classroom students interact with each other. They often form study groups with other students and meet regularly to help each other study materials. These interactions in most cases are essential to the learning process. If your only interaction is by private conversation or private email with the instructor, you are not fully participating in the course. For distance education students, most learning systems (such as Blackboard Vista) provide several tools to create this interaction. They typically include announcements, discussion list, email and chat tools.

Don't Procrastinate and Don't Get Behind

What should you do if you get behind? Plan **regular study periods.** The lack of regular study periods

is most likely the reason for why you got behind. Plan when you will do **extra study periods** in order to catch up.

Attend Class and Take Notes

Taking lecture notes and being able to review those note later when you are studying provides variety that is needed to learn material. Just writing the notes down more actively engages the brain, because you are listening and writing. But you need to arrange with at least two fellow classmates that you will all take notes and share notes with each other if absent. In addition to course materials, other administrative matters are discussed in class (such as the announcement of exam date change).

If you are taking a distance education course, you need to regularly enter the learning management system (such as Blackboard Vista) and review the announcements, discussion list postings and read (and answer if appropriate) email. Most distance education professors assume that anything they have communicated via these tools will have been read by the student within 3 days. In short this means you are responsible for having read the items and completing any action requested.

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Study Habits that Build the Brain

KENNETH LEROY BUSBEE

Introduction

During the spring of 2008 the author, Kenneth Leroy Busbee, did some research with students taking a computer programming fundamentals course to determine if using 3×5 cards would improve student performance on exams. In short, it did! This was not a surprise, but it became obvious that most of us (faculty at all levels of education as well as students) have little understanding of how are brain builds understanding and long term memory.

Attached are several PowerPoint presentations that have been save in an Adobe PDF format. Please spend a few minutes reviewing the information provided. Hopefully it will help students to better learn the subjects they are studying.

Main Presentation

Link to: [Study Habits that Build the Brain](#)

Specific Topics

Link to: [Reading the Textbook](#)

Link to: [Taking Lecture Notes](#)

Link to: [Using 3×5 Cards](#)

Link to: [Using the Flash Card Activity](#)

References

- cnx.org: Programming Fundamentals – A Modular Structured Approach using C++

Comments and Suggestions

DAVE BRAUNSCHWEIG

Thank you for reviewing Programming Fundamentals – A Modular Structured Approach, 2nd Edition!

Please leave comments and suggestions at the bottom of any page, or here on this last page. All suggestions will be reviewed and considered.

If you are looking for a specific programming language that does not have examples included yet, please let us know.

Dave Braunschweig