



Training: a flow-matching prior on the GEOMETRY BRIDGE

the prior is trained on exactly the image manifold the inference ODE walks: reconstructions under a PARTIALLY CORRECTED geometry

1. Simulate a motion-corrupted scan (CQ500, train split)

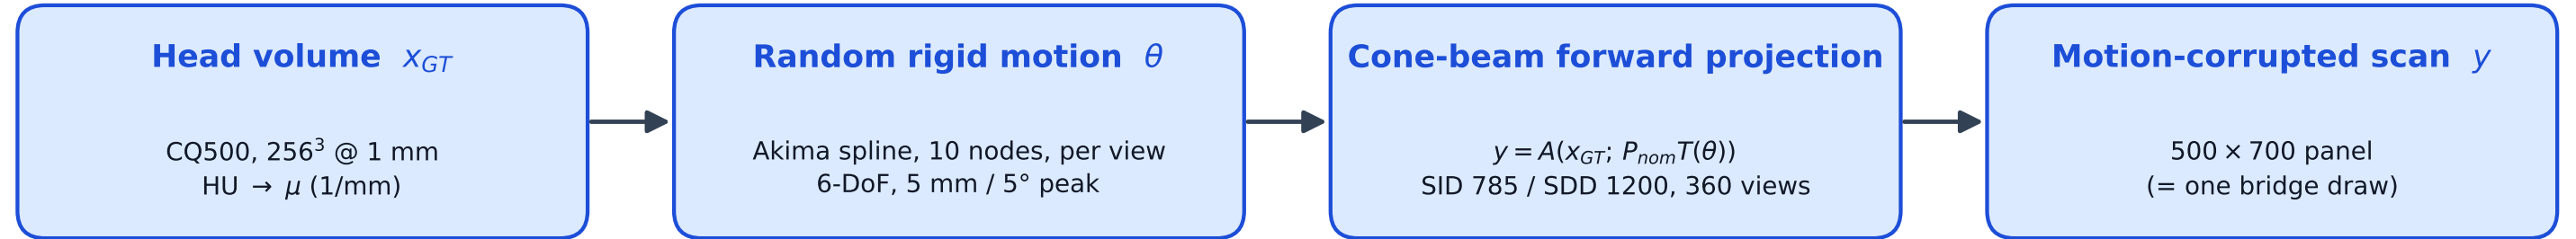

2. Geometry bridge (whole volume, no_grad — one fused FDK+tangent pass)

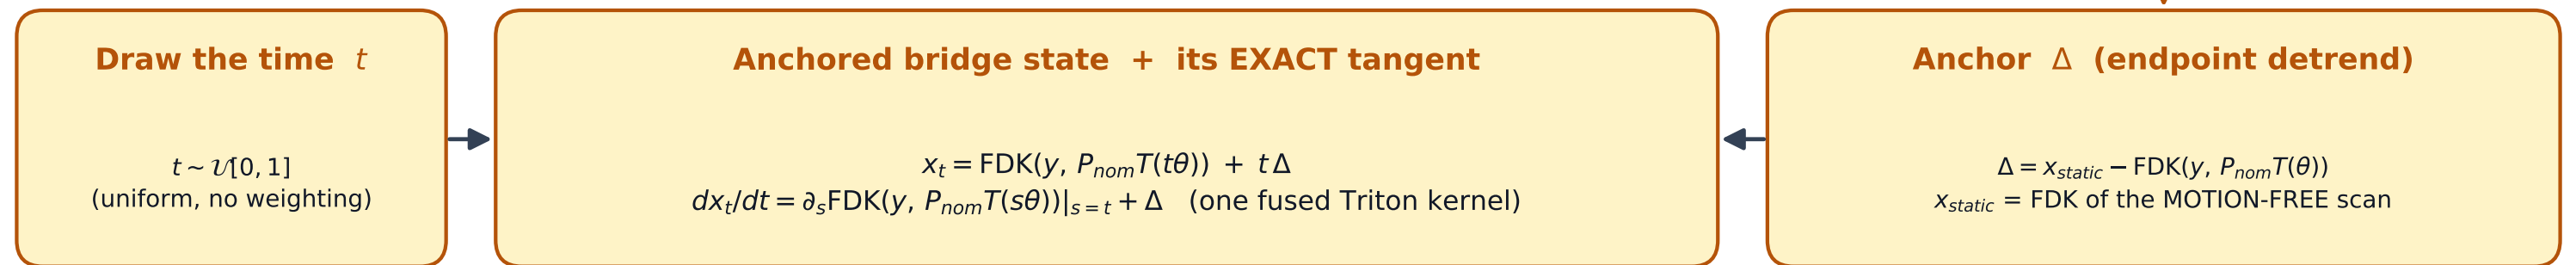


$t = 0$: $x_0 = \text{FDK}(y, P_{nom})$ — the uncorrected recon = the inference cold start

$t = 1$: $x_1 = x_{static}$ — the motion-free scan (the bare endpoint $\text{FDK}(\theta_{true})$ is 1-3 dB short)

x_t

dx_t/dt

3. Train the patch prior

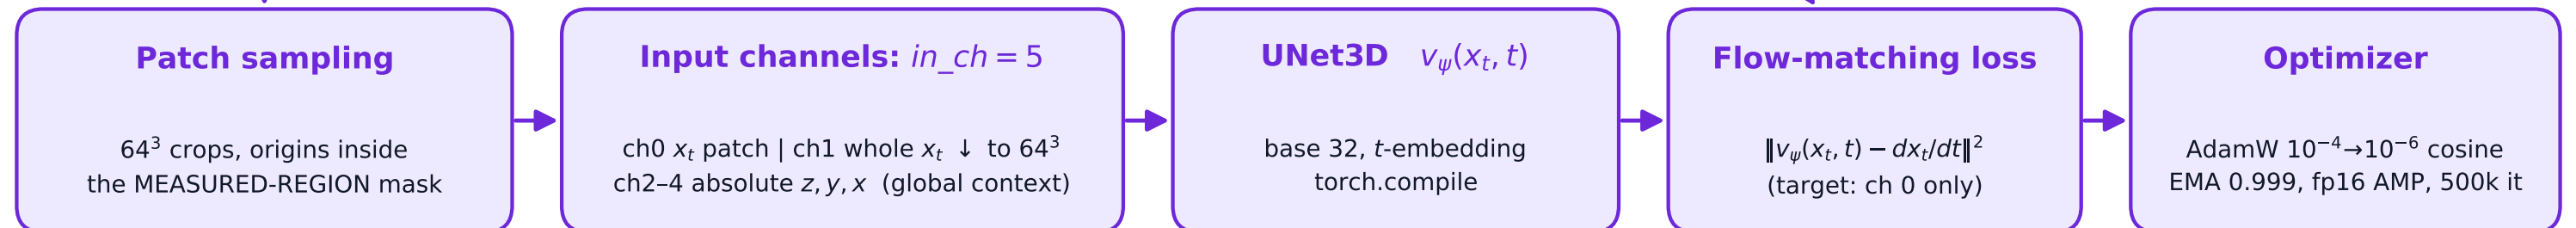

MEMORY SPLIT — the OPERATOR (FDK + its tangent) runs on the FULL volume under no_grad; the NET only ever sees 64^3 patches.

A rolling cache of 8 whole-volume bridge draws is refreshed every 12 steps; each batch of 8 patches mixes several draws, so t varies within a batch.

Validation = prior-only ODE from the cold start on held-out patients: 25.42 dB / SSIM 0.78 (rigid-aligned).