# Pilot Analysis

#### Preprocess data


```
Read in the results data.
```

```
# TODO: read in the method and dataset meta information and perform joins.
df <-
  # read in all columns as strings because of infinite values in table
  readr::read_tsv(
    "output/pilot/predict_modality/output.extract_scores.output.tsv",
    col_types = c(.default = "c")
  ) %>%
 mutate(
    # manually convert to floats afterwards
    value = as.numeric(value),
    # workaround for numerical division by almost-zero
    value = ifelse(grepl("pearson|spearman", metric_id) & value > 2, 0, value),
    # zap small values
    value = ifelse(grepl("pearson|spearman", metric_id) & value > 1, 1, value),
    # extract meta info
    dataset_loader = gsub("_.*", "", dataset_id),
    dataset_group = gsub(".*_", "", dataset_id),
    method_group = gsub("_.*", "", method_id)
  ) %>%
  spread(metric_id, value) %>%
  mutate(
    format_check = (correct_format + finished) / 2,
    logp1_mse = log(mse+1)
write_tsv(df %>% gather(metric_id, value, -starts_with("dataset_"), -starts_with("method_")), "results/pilot_pre
Calculate mean score per method. Infinite values are replaced by the highest value in the results.
replace_inf <- function(x) ifelse(is.infinite(x), max(x[is.finite(x)]), x)
summ <- df %>%
  gather(metric_id, value, -starts_with("dataset_"), -starts_with("method_")) %>%
  mutate(value = replace_inf(value)) %% # replace infinite values with the max
  group_by(method_id, metric_id) %>%
  summarise(
   mean = mean(value),
   sd = sd(value),
    var = var(value)
 )
## 'summarise()' has grouped output by 'method_id'. You can override using the '.groups' argument.
write_tsv(summ, "results/pilot_predict_modality_summary.tsv")
```


1

# Visualise results

Colour by method.

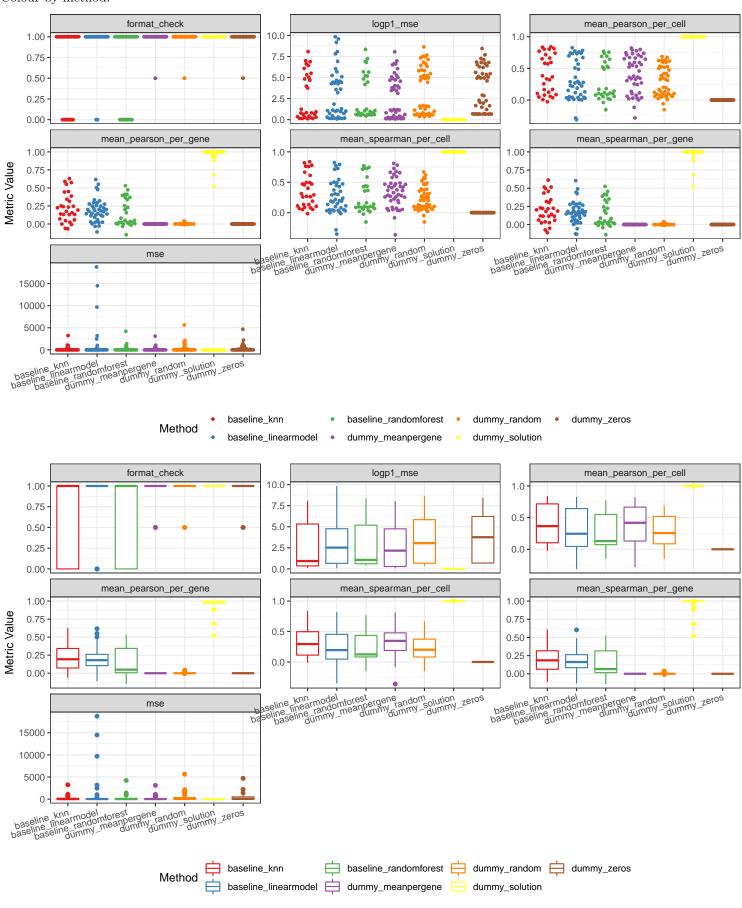

## Colour by dataset source.

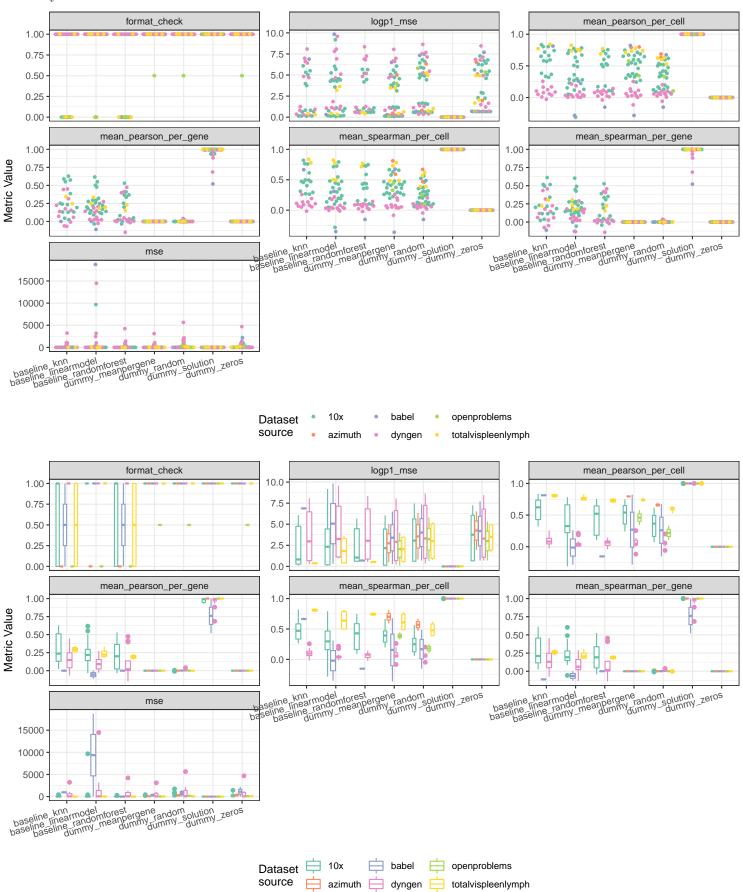

## Colour by modality group.

