




First I compute the covariance matrix of the STA. Each pixel (60 x 60 pixels for 3 chromatic channels == 10800 pixels) is a variable that is observed once per lag (in this example, 10 lags).

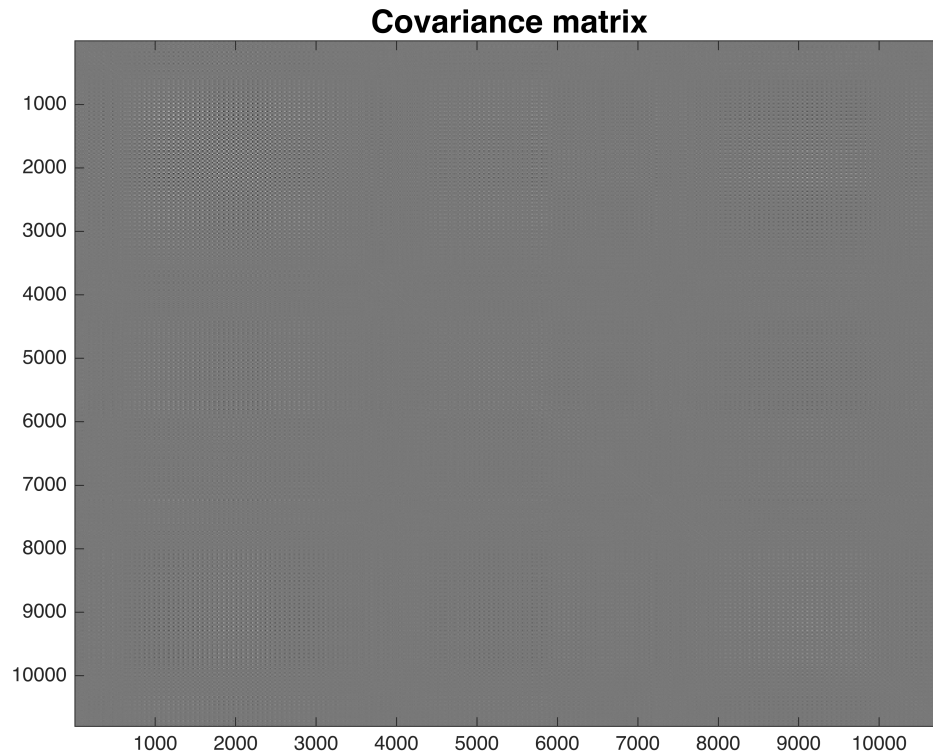

Then I sum the absolute value of the covariance matrix across columns (or rows). I get a number for each pixel, which is bigger the more that pixel covaries with other pixels. I can set a threshold to mask out the "noise" in the STA (pixels who don't meet this threshold). In this case threshold is the 85th percentile of the sum of the absolute covariances (and thus changes appropriately with different STAs).

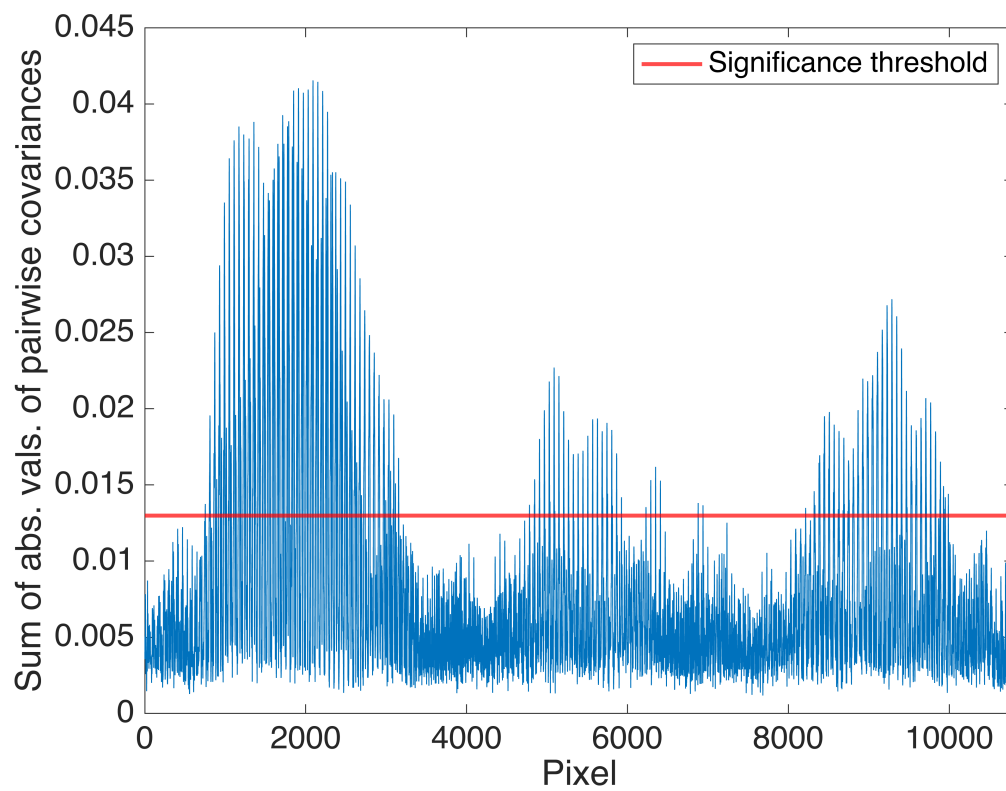

**Example STA at lag 4:**

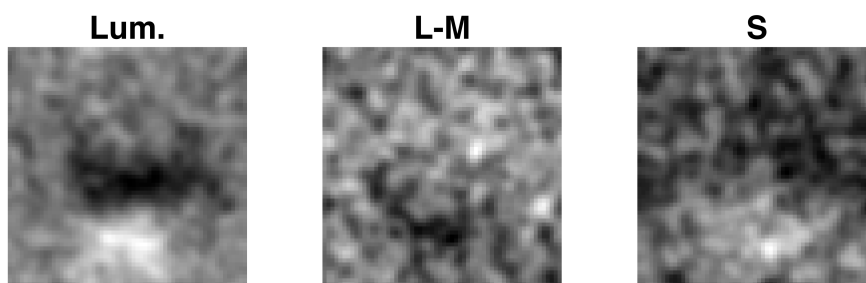

Same STA with "noise" / "insignificant" pixels masked:

