

To Tech on watch

06/11/2014


8

10/10/2014


Procedure to execute conn_net1a.sh / conn_net1b.sh scripts

- By clicking on the mouse left button anywhere on the background of the screen, OASYS POSITIONS BACKGROUND MENU should appear as follows:


06/11/2014
10/10/2014

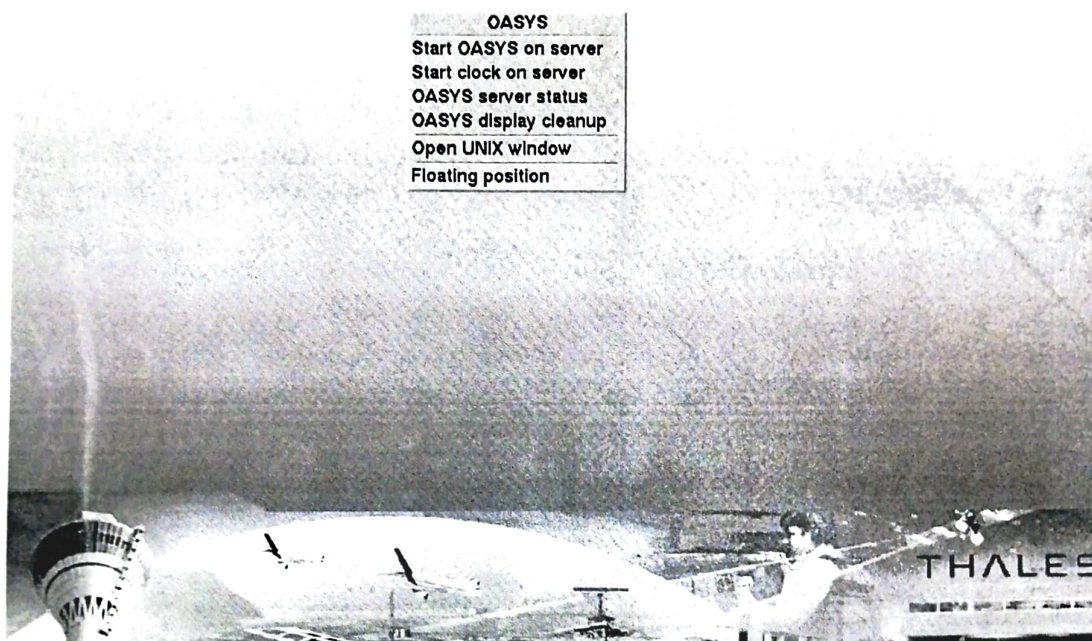


- Select Open Unix Window and choose maertks01sv as shown below:

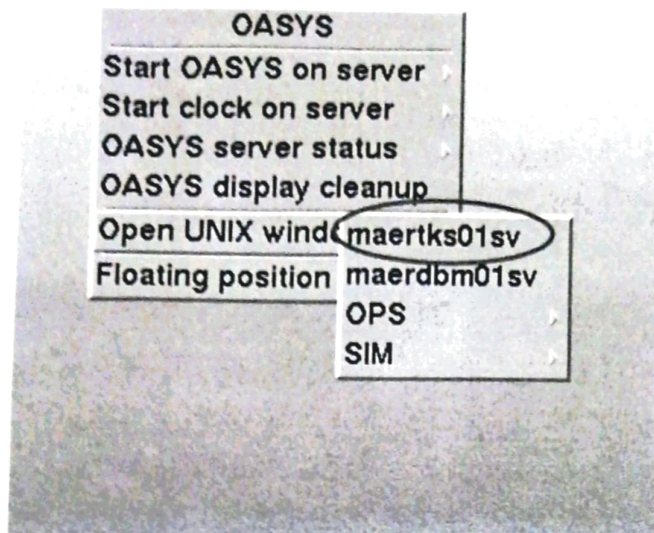


- Clicking in this menu will open a UNIX window on the selected host:

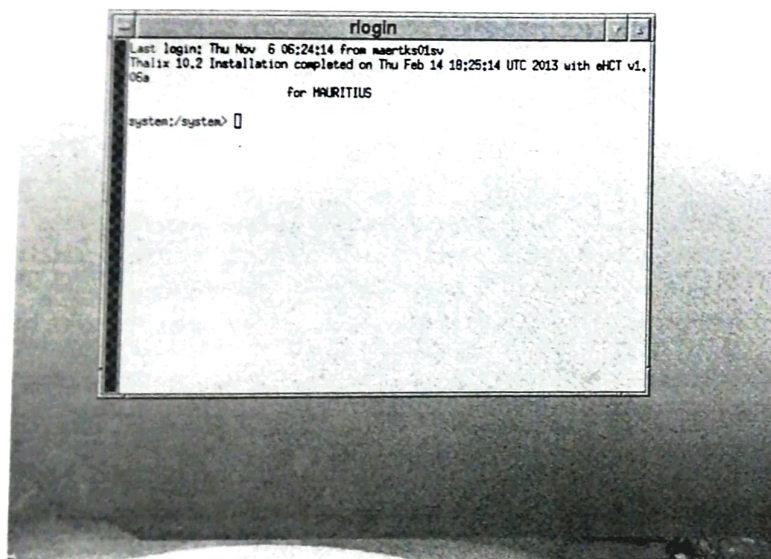

- Maximize the window by clicking on the “up arrow” located top-rightmost of the terminal window as indicated below:

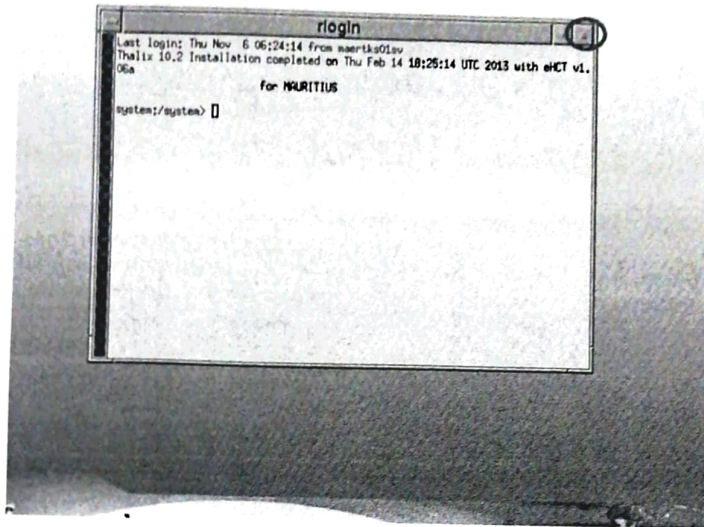

To appear as follows:

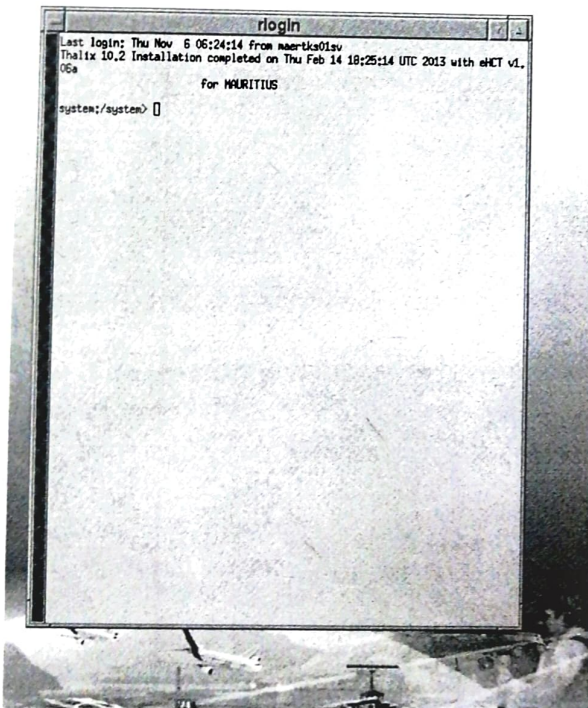


- The script to be executed is present in the *system* directory (no need to change directory)

```
-rwxr--r-- 1 system EUROCAT 485 Nov 6 05:41 conn_net1a.sh
-rwxr--r-- 1 system EUROCAT 485 Nov 6 05:43 conn_net1b.sh
```

Two scripts are available:

1. conn_net1a.sh for maerntp01sv
2. conn_net1b.sh for maerntp02sv

Depending on which NTP server is "Node Down", execute script accordingly:

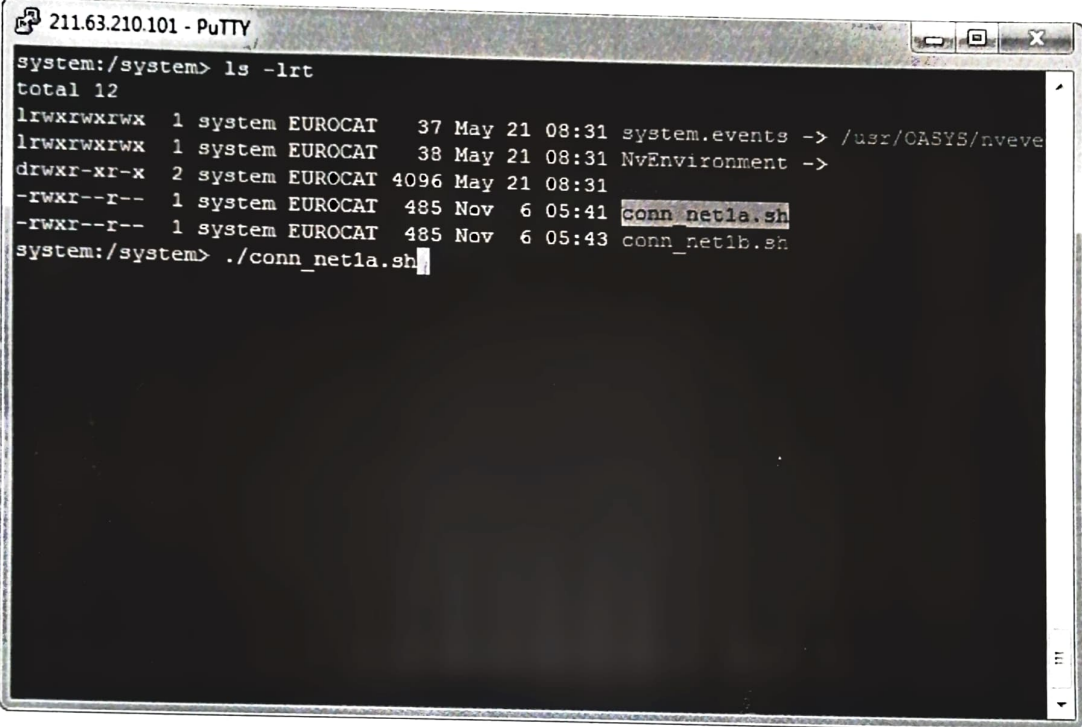

The screenshot shows a PuTTY terminal window titled "211.63.210.101 - PuTTY". The user is in the "system:/system" directory and has run the command "ls -l". The output shows a list of files, including "conn_net1a.sh" and "conn_net1b.sh". The user has then run the command " ./conn_net1a.sh".

```
system:/system> ls -l
total 12
lrwxrwxrwx 1 system EUROCAT 37 May 21 08:31 system.events -> /usr/CASYS/nveve
lrwxrwxrwx 1 system EUROCAT 38 May 21 08:31 NvEnvironment ->
drwxr-xr-x 2 system EUROCAT 4096 May 21 08:31
-rwxr--r-- 1 system EUROCAT 485 Nov 6 05:41 conn_net1a.sh
-rwxr--r-- 1 system EUROCAT 485 Nov 6 05:43 conn_net1b.sh
system:/system> ./conn_net1a.sh
```

Type at the prompt as shown above (dot forward-slash script_name):
./<script_name>