



Research Methodology

APUMP2408AI(PR)-ODL

Context-Aware Nepali Sign Language Translation using Hand Sequences and Facial Cues (Proposal)

Student Name: Dean Clarke

Student ID: TP080828

Intake Code: APUMP2408AI(PR)-ODL

Assignment Title: Context-Aware Nepali Sign Language Translation using Hand Sequences and Facial Cues- Part 2 (Proposal)

Date Completed: March 27th, 2026

Lecturer Name: Prof. Dr. Murugananthan Velayutham

Abstract

Nepali Sign Language (NSL) is a natural visual-spatial language used by Deaf communities in Nepal, yet it remains computationally under-resourced. Most existing work has focused on isolated sign recognition, which is useful as a starting point but insufficient for understanding continuous signing, grammatical context, and discourse-level meaning. This proposal presents a context-aware framework for continuous NSL translation that integrates manual features with non-manual markers such as facial expressions and body pose. The proposed system combines a multi-stream Transformer architecture with cross-lingual transfer learning from Indian Sign Language (ISL) datasets to address the data scarcity bottleneck that commonly affects low-resource language technologies (Rastgoo, Kiani, & Escalera, 2021; Núñez-Marcos, Perez-de-Viñaspre, & Labaka, 2023). A Human-in-the-Loop (HITL) feedback mechanism is incorporated through a two-phase mobile application, with automated mathematical heuristics for non-manual marker detection ensuring privacy-preserving operation without raw video storage. The research will be conducted in partnership with the National Federation of the Deaf Nepal (NDFN), which will support recruitment and corpus curation for 100 sentences distributed across five linguistic categories designed to test statements, questions, negation, temporal context, and high-utility everyday communication. To protect privacy, the system will use on-device landmark extraction rather than storing raw biometric video. The final translation model will be evaluated using BLEU and ROUGE scores, complemented by qualitative assessments from Deaf users. The overall aim is to build a practical and ethically grounded baseline for continuous NSL translation that is technically feasible, linguistically informed, and relevant to real community needs.

Keywords: Nepali Sign Language (NSL); Sign Language Translation (SLT); Sign Language Recognition (SLR); Continuous Sign Language Recognition (CSLR); Non-Manual Markers (NMMs); Multimodal Learning; Human-in-the-Loop (HITL)

Table of Content

List of Abbreviations	4
Introduction	5
Research Background	6
Problem Statement	7
Research Questions	7
Aim and Objectives	8
Scope of the Research	8
Research Methodology	9
Data Collection and Institutional Partnership	10
Annotation Workflow and Corpus Design	11
Privacy-First Feature Extraction	13
Multi-Stream Transformer Architecture	14
Implementation and Evaluation	15
Validation Strategy and Data Partitioning	15
Research Plan	17
Summary	18
References	19
Appendices	20
Appendix A: Final Sentence Corpus and Corpus Organization	20
Corpus Organization	20
Final Sentence List	20

List of Abbreviations

Table 1

Abbreviation	Meaning
NSL	Nepali Sign Language
SLT	Sign Language Translation
SLR	Sign Language Recognition
CSLR	Continuous Sign Language Recognition
NMMs	Non-Manual Markers
HITL	Human-in-the-Loop
RLHF	Reinforcement Learning from Human Feedback
ISL	Indian Sign Language
BLEU	Bilingual Evaluation Understudy
ROUGE	Recall-Oriented Understudy for Gisting Evaluation
ELAN	EUDICO Linguistic Annotator
NDFN	National Federation of the Deaf Nepal
CV	Computer Vision
NLP	Natural Language Processing

Introduction

Sign Language Translation (SLT) is a multimodal problem at the intersection of computer vision, natural language processing, and linguistics. Unlike isolated gesture recognition, SLT must interpret continuous signing in which meaning is shaped by temporal structure, co-articulation, and non-manual markers such as facial expression and body posture. Recent surveys show that sign language systems have progressed rapidly in isolated recognition, but translation remains much harder because it requires not only visual pattern recognition but also language modeling and discourse awareness (Rastgoo, Kiani, & Escalera, 2021; Núñez-Marcos, Perez-de-Viñaspre, & Labaka, 2023).

In Nepal, the Deaf community continues to face barriers in accessing public information, interpreting services, and digital communication tools. This gap is especially important because most computational attention has been given to sign languages with stronger data ecosystems, while Nepali Sign Language (NSL) remains under-resourced. The publication of the NSL23 dataset was an important step because it provided a publicly described benchmark for Nepali alphabet recognition, yet it also highlighted how limited the field still is when the task moves from isolated signs to continuous translation (Sunuwar, Borah, & Kharga, 2024).

This proposal is motivated by the idea that a useful NSL system must capture the full structure of the language rather than only the manual hand shapes. A context-aware model should recognize the role of facial cues in questions, head movement in negation, and torso posture in emphasis and temporal reference. The proposed project therefore aims to move beyond recognition toward a translation framework that is continuous, multimodal, and grounded in community use.

Research Background

The broader sign language literature provides a clear methodological direction for NSL. Research in sign language recognition and translation repeatedly shows that the availability of data determines what kinds of models can be built. How2Sign demonstrated how a large multimodal and multiview corpus can accelerate continuous American Sign Language research by enabling sentence-level modeling rather than isolated classification (Duarte et al., 2021). This is important for NSL because the field does not yet have an equivalent continuous corpus that would support comparable translation research.

Recent reviews also emphasize that sign languages are inherently multimodal. Manual signing carries lexical content, but non-manual markers provide grammatical information that changes the meaning of an utterance. Zheng et al. (2021) showed that translation quality suffers when facial expression information is ignored, which supports the view that the face must be modeled as a core linguistic channel rather than an optional feature. Similarly, surveys of sign language production and recognition argue that future systems should treat hand, face, and body information as synchronized streams rather than as isolated signals (Rastgoo et al., 2024; Rastgoo et al., 2021).

A second important trend is the move away from rigid gloss-first pipelines and toward more flexible translation strategies. Hamidullah, van Genabith, and España-Bonet (2024) show that sentence embeddings can reduce dependence on gloss annotation, while Jang, Raajesh, Momeni, Varol, and Zisserman (2025) demonstrate that contextual cues from surrounding sentences and background information improve translation quality. These findings matter for NSL because they

suggest that the best low-resource system may not be a hand-only translator but a context-aware architecture that combines visual features with linguistic priors.

Problem Statement

The central problem addressed in this proposal is that current Nepali Sign Language computational work is largely restricted to isolated sign recognition and therefore cannot capture the grammatical and semantic information required for sentence-level translation. Without modeling facial expression, head movement, and body posture, a system may recognize the lexical content of a sign but still fail to distinguish a statement from a question or a positive statement from its negation. This is a serious limitation because a translation system that ignores non-manual markers will produce output that is partially correct at the word level but unreliable at the sentence level.

A second problem is the absence of a validated continuous NSL corpus aligned with text. There is currently no robust dataset that records continuous signing from native users while also annotating glosses, non-manual markers, and sentence translations in a way that can support modern sequence-to-sequence models. Low-resource adaptation is therefore constrained by a classic cold-start problem: the model has too little local data to learn NSL-specific structure, but the available neighboring resources do not yet match the target language well enough to be directly deployed.

Research Questions

This study is guided by four related research questions. First, how can a validated continuous NSL dataset be curated through community partnership so that both manual sequences and facial cues are captured accurately? Second, what multi-stream deep learning architecture is best suited to integrating hand, face, and pose information for sequence-to-text translation? Third, to what extent does the inclusion of non-manual markers and human-in-the-loop feedback improve the translation fidelity of NSL models? Fourth, can

cross-lingual transfer learning from Indian Sign Language effectively initialize a model for the low-resource NSL domain?

Aim and Objectives

The main aim of this research is to develop a context-aware multimodal translation framework for continuous Nepali Sign Language that integrates manual and non-manual features for accurate text generation. To achieve this aim, the project will curate a high-fidelity continuous corpus of 100 linguistically diverse sentences through collaboration with the National Federation of the Deaf Nepal (NDFN), implement a multi-stream Transformer architecture with separate encoders for hand motion, facial landmarks, and body pose, deploy a mobile application using Expo and React Native for on-device landmark extraction and user feedback, and evaluate the system with BLEU and ROUGE alongside qualitative assessments from Deaf participants.

Scope of the Research

The scope of this project is intentionally focused so that the proposal remains feasible while still addressing a meaningful research gap. The corpus will consist of 100 continuous NSL sentences organized into five balanced categories, each chosen for a specific linguistic purpose. Simple declarative sentences will establish a baseline for ordinary handshape recognition and sentence ordering. Interrogative sentences will test whether eyebrow raises and other facial cues can be used to detect question force. Negation sentences will assess the model's ability to interpret head shake and other negative markers. Temporal and sequential sentences will test the handling of time-related and motion-related context. High-impact practical utility sentences will measure whether the system can support everyday communication needs such as requests for help, travel, health, and public-service interaction.

The geographic scope is limited to the Kathmandu Valley, where data collection will be coordinated through NDFN. The participant group will consist of approximately 30 to 40 fluent NSL users, which is large enough to capture useful variation but small enough to remain manageable within the project timeframe. Technically, the work is restricted to landmark-based representations extracted on-device rather than raw video storage. This keeps the project privacy-preserving and reduces the computational burden, which is important for mobile deployment and for future use in low-bandwidth environments.

Table 2. Corpus Sentence Categories and Linguistic Purpose

Category	Count	Linguistic function	Example
Declarative	20	Baseline sentence structure and lexical order	I am going home.
Interrogative	20	Question force and eyebrow raise	Where is the hospital?
Negation	20	Head shake and negative marking	I do not understand.
Temporal / Sequential	20	Time reference and motion context	I went yesterday.
High-impact Utility	20	Everyday functional communication	I need a doctor now.

Research Methodology

This study adopts a mixed-methods research design that combines dataset development, model training, system implementation, and community evaluation. The methodology is intentionally staged so that the project can first produce a usable corpus and then turn that corpus into a translation baseline that can be tested and improved with Deaf community feedback.

Data Collection and Institutional Partnership

Data collection will be conducted in collaboration with the National Federation of the Deaf Nepal, ensuring that the dataset reflects authentic language use within the Deaf community. The organization will support recruitment, scheduling, and communication with participants, while the research team will manage recording, labeling, and data governance. A total of 30 to 40 fluent NSL users will be recruited, with preference given to individuals who are regular users of the language and able to provide reliable signing samples.

Participatory Co-Creation Workshop: While standard heuristics (headshakes, leans, shrugs) provide a cross-linguistic baseline, a Linguistic Validation Workshop with representatives from the National Federation of the Deaf Nepal (NDFN) during Phase 1 will be conducted. The workshop objectives are:

1. validate whether localized NSL dialects use distinct postural markers not captured by standard heuristics (e.g., chest puffs for emphasis, specific elbow flairs for temporal marking, or unique eyebrow configurations);
2. establish culturally appropriate thresholds for geometric detection rules;
3. identify any NSL-specific grammatical markers that require additional mathematical modeling.

Any newly identified markers will be formalized using MediaPipe displacement vectors and integrated into the rule-based tagging pipeline. This participatory approach ensures the system captures culturally valid NSL grammar rather than imposing assumptions from Indian Sign Language, aligning with established principles of community-based participatory research in sign language technology development.


Each participant will record a predefined set of 100 sentences (See Appendice A - Final Sentence List) that is distributed evenly across the five categories described in the scope. The structure of

the corpus is designed so that the model is exposed to a broad but manageable range of linguistic forms. This is particularly important because questions, negations, and temporal sequences depend on non-manual markers in ways that simple declaratives do not. The 100-sentence design therefore makes the data collection task practical while still allowing the model to test grammatical sensitivity.

Annotation Workflow and Corpus Design

Annotation will be conducted at the sentence level using a structured, prompt-based approach. Since each recorded video corresponds to a predefined text prompt, the annotation focus will be on marking temporal start/end boundaries and tagging relevant non-manual markers (NMMs) through mathematical heuristics rather than frame-by-frame manual glossing.

Figure 1. Heuristic Geometry for Non-Manual Markers

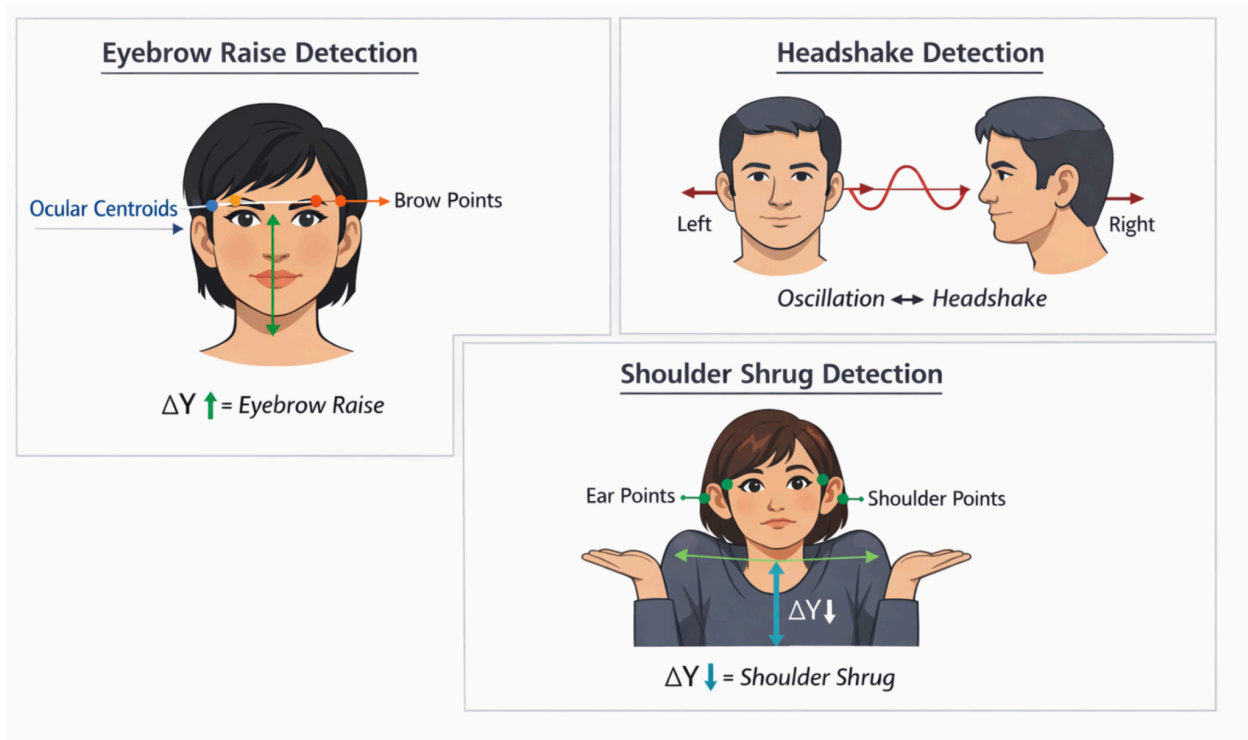

Rule-Based Heuristic Tagging for Non-Manual Markers: To ensure a privacy-first data pipeline, the project bypasses subjective manual video inspections in favor of mathematical heuristics derived from raw 3D spatial (x,y,z) coordinates extracted via MediaPipe:

NMM Type	Linguistic Function	Geometric Detection Rule	MediaPipe Landmarks
Eyebrow Raise	Question marking	Normalized vertical distance between ocular centroids and superciliary landmarks exceeds threshold	Face: 33, 133 (eyes); 105, 334 (eyebrows)
Headshake	Negation	Horizontal frequency oscillation (x-axis) of nose point (0) relative to stable shoulder baseline	Face: 0; Pose: 11, 12
Shoulder Shrug	Uncertainty/indifference	Compression of vertical distance (y-axis) between acromion (shoulders) and auditory (ear) landmarks	Pose: 11, 12; Face: 7, 8
Forward Lean	Emphasis/topic shift	Depth (z-axis) delta between shoulder plane and hip plane exceeds threshold	Pose: 11, 12, 23, 24
Body Tilt	Comparison/contrast	Angular displacement of shoulder line	Pose: 11, 12

		relative to horizontal plane	
--	--	---------------------------------	--

This lightweight annotation strategy significantly reduces complexity while remaining fully compatible with transformer-based sequence learning, where temporal dependencies are learned directly from continuous landmark sequences. The approach aligns with recent gloss-free sign language translation research demonstrating that end-to-end sequence learning can operate without intensive linguistic glossing.

Optional Validation Layer: While the primary pipeline operates without video storage, a transient verification buffer may be used during initial calibration. Raw video would exist only in encrypted temporary storage during the participatory workshop phase, with immediate deletion after heuristic validation; ensuring no biometric data persists in the final dataset.

Privacy-First Feature Extraction

To protect participant privacy and reduce storage demands, the project implements zero-retention biometric processing. The system does not depend on raw video as the primary training representation; instead, each recording undergoes immediate on-device skeletal abstraction.


Privacy-by-Design Data Flow:

- **Capture:** Mobile camera captures frames temporarily in device memory only; no disk writing occurs during recording.
- **Extraction:** MediaPipe Holistic runs on-device, extracting Hand stream (21 landmark points per hand), Face stream (468 landmark points), and Pose stream (33 body landmarks).
- **Immediate Deletion:** Raw video frames are discarded from memory immediately after landmark extraction—no video file is ever written to device storage or transmitted.
- **Transmission:** Only anonymized coordinate sequences (JSON/NumPy arrays), sentence labels, and category classifications are transmitted to the backend API.
- **Storage:** Structured landmark sequences stored for training; zero biometric video retained.

This approach enables de-identification via skeletal abstraction; landmarks are purely numerical coordinates that cannot reliably reconstruct identifiable facial imagery, addressing privacy concerns while preserving essential linguistic information. The representation becomes compact (approximately 95% storage reduction vs. video), bandwidth-efficient, and suitable for edge deployment. Security Guarantees:

- No facial images stored or transmitted
- No personally identifiable visual data retained
- Anonymization occurs at the source (device level)
- Data minimization principle satisfied.

Figure 2. Privacy-First Data Flow

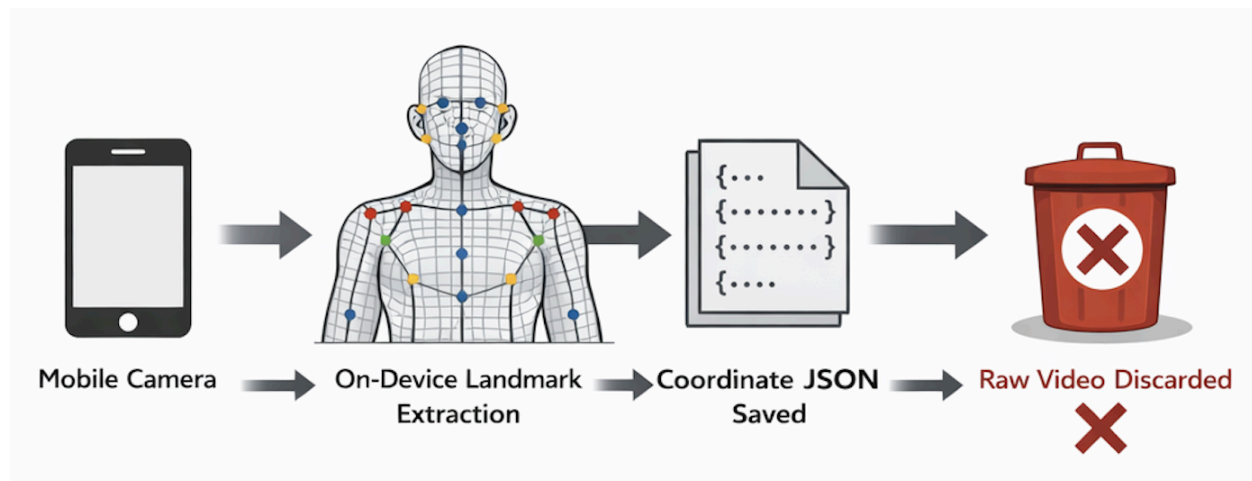

Multi-Stream Transformer Architecture

The proposed model will use a multi-stream Transformer architecture with three parallel encoders. One encoder will process hand motion, another will process facial landmarks, and the third will process pose landmarks. Each encoder will learn modality-specific patterns before the outputs are combined through a cross-attention fusion layer. The fusion mechanism allows the facial stream to influence the interpretation of the hand stream and the pose stream to contribute contextual information about movement and posture.

The fused representation will then be passed to a Transformer decoder that generates the final text output. This architecture is appropriate because Transformers are strong at modeling long-range dependencies and can manage the interaction between multiple synchronized streams. The design is also supported by recent research: Gueuwou, Du, Shakhnarovich, and Livescu (2025) show that multi-stream translation is a strong strategy at scale, while Jang et al. (2025) show that contextual cues improve translation on continuous sign language tasks. For the NSL use case, the advantage is that the model can learn not only what a signer is doing with the hands, but also how facial and body context changes the meaning of that motion.

Implementation and Evaluation

The technical implementation will be delivered through a two-phase mobile application built in Expo and React Native. In Phase 1, the app will function as a data collection tool that displays sentence prompts, records signing sessions, and sends videos through the on-device landmark extraction pipeline. In Phase 2, the app will become a translation interface where users can sign into the camera and receive an English translation in real time. Users will then be able to provide simple up-or-down feedback to indicate whether the output is useful, accurate, or in need of correction. That feedback will be logged and used to prioritize samples for retraining.


Validation Strategy and Data Partitioning

Given the limited corpus size (100 sentences $\times$ $\sim$ 35 signers), the project employs a signer-independent stratified split to ensure robust generalization assessment. The dataset is partitioned as follows: 70% for training (approximately 24 signers), 15% for validation (5-6 signers), and 15% for final testing (5-6 signers). This signer-independent approach ensures that the model is evaluated on entirely unseen individuals, preventing signer-specific idiosyncrasies from inflating performance metrics. Stratification ensures proportional representation across all five linguistic categories (declarative, interrogative, negation, temporal, high-utility) in each split. During Phase 4 model fine-tuning, 5-fold cross-validation will be used on the training set to

optimize hyperparameters without exhausting the held-out validation data. The test set remains strictly untouched until final evaluation to prevent data leakage from the Human-in-the-Loop feedback loop. This partitioning strategy aligns with low-resource best practices in sign language research, where signer independence is considered more stringent than random frame-level splits (Rastgoo et al., 2021).


Evaluation will combine quantitative and qualitative methods. Quantitatively, translation output will be measured with BLEU and ROUGE, which are standard metrics for assessing overlap between generated and reference text. Qualitatively, Deaf participants will review selected translations and rate naturalness, grammaticality, and overall usefulness on a Likert scale. This mixed evaluation is important because automatic metrics alone may not fully capture the meaning carried by facial cues, timing, and discourse structure. The literature on sign language translation consistently warns that data scarcity, alignment difficulties, and evaluation remain recurring problems, which is why the proposal combines translation metrics with human validation (Núñez-Marcos et al., 2023; Rust et al., 2024).

Figure 3. Multi-Stream Transformer Architecture

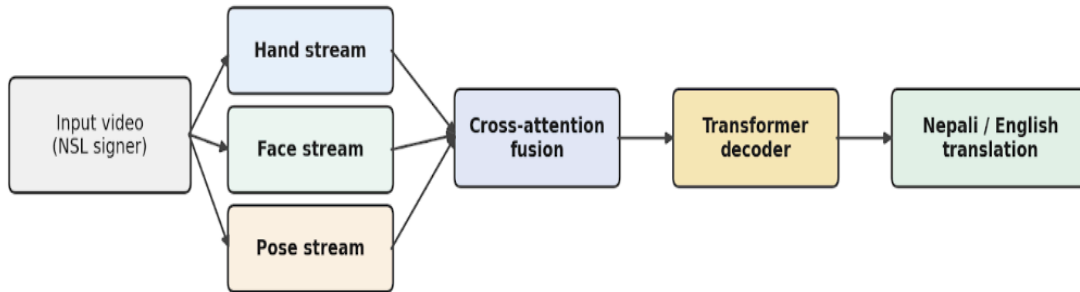

Landmark-based representation preserves manual gestures, facial markers and body context while avoiding raw video storage.

Figure 4. Data Collection and Ann

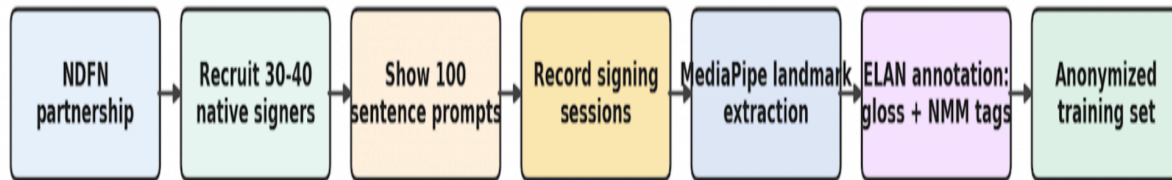


The workflow is designed to capture language use in context, while storing only landmark coordinates rather than raw biometric video.

Research Plan

The project will be carried out in five phases across the proposed six-month schedule. Phase 1 will focus on institutional coordination with NDFN and ethics approval. Phase 2 will cover the release of the first mobile app version and the collection of continuous NSL data in the Kathmandu Valley. Phase 3 will focus on ELAN annotation and pre-training with ISL data so that the model can learn transferable sign-language representations. Phase 4 will involve model fine-tuning, integration of the translation pipeline, and release of the second app version for community testing. Phase 5 will be dedicated to evaluation, refinement, and final thesis submission.

Figure 5. Execution Timeline

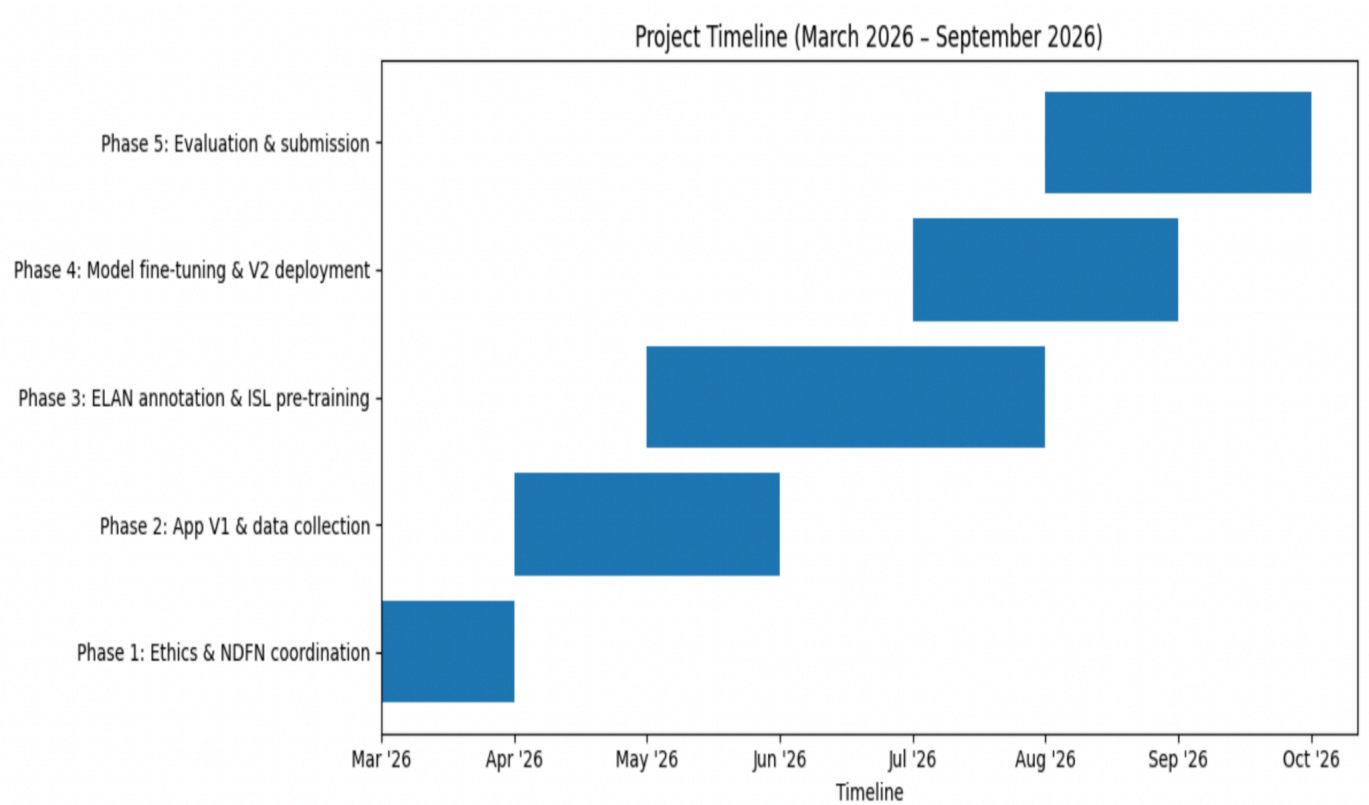

Summary

This proposal outlines a feasible and socially meaningful approach to advancing Nepali Sign Language translation. The project addresses the core bottleneck identified in the literature: the lack of continuous NSL data, the absence of explicit non-manual marker modeling, and the need for evaluation methods that reflect real linguistic use. By combining a community-led corpus, privacy-preserving landmark extraction, a multi-stream Transformer, and feedback from Deaf users, the study aims to create a strong baseline for context-aware NSL translation.

The expected contribution is not only a working prototype but also a reusable research framework for future sign language work in Nepal. If successful, the project will provide a foundation for more advanced accessibility tools and will demonstrate how technical design can be aligned with community needs, privacy concerns, and low-resource constraints.

References

- Duarte, A., Palaskar, S., Ventura, L., Ghadiyaram, D., DeHaan, K., Metze, F., Torres, J., & Giro-i-Nieto, X. (2021). How2Sign: A large-scale multimodal dataset for continuous American sign language. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition* (pp. 2735-2744). <https://doi.org/10.1109/CVPR46437.2021.00276>
- Gueuwou, S., Du, X., Shakhnarovich, G., & Livescu, K. (2025). SignMusketeers: An efficient multi-stream approach for sign language translation at scale. In *Findings of the Association for Computational Linguistics: ACL 2025* (pp. 22506-22521). <https://doi.org/10.18653/v1/2025.findings-acl.1157>
- Hamidullah, Y., van Genabith, J., & España-Bonet, C. (2024). Sign language translation with sentence embedding supervision. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)* (pp. 425-434). <https://doi.org/10.18653/v1/2024.acl-short.40>
- Jang, Y., Raajesh, H., Momeni, L., Varol, G., & Zisserman, A. (2025). Lost in translation, found in context: Sign language translation with contextual cues. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition* (pp. 8742-8752).
- Núñez-Marcos, A., Perez-de-Viñaspre, O., & Labaka, G. (2023). A survey on sign language machine translation. *Expert Systems with Applications*, 213, 118993. <https://doi.org/10.1016/j.eswa.2022.118993>
- Rastgoo, R., Kiani, K., & Escalera, S. (2021). Sign language recognition: A deep survey. *Expert Systems with Applications*, 164, 113794. <https://doi.org/10.1016/J.ESWA.2020.113794>
- Rastgoo, R., Kiani, K., Escalera, S., Athitsos, V., & Sabokrou, M. (2024). A survey on recent advances in sign language production. *Expert Systems with Applications*, 243, 122846. <https://doi.org/10.1016/j.eswa.2023.122846>
- Rust, P., Shi, B., Wang, S., Camgoz, N. C., & Maillard, J. (2024). Towards privacy-aware sign language translation at scale. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)* (pp. 8624-8641). <https://doi.org/10.18653/v1/2024.acl-long.467>
- Sunuwar, J., Borah, S., & Kharga, A. (2024). NSL23 dataset for alphabets of Nepali sign language. *Data in Brief*, 53, 110080. <https://doi.org/10.1016/j.dib.2024.110080>
- Zheng, J., Chen, Y., Wu, C., Shi, X., & Kamal, S. M. (2021). Enhancing neural sign language translation by highlighting the facial expression information. *Neurocomputing*, 464, 462-472.

Appendices

Appendix A: Final Sentence Corpus and Corpus Organization

The proposed NSL corpus is organized into five balanced categories to ensure that the dataset captures both baseline manual signing and the non-manual grammatical features required for context-aware translation. Each category contains 20 sentences, giving a total corpus size of 100 sentences. The structure is intended to support sentence-level translation, multimodal fusion, and targeted evaluation of grammatical functions such as interrogatives, negation, temporal marking, and practical utility expressions.

Corpus Organization

The sentence corpus is divided as follows:

1. **Category A: Simple Declarative Sentences**
 - a. These sentences represent baseline handshapes and basic sentence structures used for general communication.
2. **Category B: Interrogative Sentences**
 - a. These sentences are designed to test facial grammar, especially eyebrow raise and question marking.
3. **Category C: Negation Sentences**
 - a. These sentences are designed to test head shake, mouth morphemes, and negative grammatical marking.
4. **Category D: Temporal and Sequential Sentences**
 - a. These sentences are designed to test body pose, motion flow, and time-related context.
5. **Category E: High-Impact Practical Utility Sentences**
 - a. These sentences reflect everyday communication needs and emergency or service-related situations.

Final Sentence List

Category A: Simple Declarative Sentences	Category B: Interrogative Sentences
I am going home.	What is your name?
My name is [Name].	Where is the hospital?

The school is open.	Are you hungry?
I like coffee.	Can you help me?
It is a sunny day.	When does the shop open?
The bus is late.	How do I get to Kathmandu?
I have a pen.	Is this your bag?
We are learning.	Who is that person?
The water is cold.	Why are you late?
I see a mountain.	Do you know sign language?
She is reading a book.	Where are you going?
He is at the market.	What time is it?
The room is quiet.	Can I sit here?
We are in Kathmandu.	Is the bus coming?
The teacher is busy.	Do you live here?
My brother is tall.	Are you a student?
The food is ready.	Which road should I take?
I feel happy today.	When will you return?
The sky is clear.	Can you repeat that?
This is my house.	Is the water safe to drink?

Category C: Negation Sentences	Category D: Temporal and Sequential Sentences
I do not understand.	I went yesterday.
I don't want sugar.	We will meet tomorrow.
No, that is wrong.	I woke up at 7 AM.
The doctor is not here.	Next week is a holiday.
I cannot sign fast.	Last year I was a student.

There is no more rice.	I will finish soon.
I didn't see the car.	Before I eat, I wash hands.
He is not my brother.	After the movie, I went home.
I don't like spicy food.	Monday is a busy day.
It is not raining.	It takes two hours.
She is not at home.	I will arrive in the evening.
I do not agree.	She came before lunch.
The store is not open.	We studied after class.
We cannot wait longer.	The meeting starts at 9 AM.
There is no money left.	I left early this morning.
He did not come today.	The shop closes at 5 PM.
This is not mine.	I will call you later.
I am not ready.	We finished the task yesterday.
They are not coming.	He will travel next month.
I cannot go now.	I eat breakfast before class.

Category E: High-Impact Practical Utility Sentences
I need a doctor now.
Where is the emergency room?
I lost my wallet.
Please call an interpreter.
I am allergic to medicine.
There is a fire.
I am feeling dizzy.

Please write it down.
Where is the police station?
need help with this form.
I need water.
Please help me.
I missed my bus.
My phone is not working.
Can you show me the way?
I need to go to the hospital.
Please speak slowly.
I do not feel well.
My child is sick.
I need urgent assistance.