

(a) where the branches go: the fork in each representation space, one path per rule


raw layer 5 (reference space)

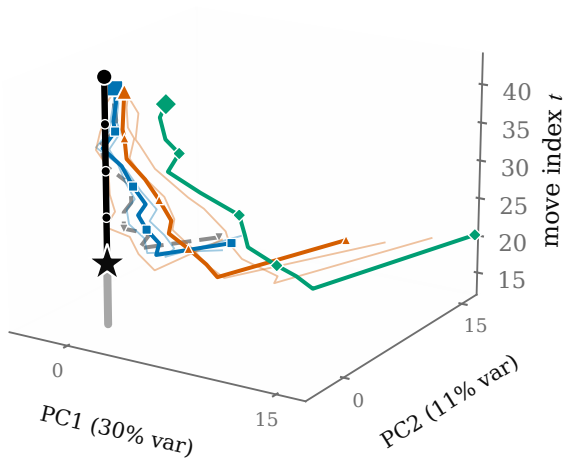


PAnneal (p-anneal, pen 0.042)

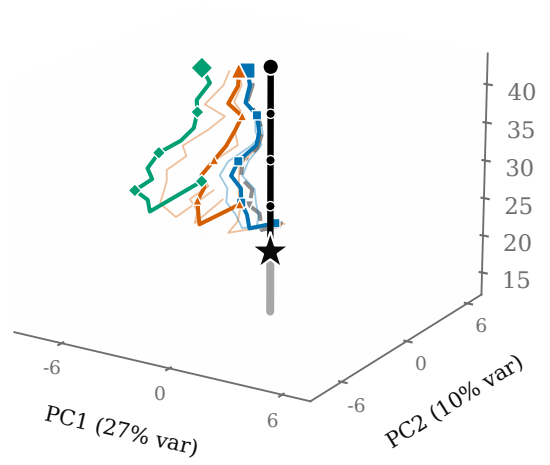


Standard (L1 0.059)

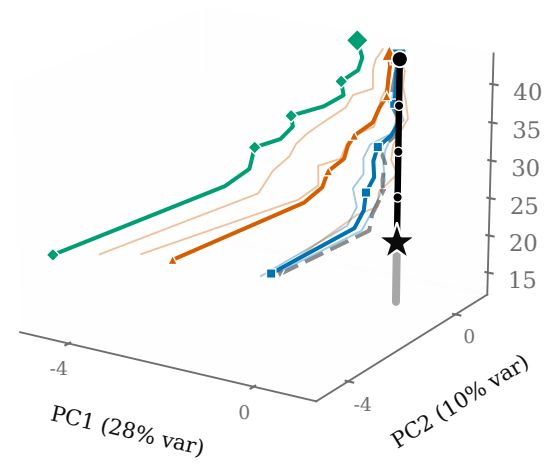


GatedSAE (L1 1.37)

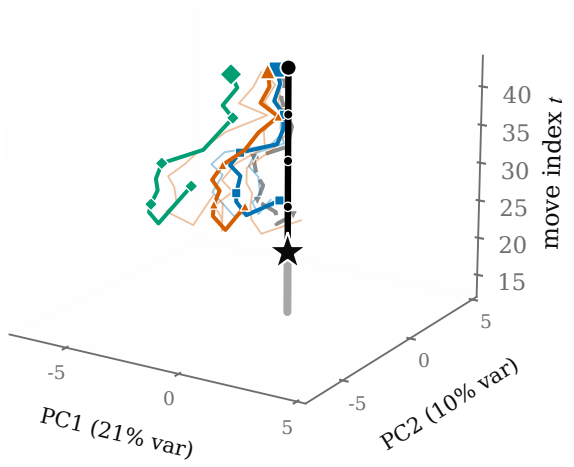


TopK (k=80)

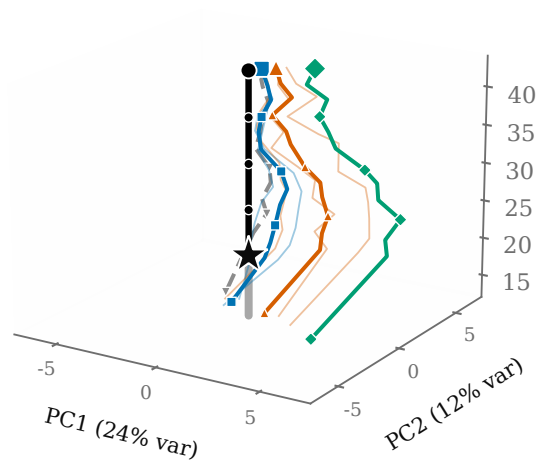


GatedAnneal (p-anneal, pen 0.955)

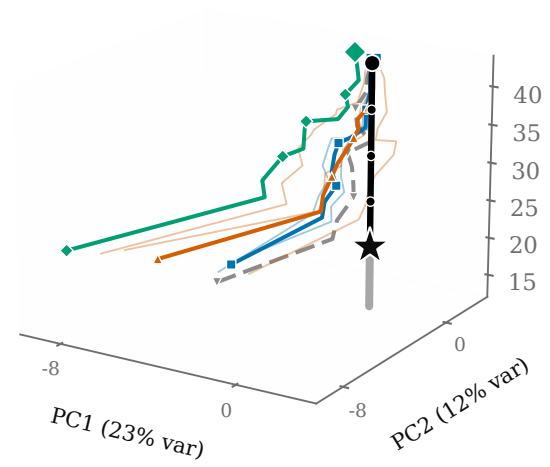


BatchTopK (k=80)

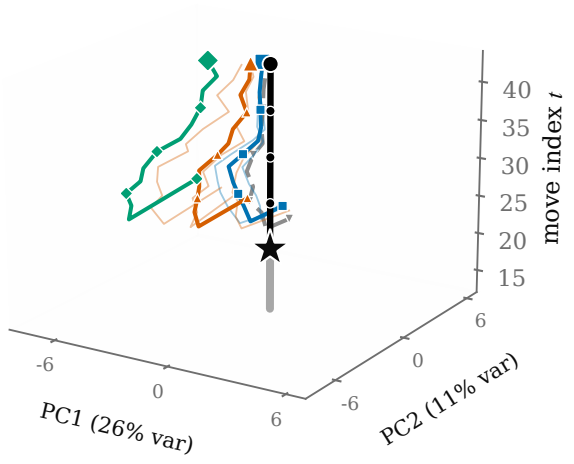


CosineSpaDE (γ=1.0)

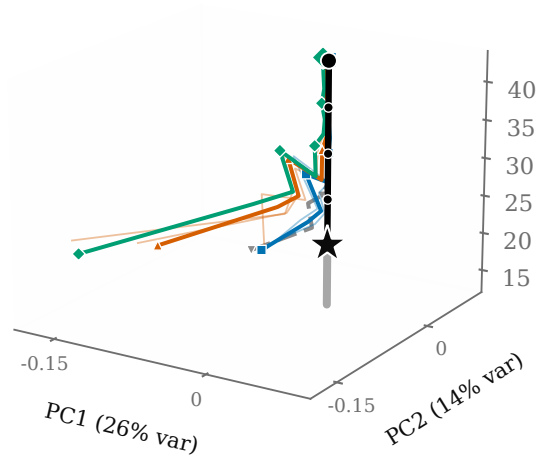

SpaDE (λ=1e-3, γ=1e-4)

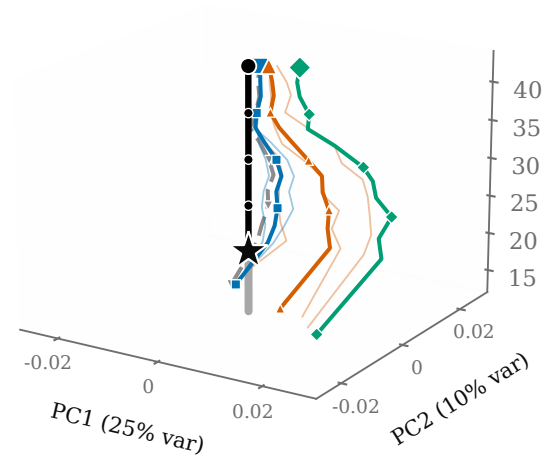


(b) what they are: the position at t_0 (Black to move), and the move each branch plays there

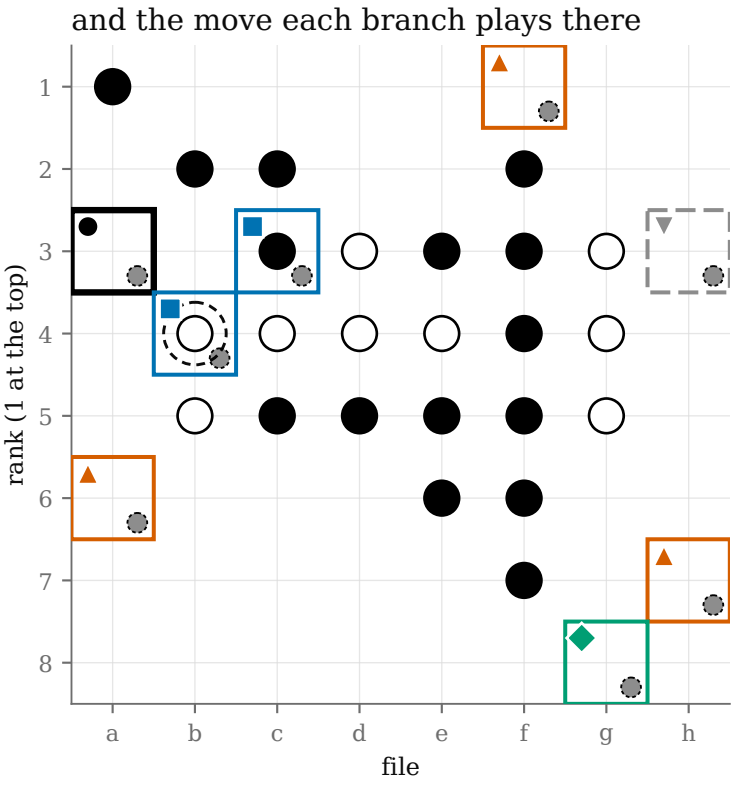

shared prefix (branches identical)
reference (the game as played)
R1 placement (mean of 2)
R2 bracketing (mean of 3)
R3 turn (mean of 1)
one category inside a rule (within-rule spread)
branch point t_0
control: another legal move (null)

discs in absolute colour, black to move at t_0; outlined cell = a branch square, its marker in the corner so a disc underneath stays visible; small dashed disc in the opposite corner = the disc that branch would place, never a disc on the board; dashed ring = a disc the played move flips; a rule's member categories share one colour and marker here, and are told apart by their square

(c) how far they run: each rule's distance from the reference, in the plane its cell draws (bar) and in that cell's full space (open marker), as a multiple of the same cell's legal control

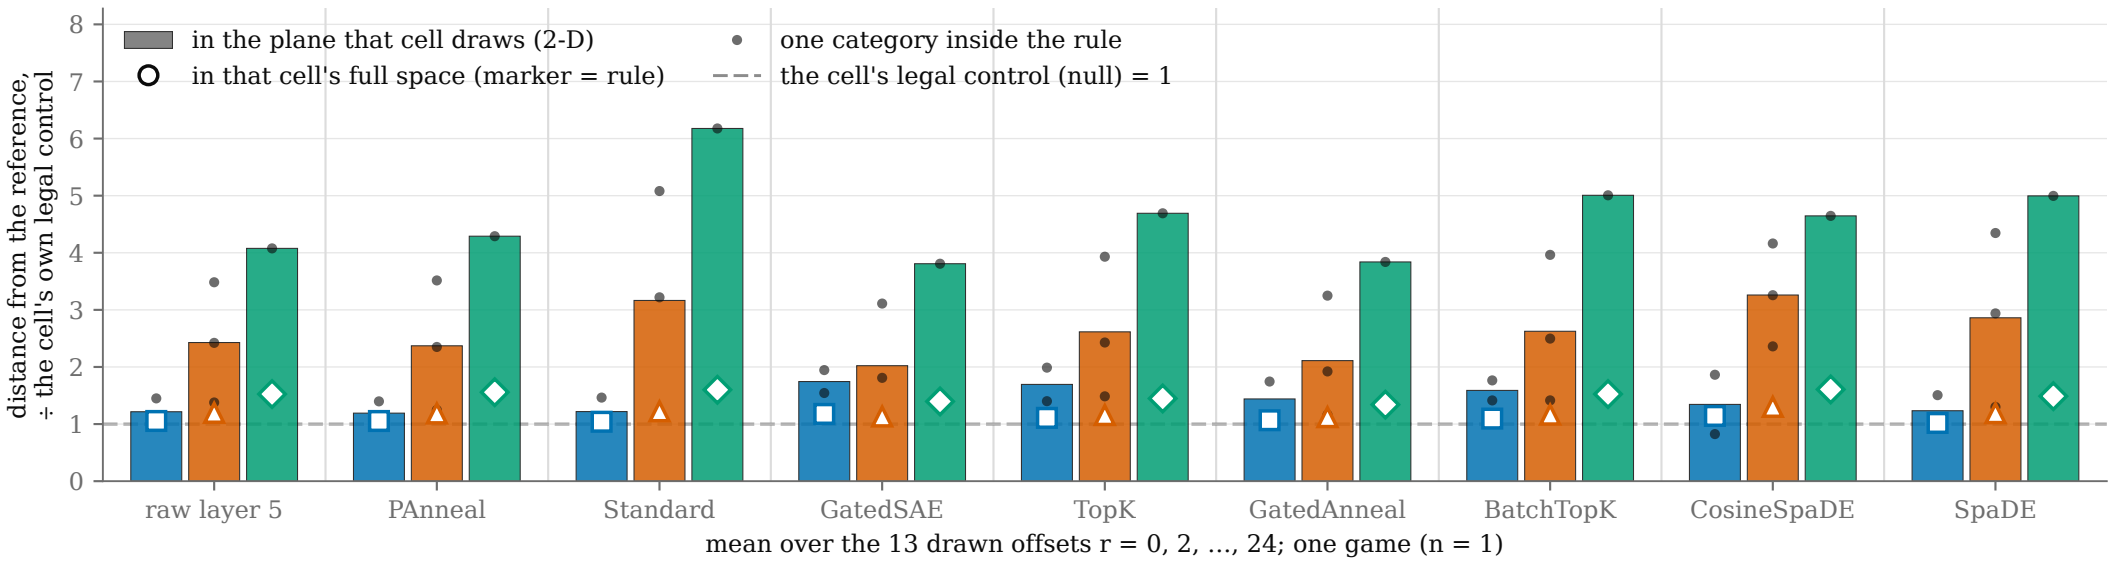

game 1235 is selected, not typical: the argmax over 1550 branch-complete games of its illegal branches' mutual separation (README)

R1 placement (2): square holds the mover's disc · square holds the opponent's disc

R2 bracketing (3): empty, touches no discs · empty, touches only the mover's discs · empty, touches opponent discs, no line closes

R3 turn (1): flips only for the opponent (turn confusion)