step length at the fork, as a multiple of the reference branch's at the same position — one curve per constraint rule over its member categories, drawn faint; n = 1 game, so no interval over games

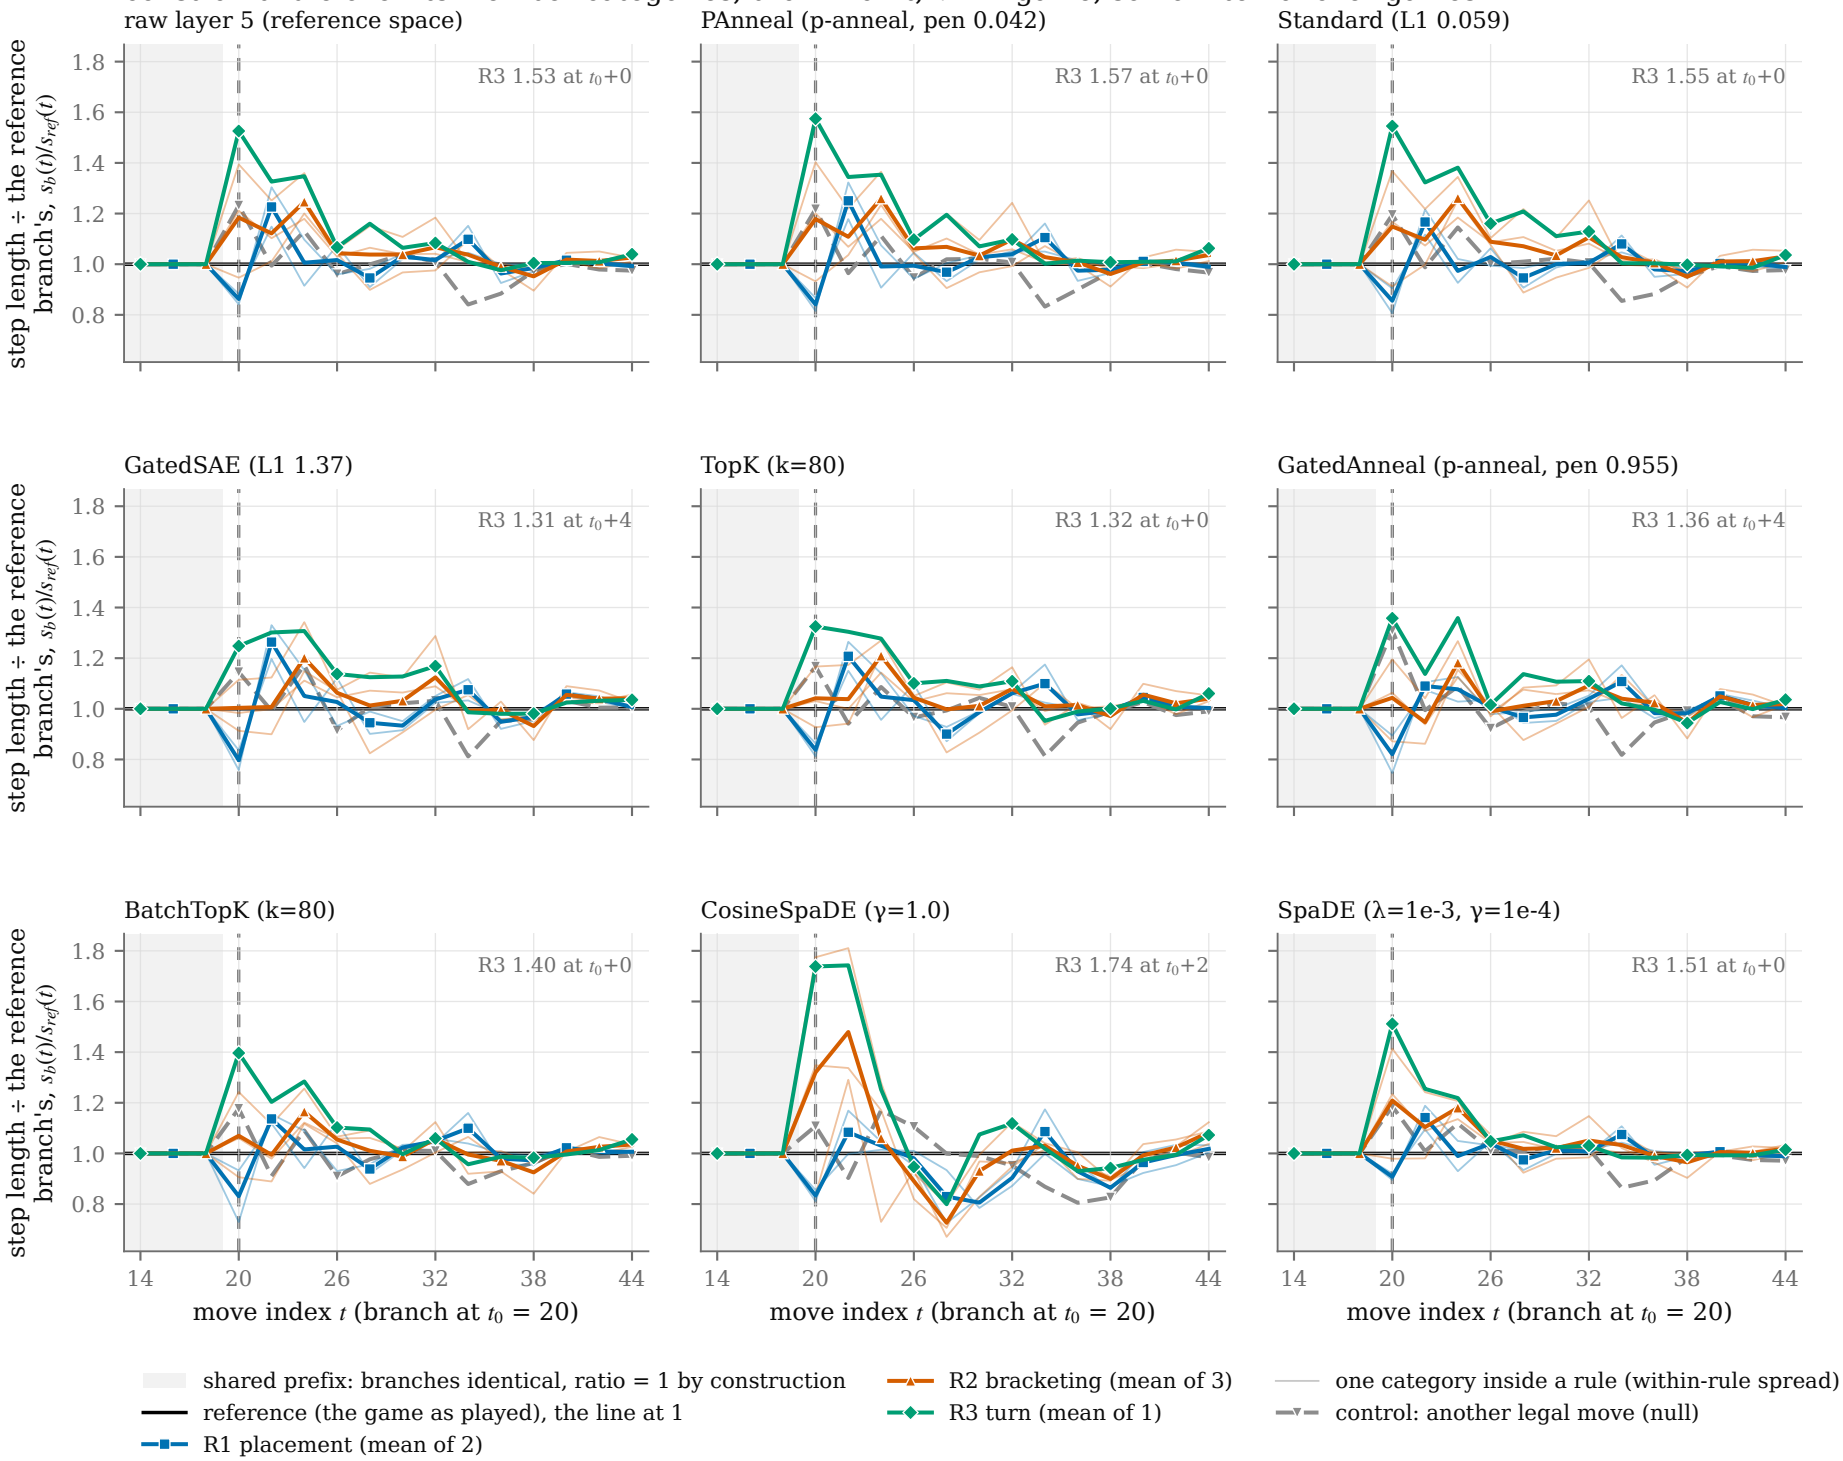

shared prefix: branches identical, ratio = 1 by construction
reference (the game as played), the line at 1
R1 placement (mean of 2)
R2 bracketing (mean of 3)
R3 turn (mean of 1)
one category inside a rule (within-rule spread)
control: another legal move (null)

one step spans 4 plies: positions are sampled every 2 plies at t_0's parity (fork_plane.positions), the fork family's convention. ../rule_curvature samples every ply instead, where the same layer-5 legal corpus steps 29.2 against 18.9 here (../theta_comparability) — the two conventions measure different quantities and must never share an axis.
within ÷ between-rule spread of the drawn ratio over $t \geq t_0$, in raw layer 5, one game: 0.757. Near 1 the three curves are a label rather than a finding, and the faint member traces carry the evidence; the nine spaces' values are in README.md.
game 1235 is selected, not typical: the argmax over 1550 branch-complete games of its illegal branches' mutual separation (README)
R1 placement (2): square holds the mover's disc · square holds the opponent's disc
R2 bracketing (3): empty, touches no discs · empty, touches only the mover's discs · empty, touches opponent discs, no line closes
R3 turn (1): flips only for the opponent (turn confusion)