

NOTES & LEGENDS:

1. ALL DIMENSIONS ARE IN MILLIMETERS AND ALL LEVELS GIVEN IN METERS UNLESS OTHERWISE NOTED.

2. FINISHED FLOOR AND ELEVATION - F.F.L. +0.00 METERS SHOWN IN THIS DRAWING IS EQUIVALENT TO SEA LEVEL.

3. THIS GRADING LAYOUT DWD NO. RCC-NPC-ASR-CV-001-001.

4. THIS DRAWING IS TO BE USED IN CONJUNCTION WITH RELEVANT ELECTRICAL, MECHANICAL, TELECOM AND STRUCTURAL DRAWINGS.


5. CONTRACTOR TO VERIFY ALL DIMENSIONS AND CONDITIONS ON SITE PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPANCY SHOULD BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE CLIENT FOR CLARIFICATION BEFORE PROCEEDING WITH THE AFFECTED PART OF WORK.

0	COLUMNS GRID	SPOT ELEVATION
XX	YY A ZZ	ROOM NAME & NUMBER
50	ISO M2	WALL/FINISH TYPE
10	DOOR TAGS	

WALLS LEGEND

TYPE	DESCRIPTION
CW 02	GLAZED CURTAIN WALL PANELS
CW 03	SPANREL PANELS
CW 04	FRAMELESS GLASS PARTITION
LV 01	CURTAIN LOWER PARTITION
WP 02	EXTERIOR WALL PANEL SYSTEM 150MM THICK - COLOR WHITE
WP 03	EXTERIOR WALL PANEL SYSTEM 150MM THICK - COLOR WHITE
WP 04	INTERIOR WALL PANEL SYSTEM 150MM THICK 1-HR FIRE RATED
WP 05	WALL PANEL SYSTEM 100MM THICK FOR STAGING AREA
WP 06	WALL PANEL SYSTEM 150MM THICK FOR STAGING AREA
WP 07	UN-INSULATED WALL PANEL SYSTEM 150MM THICK
WP 08	SOLID POLYMER FABRICATION RESIN TOILET COMPARTMENTS
WP 09	SOLID POLYMER FABRICATION RESIN TOILET COMPARTMENTS 150MM
WP 10	ACP CLADDING 4MM THICK
WP 11	EXTERIOR WALL PANEL SYSTEM 150MM THICK - COLOR WHITE
WP 12	EXTERIOR WALL PANEL SYSTEM 150MM THICK - COLOR WHITE
WP 13	COMPOSITE PANEL CLADDING 20MM THICK
WP 14	WALL PANEL SYSTEM 150MM THICK FOR CHILLED & FREEZER ROOMS
WP 15	GREEN WALL
WP 16	EXTERIOR WALL PANEL SYSTEM 150MM THICK - COLOR WHITE
WP 17	DECORATIVE WOOD WALL PANELS
WS 01	CONCRETE MASONRY UNIT WALL (UNIT: 400X200, 150MM THICK)
WS 02	CONCRETE MASONRY UNIT WALL (UNIT: 400X200, 150MM THICK)
WS 03	CONCRETE MASONRY UNIT WALL (UNIT: 400X200, 200MM THICK)
WS 04	CONCRETE MASONRY UNIT WALL (UNIT: 400X200, 200MM THICK)
WS 05	CONCRETE MASONRY UNIT WALL 2-HRS FIRE RATED (UNIT: 400X200, 200MM THICK)
WS 06	CONCRETE MASONRY UNIT WALL (UNIT: 400X200, 150MM THICK) + 30MM AIR SPACE + 30MM INSULATION + CONCRETE MASONRY UNIT WALL (UNIT: 400X200, 150MM THICK)
WS 07	CONCRETE MASONRY UNIT WALL (UNIT: 400X200, 150MM THICK) + 30MM AIR SPACE + 30MM INSULATION + 30MM CONCRETE MASONRY UNIT WALL (UNIT: 400X200, 150MM THICK)
WS 08	20MM THICK SAND CEMENT PLASTER TO EXTERNAL WALLS INCLUDING EXTERNAL PAINT
WS 09	20MM THICK SAND CEMENT PLASTER TO INTERNAL WALLS WITH WASHABLE OIL PAINT
WS 10	20MM THICK INSULATED TWO LAYERS OF GYPSUM BOARD FROM EACH SIDE - WALL PARTITIONS
WS 11	2-HRS FIRE RATED GYPSUM WALL - 2 LAYERS OF FIRE RATED GYPSUM FROM BOTH SIDES 12.5MM THICK FOR EACH LAYER INCLUDING ROCKWOOL INSULATION
WS 12	150MM THICK INSULATED GYPSUM DRYWALL CLADDING
WS 13	150MM THICK INSULATED GYPSUM DRYWALL CLADDING
WS 14	150MM THICK INSULATED GYPSUM BOARD WALL PANELS
WS 15	150MM THICK INSULATED GYPSUM BOARD WALL PANELS
WT 01	PAINTING FINISHING

KEY PLAN :

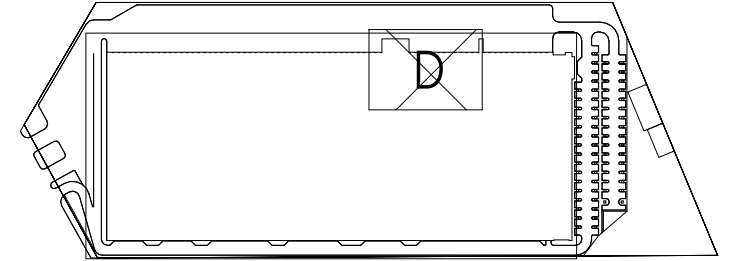

REV.	DATE	DESCRIPTION OF REVISION
00	16/08/2025	ISSUE FOR DETAILED DESIGN
01	03/09/2025	ISSUE FOR DETAILED DESIGN
02	20/10/2025	ISSUE FOR DETAILED DESIGN

SEAL & SIGNATURE:

DRAWN BY	CHECKED BY	DATE (DD.MM.YYYY)
AMM	ZYD	03/07/2025

NUPCO WAREHOUSE ASER, KSA

CLIENT:



PROJECT MANAGER:



PROJECT PROGRAM MANAGER:



ARCHITECTURE & ENGINEERING CONSULTANT:



PHASE & DISCIPLINE:

DETAIL DESIGN
ARCHITECTURE

DRAWING TITLE:

STAIRCASE 2 - SECTIONS


PROJECT NO.	DRAWING NUMBER	REV
102	RCC-NPC-ASR-AR-00124	02
SCALE (A0)	AS INDICATED	

HANDRAIL LEGEND


REF.	DESCRIPTION
H01	1000MM GALVANIZED STEEL HANDRAIL - EPOXY PAINTED
H02	1000MM STAINLESS STEEL HANDRAIL
H03	1000MM STAINLESS STEEL HANDRAIL WITH GLASS
H04	1000MM STAINLESS STEEL HANDRAIL WALL MOUNTED
H04-B	1000MM GALVANIZED STEEL HANDRAIL WALL MOUNTED RAIL 50/3
H05	1000MM GALVANIZED STEEL HANDRAIL POWDER COATED RAIL 50/3

CEILING LEGEND

REF.	DESCRIPTION
C01	FIBER GYPSUM CEILING 600X600 MM
C02	PERFORATED METAL CEILING - 600X600MM GRID-MOISTURE RESISTANT
C03	FIBER GYPSUM CEILING 600X600 MM
C04	PAINTED GYPSUM BOARD SUSPENDED CEILING
C05	INSULATED ROOF SANDWICH PANEL - 150MM THICK
C06	COLD ROOM INSULATED PANELS - 200MM THICK
C07	BAFFLE CEILING

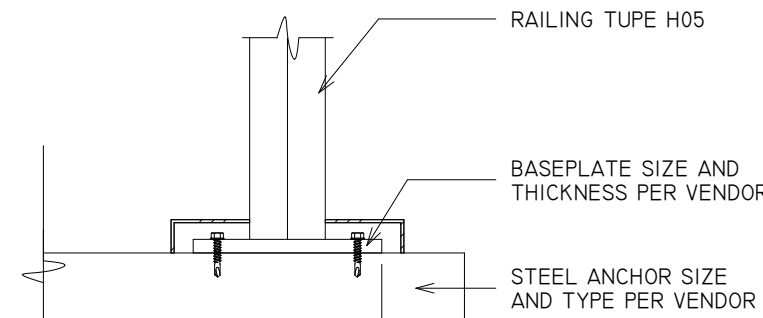

RAILING DETAILS 1 : 5

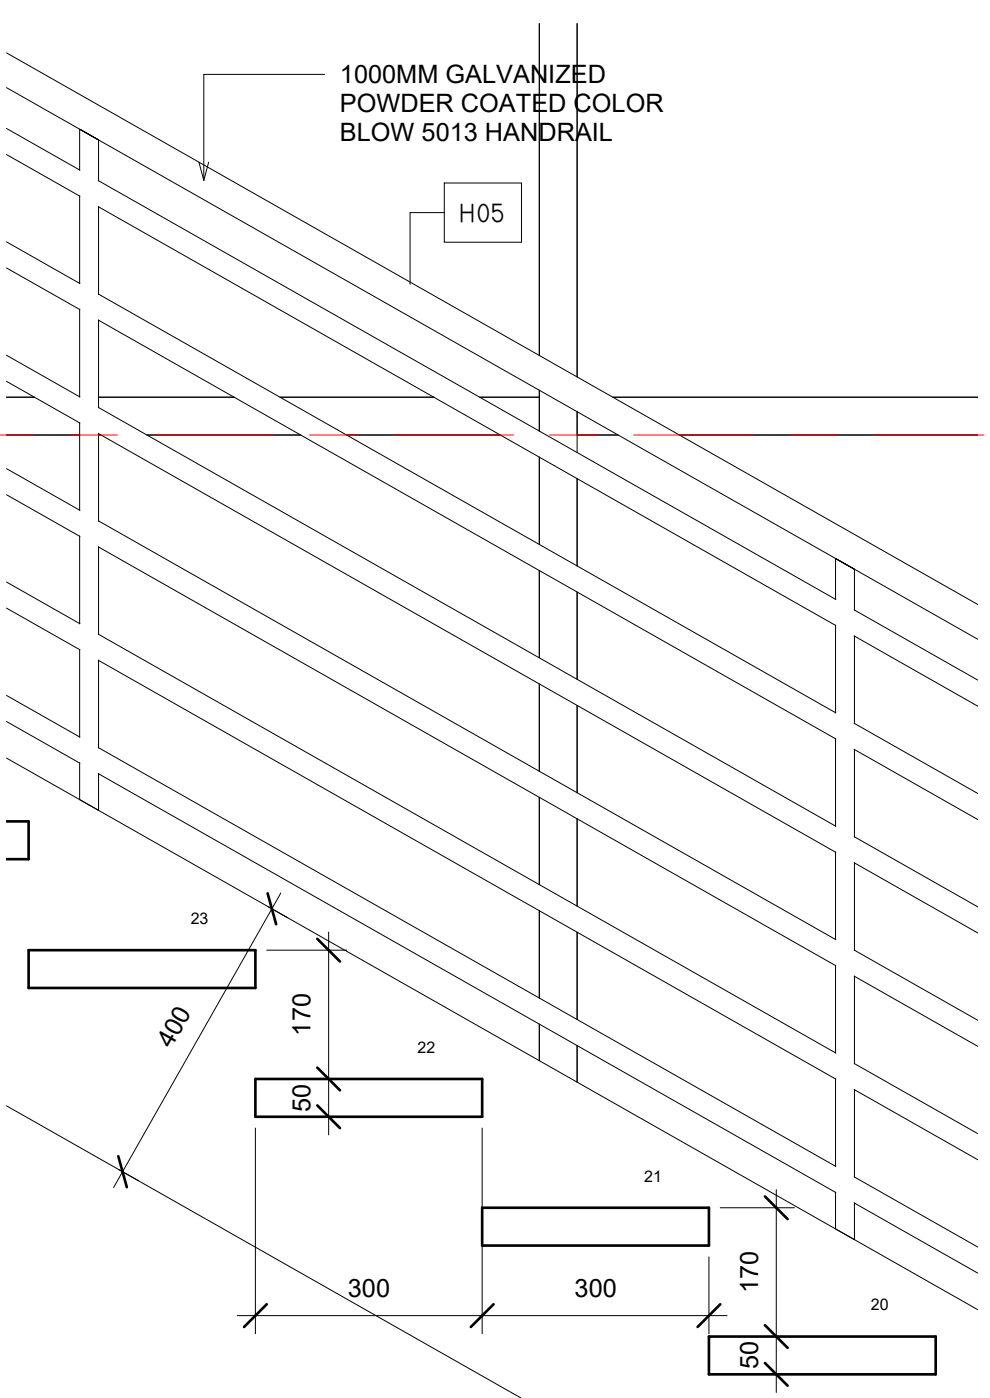

SECTION -2 (STAIRCASE -2) - CALLOUT 1 1 : 10

SECTION -1 (STAIRCASE -2) 1 : 30

SECTION -2 (STAIRCASE -2) 1 : 30