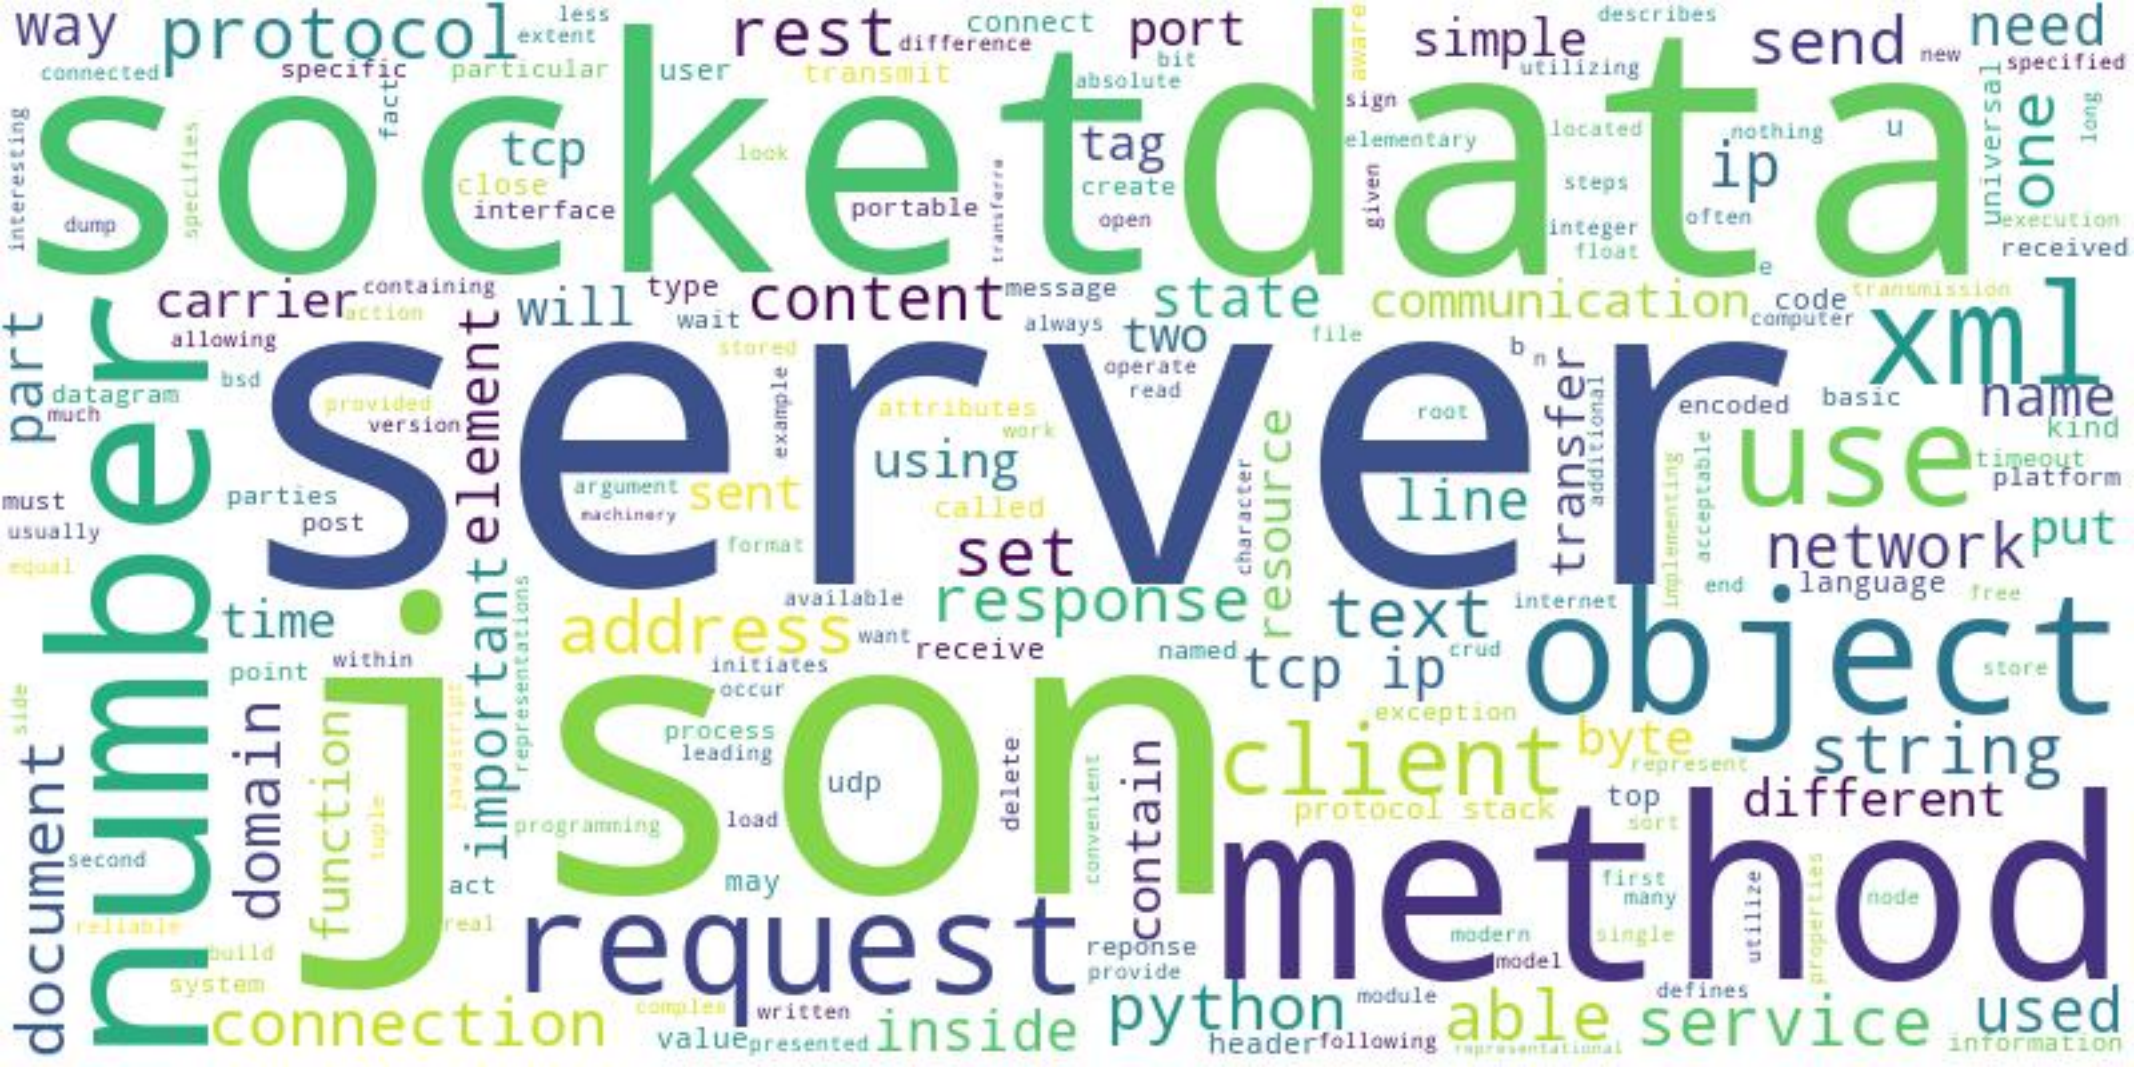
way
protocol
less
extent
rest
connect
difference
port
bit
aware
simple
describes
send
need
new
specified
connected
specific
particular
user
transmit
absolute
utilizing
socket
data
sign
fact
tcp
tag
elementary
located
nothing
u
universal
one
long
interesting
specifies
close
look
create
given
steps
ip
interface
portable
open
integer
often
execution
dump
transferre
float
received
e
carrier
containing
will
type
content
message
state
communication
code
transmission
part
allowing
action
wait
always
two
computer
server
xml
stored
file
b
n
datagram
bsd
operate
read
much
provided
version
example
attributes
root
encoded
basic
name
kind
element
work
using
use
timeout
must
parties
argument
sent
called
line
transfer
additional
platform
usually
post
machinery
resource
set
network
put
equal
format
character
implementing
acceptable
end
language
free
time
available
response
text
internet
address
want
receive
named
tcp ip
crud
object
point
within
initiates
occur
exception
store
process
leading
byte
client
string
side
domain
important
function
udp
delete
contain
protocol stack
top
different
number
representations
convenient
represent
sort
programming
load
second
act
may
first
many
node
reliable
real
reponse
modern
single
utilize
properties
build
provide
model
system
module
defines
complex
written
connection
value
inside
python
able
service
used
presented
header
following
representational
information
document
method
request