


SystemD with Hyprland on UWSM


TLDR: 'systemd-analyze dot --from-pattern="" --to-pattern=""' is extremely useful.

See this PDF: [systemd-analyze.man.pdf](#)


(targets)^2

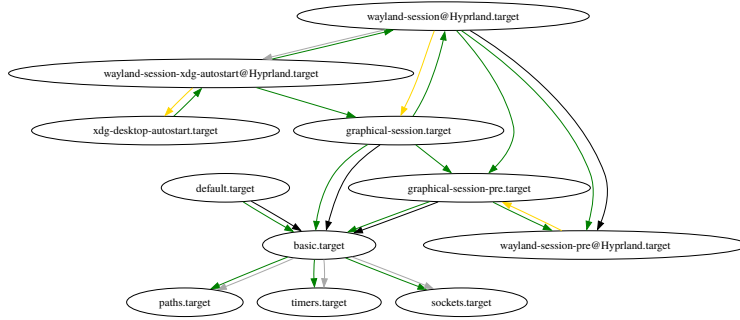


(slices)*(targets)




(non-templated services)^2

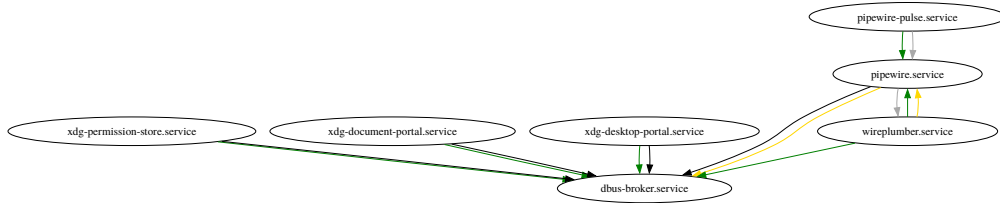

(slices + scopes + targets)^2

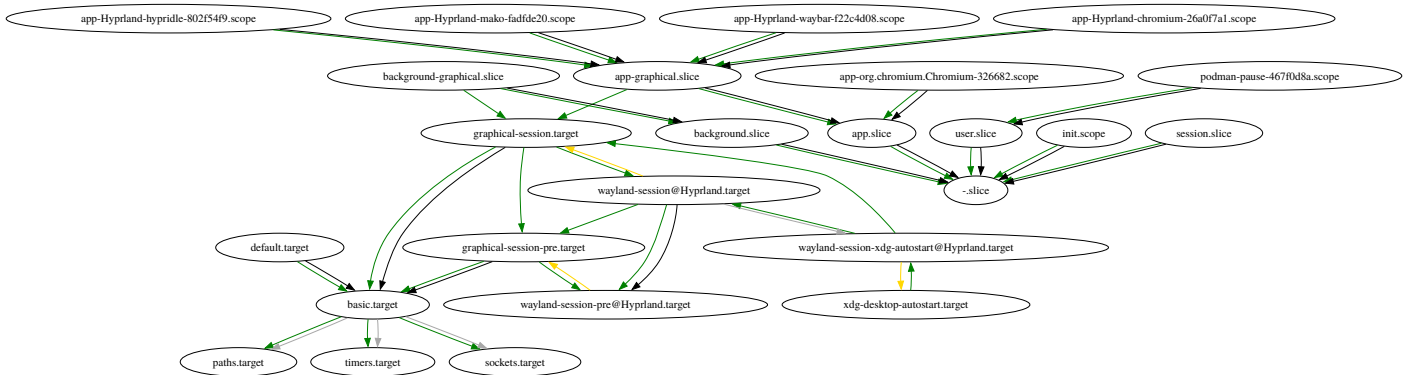

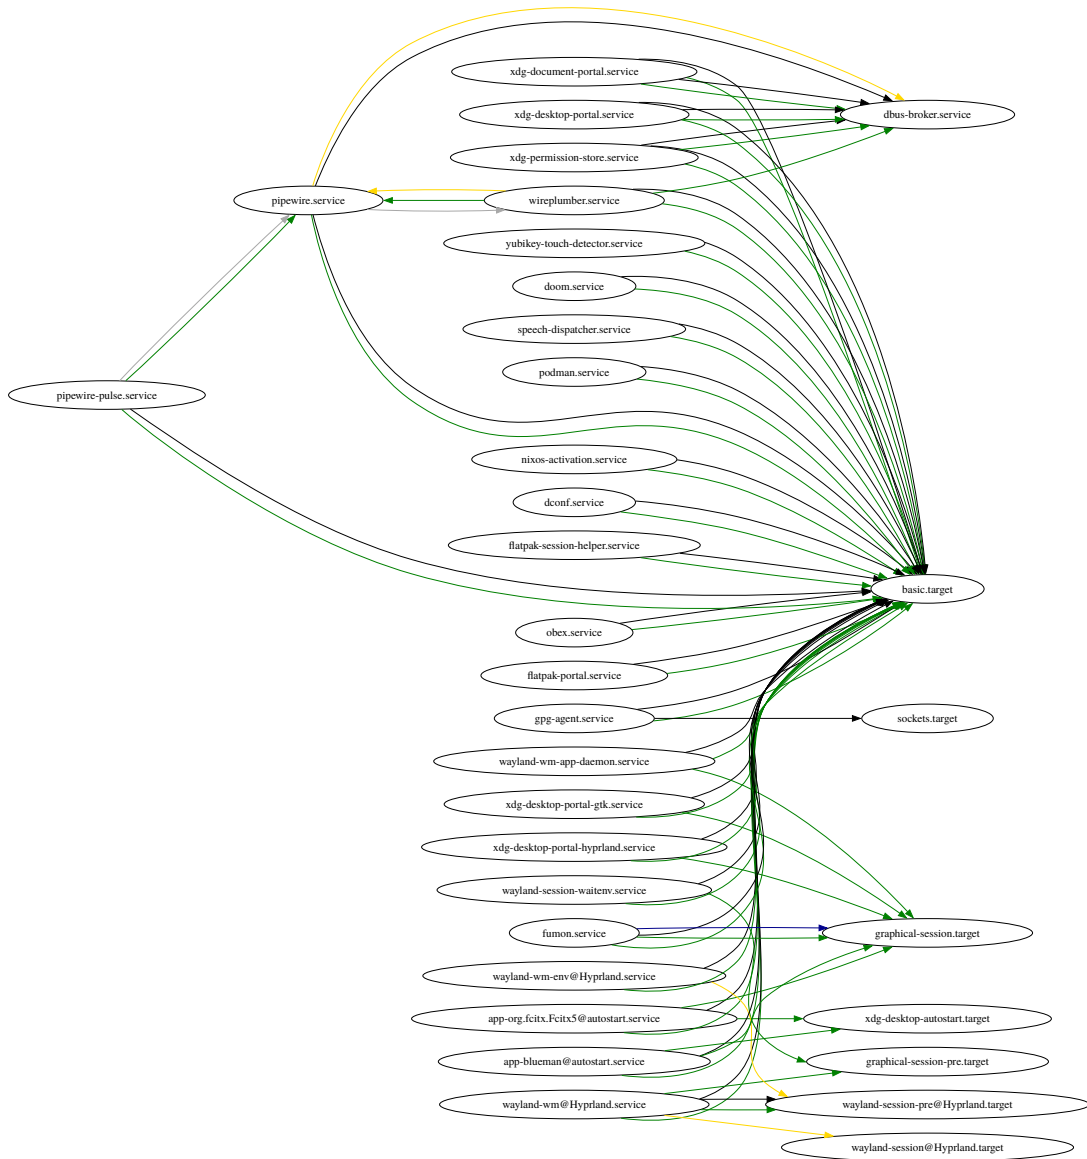

(Services)*(1 + Targets)