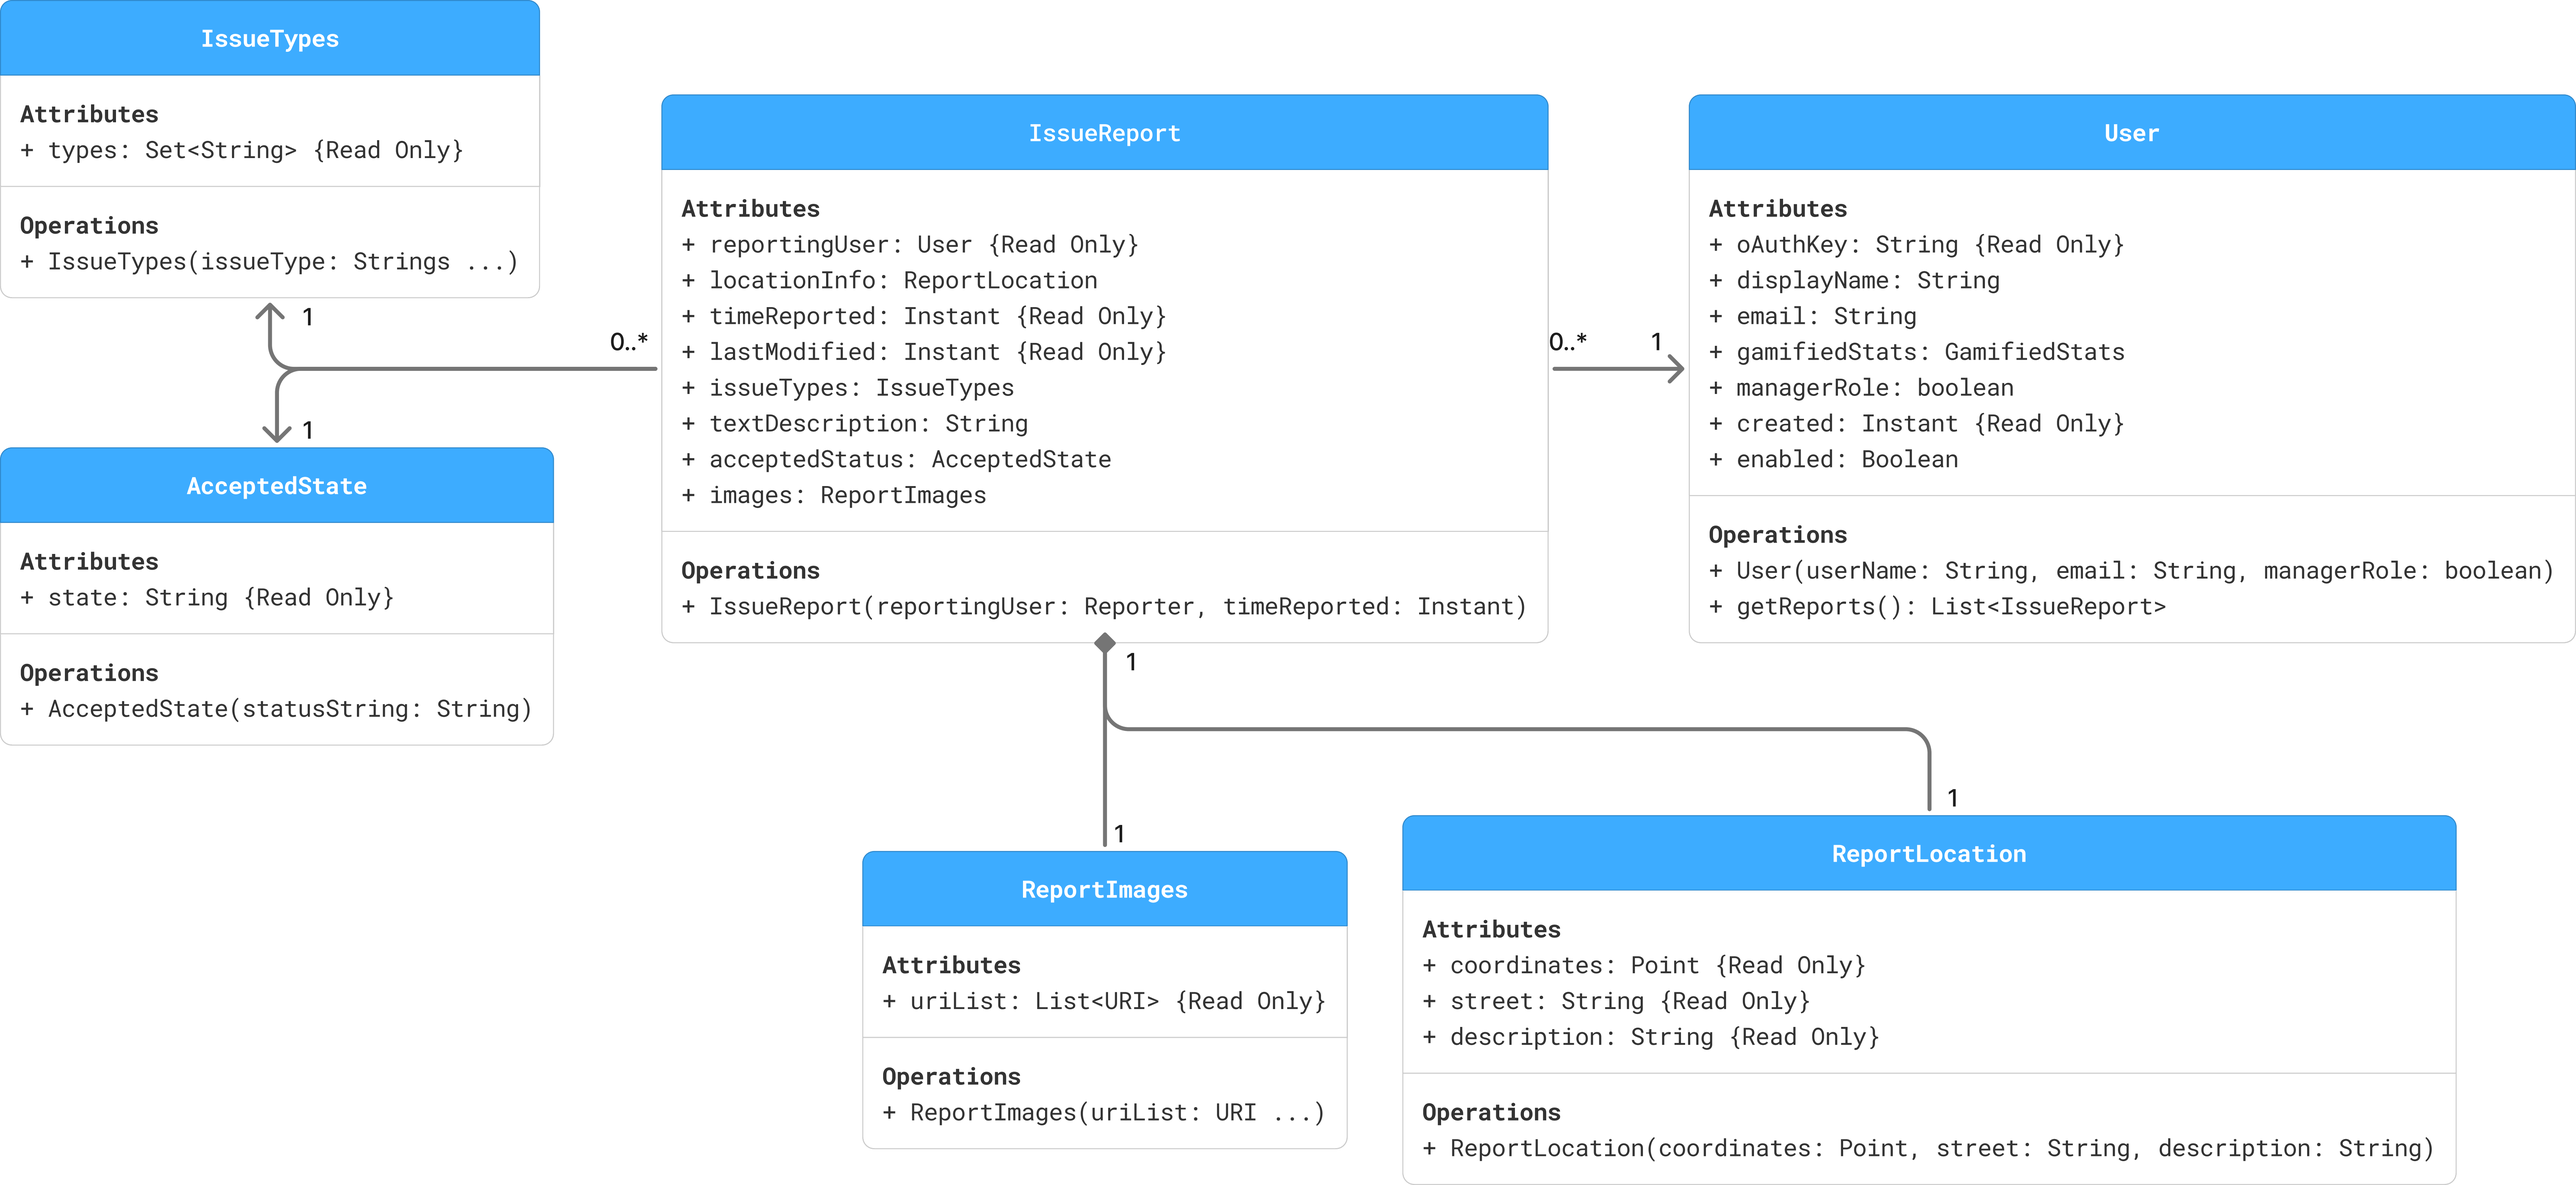
IssueTypes
Attributes
+ types: Set<String> {Read Only}
Operations
+ IssueTypes(issueType: Strings ...)
1
1
0..*
AcceptedState
Attributes
+ state: String {Read Only}
Operations
+ AcceptedState(statusString: String)
IssueReport
Attributes
+ reportingUser: User {Read Only}
+ locationInfo: ReportLocation
+ timeReported: Instant {Read Only}
+ lastModified: Instant {Read Only}
+ issueTypes: IssueTypes
+ textDescription: String
+ acceptedStatus: AcceptedState
+ images: ReportImages
Operations
+ IssueReport(reportingUser: Reporter, timeReported: Instant)
0..*
1
User
Attributes
+ oAuthKey: String {Read Only}
+ displayName: String
+ email: String
+ gamifiedStats: GamifiedStats
+ managerRole: boolean
+ created: Instant {Read Only}
+ enabled: Boolean
Operations
+ User(userName: String, email: String, managerRole: boolean)
+ getReports(): List<IssueReport>
1
1
1
ReportImages
Attributes
+ uriList: List<URI> {Read Only}
Operations
+ ReportImages(uriList: URI ...)
ReportLocation
Attributes
+ coordinates: Point {Read Only}
+ street: String {Read Only}
+ description: String {Read Only}
Operations
+ ReportLocation(coordinates: Point, street: String, description: String)