

Datadog Live Debugger audit

Beginner experience and professional QA for Live Debugger and Source Code Integration

Consolidated evidence checkpoint | 8 October 2026 at 21:51:46 UTC

Executive summary

Live capture, source attribution and scoped two-revision controls work in the tested setup. Four Medium and six Low findings remain. Metadata repair, restarts and bounded traffic add evidence; unexecuted branches, access gates and fixture limitations still constrain release confidence.

- **Preserve dirty drafts.** A save in another tab erased an unsaved condition.
- **Distinguish missing locals.** ddtrace 4.11.0 conflates absence with None.
- **Repair source linking.** Same-scope reinstall repaired the interrupted association.
- **Fix the quickstart.** Its .py-suffixed module command fails.
- Explain target errors. A blank-line diagnostic incorrectly suggests an unsupported decorator.
- **Clarify first choices.** Improve region, empty-state and navigation guidance.

Severity index below: HIGH 0 · MEDIUM 4 · LOW 6. Click a finding ID to jump to its detail page.

[Open the High severity only view](#)

63 cases: 23 PASS, 8 FINDING, 21 OPEN and 11 BLOCKED. OPEN comprises 19 in progress and 2 pending.

Decision boundaries

This is an evidence checkpoint, not release signoff. Every original case definition is retained. A finding does not complete every branch. Production-labeled synthetic capture remains unapproved. Current runtimes and known sessions are stopped; retained assets and remaining scope are explicit.

Severity ranked finding index

Record	Classification	Observed impact	Part
DOC01	MEDIUM · bug	Python portion fails the isolated module invocation check	2
SCI01	MEDIUM · recovery	Connect retry failed; same-scope reinstall restored association	2
FUNC01	MEDIUM · draft loss	Remote save silently discards an unsaved condition	2
FUNC02	MEDIUM · SDK values	Unbound/deleted locals serialize as explicit None	2
DOC02	LOW · bug	Navigation labels break mid-word at desktop width	1
UX01	LOW · UX	Permanent region choice precedes explanatory context	1
UX02	LOW · UX	Empty services and environments need a concrete setup recovery step	1
UX03	LOW · feedback	Invalid template leaves the correction implicit in the observed state	1
UX04	LOW · navigation	Direct event link needs an extra click to open its indexed snapshot	1
FUNC03	LOW · diagnostic	Blank-line rejection suggests an unsupported decorator	2

Scope and interpretation

The requested outcome is a real end-to-end debugging journey: create a fresh account, find the feature, prepare a simple application, observe runtime values, connect the matching source, and stop collection cleanly.

Two distinct review tracks

Beginner track. Assess what the page itself explains to someone unfamiliar with Datadog and APM. Record the first path, unclear terms, missing prerequisites, progress feedback, and recovery steps. Confusion is a UX assessment unless a specific promised behavior fails.

Professional QA track. Verify identity, configuration, deployed source revision, runtime state, error handling, permissions, lifecycle, and data presentation. A green badge or successful save is not evidence of a real event or correct source.

Evidence rules

- Genuine screenshots use disclosed crops, opaque privacy masks and thin outline annotations. No UI content is reconstructed. Recorded foreground limits and screenshot-only observations remain explicit.
- The early Python command check isolates quickstart syntax. Later browser captures establish the live baseline. A separate actual-package SDK reproduction checks local-variable collection/serialization without transmitting telemetry; it does not inspect the hosted transport payload.
- Only observed states are called passed or failed. Blocked and not-run cases remain explicit, including parts of otherwise useful partial tests.
- Report clocks are UTC; some UI controls display UTC-07:00. Screenshot-file timestamps and recording offsets are identified separately and are not interchangeable.

Severity definitions

Severity	Meaning
HIGH	Core task blocked or significant incorrect behavior with no reasonable workaround
MEDIUM	Material task failure or misleading behavior with bounded demonstrated impact
LOW	Readability, discoverability, or localized friction without demonstrated task failure

Environment

The viewport is approximately 1180 × 757 pixels. Agent 7.84.2 and ddtrace 4.11.0 are used in the hosted tests; Python series 3.13 was requested and its exact hosted patch is not established here. The offline SDK reproduction used Python 3.13.5. The preview UI build visible in the later original screenshots is 35.143306223; earlier captures used 35.143254999. Authorization, SDK registration, actual captures and baseline source retrieval have been verified.

Part 1 New user usability study

This is a structured walkthrough from a complete beginner's perspective, rather than a recruited-participant study. It records what the interface explains, where prerequisite knowledge is assumed, and how recovery is presented. No population-wide usability rate or aggregate time-on-task claim is made.

Stage	What a beginner needs to understand	Observation
Choose region	Where the account lives and whether the decision can change	Permanent-choice warning is visible; choosing criteria are not explained in the captured form
Find the feature	How APM, Live Debugger, sessions, and logpoints relate	Informed navigation and manual entry verified; the blind first-path study requires a fresh tester
Prepare an app	Which commands run on the host, in the app, and in the Agent	Docs surface several independent prerequisites; Python launch syntax is faulty
Get a first result	Difference between service discovery, active logpoint, and captured data	Manual capture now matches the numeric oracle. Initial progress and Logs navigation observations remain scoped.
Connect source	Difference between repository access and exact deployed-commit mapping	Same-scope reinstall repaired the association; actual source matches the deployed revision.
Stop safely	How expiry and disable affect collection and old results	Expiry and stop/history controls passed; current job cleanup and seven-session inactive inventory verified. Broader scope stays explicit.

Make the first success concrete

Show a short path from one running test service to one visible captured value. State which setup checks are complete and which still need action. Keep the manual path visible when source integration is optional, then explain what source linking adds.

Do not collapse distinct states

A beginner should be able to tell whether an app is unknown, not instrumented, waiting for activation, receiving no matching traffic, or capturing data that is hidden by filters. These are test questions, not unverified defects.

[See the reproducible Python command finding in Part 2](#)

A permanent region choice needs decision support

The signup form clearly warns that the selected region cannot be changed later. The captured form does not explain what should drive that choice.

Datadog named a Leader in the Gartner® Magic Quadrant™ for Observability Platforms

PRODUCT CUSTOMERS

Start Your Free Trial Now

No credit card required

Try it free for 14 days and monitor as many servers as you like.

Select a Region *

United Kingdom (UK1)

Important: This can't be changed later

Business Email *

Full Name *

Company *

Password *

Use at least 8 characters containing at least 1 number and 1 lowercase letter

Phone

*Required Fields. By signing up, you agree to the [Master Subscription Agreement](#), [Privacy Policy](#), and [Cookie Policy](#)

Sign Up With Google Sign Up

UX OBSERVATION | Permanent region choice appears during trial signup
The warning is clear; explaining how to choose could help a first-time user.

E08 · Actual edited-video frame at 00:20, sourced from raw capture 00:50, about 02:15:17 UTC. All identity fields are blank.

Video evidence 00:20 to 00:34

Reproduce Start a fresh trial and inspect Select a Region before submitting the form.


Recommended experience Give a short explanation or linked chooser covering account location and relevant selection criteria before the irreversible step.

Assessment The permanent-choice warning is explicit and useful. Additional decision support would reduce guesswork for a complete beginner.

Boundary This is an onboarding recommendation. No wrong-region account, data loss, or failed submission was demonstrated.

Documentation navigation breaks words at desktop width

The right-hand contents rail wraps ordinary section names in the middle of words, making the onboarding outline harder to scan.

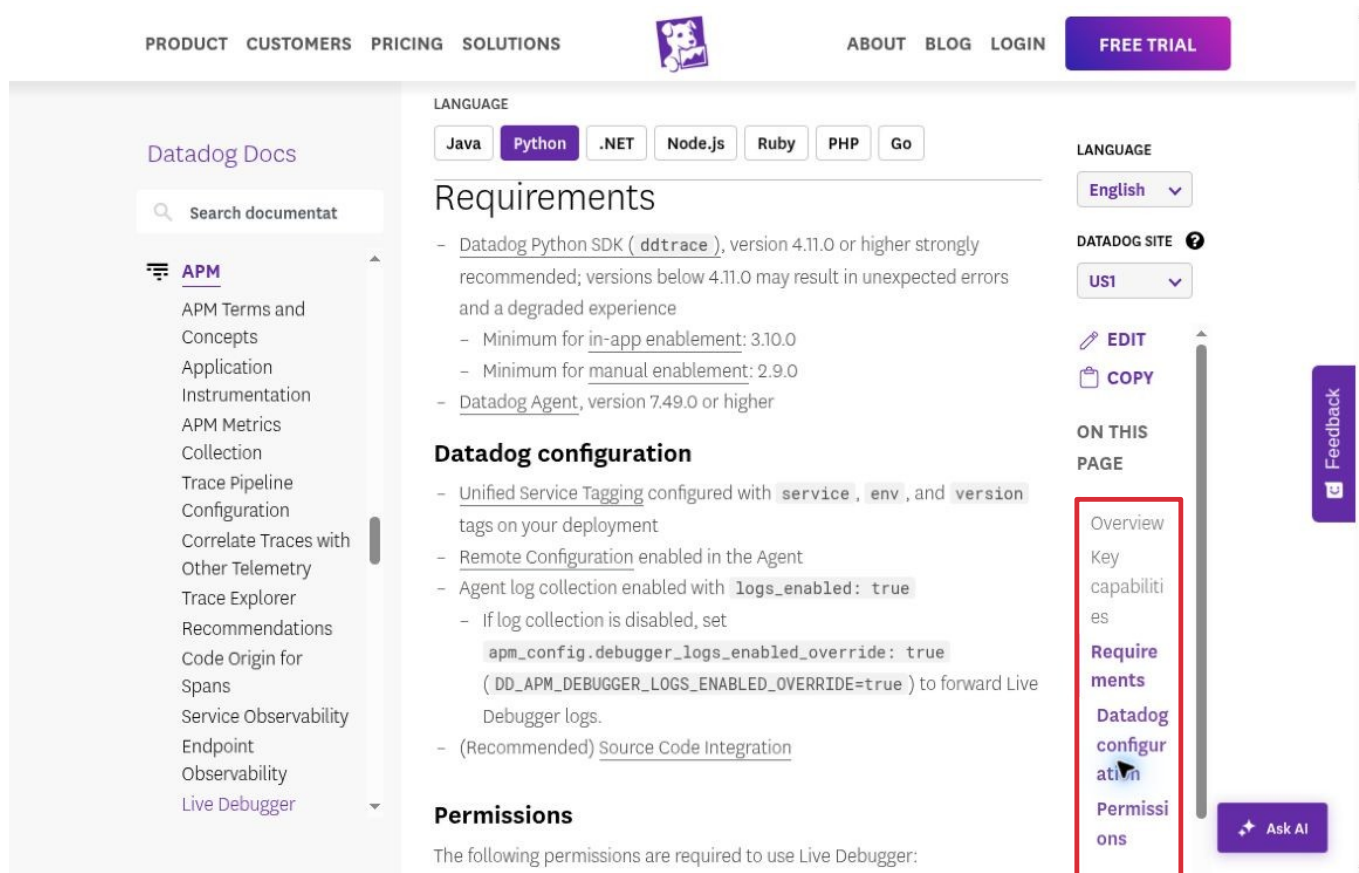

E03 · Requirements page · Screenshot file 02:19:51 UTC · 1165 × 747 captured page image; default browser zoom.

Video evidence 00:34 to 00:58

Reproduce Open the Python Live Debugger documentation at the observed desktop width and scroll to Requirements. Inspect the right-hand contents rail.


Expected Section names remain readable, either wrapping at word boundaries or collapsing into a usable navigation control.

Actual Labels such as Requirements, Permissions, and Datadog configuration split mid-word. The defect is visible in two separate scroll positions.

Fix and retest Reserve sufficient rail width or collapse the rail earlier. Retest default desktop widths and 125–150% zoom, including long translated labels.

Empty service states do not explain setup recovery

A fresh account reaches a manual-debugging path, but unavailable services and environments leave a newcomer without a concrete next step in the captured setup section.

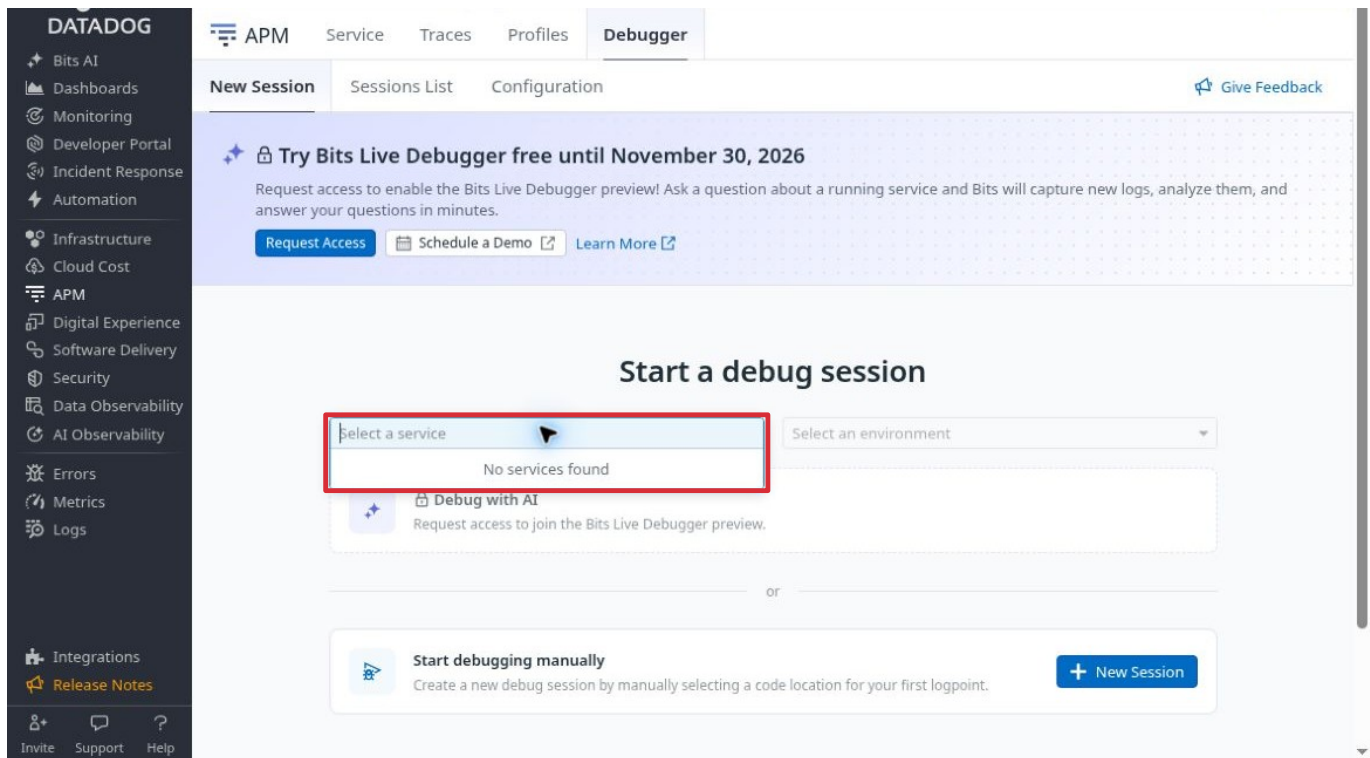

E10 · 03:21:54 UTC · Actual screenshot with top 76 pixels removed to exclude the account greeting. Remaining UI pixels are unchanged beneath the red border.

Online finding with both annotated screenshots

Reproduce Open New Session, inspect the empty service picker, enter the manual logpoint modal, close it, then inspect Configuration. The setup section reports No environments found.


Recommended experience The empty state should offer a concrete route to connect or troubleshoot the first service and explain which prerequisites are missing or not yet known.

Positive controls The modal requires a service and safely disables Start Debug Session. Close returns correctly. Manual debugging remains visible without source integration.

Boundary This earlier observation concerns a genuinely empty account. After service discovery, the wildcard-environment warning provides useful setup guidance. The finding is not evidence that a healthy service is incorrectly absent.

Invalid log template lacks an explanatory error message

An unmatched log template prevents submission and gets a red border after blur. In the tested view and recorded accessibility snapshot, no text explains the syntax error or the required correction.

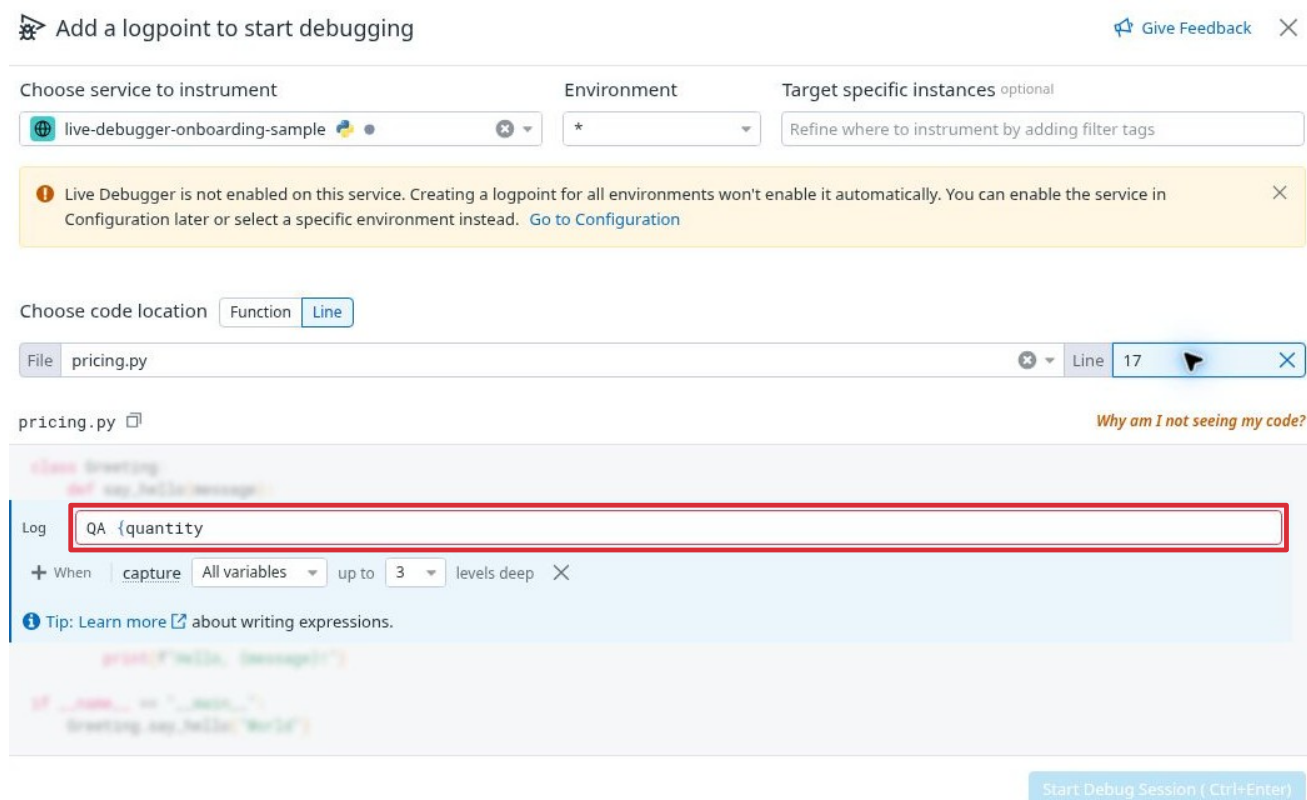

Source 58 file timestamp 06:26:32 UTC; interaction 06:25–06:28. Actual crop; no generated UI. The separate outline preserves the genuine application border.

Full-size original annotation and correction control

Reproduce and control Enter QA {quantity in the manual Line draft, then blur. Start is disabled and the border turns red. Add the closing brace: the border clears and Start enables. No submit.

Expected and actual Give a specific text explanation, associated with the field. The inspected textarea has a generic editor name and lacks the recorded error-related ARIA attributes; the captured alert addresses service setup instead.


Boundary W3C SC 3.3.1 motivates an explanatory text error. Missing aria-invalid alone is not proof of failure. This is not a screen-reader run or global WCAG verdict; a transient announcement and computed Line naming require retest.

Motion evidence Reviewed source 10 highlights show unmatched input at 00:29.30, blur feedback at 00:41.30 and correction at 00:53.30. The online finding links exact source clocks and the full retained recording.

View in Logs needs an extra indexed row click

LOW · UX04 · Navigation recovery friction · Part 1 beginner usability · B08

Across two tested snapshots, View in Logs opened “The requested event is not indexed” while the snapshot-targeted view contained the matching indexed log. Clicking that row recovered the same snapshot’s values, source and JSON.

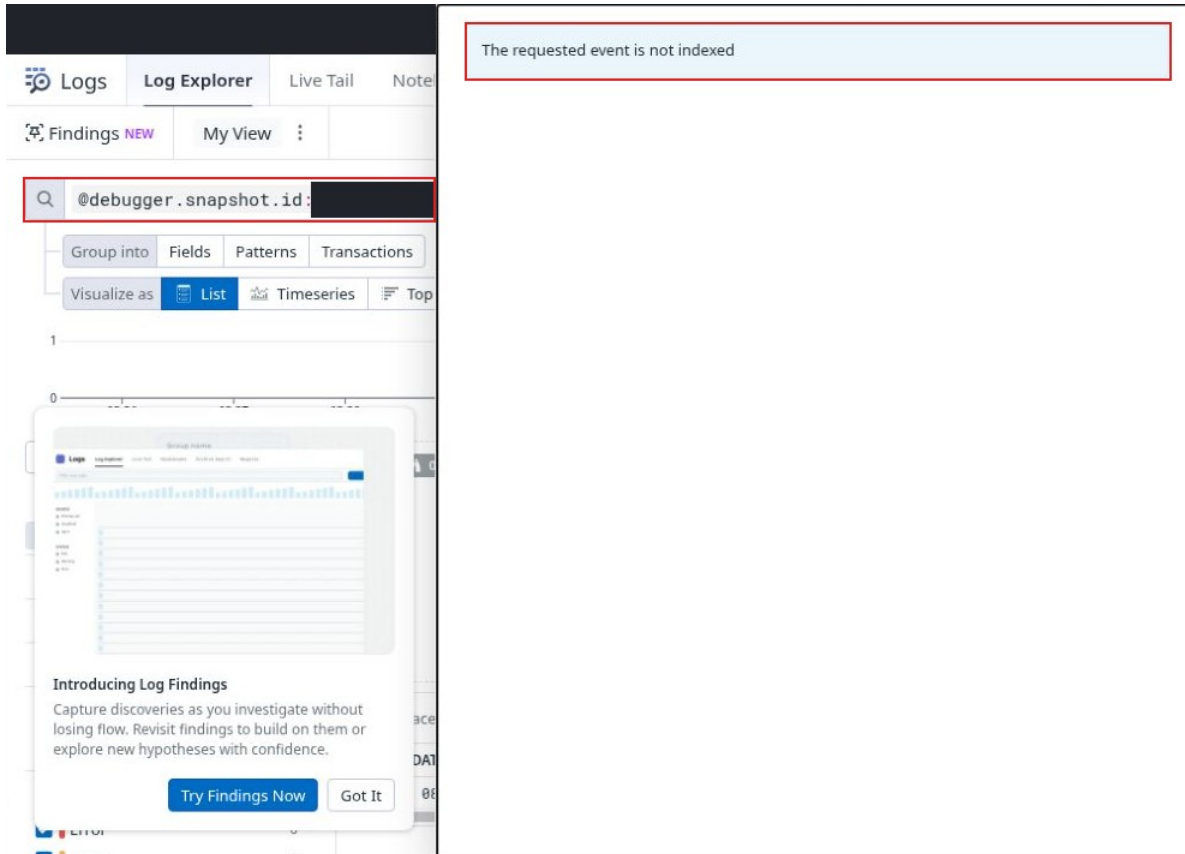

10:41 UTC observed state. Outlines mark the actual error and snapshot query. The results row/count is obscured; exact matching identity and repeatability are established separately.

Full-size annotated screenshot and exact evidence boundaries

Reproduce: select a captured debugger snapshot, use View in Logs, observe the error panel, then select the matching indexed row. Verify debugger.snapshot.id, probe and timestamp against the original capture.

Verification: independent reproductions used the control snapshot at 10:24 and the target snapshot at 10:41. The recovered JSON matched each originating snapshot identity exactly, not merely a similar message or time.

Expected and impact: a direct event link should open its available indexed target, or offer clear recovery. The extra row click is a verified workaround. Severity is Low because recovery succeeds; no data loss or broad indexing failure is established.

Limits: differing live/indexed UI event IDs are observations, not a proven cause. This still does not display the one matching row/count. Screenshots and separate UI/payload checks verify the case; only genuinely visible foreground steps are claimed by the reviewed video.

Part 2 Professional QA

This part evaluates correctness and recovery using explicit preconditions, a known sample oracle, expected versus actual results, and reproducible evidence. The shared index links each confirmed finding to its detail page. Planned scenarios stay separate from executed outcomes.

63 cases: 23 PASS, 8 FINDING, 21 OPEN and 11 BLOCKED. OPEN comprises 19 in progress and 2 pending. The online matrix preserves full original steps and cleanup. PASS covers its stated tested scope; supplemental observations do not enlarge the denominator.

Check	Outcome	Scope and remaining work
8 case findings	FINDING	Ten distinct findings are shared across both tracks; duplicate case references are not new findings.
B04/S01	PASS scoped	Manual entry without SCI; actual manual capture subsequently succeeded before source association repair.
B07/C03	PASS scoped	Recorded first-success sequence and verified invocation/source-repair controls; no blind-user or causal claim.
Open original branches	IN PROGRESS	Entry, saved-write, source/instance, environment, value and feedback branches retain concrete limits.
C01/C02	IN PROGRESS	Named runtime and capture shutdown verified. Retained-resource/settings scope remains explicit.
Runtime controls	SCOPED RESULTS	Baseline capture/source/expiry and actual metadata, revision, restart and burst controls are separated from full-case verdicts.

Historical attempts at 05:15 and 05:19 returned a visible instrumentation-invalid error and HTTP 400. Later, a healthy SDK runtime with a specific staging environment created sessions and captured correct values. The earlier failure did not recur in that changed context; a sole cause was not isolated.

Permission tests need precise interpretation

An organization integration can legitimately share access according to its grant model. Do not call lack of a per-user GitHub check a vulnerability without verifying that model. Old source may remain cached for up to seven days under the documented contract; revocation tests must distinguish cached content from a newly fetched, never-seen revision.


Release confidence checklist

- Verified baseline: actual quantity 3 locals, selected service/environment and deployed source match the fixture.
- Observed B metadata controls returned no source, including an isolated editor. Authentic B execution and the authorization-decision cause are not established.
- Verified bounded expiry: distinguish SDK snapshot execution, UI row time and retained history; no instantaneous stop claim.
- Verified shutdown: the bounded job succeeded with explicit owned cleanup, and the post-terminal unfiltered list shows seven inactive sessions. Full retained-asset and remaining-case reconciliation stays explicit.

[See the beginner documentation navigation finding in Part 1](#)

Python quickstart contains an invalid module command

The launch example uses `python -m myapp.py`. Python's module switch expects a module name rather than a script filename.

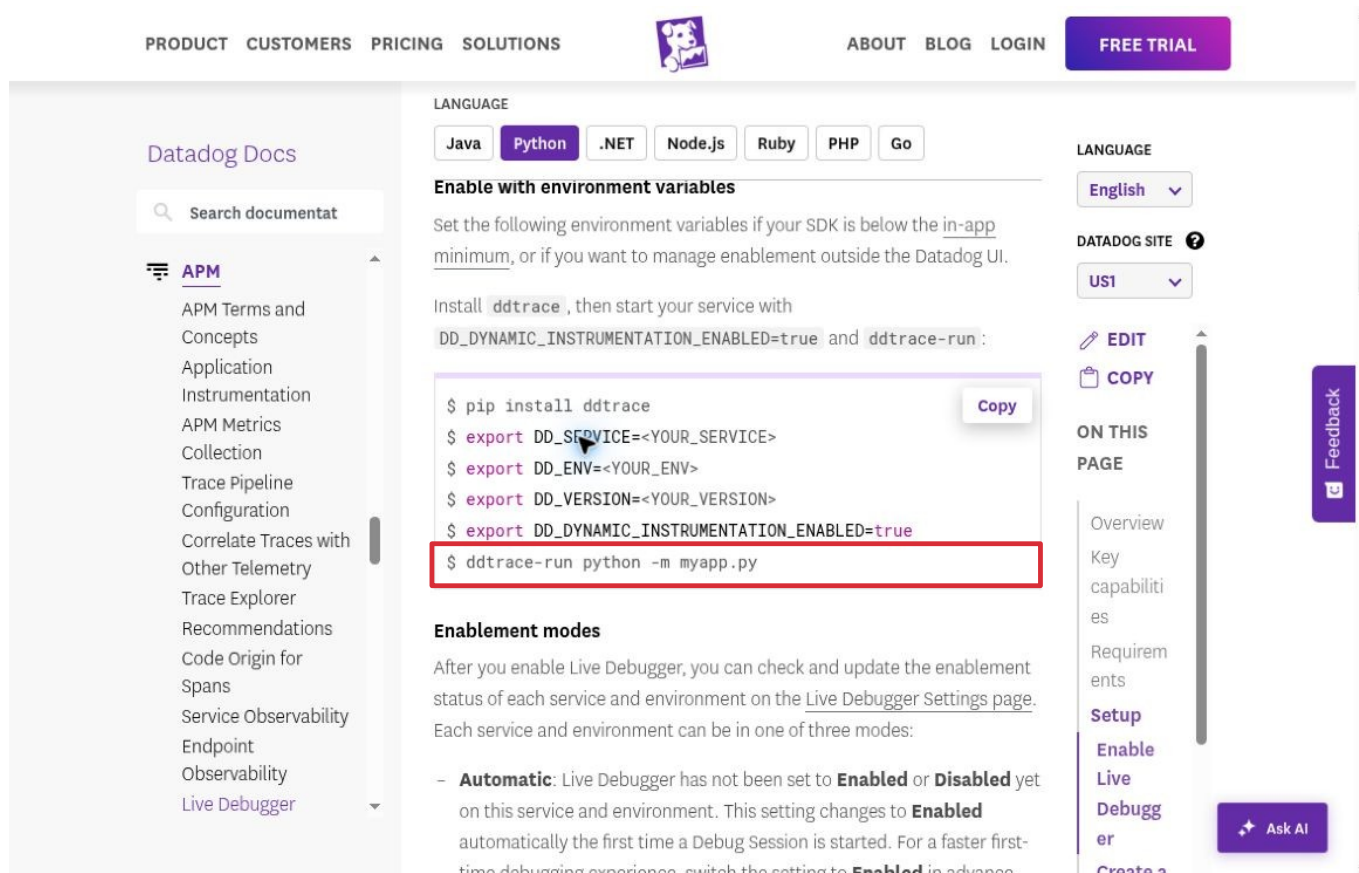

E04 · Official Live Debugger documentation, Python tab · Screenshot file 02:20:19 UTC. Red outline identifies the launch command.

Video evidence 00:58 to 01:20

Reproduce Open Live Debugger docs, select Python, then Enable with environment variables. Follow the final launch line with an ordinary `myapp.py` script.


Expected A copied quickstart command starts the intended Python application without a module-resolution error.

Actual The Python portion exits 1 for a minimal script. Import-time code runs before the error, so this check does not imply that no application code executes.

Fix and retest Use `ddtrace-run python myapp.py` for a script, or `ddtrace-run python -m myapp` for a module. Add a quickstart smoke test that asserts successful process startup.

Interrupted GitHub setup recovered after a controlled reinstall

The original interrupted flow left Datadog unconnected while GitHub showed the approved A-only installation. Connect retried into unchanged settings. A controlled same-scope uninstall/reinstall later reached connected configuration and verified source retrieval.

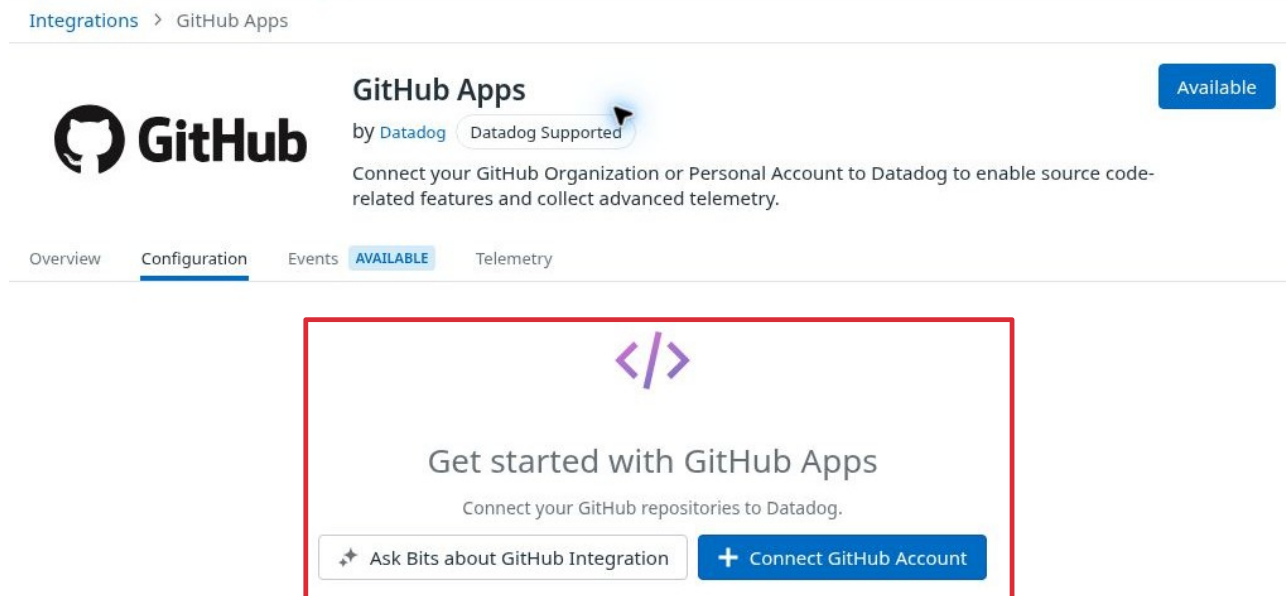

04:50:15 UTC · Actual sanitized screenshot. The installation form had been left open about 75 minutes. Delay is a precondition, not an established cause.

[Full-size annotated screenshot and installed authorized scope evidence](#)

Reproduce Complete the approved install after the pause, select the intended Datadog organization, then retry Connect. Re-enter fresh through the official integration catalog and verify the intended site/org.

Expected and actual Complete the association or explain a concrete recovery step. The interrupted flow showed Get Started and returned to GitHub settings with Save disabled. Fresh catalog navigation did not repair that state. A full approved reinstall subsequently did.


Impact and boundary The interrupted state blocked source linking. Connect/catalog retries failed; a privileged same-scope reinstall recovered it. The fresh A-only callback and deployed-source comparison now pass; B remains ungranted. The approximately 75-minute pause is a precondition, not an established cause. Fresh installation failure is not generalized from the original result.

Recording scope Original install/reauthentication before 04:49:33 is screenshot-only; later failed recovery has reviewed source 07 motion. Source 11 records the removal and fresh draft, then stops at 09:53:41.25 before the successful callback. The 09:55 connected configuration is screenshot-only; source 12 records later capture/source checks.

Remote save erases an unsaved condition

MEDIUM · FUNC01 · Two-tab dirty-draft loss · F09

A message-only save in tab A twice erased an unsaved condition in tab B. B visibly reverted from quantity == 3 to the stored quantity == 4, and Apply became disabled. No warning was observed. The saved condition remained correct; conflicting saved writes and capture corruption are not established.

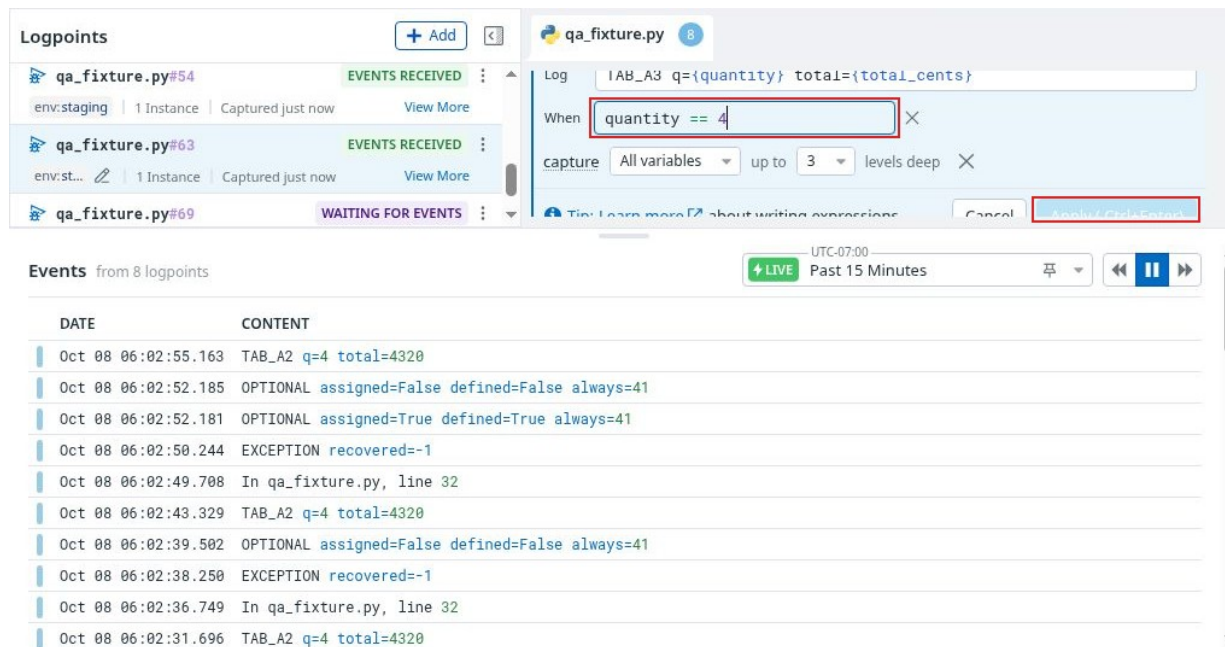

Second reproduction, 13:02:26–13:03:02 UTC. After the remote save, the editor shows TAB_A3 and quantity == 4. Apply is partly clipped; its disabled state was confirmed separately.

Full-size annotated before and after plus exact reproduction

Reproduce: open the same logpoint in two tabs; leave a quantity == 3 condition dirty in B; save only a message change in A; return to B. Preserve the draft or explain a reconciliation choice instead of silently discarding it.


Evidence: first reproduction 13:01:13–13:01:59; repeated clean sequence 13:02:26–13:03:02. Rendered pixels/editor text establish the changed value; a briefly stale accessibility value is excluded.

Source 13 does not show the complete editor-overwrite transition. Later source 17 does show another dirty-draft reset and disabled Apply after a remote save. Both tabs reloaded the accepted state; a stale B write was never accepted. This strengthens FUNC01 without creating a new finding.

Unbound Python locals serialize as null

MEDIUM · FUNC02 · ddtrace 4.11.0 SDK serialization · Separate verification addendum

An unbound or deleted local is different from a value explicitly assigned None. Actual ddtrace 4.11.0 helpers serialize all three as NoneType with isNull=true, although isDefined is false for absent names and true for explicit None. Assigned 42 and later-assigned 99 controls remain correct.

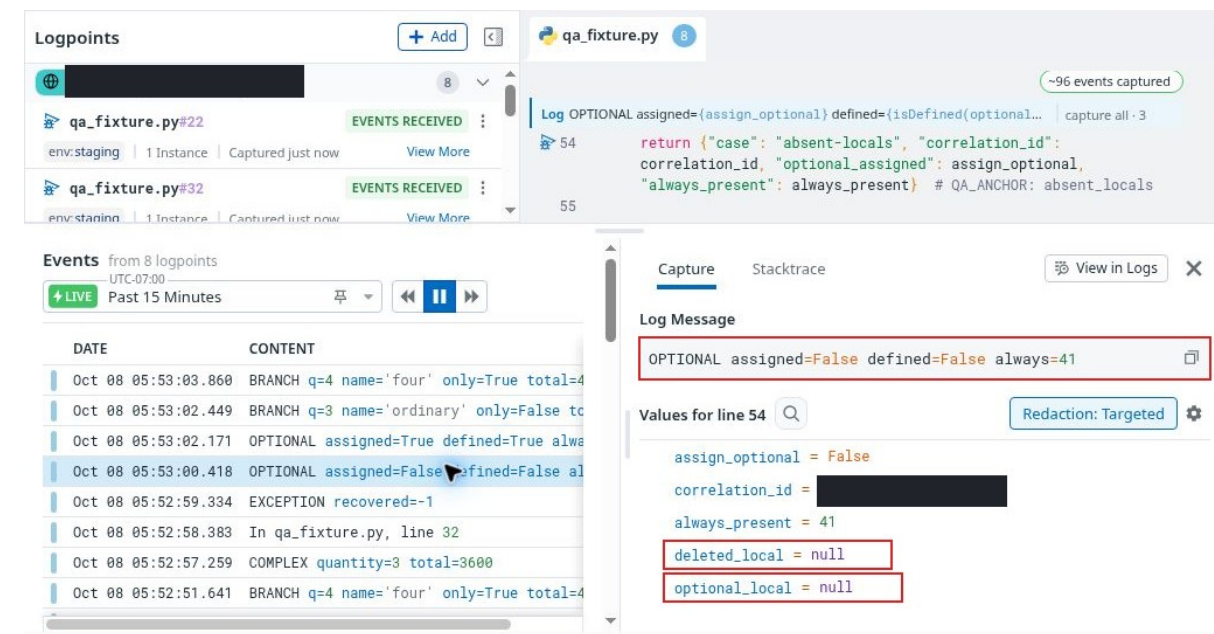

Live optional/deleted-local control before the 13:15 cutoff. The genuine message says defined=False while the values show null. Local SDK verification was confirmed separately at 13:16:33.

Full-size evidence, exact offline command, assertions and measured source hashes

Verified with actual ddtrace 4.11.0 on local Python 3.13.5. Both helper files match official version-tagged source byte-for-byte. Collection enumerates compiled names and uses a locals lookup whose missing default is None; the capture helper gives None its null representation.

Scope: three live UI contexts corroborate the discrepancy, with assigned 42/404 controls. The hosted transport payload was not inspected. This is a proven package behavior, not a UI-only attribution or a claim about every language/version. The local patch version does not establish the hosted patch.

Reproduction: tracing/telemetry/RC and related products were disabled in a clean environment; a pre-import audit guard reported zero blocked network/subprocess attempts. Source hashes cover two helpers, not a whole distribution. Preserve absence before serialization or provide a distinct unavailable marker.


Measured helper	SHA256 of installed and official file
safety helper	b143433011976416337413e53be18921be0a8c625c8339b1aa3604b5b00ec4ff
capture helper	a952f392c6b4dd1e1484622941cef12ab4a485024cf873a1b789d7e801f51cb6

[Official collection source](#) · [Official null serialization source](#)

Blank line rejection suggests an unsupported decorator

LOW · FUNC03 · Diagnostic specificity · F06

The runtime correctly rejected pricing.py line 10, which is blank. Its NoFunctionsAtLine detail nevertheless suggested an unsupported decorator. The unchanged function has no decorators, and executable line 17 captures the expected quantity-four values. The misleading hint can send the user toward the wrong repair.

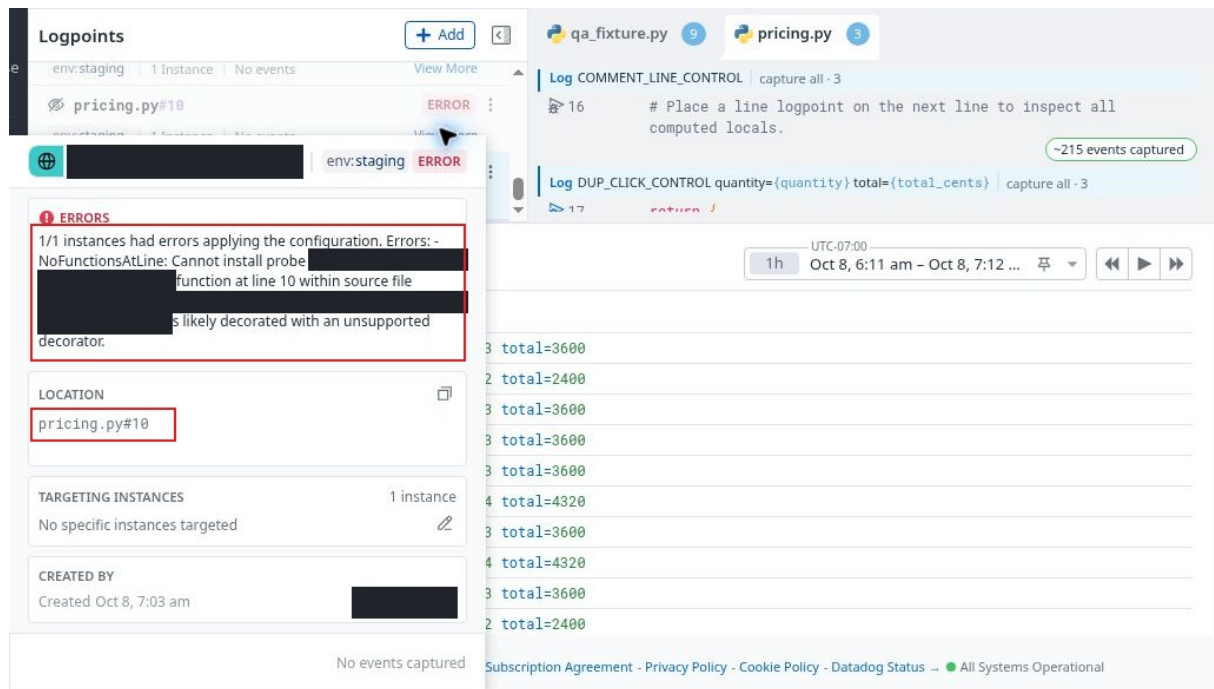

Genuine line 10 diagnostic inspected at 14:14:20 UTC. Outlines identify the observed error and target; opaque masks protect private identities. No full-function or offscreen value claim is made.

Reproduce: select the blank line, wait for installation ERROR, then inspect its details. Compare a separate executable-line control in the same loaded function. **Expected:** explain the non-executable target or give cause-specific guidance. **Observed:** an unsupported-decorator suggestion despite zero AST decorators.

Independent checks establish blank/comment lines are non-executable and line 17 is executable. The installed ddtrace 4.11.0 diagnostic source matches the official tagged file byte-for-byte. This is a measured source-file comparison, not a package-wide checksum or a claim about the hosted Python patch.

Recommendation: distinguish a non-executable line from actual wrapper/decorator evidence and suggest an executable statement. The rejection itself is appropriate; no silent relocation or corrupted capture is proved.

[Full finding, genuine recovery still and exact source provenance](#)

Reproduction and fixture oracle

Command isolation

Independent reproduction: 02:31:35 UTC on 8 October 2026. The file myapp.py contains one harmless print statement; no Datadog SDK or telemetry is involved.

```
myapp.py:
print("INERT_FIXTURE_EXECUTED")

$ python -m myapp.py
INERT_FIXTURE_EXECUTED
ModuleNotFoundError: __path__ attribute not found on myapp
Exit: 1

$ python myapp.py
INERT_FIXTURE_EXECUTED
Exit: 0

$ python -m myapp
INERT_FIXTURE_EXECUTED
Exit: 0
```

The error is abbreviated for readability. Python also suggests using myapp instead of myapp.py as the module name. The working alternatives establish the module-versus-filename distinction; neither has been claimed as an instrumented Datadog success.

Known sample behavior

The synthetic quote service intentionally uses quantity > 3 instead of quantity >= 3. It is a target bug in the demo application, not a Datadog defect. At pricing.py line 17 all calculated locals are available for the intended line logpoint.

Quantity	Subtotal	Discount eligible	Discount	Actual total
2	2400	false	0	2400
3	3600	false	0	3600
4	4800	true	480	4320

All monetary values are integer cents. The intended quantity 3 total is 3240. A valid debugger result should expose the actual 3600 and the false eligibility, making the boundary error explainable.

Local test rerun at 02:36 UTC: nine tests completed, eight passed and one intentional expected failure. HTTP tests bind to loopback and clean up their server.

Evidence and reference index

ID	Evidence	UTC time or recording location
E10	Empty service picker evidence crop	03:21:54 UTC; account greeting excluded
E13	No environments found configuration	03:23:59 UTC; clean scrolled screenshot
E08	Blank Datadog trial form video frame	Edited video 00:20; raw 00:50; approximately 02:15:17 UTC
E03	Python requirements and navigation	File timestamp 02:19:51; initial video approximately 05:15–05:45
E04	Python environment-variable launch example	File timestamp 02:20:19; initial video approximately 05:45–06:20
R01	Independent Python invocation reproduction	02:31:35; Python 3.12.14; bad form exits 1, alternatives exit 0
R02	Local fixture test rerun	02:36; 8 passes, 1 intentional expected failure

The 80-second public edited excerpt covers signup and documentation only. Its chapters are 00:20 region choice, 00:34 contents-rail wrapping, and 00:58 invalid Python command. Authenticated account-creation footage is not claimed by this excerpt.

The initial continuous recording began at 02:14:27 UTC and ended at 02:21:01 UTC. It is 393.7 seconds at 1364 × 1024 pixels, 20 fps. Edited-video offsets will differ from raw recording offsets. E03 and E04 are direct page captures; E08 is an extracted video frame. Published evidence excludes browser chrome.

[Authenticated UI video with exact chapter and source times](#)

Sources 01–17 now have reviewed archives and highlights in the consolidated publication. Source 13's original editor-transition limit remains explicit; later source 17 captures another dirty-draft reset. Background-tab and after-recording checks remain still/recorded-observation evidence. No missing motion is reconstructed.

Primary product references

[Live Debugger setup and session behavior](#)

[Python source mapping](#)

[Source Code Management Providers and caching](#)

[GitHub integration](#)

[Live Debugger expression language](#)

References describe expected behavior, not execution. Results are limited to the tested account, site, versions and controlled synthetic fixtures.

Verified UI subchecks

These narrowly scoped observations preserve the work that actually ran. They do not promote all requirements of their parent cases or add to the 63-case denominator.

Check	UTC	Verified scope
U01 Informed navigation	03:33–03:40	Home → APM introduction → global search → Live Debugger reached the intended route. No blind timing claim.
U02 Manual entry without source	03:21–03:24	Manual session route opens without Source Code Integration. No successful runtime start.
U03 Missing service prevents submit	03:21–03:24; 04:01–04:02	Start is disabled without service; Ctrl+Enter does not submit.
U04 Actual 125 percent zoom	03:33–03:40	Native browser menu shows 125%; modal remains usable; reset to 100% verified. Failed shortcut attempt excluded.
U05 Modal focus and Escape	03:33–03:40	Tab focus cycles through modal controls; Escape closes and restores New Session focus.
U06 Modal history navigation	03:33–03:40	Back removes modal and reaches APM intro; Forward returns New Session without ghost modal. Empty-service context only.
U07 Refresh and repeated Close	04:01–04:02	Refresh dismisses the empty-service modal; two open/Close cycles return correctly. No editable saved configuration.
U08 Empty list filter persistence	03:56–03:58	Search/status/owner controls were exercised; status/owner persist on reload. No populated-result correctness.
U09 Clear Filter and custom dates	03:56–03:58	Clear Filter resets selections. October 1–7 custom range displays correctly. Zero-session list.
U10 Pre-install cancellation	03:59–04:00	Official/custom setup canceled; reload remains Not Connected. No App grant.

Verified setup and control checks

Check	UTC	Verified scope
U11 Final session inventory	04:12	All 0 / Active 0 / Inactive 0; filters cleared. Live accessibility observation after video stopped.
U12 Python command controls	02:31:35; 03:19:52	Invalid module command exits 1; script and suffix-free module alternatives exit 0. Local-only, not Datadog capture.
U13 Published finding images	Verified by 03:59	All four finding pages rendered their inline annotated image; the UX02 original-image link opened. Publication QA, not Datadog behavior.
U14 Temporary helper shutdown	04:22:42	Two completed local setup helpers stopped; each shows zero remaining owned processes. Private configuration retained without inspection.
U15 Service discovery	04:50:17	The synthetic sample became selectable; only wildcard environment was offered. No session or capture.
U16 Agent and sample snapshots	04:47:03; 04:54:47	Local Agent intake/sample startup and Agent RC org/key authorization verified at these instants. Debugger SDK client registration and current liveness remain unverified.
U17 A-only installed scope	04:51:29; 05:06:05	GitHub installation plus persisted one-repository selection verified, identified privately as A. B created afterward remains ungranted. Datadog association failed.
U18 Wildcard setup warning	04:53:17	Manual draft explains all-environment creation will not auto-enable the service and offers Configuration or a specific environment.
U19 Invalid line draft controls	04:54–04:55	Line 0, -1 and abc kept Start disabled; 9999 enabled an unsubmitted draft and 17 restored the baseline. No runtime target validation.
U20 Source guidance	04:55:34	Missing-source explanation identifies permissions or tags as possible causes and links Learn More; it does not claim fetched source.

Verified setup and control checks

Check	UTC	Verified scope
U21 Template rejection and recovery	05:06:52–05:38:08	An actual unmatched brace disabled Start; blur added a red field outline. Correcting the brace enabled Start. Initial auto-balanced attempt excluded.
U22 Fixture file integrity	By 05:10	Downloaded A pricing.py and app.py match the local baseline byte-for-byte; intended return target remains line 17. This is not Datadog source mapping.
U23 Python Function draft	05:39:50	Function mode accepts Module pricing and Function calculate_quote as an enabled draft. No submit or entry/exit capture.
U24 Edited draft cancellation	05:43	Closing and reopening resets to Line mode and empty File/Line, retaining service/environment. No unsaved draft was published; reopened draft closed.
U25 Latest zero inventory	By 05:45	After rejected creates and draft cancellation, All 0 / Active 0 / Inactive 0 remained. A-only installation unchanged; active lifecycle semantics untested.
U26 Historical APM ingestion	05:49–06:21	47 indexed spans recovered; an actual old span carries HTTP 200, Python, staging, version 0.1.0 and the baseline commit. No debugger capture or source retrieval.
U27 APM time-window recovery	05:55–06:21	Empty recent search offered a wider timeframe; one-hour history recovered spans. This is APM search behavior, not debugger result filtering.
U28 SDK freshness guidance	By 06:15	SDK Configurations states no data detected in the last 15 minutes and suggests runtime, telemetry and intake checks. Stopped runtime is compatible; no registration-failure conclusion.

[Open exact evidence for every supplemental check](#)

Authorization gates and resume order

Baseline capture and source matching are established. Later phases add same-profile metadata repair, real C1/C2 attribution, app/Agent interruption and bounded traffic. Actual stage receipts are separate from UI and payload observations. Independent identities, authorization-sensitive branches and incomplete original checks remain explicit.

Gate	Current readiness or missing prerequisite
Runtime G1	G1 established for baseline and controlled later captures. Current bounded runtimes are stopped; no active test traffic is implied.
Source G2	A source matching and scoped metadata/revision controls verified. B remains ungranted; no authorization-cause guarantee.
Access G3	Restricted identities, current provider reauthentication and case-specific revocation approvals remain distinct gates.
Variants G4	Actual revisions, repair, restarts and bounded traffic executed. Some original per-instance, path, environment and value branches remain incomplete.
Study method	A fresh uninformed tester is required for blind first-use timing; this walkthrough is informed.

Resume in this order

Finish the remaining original branches before optional expansion: saved-write conflicts, in-flight source behavior, exact restart/expiry behavior, same-target traffic comparison, corrected path fixture, value limits and two-session isolation. Keep approval/identity requirements separate from engineerable setup.

Retained state

The current bounded job was observed successful at 21:20:54 with explicit owned-runtime cleanup. At 21:28:36, an unfiltered list showed All 7 / Active 0 / Inactive 7; later retained navigation stayed inactive. Accounts, keys, approved A-only source scope, repositories and fixture history are retained, not described as deleted or revoked.

Original case outcomes 1 to 9

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
B01	BLOCKED	Blind navigation timing needs a fresh uninformed tester; informed navigation is documented separately.
B02	FINDING	LOW UX02: natural first-run empty-state recovery guidance. Other causes untested.
B03	FINDING	MEDIUM DOC01: isolated invalid Python launch-command reproduction. No runtime start.
B04	PASS	Manual route/prerequisite clarity verified; later actual manual capture worked before source-association repair.
B05	IN PROGRESS	Populated service/staging filters, facet search and history tested; second-environment/version dependency branch incomplete.
B06	BLOCKED	No independent restricted identity or naturally occurring permission-error state is established.
B07	PASS	Recorded creation/progress/first-value sequence; operator navigation is included, not a performance benchmark.
B08	FINDING	Source/values and return context work; UX04 is repeated direct-event link friction with a one-click recovery.
B09	FINDING	Existing UX03 feedback finding; code-gutter, long-path and computed Line-label coverage remain incomplete.

Full case steps, gates, evidence and cleanup

Original case outcomes 10 to 18

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
B10	IN PROGRESS	Expiry, stop/history and list state observed; complete return-later and service-wide scope guidance remain partial.
F01	PASS	Numeric message and actual locals match all three controls: 2 → 2400; 3 → 3600/false; 4 → 4320/true.
F02	PASS	3 → 4 predicate transition matched actual locals; retained old COND3 capture gained OUTDATED feedback.
F03	PASS	Never-match interval had no new matching rows while control traffic continued; removal restored 2/3/4 rows.
F04	FINDING	Invalid conditions/template were rejected and valid corrections worked. Existing UX03 feedback issue is retained.
F05	PASS	Missing expression error, absent isDefined=False and available-local True controls passed; distinct from FUNC02.
F06	FINDING	Low FUNC03: blank/comment lines reject; blank-line hint wrongly suggests decorator. Valid line 17 captures correctly.
F07	IN PROGRESS	Function exit and return-on-line error tested; supported method-entry comparison remains incomplete.
F08	PASS	One rapid double-click plus Return produced one definition; count/identity remained correct after reload.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 19 to 27

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
F09	FINDING	FUNC01 repeated. A's saved state survives reload and fresh data; stale B saved-write was not accepted.
F10	IN PROGRESS	Individual/session update states observed; reactivation feedback and the remaining original detail/reload matrix stay partial.
F11	PASS	Expired state/history survived reload/direct link. Last target execution and continuing control bound the stop; not instantaneous.
F12	PASS	Explicit resume preserved IDs, renewed one hour and produced a fresh SDK-timestamped capture; stopped again.
F13	PASS	Child disable preserved siblings; whole-session stop, child-only enable/capture and final session stop passed.
F14	PASS	Seven dismissal/navigation routes preserve saved definition and count without Save/Apply. Tested while disabled.
F15	IN PROGRESS	Existing identity fields not editable in inspected UI; supported alternate creation/history branch remains open.
F16	PASS	New capture-off events were message-only; old event stayed OUTDATED after re-enable and future locals returned.
F17	IN PROGRESS	Range, viewing pause, sort and exact identity checked; ascending resets on refresh, under assessment.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 28 to 36

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
F18	IN PROGRESS	Actual fixture restart and new process generation recover same probe/value. Disappearance and expired-control gaps remain.
F19	IN PROGRESS	Actual Agent outage and same-app recovery verified. No explicit offline indicator observed; feedback expectation unresolved.
F20	IN PROGRESS	Real staging C1/C2 values and source verified. Separate production-labeled synthetic capture awaits approval.
F21	PASS	Numeric/bool/harmless text visible; dummy sensitive names had explicit name-based redaction. Protection unchanged.
F22	IN PROGRESS	Empty/nested/Unicode/leaf/search/collapse controls observed. Full string payload and cycle/depth bounds unverified.
F23	IN PROGRESS	Actual 9/9 burst in 0.26s, healthy before/after. Original same-target 1.1-second baseline and sampling explanation incomplete.
S01	PASS	Pre-install permission/cancel scope verified; approved A-only repair and exact source retrieval are documented separately.
S02	PASS	Captured event, in-product source and followed provider link match the deployed SHA, pricing.py:17 and nearby code.
S03	IN PROGRESS	Exact B metadata attempt returns no source; current provider-grant recheck and authorization-cause interpretation incomplete.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 37 to 45

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
S04	PASS	Isolated B metadata request shows no editor/event-source fallback. A bytes with B tags; no authorization-cause claim.
S05	PASS	Actual C1 remains correct after named-branch C2 advance. C2 was then nondeployed; default branch unchanged.
S06	IN PROGRESS	All six same-profile event sources recover to A/C1 with corrected received tags. Generic/shared-editor interpretation remains.
S07	IN PROGRESS	Direct/history/rapid selections executed; settled source correct. Immediate prior content prevents an atomic-state guarantee.
S08	IN PROGRESS	Alpha/beta paths and 11011/22022 agree. Unicode loader confound and genuine move/rename branch remain open.
S09	PASS	Canonical HTTPS, HTTPS.git and SSH.git each resolve exact C1; tested forms/provider only.
S10	BLOCKED	Case-specific restricted identity/permission-revocation setup is not established.
S11	FINDING	Interrupted Connect retry failed; controlled A-only reinstall repaired association and baseline source retrieval.
S12	BLOCKED	Case-specific restricted identity/permission-revocation setup is not established.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 46 to 54

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
S13	BLOCKED	Case-specific restricted identity/permission-revocation setup is not established.
S14	BLOCKED	Case-specific restricted identity/permission-revocation setup is not established.
S15	BLOCKED	Case-specific restricted identity/permission-revocation setup is not established.
S16	PENDING	Signed-out deep-link branch awaits execution; wrong-org branch needs a second authorized context.
S17	BLOCKED	Targeted redaction is visible; Strict-mode and full source/preview gate combinations remain unverified.
S18	BLOCKED	Source baseline works; Bits preview availability and the approved assisted path remain unverified.
C01	IN PROGRESS	All known sessions inactive and current job-owned runtime stopped. Full original inventory/post-stop scope remains explicit.
C02	IN PROGRESS	Named cleanup verified; accounts, keys, grant and fixture history retained. Broader restoration/reconciliation not asserted.
C03	PASS	Command workaround and controlled A-only repair are verified with actual capture/source; original causes/fixes are not overclaimed.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 55 to 63

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
X01	PASS	Real overlapping C1/C2 sampled captures match process/version/SHA/path/value. Current extra runtimes stopped.
X02	BLOCKED	Additional controlled fixture/deployment variant is not yet exercised: same service name across two test environments and two repository forks.
X03	PASS	Quiet-versus-error control followed by actual 707 capture and disabled definitions completed the requested positive control.
X04	PASS	SDK snapshot time is separated from UI row time and retained history; later control executed after the target stopped.
X05	IN PROGRESS	Original line 17 kept while C2 arrived; separate correct line 24 captures. Original target's C2 instance behavior unresolved.
X06	PASS	Two sampled overlapping-request members matched locals, trace context and source links; not a complete captured pair.
X07	IN PROGRESS	Unicode, duplicate leaves and bounded cycle/search controls observed; nested protection and exact depth bounds remain partial.
X08	BLOCKED	Case-specific restricted identity/permission-revocation setup is not established.
X09	PENDING	Working baseline is available; remaining original steps are not yet executed.

[Full case steps, gates, evidence and cleanup](#)

Beginner glossary

These terms describe the debugging workflow. A visible setup check is not the same as a captured event.

Term	Plain language meaning
APM	Application Performance Monitoring. Traces show how requests move through application operations.
Agent	A process near the application that receives and forwards supported telemetry and configuration.
SDK or tracer	A language-specific library in the application. Python uses ddtrace.
Trace and span	A trace follows a request or task; a span represents one operation within it.
Service	The named application or component being monitored. Names alone do not establish environment or source identity.
Environment and version	Tags identifying where the application runs, such as staging, and which release it runs.
Remote Configuration	A channel for supported configuration changes to reach a running Agent or SDK without a new deployment.
Debug session	A bounded investigation containing debugger configuration and related results. Check its actual expiry and active state.
Logpoint	A location and rule that collect a message or values without editing the deployed source for each observation.
Snapshot or captured locals	Values observed at a specific runtime execution. Availability, redaction, sampling, and truncation affect what appears.
Source Code Integration	Repository access plus mapping that connects runtime evidence to source files. A connected account alone is insufficient.
Commit SHA	A Git revision identifier. The source shown for a capture should match the deployed commit, not merely the latest branch.
Redaction	Protection that removes or masks selected data. Missing, unavailable, and redacted values mean different things.
ARIA	Labels, states and relationships that can help assistive technology interpret an interface. Missing one attribute alone does not prove an accessibility failure.
WCAG	Web Content Accessibility Guidelines. The focused checks in this report are not a complete conformance audit.

Verified live capture

F01 now passes the planned baseline. The live message template and captured locals agree for quantities 2, 3 and 4. Quantity 3 exposes the deliberately planted application boundary bug; it is not a Datadog defect.

Quantity	Subtotal	Discount eligible	Discount	Actual total
2	2400	false	0	2400
3	3600	false	0	3600
4	4800	true	480	4320

Logpoints

pricing.py#17

env:staging | 1 Instance | Captured just now

EVENTS RECEIVED

View More

This file was not found in your repository

This may be caused by missing permissions or incorrect source code integration tags.

Learn More

Log QA quantity={quantity} total={total_cents} | capture all:3

line 17

Events from 1 logpoint

UTC-07:00

LIVE

Past 15 Minutes

DATE	CONTENT
Oct 08 03:03:44.158	QA quantity=2 total=2400
Oct 08 03:03:43.175	QA quantity=4 total=4320
Oct 08 03:03:41.556	QA quantity=3 total=3600
Oct 08 03:03:41.531	QA quantity=2 total=2400
Oct 08 03:03:38.917	QA quantity=4 total=4320
Oct 08 03:03:37.235	QA quantity=3 total=3600
Oct 08 03:03:36.679	QA quantity=2 total=2400
Oct 08 03:03:34.293	QA quantity=3 total=3600

Capture

Stacktrace

View in Logs

Log Message

QA quantity=3 total=3600

Values for line 17

Redaction: Targeted

quantity = 3

discount_cents = 0

discount_eligible = False

subtotal_cents = 3600

total_cents = 3600

unit_price_cents = 1200

Source 12 · Numeric quantity-3 control observed 10:03:50.811 UTC. Exact event execution time is not inferred from the visible list or UI timestamp parameter. Source identity is masked; all shown values are genuine.

Full-size numeric capture and provenance

Check	UTC	Verified scope
U29 SDK registration	09:20:37	Agent authorization and matching SDK products registered; subsequent capture provides the functional proof.
U30 First capture	09:28–09:31	Manual creation, instrumenting, events and actual locals observed. Operator navigation is included; this is not measured ingestion latency.
U31 Numeric controls	10:03–10:04	Rendered template and six locals matched all 2/3/4 oracle cases. Exact observations are in the evidence ledger.

Verified source and ongoing lifecycle checks

S02 passes the baseline source comparison. A real post-handover snapshot has debugger.snapshot.timestamp 1791455041812, or 10:24:01.812 UTC. Datadog displays pricing.py source and captured values. Its provider link was followed and matched repository A, deployed revision f5061500e8bf30880aebcf7966ba64df44d2ccde, line 17 and the full nearby code.

Logpoints

pricing.py#17

env:staging | 1 Instance | Captured just now | View More

EVENTS RECEIVED

Events from 1 logpoint

UTC-07:00

LIVE

Past 15 Minutes

DATE	CONTENT
Oct 08 03:24:22.465	CONTROL quantity=4 total=4320
Oct 08 03:24:21.626	CONTROL quantity=3 total=3600
Oct 08 03:24:20.918	CONTROL quantity=2 total=2400
Oct 08 03:24:20.123	CONTROL quantity=4 total=4320
Oct 08 03:24:17.847	CONTROL quantity=3 total=3600
Oct 08 03:24:17.301	CONTROL quantity=2 total=2400
Oct 08 03:24:15.376	CONTROL quantity=3 total=3600
Oct 08 03:24:13.418	CONTROL quantity=2 total=2400

pricing.py

15

total_cents = subtotal_cents - discount_cents

16

Place a line logpoint on the next line to inspect all computed locals.

Log CONTROL quantity={quantity} total={total_cents} | capture all - 3

17

return {

Capture

Stacktrace

View in Logs

Log Message

CONTROL quantity=3 total=3600

Values for line 17

Redaction: Targeted

quantity = 3

discount_cents = 0

discount_eligible = False

subtotal_cents = 3600

total_cents = 3600

unit_price_cents = 1200

Source 12 · Datadog source and post-handover control capture. The exact SDK snapshot timestamp is verified separately in Logs JSON and screenshot 82; it is not printed in this still.

Full-size source and capture evidence

Check	UTC	Verified scope
U32 Source repair	09:49–09:55	Controlled same-A-only removal/reinstall reached connected configuration. B remained ungranted; the successful callback is screenshot-only after source 11 stopped.
U33 Exact source	10:25:48	Provider link was followed to the deployed revision/file/line. The older file last-change commit is correctly distinct from the selected revision.
U34 Handover control	10:21–10:24	Run 2 registered and the later control produced a real snapshot after handover. Creation/status alone is not counted as capture.
U35 Verified expiry	10:45–10:50	Observed active → expired window 10:45:35.975–10:45:50.640. Last target execution 10:45:41.045; later control 10:47:30.402. Reload/direct link retained expiry.

Same-scope source-association recovery and baseline expiry/history controls remain established. Later actual metadata repair and two-version source checks appear in the consolidated continuation below. Repository authorization, original-target migration and other stated limits remain separate.

Connected configuration and recovery provenance

Additional checks and open observations

U01–U72 retain their dated historical scopes; coverage-phase records extend the online inventory to 83 separately scoped observations. They do not add original cases or imply that every branch is complete.

Check	UTC / source	Verified scope
U36 When editor operability	10:30:40	A normal supported click opened When; native disabled was false and no aria-disabled existed. Prior availability assessment was corrected.
U37 Invalid-line rejection and recovery	10:29–10:33	At this earlier check, line 9999 rejected and valid line 17 recovered. Later blank/comment controls establish Low FUNC03.
U38 Predicate revision control	10:33–10:35	COND3 and COND4 post-activation rows/locals matched predicates; old selected COND3 snapshot was labeled OUTDATED.
U39 No-match and restoration	10:36–10:39	Bounded NOMATCH interval had no new matching rows while baseline traffic continued; removing the predicate restored expected 2/3/4 rows.
U40 B discovery check	source 12	Ungranted B was not found in the source picker. This is discovery evidence, not proof of denied private-content retrieval.
U41 Direct event-link recovery	10:24; 10:41	Two View in Logs errors recovered through exact-identity indexed rows. UX04 is Low; no data loss or cause claimed.
U42 Source/value explanation and return	10:42:45	The same control snapshot/context survived return; Datadog source quantity > 3 and captured quantity 3/false/zero discount explained the planted application bug.

Unconfirmed observations

Seven unresolved topics remain outside the ten findings: initial Enable logs feedback, early HTTP 400 guidance, child lifetimes, invalid-line marker placement, disabled-draft Apply feedback, generic source-lookup guidance and sort choice after refresh. New case-specific limits and the Unicode loader issue are not additional confirmed defects.

Initial Enable logs state: the first session offered this prompt before Logs was visited and the session refreshed. Capture then worked without an explicit Logs settings change. Initial activation, timing and staleness have not been separated.

Earlier HTTP 400 guidance: wildcard-environment attempts returned a visible instrumentation-invalid error while Configuration had no environment. A later healthy SDK/specific-staging baseline worked. The cause was not isolated; recovery-message clarity remains a retest question.

Countdown and child lifetimes: the original session expired around 10:45 after a 09:45 Apply. A later 11:33 follow-up found the older failed 9999 probe expired while edited line 17 still captured and the header showed 6 minutes. Edits did not renew every sibling; the countdown appears tied to active child lifetimes. This later unscored observation narrows the question; it does not prove a session-wide TTL defect.

Invalid-line marker position: the 9999 marker appeared near the file end while the runtime explicitly rejected line 9999. No relocation or capture at a different line was proved. Check visual placement separately from installation.

Disabled-draft Apply feedback remains unresolved. Generic source lookup errors and shared-editor context are distinct from exact event-source recovery. Ascending sort resets after refresh while capture identity survives. The Line naming assessment remains incomplete; earlier condition-unavailability was a corrected tooling observation.

[Full unconfirmed-observation inventory and retest boundaries](#)

Further runtime controls and remaining scope

These earlier controls retain their dated scope. The following pages consolidate run 4, source metadata, actual revision/restart/outage receipts and retained-state checks without changing the original 63 definitions. Complete case evidence remains in the online matrix.

Case	Observed UTC	Executed scope
F04	11:34–11:36	Invalid and non-Boolean predicates rejected; valid quantity 2 correction captured. Existing template-feedback finding retained.
F05	11:38–11:40	Missing expression error and absent/present definedness controls distinguished.
F12	11:29–11:31	Explicit resume produced SDK execution 11:29:48.334, same IDs, then explicit stop and inactive reload.
F16	11:42–11:43	Message-only new events with capture off; OUTDATED history and fresh locals after re-enable.
F21	12:20–12:21	Ordinary controls visible and synthetic sensitive names explicitly redacted; mode unchanged.
X06	12:23 / 12:32	Sampled A/B overlap members match values, trace correlation and deployed source links. Different pair indices.
F07	By 13:12	Full function-exit return message and explicit @return-on-line error; entry untested.
F13	13:10–13:13	Child/session hierarchy and child-only capture controls; final session stop 13:13:55.
F22/X03/X07	At cutoff	Historical partial state. X03 later completed its 707 positive control; current complex/depth limits remain explicit.

Later cleanup is established separately: the current bounded workflow succeeded, its owned cleanup completed, and all seven known sessions were inactive after terminal. This verifies the named shutdown, not deletion or revocation of retained accounts, keys, grants or fixture history.

Data boundaries: UI row times are not automatically SDK execution times. The X06 samples are not a complete captured pair. New-event rows are not evidence that an OUTDATED selected pane contains that new event. Screenshots prove only their visible fields.

[Full original case matrix and separately scoped checks](#)

[Supplemental execution ledger](#)

Run 4 controls and retained state

This continuation combines later evidence after the former 13:15 document freeze. The original 63 case definitions remain intact. A successful control does not silently close a broader original case.

Case	Observed UTC	Executed scope
F06	14:14:20	Blank/comment rejection and valid-line recovery. Low FUNC03 concerns the misleading blank-line hint.
X03	13:58:26.856 SDK	Quiet target versus explicit installation error, followed by actual 707 capture; both definitions disabled.
F08	About 14:04:40	One double-click-plus-Return submission created one definition; count 12 survived reload and correct capture followed.
F10	14:16–14:20	Session/child states and fresh edited capture observed. Reactivation feedback and remaining original branches remain partial.
F14	18:42:30	Seven dismissal/navigation attempts preserved saved identity and count without Apply.
B05/F15/F17	18:45–18:51	Populated filters, identity controls and retained view checked. Environment/alternate-creation/sort persistence limits remain.

The runtime later completed and known capture sessions were stopped. A filtered list, an inactive parent, actual process termination and full account/settings reconciliation are separate assertions.

[Exact case outcomes, safe evidence and timestamps](#)

Source metadata and revision controls

The source phase distinguishes received metadata, deployed code, selected-event source and the shared editor. It does not treat a repository label or a green status as exact source proof.

Control	Result	Boundary
URL forms	Scoped PASS	Canonical HTTPS, HTTPS.git and SSH.git resolve exact C1 in the tested provider.
B metadata request	Scoped PASS S04	An isolated one-profile request shows no editor/event-source fallback. A bytes with B tags; no authorization-cause guarantee.
Held C1	Scoped PASS S05	A payload-timestamped execution keeps C1 after the named branch advances to nondeployed C2; default branch unchanged.
Six repairs	Event-source recovery	Actual repair stage and all corrected received tags verified. Original probe identities and exact C1 event links retained; generic/shared-editor behavior remains under assessment.

Later, C2 actually executed alongside C1. Distinct runtime identities, received tags and payload timestamps support the sampled source/value comparison below.

The screenshot displays the Datadog Live Debugger interface. At the top, there are tabs for 'Logpoints' and 'Events'. The 'Logpoints' tab is active, showing two logpoints for 'pricing.py#17' and 'pricing.py#24'. The 'pricing.py#24' logpoint is selected, showing its configuration and the code it monitors. The 'Events' tab shows a list of events with columns for DATE and CONTENT. The 'Stack trace' tab is also visible, showing the call stack for the selected logpoint. The code editor shows the 'calculate_quote()' function in 'pricing.py#24'.

Logpoints

- pricing.py#17**: env: stagi... | 2 Instances | Captured just now | View More
- pricing.py#24**: env: +1 | 1 Instance | Captured just now | View More

Events from 3 logpoints

UTC-07:00

+ LIVE Past 15 Minutes

DATE	CONTENT
Oct 08 13:20:23.190	COVERAGE_VALUE value=4 numeric=90004
Oct 08 13:20:20.730	COVERAGE_C2 quantity=3 total=3900
Oct 08 13:20:19.942	COVERAGE_VALUE value=3 numeric=90003
Oct 08 13:20:18.307	COVERAGE_VALUE value=2 numeric=90002
Oct 08 13:20:17.357	COVERAGE_C1 quantity=4 total=4320
Oct 08 13:19:56.239	COVERAGE_C2 quantity=2 total=2600
Oct 08 13:19:51.232	COVERAGE_C1 quantity=3 total=3600
Oct 08 13:19:39.390	COVERAGE_VALUE value=4 numeric=90004

Stack trace

capture_quote() in pricing.py#24

```

11 def calculate_quote(quantity:3: int) -> dict[str,
12     int | bool]:
13     """The intended offer is 10% off orders of
14     THREE or more units."""
15     if isinstance(quantity, bool) or not isinstance
16     (quantity, int):
17         raise ValueError("quantity must be an
18         integer")
19     if not 1 <= quantity <= 100:
20         raise ValueError("quantity must be between

```

Values for line 24

Redaction: Targeted

C2 control: selected stack line 24, main-editor commit 2d38d91 and a quantity 3 / total 3900 row are visible. Full SHA, SDK timestamp and below-frame locals are independently recorded, not claimed visible here.

Source controls, received metadata and scope limits

Actual deployment restart and outage controls

Control	Actual verification	Remaining original scope
C1 and C2	C2 startup at 20:14:41.182; C2 SDK 20:18:57.336 and C1 SDK 20:30:55.057 match exact revisions, lines and distinct values.	X01 sampled attribution passes. Original line 17 behavior on C2 remains X05, separately unresolved.
Application restart	Stage 20:34:39.166–40.569; same probe/location recovers with new process generation and SDK 20:35:13.807.	Disabled complex stays off. Short disappearance and an actually expired matching definition remain untested.
Agent interruption	Stop completed 20:49:39.862; restore 20:50:40.905–43.474. Same-app SDK capture 20:51:21.893 follows recovery.	During-window UI kept historical EVENTS RECEIVED; no explicit offline indicator. Feedback expectation remains under assessment.
Tiny burst	Nine of nine requests in 0.26s, health before/after true, strict maximum 9. Actual 21:04:38.240–38.503.	Distributed baseline differs from original same-target 1.1-second comparison. No sampling/rate-limit or capture-count guarantee.

These are actual stage receipts, not merely planned clocks or an overall successful workflow. UI row time, SDK execution time and supervisor stage time remain separate.

[Sanitized actual-stage receipt images and safe outcomes](#)

Paths values and state consistency

Area	Observed result	Limit
Paths	Alpha/handler.py → 11011 and beta/handler.py → 22022 have exact distinct source paths.	Unicode/space live error is loader-confounded; the ASCII direct-loader control also fails. A real move/rename across revisions remains unexecuted.
Complex values	Typed empties, Unicode keys/values, nested leaves 11/22 and five search matches verified. Four cycle expansions remained responsive and collapsed.	Received long-string truncation flags and exact cycle/depth bounds remain unverified. Nested sensitive-child protection is not fully closed.
Saved state	Known FUNC01 dirty-draft loss repeats; both reloads preserve A's accepted value==2 and a matching fresh row.	A stale B save was never accepted. No conflicting accepted-write or mixed-revision conclusion.
Revision navigation	Direct links and Back/Forward restore exact C1/C2. Rapid C1 → C2 → C1 loop completes and settles correctly.	Immediate frames retain prior content during transition. Atomic-every-frame behavior and a new defect are not asserted.

Production-labeled synthetic capture was never created; explicit approval is pending. A cancelled or blocked draft provides no capture result. Browser interruptions and the direct-loader limitation are disclosed test conditions, not automatically product defects.

[Exact remaining original-case work and access gates](#)

Final capture state and recorded evidence

The bounded workflow was observed SUCCESS at 21:20:54 UTC after 1h 30m 57s. Its explicit owned-runtime cleanup completed. A fresh unfiltered list at 21:28:36 showed All 7 / Active 0 / Inactive 7, with My sessions off. The mixed session had seven disabled probes; six recovery definitions expired and three older definitions in that session remained disabled. Retained navigation stayed inactive.

Shutdown does not erase historical captures or revoke deliberately retained accounts, keys, source grants and fixture history. Those retained assets and the broader original reconciliation requirements remain explicit in C01/C02.

Media	Unique archive accounting	Availability and limits
Sources 01–17	729:50.65 recorded = 609:59.40 retained + 119:51.25 omitted; 57 archive MP4s.	Thirteen overlapping highlights total 47:14.40; highlights are not additional unique coverage.
Source 15	147:18.05 recorded; 134:53.05 retained.	Includes 122:40 of unchanged idle recording, not continuous QA.
Source 16	89:26.25 recorded; 78:04.90 retained.	Late draft/filter/sort work is still/recorded-observation evidence while foreground remains on integration settings.
Source 17	102:21.80 recorded; 98:58.45 retained.	Crashes, recovery periods, exclusions and foreground limits are mapped. Later rapid-navigation checks occurred after recording stopped.

No missing UI transition is reconstructed, and screenshots are never inserted to imitate motion. Every public finding has genuine inline screenshot evidence. Image-level provenance, masks, timing maps, hashes and explicit omissions are available in the public evidence catalog.

[Full safe archives and chaptered highlight catalog](#)

[All original case definitions and current outcomes](#)

[Severity-ranked findings and High-only view](#)