

Datadog Live Debugger onboarding audit

Beginner experience and professional QA for Live Debugger and Source Code Integration

Overnight checkpoint | 8 October 2026 at 04:23 UTC | 00:23 New York

Executive summary

The public onboarding path contains a reproducible Python command defect and a desktop documentation layout defect. Runtime and source testing are paused at explicit authorization gates. This report records verified UI and local results, and gives every original case a concrete checkpoint outcome.

- **Fix the Python quickstart first.** The documented module command includes a .py suffix and fails for an ordinary Python script. Both corrected forms pass the isolated local check.
- **Make navigation labels readable.** At the observed desktop viewport, the documentation contents rail breaks several section names mid-word.
- **Give empty states a next step.** The authenticated manual route is visible and prevents starting without a service, but the empty service/environment sections do not explain setup recovery.
- **Explain the first irreversible decision.** Region selection is clearly marked permanent, but a complete beginner receives little in-place help choosing one.

Severity index below: HIGH 0 · MEDIUM 1 · LOW 3. Click a finding ID to jump to its detail page.

[Open the High severity only view](#)

63 original cases: 2 scoped PASS, 2 FINDING, 59 BLOCKED. Separate executed subchecks preserve genuine UI observations without implying full runtime coverage.

Decision boundaries

A documented prerequisite is not proof that it worked. This report distinguishes directly observed behavior, local reproduction, UX recommendations, and tests not run. Real capture, exact source revision, authorization boundaries, expiry, and cleanup require separate evidence.

Severity ranked finding index

Record	Classification	Observed impact	Part
DOC01	MEDIUM · bug	Python portion fails the isolated module invocation check	2
DOC02	LOW · bug	Navigation labels break mid-word at desktop width	1
UX01	LOW · UX	Permanent region choice precedes explanatory context	1
UX02	LOW · UX	Empty services and environments need a concrete setup recovery step	1

Highest value retests

After the command fix, run one clean Python quickstart through first real variable capture. Then verify the exact deployed commit in source view, an A-only repository grant, stop/expiry behavior, and safe recovery from missing prerequisites.

Scope and interpretation

The requested outcome is a real end-to-end debugging journey: create a fresh account, find the feature, prepare a simple application, observe runtime values, connect the matching source, and stop collection cleanly.

Two distinct review tracks

Beginner track. Assess what the page itself explains to someone unfamiliar with Datadog and APM. Record the first path, unclear terms, missing prerequisites, progress feedback, and recovery steps. Confusion is a UX assessment unless a specific promised behavior fails.

Professional QA track. Verify identity, configuration, deployed source revision, runtime state, error handling, permissions, lifecycle, and data presentation. A green badge or successful save is not evidence of a real event or correct source.

Evidence rules

- Actual browser screenshots and continuous screen capture support UI observations. Red outlines are editable report overlays; screenshot content is unchanged.
- A local Python process check isolates the quickstart syntax. It does not validate the ddtrace-run wrapper, Agent, log ingestion, or a long-running instrumented application.
- Only observed states are called passed or failed. Blocked and not-run cases remain explicit, including parts of otherwise useful partial tests.
- Dates and times are UTC. Screenshot-file timestamps and recording offsets are identified separately; approximate offsets are not capture clocks.

Severity definitions

Severity	Meaning
HIGH	Core task blocked or significant incorrect behavior with no reasonable workaround
MEDIUM	Material task failure or misleading behavior with a practical workaround
LOW	Readability, discoverability, or localized friction without demonstrated task failure

Environment

Cloud desktop browser; approximately 1180 × 757 page viewport at default zoom. Documentation evidence images are 1165 × 747 pixels. Local reproduction uses Python 3.12.14. A dedicated synthetic sample contains no real customer data. No successful runtime capture was established. Agent/sample processes are stopped; the official GitHub App installation was not submitted. The exact runtime build is therefore not a validated test environment.

Part 1 New user usability study

This is a structured walkthrough from a complete beginner's perspective, rather than a recruited-participant study. It records what the interface explains, where prerequisite knowledge is assumed, and how recovery is presented. No population-wide usability rate or aggregate time-on-task claim is made.

Stage	What a beginner needs to understand	Observation
Choose region	Where the account lives and whether the decision can change	Permanent-choice warning is visible; choosing criteria are not explained in the captured form
Find the feature	How APM, Live Debugger, sessions, and logpoints relate	Informed navigation and manual entry verified; the blind first-path study requires a fresh tester
Prepare an app	Which commands run on the host, in the app, and in the Agent	Docs surface several independent prerequisites; Python launch syntax is faulty
Get a first result	Difference between service discovery, active logpoint, and captured data	No services/environments shown; session start safely disabled; actual capture remains unverified
Connect source	Difference between repository access and exact deployed-commit mapping	Source integration is recommended; manual entry is available without a source connection
Stop safely	How expiry and disable affect collection and old results	No active session; stop and expiry semantics blocked pending a real capture

Make the first success concrete

Show a short path from one running test service to one visible captured value. State which setup checks are complete and which still need action. Keep the manual path visible when source integration is optional, then explain what source linking adds.

Do not collapse distinct states

A beginner should be able to tell whether an app is unknown, not instrumented, waiting for activation, receiving no matching traffic, or capturing data that is hidden by filters. These are test questions, not unverified defects.

[See the reproducible Python command finding in Part 2](#)

A permanent region choice needs decision support

The signup form clearly warns that the selected region cannot be changed later. The captured form does not explain what should drive that choice.

Start Your Free Trial Now X

No credit card required

Try it free for 14 days and monitor as many servers as you like.

Select a Region *

United Kingdom (UK1)

Important: This can't be changed later

Business Email *

Full Name *

Company *

Password *

Use at least 8 characters containing at least 1 number and 1 lowercase letter

Phone

*Required Fields. By signing up, you agree to the [Master Subscription Agreement](#), [Privacy Policy](#), and [Cookie Policy](#)

[Sign Up With Google](#) [Sign Up](#)

UX OBSERVATION | Permanent region choice appears during trial signup
The warning is clear; explaining how to choose could help a first-time user.

E08 · Actual edited-video frame at 00:20, sourced from raw capture 00:50, about 02:15:17 UTC. All identity fields are blank.

[Video evidence 00:20 to 00:34](#)

Reproduce Start a fresh trial and inspect Select a Region before submitting the form.


Recommended experience Give a short explanation or linked chooser covering account location and relevant selection criteria before the irreversible step.

Assessment The permanent-choice warning is explicit and useful. Additional decision support would reduce guesswork for a complete beginner.

Boundary This is an onboarding recommendation. No wrong-region account, data loss, or failed submission was demonstrated.

Documentation navigation breaks words at desktop width

The right-hand contents rail wraps ordinary section names in the middle of words, making the onboarding outline harder to scan.

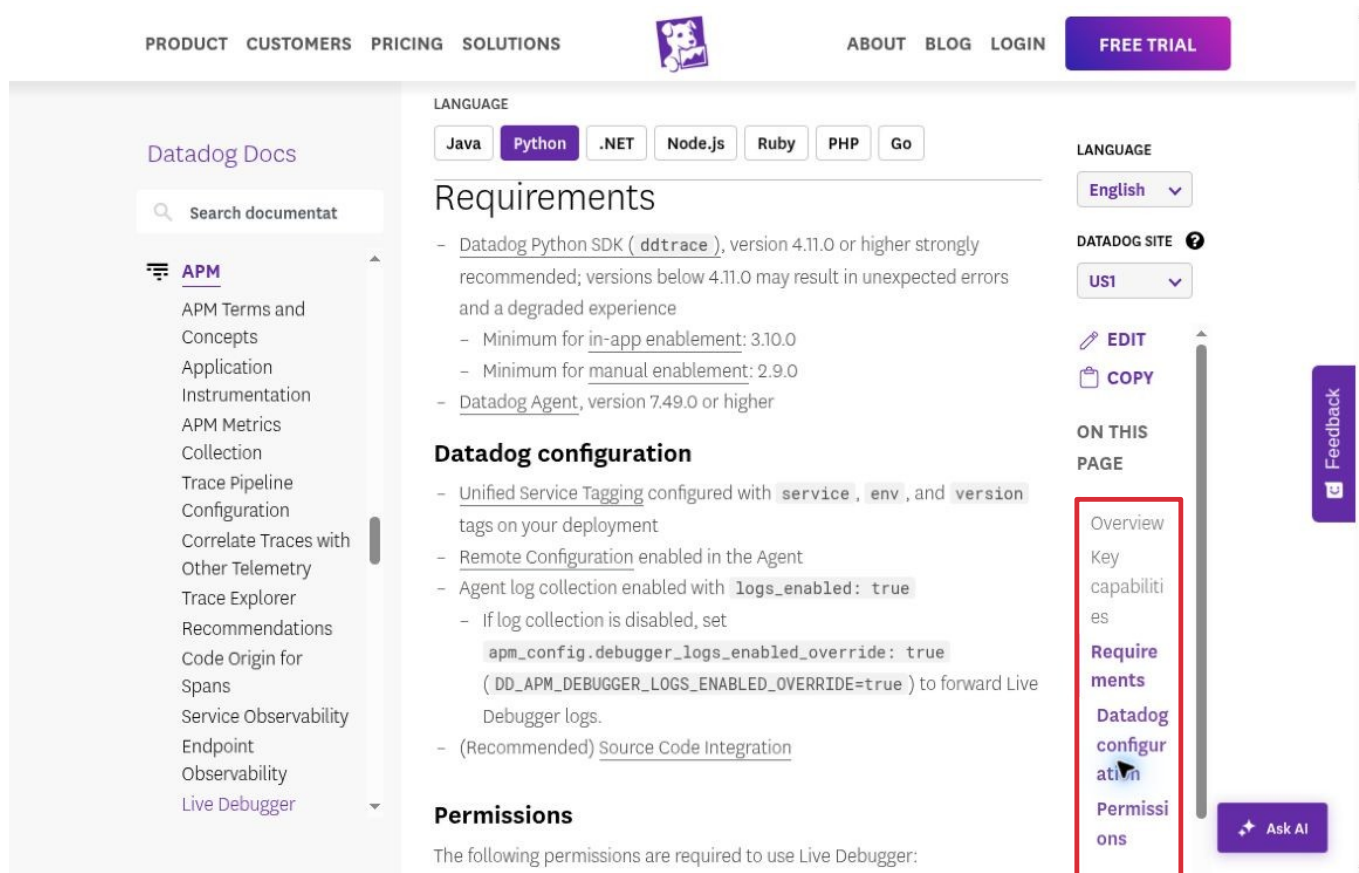

E03 · Requirements page · Screenshot file 02:19:51 UTC · 1165 × 747 captured page image; default browser zoom.

Video evidence 00:34 to 00:58

Reproduce Open the Python Live Debugger documentation at the observed desktop width and scroll to Requirements. Inspect the right-hand contents rail.


Expected Section names remain readable, either wrapping at word boundaries or collapsing into a usable navigation control.

Actual Labels such as Requirements, Permissions, and Datadog configuration split mid-word. The defect is visible in two separate scroll positions.

Fix and retest Reserve sufficient rail width or collapse the rail earlier. Retest default desktop widths and 125–150% zoom, including long translated labels.

Empty service states do not explain setup recovery

A fresh account reaches a manual-debugging path, but unavailable services and environments leave a newcomer without a concrete next step in the captured setup section.

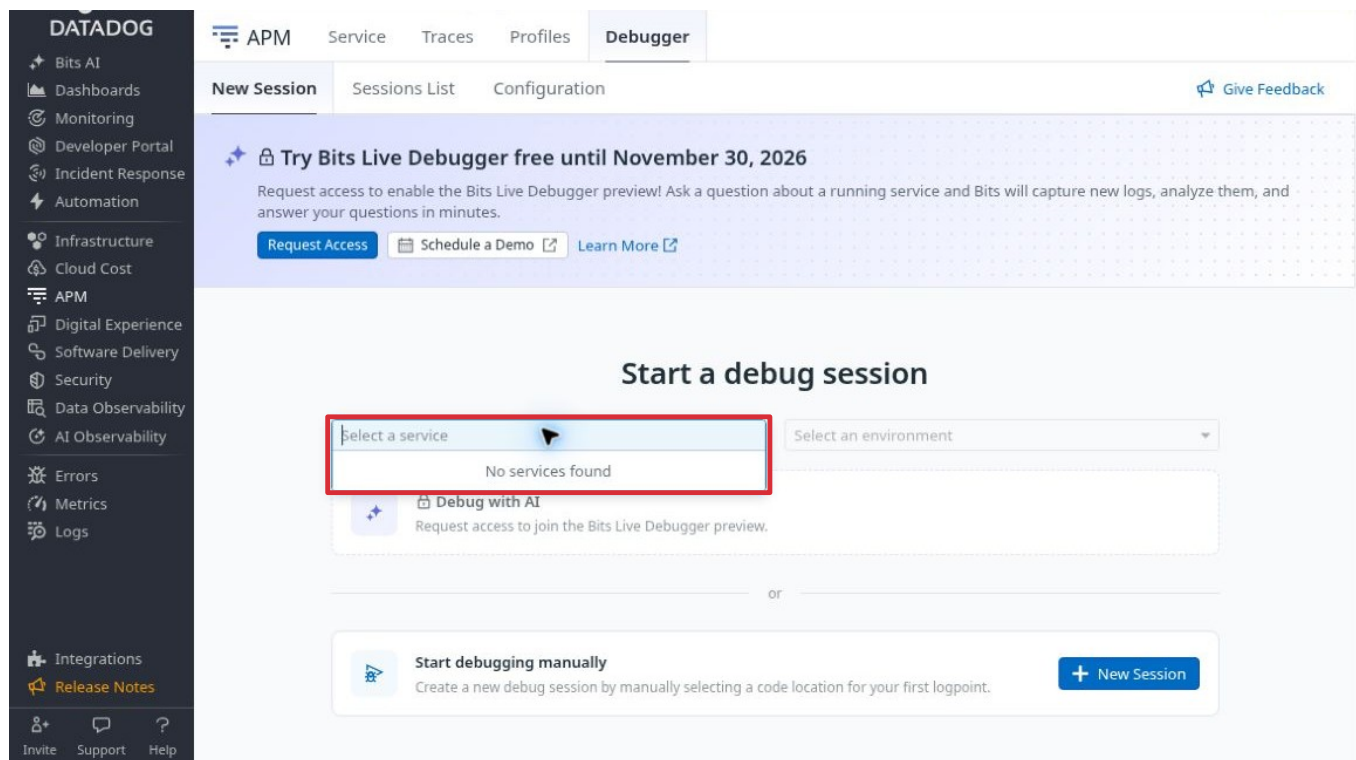

E10 · 03:21:54 UTC · Actual screenshot with top 76 pixels removed to exclude the account greeting. Remaining UI pixels are unchanged beneath the red border.

Online finding with both annotated screenshots

Reproduce Open New Session, inspect the empty service picker, enter the manual logpoint modal, close it, then inspect Configuration. The setup section reports No environments found.

Recommended experience The empty state should offer a concrete route to connect or troubleshoot the first service and explain which prerequisites are missing or not yet known.

Positive controls The modal requires a service and safely disables Start Debug Session. Close returns correctly. Manual debugging remains visible without source integration.

Boundary Runtime telemetry is paused pending explicit payload approval. This is a guidance recommendation, not evidence that a healthy service is incorrectly absent. The evidence index distinguishes screenshots from published motion footage.

Part 2 Professional QA

This part evaluates correctness and recovery using explicit preconditions, a known sample oracle, expected versus actual results, and reproducible evidence. The shared index links each confirmed finding to its detail page. Planned scenarios stay separate from executed outcomes.

All 63 original cases are accounted for: 2 scoped PASS, 2 FINDING and 59 BLOCKED. B04 and S01 pass only the route and pre-install scopes stated below. The appendix lists every case; the online matrix preserves full preconditions, steps, expected results and cleanup. No runtime capture or source-mapping pass is claimed.

Check	Outcome	Scope and remaining work
B02/B03	FINDING	UX02 first-run guidance and DOC01 Python command; other prerequisite causes remain untested
B04	PASS scoped	Manual entry without SCI and visible Bits prerequisite; no successful session
S01	PASS scoped	Pre-install permissions and cancel/reload; no App grant or source retrieval
B09/F14	BLOCKED	Modal zoom, focus, Escape/history/refresh checks passed; editor and saved-state variants unavailable
C01/C03	BLOCKED	Zero-session inventory and local syntax controls passed; active cleanup and live correction retest unavailable
Runtime/source	BLOCKED	Synthetic payload and A-only App-install approvals pending; role and deployment gates also required

Permission tests need precise interpretation

An organization integration can legitimately share access according to its grant model. Do not call lack of a per-user GitHub check a vulnerability without verifying that model. Old source may remain cached for up to seven days under the documented contract; revocation tests must distinguish cached content from a newly fetched, never-seen revision.

High risk tests before confidence in release readiness

- Capture actual quantity 3 locals at pricing.py line 17 and match the correct service, environment, and deployed revision.
- Confirm repo A works while never-granted private repo B cannot return source through the tested integration.
- Observe capture before and after real expiration, distinguishing late ingestion from late execution.
- Reload after stopping and verify every created test session/logpoint is inactive.

[See the beginner documentation navigation finding in Part 1](#)

Python quickstart contains an invalid module command

The launch example uses `python -m myapp.py`. Python's module switch expects a module name rather than a script filename.

The screenshot shows the Datadog Docs interface for the Python quickstart. The left sidebar contains a navigation menu with 'APM' selected. The main content area is titled 'Enable with environment variables' and includes instructions to set environment variables and run the command `ddtrace-run python -m myapp.py`. A red rectangle highlights this command in the terminal output section. The right sidebar contains a 'Feedback' button and a 'Ask AI' button.

E04 · Official Live Debugger documentation, Python tab · Screenshot file 02:20:19 UTC. Red outline identifies the launch command.

Video evidence 00:58 to 01:20

Reproduce Open Live Debugger docs, select Python, then Enable with environment variables. Follow the final launch line with an ordinary `myapp.py` script.

Expected A copied quickstart command starts the intended Python application without a module-resolution error.

Actual The Python portion exits 1 for a minimal script. Import-time code runs before the error, so this check does not imply that no application code executes.

Fix and retest Use `ddtrace-run python myapp.py` for a script, or `ddtrace-run python -m myapp` for a module. Add a quickstart smoke test that asserts successful process startup.

Reproduction and fixture oracle

Command isolation

Independent reproduction: 02:31:35 UTC on 8 October 2026. The file myapp.py contains one harmless print statement; no Datadog SDK or telemetry is involved.

```
myapp.py:
print("INERT_FIXTURE_EXECUTED")

$ python -m myapp.py
INERT_FIXTURE_EXECUTED
ModuleNotFoundError: __path__ attribute not found on myapp
Exit: 1

$ python myapp.py
INERT_FIXTURE_EXECUTED
Exit: 0

$ python -m myapp
INERT_FIXTURE_EXECUTED
Exit: 0
```

The error is abbreviated for readability. Python also suggests using myapp instead of myapp.py as the module name. The working alternatives establish the module-versus-filename distinction; neither has been claimed as an instrumented Datadog success.

Known sample behavior

The synthetic quote service intentionally uses quantity > 3 instead of quantity >= 3. It is a target bug in the demo application, not a Datadog defect. At pricing.py line 17 all calculated locals are available for the intended line logpoint.

Quantity	Subtotal	Discount eligible	Discount	Actual total
2	2400	false	0	2400
3	3600	false	0	3600
4	4800	true	480	4320

All monetary values are integer cents. The intended quantity 3 total is 3240. A valid debugger result should expose the actual 3600 and the false eligibility, making the boundary error explainable.

Local test rerun at 02:36 UTC: nine tests completed, eight passed and one intentional expected failure. HTTP tests bind to loopback and clean up their server.

Evidence and reference index

ID	Evidence	UTC time or recording location
E10	Empty service picker evidence crop	03:21:54 UTC; account greeting excluded
E13	No environments found configuration	03:23:59 UTC; clean scrolled screenshot
E08	Blank Datadog trial form video frame	Edited video 00:20; raw 00:50; approximately 02:15:17 UTC
E03	Python requirements and navigation	File timestamp 02:19:51; initial video approximately 05:15–05:45
E04	Python environment-variable launch example	File timestamp 02:20:19; initial video approximately 05:45–06:20
R01	Independent Python invocation reproduction	02:31:35; Python 3.12.14; bad form exits 1, alternatives exit 0
R02	Local fixture test rerun	02:36; 8 passes, 1 intentional expected failure

The 80-second public edited excerpt covers signup and documentation only. Its chapters are 00:20 region choice, 00:34 contents-rail wrapping, and 00:58 invalid Python command. Authenticated account-creation footage is not claimed by this excerpt.

The initial continuous recording began at 02:14:27 UTC and ended at 02:21:01 UTC. It is 393.7 seconds at 1364 × 1024 pixels, 20 fps. Edited-video offsets will differ from raw recording offsets. E03 and E04 are direct page captures; E08 is an extracted video frame. Published evidence excludes browser chrome.

Authenticated UI video with exact chapter and source times

Reviewed motion: authenticated UI QA 181.30 seconds; account/setup transitions 20.25 seconds, with identity masked and OAuth omitted. UX02 appears at 00:00 and 02:42.80 in the UI excerpt. The complete privacy-safe archive is still being prepared; excerpts are not all recorded footage.

Primary product references

[Live Debugger setup and session behavior](#)

[Python source mapping](#)

[Source Code Management Providers and caching](#)

[GitHub integration](#)

[Live Debugger expression language](#)

References inform expected behavior and test design. They are not substitutes for observed product results. All current findings are limited to the captured site, viewport, and isolated runtime check.

Verified UI subchecks

These narrowly scoped observations preserve the work that actually ran. They do not promote all requirements of their parent cases or add to the 63-case denominator.

Check	UTC	Verified scope
U01 Informed navigation	03:33–03:40	Home → APM introduction → global search → Live Debugger reached the intended route. No blind timing claim.
U02 Manual entry without source	03:21–03:24	Manual session route opens without Source Code Integration. No successful runtime start.
U03 Missing service prevents submit	03:21–03:24; 04:01–04:02	Start is disabled without service; Ctrl+Enter does not submit.
U04 Actual 125 percent zoom	03:33–03:40	Native browser menu shows 125%; modal remains usable; reset to 100% verified. Failed shortcut attempt excluded.
U05 Modal focus and Escape	03:33–03:40	Tab focus cycles through modal controls; Escape closes and restores New Session focus.
U06 Modal history navigation	03:33–03:40	Back removes modal and reaches APM intro; Forward returns New Session without ghost modal. Empty-service context only.
U07 Refresh and repeated Close	04:01–04:02	Refresh dismisses the empty-service modal; two open/Close cycles return correctly. No editable saved configuration.

Verified control and inventory checks

Check	UTC	Verified scope
U08 Empty list filter persistence	03:56–03:58	Search/status/owner controls were exercised; status/owner persist on reload. No populated-result correctness.
U09 Clear Filter and custom dates	03:56–03:58	Clear Filter resets selections. October 1–7 custom range displays correctly. Zero-session list.
U10 Pre-install cancellation	03:59–04:00	Official/custom setup canceled; reload remains Not Connected. No App grant.
U11 Final session inventory	04:12	All 0 / Active 0 / Inactive 0; filters cleared. Live accessibility observation after video stopped.
U12 Python command controls	02:31:35; 03:19:52	Invalid module command exits 1; script and suffix-free module alternatives exit 0. Local-only, not Datadog capture.
U13 Published finding images	Verified by 03:59	All four finding pages rendered their inline annotated image; the UX02 original-image link opened. Publication QA, not Datadog behavior.
U14 Temporary helper shutdown	04:22:42	Two completed local setup helpers stopped; each shows zero remaining owned processes. Private configuration retained without inspection.

[Open exact evidence for every supplemental check](#)

Authorization gates and resume order

The synthetic runtime is stopped and no successful ingestion was proved. The official GitHub App installation remains unsubmitted. Earlier connection refusals and unready Remote Configuration checks were unresolved setup signals, not product defects. Telemetry approval is the current restart gate. Locator and recording failures belong to audit tooling.

Gate	Concrete missing prerequisite
Runtime G1	Approval for the specific synthetic telemetry payload to Datadog US1; then healthy Agent/SDK, Remote Configuration, forwarding and a real first captured event.
Source G2	Approval for the official GitHub App limited to A; exact deployed commit mapping. Private B is not created or granted.
Access G3	Independent restricted test identities and approval for the exact test-only role/revocation changes.
Variants G4	Case-specific controlled deployment/restart/failure tests after a working baseline. Local prepared fixtures are not executed tests.
Study method	A fresh uninformed tester for blind navigation timing. Existing navigation observations are informed.

Resume in this order

After the specific approvals, establish F01 with actual quantity 3 locals and verified service/environment/version. Start F11 using the shortest available expiry and observe its terminal state. Validate S02 exact deployed SHA and S03 A allowed with B never granted. Run the other prerequisite-matched cases, then reconcile created entities and retained settings with C01–C03.

Retained state

Final product inventory at 04:12 UTC was All 0 / Active 0 / Inactive 0, with filters cleared. Agent/sample processes stopped by 03:39. Two temporary setup helpers stopped at 04:22:42, with zero remaining owned processes. Accounts, public audit repository and private A are intentionally retained. Private configuration was not inspected; C02 is not a full cleanup certification.

Original case outcomes 1 to 9

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
B01	BLOCKED	Blind timing needs a fresh tester. Informed navigation passed separately.
B02	FINDING	LOW UX02: natural first-run empty-state recovery guidance. Other causes untested.
B03	FINDING	MEDIUM DOC01: isolated invalid Python launch-command reproduction. No runtime start.
B04	PASS	Manual entry without SCI and visible Bits prerequisite only. No successful session.
B05	BLOCKED	No two-target service/env/version values. Empty-list controls passed separately.
B06	BLOCKED	No restricted test identity or natural permission failure. Preflight explanation inspected.
B07	BLOCKED	G1 unavailable. Record time from creation to accepted/configured/installed/first event.
B08	BLOCKED	G1 unavailable. Find quantity 3 and inspect locals.
B09	BLOCKED	125% modal focus/Escape smoke passed; editor, long paths and validation unavailable.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 10 to 18

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
B10	BLOCKED	G1 unavailable. From session and list views, find expiry, manual stop, what remains visible afterward, and route back tomorrow.
F01	BLOCKED	G1 unavailable. Baseline capture at pricing.py line 17 with numeric locals and bounded quantity 2/3/4 traffic not run.
F02	BLOCKED	G1 unavailable. Create condition quantity == 3; cycle 2/3/4; then change to quantity == 4, apply, wait for activation and repeat.
F03	BLOCKED	G1 unavailable. Set quantity == 101 with valid 2/3/4 traffic; then remove condition and reapply.
F04	BLOCKED	No selectable service, so expression/target fields were not reached. Locator failure occurred before input. Runtime portion also needs G1.
F05	BLOCKED	G1 unavailable. Reference nonexistent missing_qa_value; separately test isDefined(missing_qa_value); compare with an available local.
F06	BLOCKED	No selectable service, so expression/target fields were not reached. Locator failure occurred before input. Runtime portion also needs G1.
F07	BLOCKED	G1 unavailable. Compare pricing.calculate_quote method entry/exit and line 17 context; no installed capture to inspect.
F08	BLOCKED	G1 unavailable. Rapidly double-click Create/Apply once; repeat Enter once during pending state; reload and inspect list.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 19 to 27

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
F09	BLOCKED	G1 unavailable. Two-tab stale edit and lost-update behavior require an existing logpoint and actual active-definition checks.
F10	BLOCKED	G1 unavailable. Disable logpoint in A; use stale edit/re-enable UI in B; reload.
F11	BLOCKED	G1 unavailable. Record expiry time; keep traffic before and after it; leave page open, then reload and reopen direct session link.
F12	BLOCKED	G1 unavailable. Use available re-enable/extend flow; inspect new deadline and resulting IDs; generate fresh traffic.
F13	BLOCKED	G1 unavailable. Disable one logpoint, then whole session; attempt documented re-enable paths; inspect sibling state each time.
F14	BLOCKED	Empty-modal navigation/cancel/refresh passed; saved-state/editor variants need G1.
F15	BLOCKED	G1 unavailable. Attempt to edit original target service/environment/location on an existing logpoint; use the UI's supported alternate flow if blocked.
F16	BLOCKED	G1 unavailable. Turn variable capture off, apply, produce traffic, then turn back on and capture again.
F17	BLOCKED	G1 unavailable. Narrow time range to exclude newest events, pause/resume stream, change sorting, clear filters, reopen event.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 28 to 36

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
F18	BLOCKED	G1, G4 unavailable. While session is active, stop/restart only test process, then send traffic.
F19	BLOCKED	G1, G4 unavailable. Preserve config; deliberately stop only test Agent or use approved test-only disconnected state.
F20	BLOCKED	G1, G4 unavailable. Target one version/environment, produce traffic in both, inspect event tags and source view; then deliberately choose the other.
F21	BLOCKED	G1, G4 unavailable. Capture dummy numeric locals plus obvious dummy password/accessToken values and harmless string.
F22	BLOCKED	G1, G4 unavailable. Capture empty list/map, nested object, duplicate leaf names, long synthetic string, and bounded cyclic structure.
F23	BLOCKED	G1/G4 unavailable. Normal 1.1-second traffic versus a bounded burst; sampling and application health not tested.
S01	PASS	Pre-install permissions and cancel/reload only. Integration remains unconnected.
S02	BLOCKED	G2 unavailable. Open source from actual capture; compare repository owner/name, full SHA, file, line, and nearby text with deployed C1.
S03	BLOCKED	G2 unavailable. Record effective A-only grant.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 37 to 45

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
S04	BLOCKED	G2, G4 unavailable. Map only a dedicated test instance to known B URL/SHA without granting B.
S05	BLOCKED	G2, G4 unavailable. In C2 shift the pricing lines and change a numeric marker; do not deploy C2.
S06	BLOCKED	G2, G4 unavailable. Independently test absent SHA, syntactically invalid SHA, valid-length nonexistent SHA, then real SHA with wrong repository.
S07	BLOCKED	G2, G4 unavailable. Show both versions under same service/environment.
S08	BLOCKED	G2, G4 unavailable. Test same basename in two directories, moved/renamed file across commits, and path with spaces or non-ASCII.
S09	BLOCKED	G1/G2/G4 unavailable. Compare HTTPS, trailing .git and supported SSH metadata forms with actual source mapping.
S10	BLOCKED	G2, G3 unavailable. Record before-state and known fetched files.
S11	BLOCKED	G3 unavailable. After S10 or a canceled/expired setup, reconnect using approved A-only scope, return to debugger, load fresh source.
S12	BLOCKED	G1, G3 unavailable. As read-only user, inspect session and attempt create/edit/disable through UI and copied direct page link.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 46 to 54

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
S13	BLOCKED	G1, G3 unavailable. Open an editable session, revoke only that user's write capability via approved admin, then apply from stale tab and reload.
S14	BLOCKED	G1, G3 unavailable. Open same session under both identities; test event/snapshot direct links and expand captured values.
S15	BLOCKED	G2, G3 unavailable. Compare source retrieval under user with GitHub access and user without it, using the same authorized Datadog org integration.
S16	BLOCKED	No second org/account and no genuine session/source direct-link target.
S17	BLOCKED	Bits gate visible; Strict-mode and full source/preview combinations not established.
S18	BLOCKED	G1, G2 unavailable. Ask why exactly three units cost 3600 instead of 3240.
C01	BLOCKED	Zero-session inventory verified; created-entity disable and post-stop traffic need G1.
C02	BLOCKED	Named processes/helpers stopped and assets retained; full settings inventory incomplete.
C03	BLOCKED	Local invalid/valid command controls verified; live correction retest needs G1/G2.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 55 to 63

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
X01	BLOCKED	G1, G2, G4 unavailable. Keep both commits active under one service/environment; give each replica a unique numeric marker; capture bounded traffic and open each event source.
X02	BLOCKED	G1, G2, G4 unavailable. Use different numeric markers; switch environment/version/repository filters quickly and open each event directly.
X03	BLOCKED	G1, G4 unavailable. Install at the never-executed function; separately create a target known to fail installation; compare status; finally execute the healthy function once.
X04	BLOCKED	G1 unavailable. Record executions immediately before and after effective stop; inspect late arrivals and refresh/direct links.
X05	BLOCKED	G1, G2, G4 unavailable. Capture baseline at C1; deploy C2; inspect installed target, displayed source, and new captures.
X06	BLOCKED	G1, G4 unavailable. Send bounded overlapping requests carrying unique numeric correlation IDs; inspect local variables, trace/request context, and source per event.
X07	BLOCKED	G1, G4 unavailable. Exercise cyclic objects, Unicode keys/values, duplicate nested keys, and nested dummy password/accessToken identifiers without weakening redaction.
X08	BLOCKED	G2, G3 unavailable. Establish source baseline; remove one permitted prerequisite or revoke A; restore only its prior authorized scope; refresh and request fresh source.
X09	BLOCKED	G1 unavailable. Give session one condition quantity == 3 and session two quantity == 4; generate 2/3/4 traffic; edit one, then stop/expire one while the other remains active.

[Full case steps, gates, evidence and cleanup](#)

Beginner glossary

These terms describe the debugging workflow. A visible setup check is not the same as a captured event.

Term	Plain language meaning
APM	Application Performance Monitoring. Traces show how requests move through application operations.
Agent	A process near the application that receives and forwards supported telemetry and configuration.
SDK or tracer	A language-specific library in the application. Python uses ddtrace.
Trace and span	A trace follows a request or task; a span represents one operation within it.
Service	The named application or component being monitored. Names alone do not establish environment or source identity.
Environment and version	Tags identifying where the application runs, such as staging, and which release it runs.
Remote Configuration	A channel for supported configuration changes to reach a running Agent or SDK without a new deployment.
Debug session	A bounded investigation containing debugger configuration and related results. Check its actual expiry and active state.
Logpoint	A location and rule that collect a message or values without editing the deployed source for each observation.
Snapshot or captured locals	Values observed at a specific runtime execution. Availability, redaction, sampling, and truncation affect what appears.
Source Code Integration	Repository access plus mapping that connects runtime evidence to source files. A connected account alone is insufficient.
Commit SHA	A Git revision identifier. The source shown for a capture should match the deployed commit, not merely the latest branch.
Redaction	Protection that removes or masks selected data. Missing, unavailable, and redacted values mean different things.