

Datadog Live Debugger onboarding audit

Beginner experience and professional QA for Live Debugger and Source Code Integration

Continuation checkpoint | 8 October 2026 at 06:28 UTC | 02:28 New York

Executive summary

The audit has two Medium findings: an invalid Python quickstart command and an interrupted GitHub connection that cannot recover through Connect. Historical APM ingestion and Agent-side authorization were observed. Debugger SDK registration, live capture and source association remain unverified. Every original case has a scoped result or concrete blocker.

- **Recover interrupted source connections.** The A-only App is installed/authorized, but Datadog remains unconnected after a paused flow. Fresh-install behavior is unproven.
- **Fix the Python quickstart.** Its .py-suffixed module command fails for an ordinary script; corrected script/module forms pass local controls.
- **Explain invalid templates.** The red border and disabled Start work, but the observed invalid state lacks a syntax-error explanation. The valid correction recovers.
- **Make navigation labels readable.** At the observed desktop viewport, the documentation contents rail breaks several section names mid-word.
- **Give empty states a next step.** The authenticated manual route is visible and prevents starting without a service, but the empty service/environment sections do not explain setup recovery.
- **Explain the first irreversible decision.** Region selection is clearly marked permanent, but a complete beginner receives little in-place help choosing one.

Severity index below: HIGH 0 · MEDIUM 2 · LOW 4. Click a finding ID to jump to its detail page.

[Open the High severity only view](#)

63 original cases: 2 scoped PASS, 4 FINDING, 57 BLOCKED. Separate executed subchecks preserve genuine UI observations without implying full runtime coverage.

Decision boundaries

A scoped result is not a completed end-to-end test. Live capture, source retrieval, authorization boundaries and lifecycle remain unverified.

Severity ranked finding index

Record	Classification	Observed impact	Part
DOC01	MEDIUM · bug	Python portion fails the isolated module invocation check	2
SCI01	MEDIUM · recovery	Interrupted GitHub connection cannot recover through the offered route	2
DOC02	LOW · bug	Navigation labels break mid-word at desktop width	1
UX01	LOW · UX	Permanent region choice precedes explanatory context	1
UX02	LOW · UX	Empty services and environments need a concrete setup recovery step	1
UX03	LOW · feedback	Invalid template leaves the correction implicit in the observed state	1

Scope and interpretation

The requested outcome is a real end-to-end debugging journey: create a fresh account, find the feature, prepare a simple application, observe runtime values, connect the matching source, and stop collection cleanly.

Two distinct review tracks

Beginner track. Assess what the page itself explains to someone unfamiliar with Datadog and APM. Record the first path, unclear terms, missing prerequisites, progress feedback, and recovery steps. Confusion is a UX assessment unless a specific promised behavior fails.

Professional QA track. Verify identity, configuration, deployed source revision, runtime state, error handling, permissions, lifecycle, and data presentation. A green badge or successful save is not evidence of a real event or correct source.

Evidence rules

- Actual browser screenshots and continuous screen capture support UI observations. Red outlines are editable report overlays; screenshot content is unchanged.
- A local Python process check isolates the quickstart syntax. It does not validate the ddtrace-run wrapper, Agent, log ingestion, or a long-running instrumented application.
- Only observed states are called passed or failed. Blocked and not-run cases remain explicit, including parts of otherwise useful partial tests.
- Report clocks are UTC; some UI controls display UTC-07:00. Screenshot-file timestamps and recording offsets are identified separately and are not interchangeable.

Severity definitions

Severity	Meaning
HIGH	Core task blocked or significant incorrect behavior with no reasonable workaround
MEDIUM	Material task failure or misleading behavior with bounded demonstrated impact
LOW	Readability, discoverability, or localized friction without demonstrated task failure

Environment

Cloud desktop browser; approximately 1180 × 757 page viewport at default zoom. Documentation evidence images are 1165 × 747 pixels. Local reproduction uses Python 3.12.14. A dedicated synthetic sample contains no real customer data. Local process/intake snapshots used Agent/trace-agent 7.84.2, ddtrace 4.11.0 and Python 3.13.5. They do not establish debugger SDK client registration. Datadog UI build 35.143254999. Runtime later stopped at an additional-destination boundary; source association remains unconnected despite verified GitHub installation and authorization. Historical APM spans were later verified; no captured debugger event.

Part 1 New user usability study

This is a structured walkthrough from a complete beginner's perspective, rather than a recruited-participant study. It records what the interface explains, where prerequisite knowledge is assumed, and how recovery is presented. No population-wide usability rate or aggregate time-on-task claim is made.

Stage	What a beginner needs to understand	Observation
Choose region	Where the account lives and whether the decision can change	Permanent-choice warning is visible; choosing criteria are not explained in the captured form
Find the feature	How APM, Live Debugger, sessions, and logpoints relate	Informed navigation and manual entry verified; the blind first-path study requires a fresh tester
Prepare an app	Which commands run on the host, in the app, and in the Agent	Docs surface several independent prerequisites; Python launch syntax is faulty
Get a first result	Difference between service discovery, active logpoint, and captured data	Service discovered after approval; wildcard setup guidance and draft validation checked; actual capture unverified
Connect source	Difference between repository access and exact deployed-commit mapping	Manual entry available; installed/authorized GitHub link cannot recover in the interrupted state
Stop safely	How expiry and disable affect collection and old results	No active session; stop and expiry semantics blocked pending a real capture

Make the first success concrete

Show a short path from one running test service to one visible captured value. State which setup checks are complete and which still need action. Keep the manual path visible when source integration is optional, then explain what source linking adds.

Do not collapse distinct states

A beginner should be able to tell whether an app is unknown, not instrumented, waiting for activation, receiving no matching traffic, or capturing data that is hidden by filters. These are test questions, not unverified defects.

[See the reproducible Python command finding in Part 2](#)

A permanent region choice needs decision support

The signup form clearly warns that the selected region cannot be changed later. The captured form does not explain what should drive that choice.

Datadog named a Leader in the Gartner® Magic Quadrant™ for Observability Platforms

PRODUCT CUSTOMERS

Start Your Free Trial Now

No credit card required

Try it free for 14 days and monitor as many servers as you like.

Select a Region *

United Kingdom (UK1)

Important: This can't be changed later

Business Email *

Full Name *

Company *

Password *

Use at least 8 characters containing at least 1 number and 1 lowercase letter

Phone

*Required Fields. By signing up, you agree to the [Master Subscription Agreement](#), [Privacy Policy](#), and [Cookie Policy](#)

Sign Up With Google

Sign Up

UX OBSERVATION | Permanent region choice appears during trial signup
The warning is clear; explaining how to choose could help a first-time user.

E08 · Actual edited-video frame at 00:20, sourced from raw capture 00:50, about 02:15:17 UTC. All identity fields are blank.

Video evidence 00:20 to 00:34

Reproduce Start a fresh trial and inspect Select a Region before submitting the form.


Recommended experience Give a short explanation or linked chooser covering account location and relevant selection criteria before the irreversible step.

Assessment The permanent-choice warning is explicit and useful. Additional decision support would reduce guesswork for a complete beginner.

Boundary This is an onboarding recommendation. No wrong-region account, data loss, or failed submission was demonstrated.

Documentation navigation breaks words at desktop width

The right-hand contents rail wraps ordinary section names in the middle of words, making the onboarding outline harder to scan.

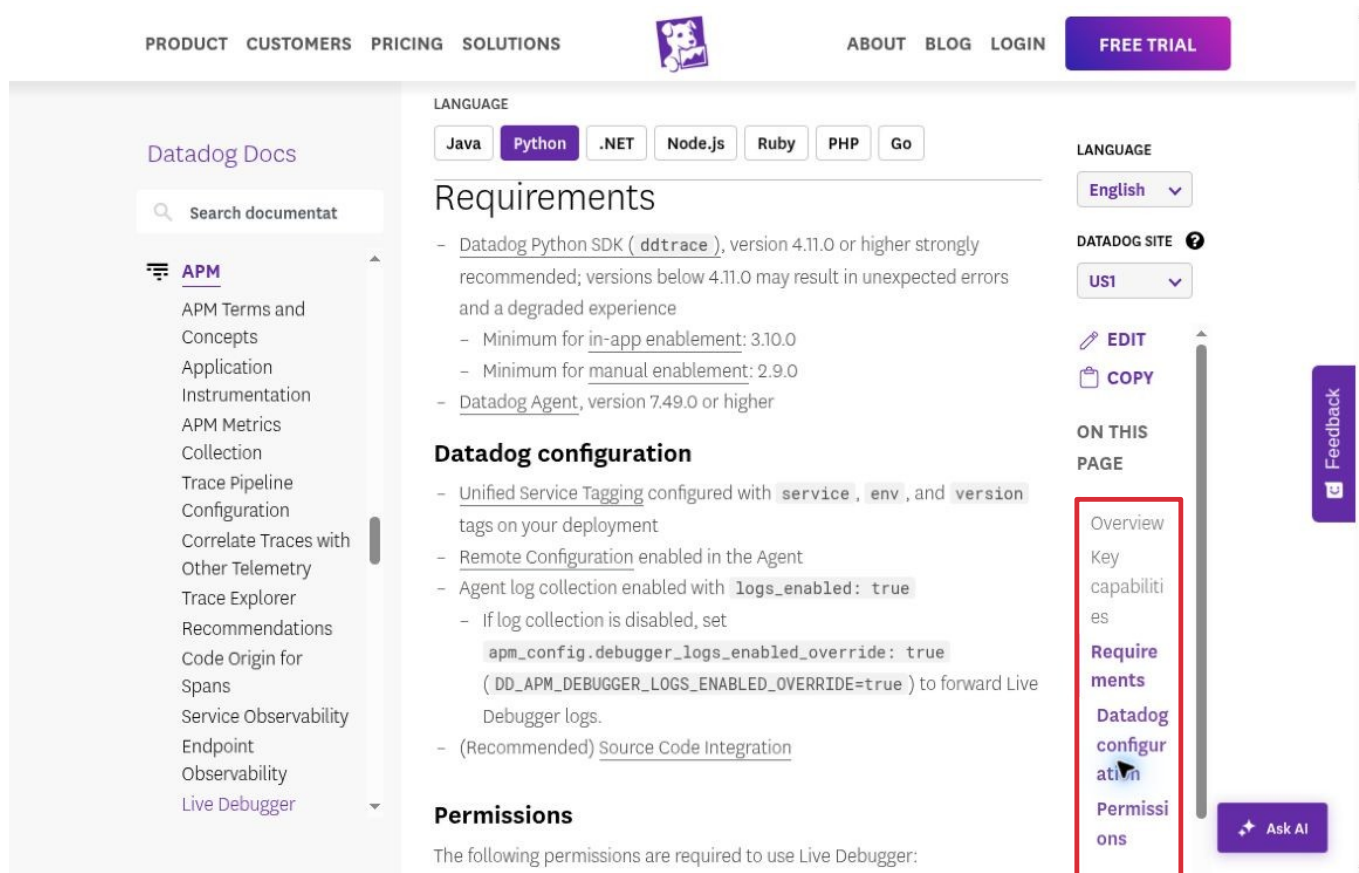

E03 · Requirements page · Screenshot file 02:19:51 UTC · 1165 × 747 captured page image; default browser zoom.

Video evidence 00:34 to 00:58

Reproduce Open the Python Live Debugger documentation at the observed desktop width and scroll to Requirements. Inspect the right-hand contents rail.


Expected Section names remain readable, either wrapping at word boundaries or collapsing into a usable navigation control.

Actual Labels such as Requirements, Permissions, and Datadog configuration split mid-word. The defect is visible in two separate scroll positions.

Fix and retest Reserve sufficient rail width or collapse the rail earlier. Retest default desktop widths and 125–150% zoom, including long translated labels.

Empty service states do not explain setup recovery

A fresh account reaches a manual-debugging path, but unavailable services and environments leave a newcomer without a concrete next step in the captured setup section.

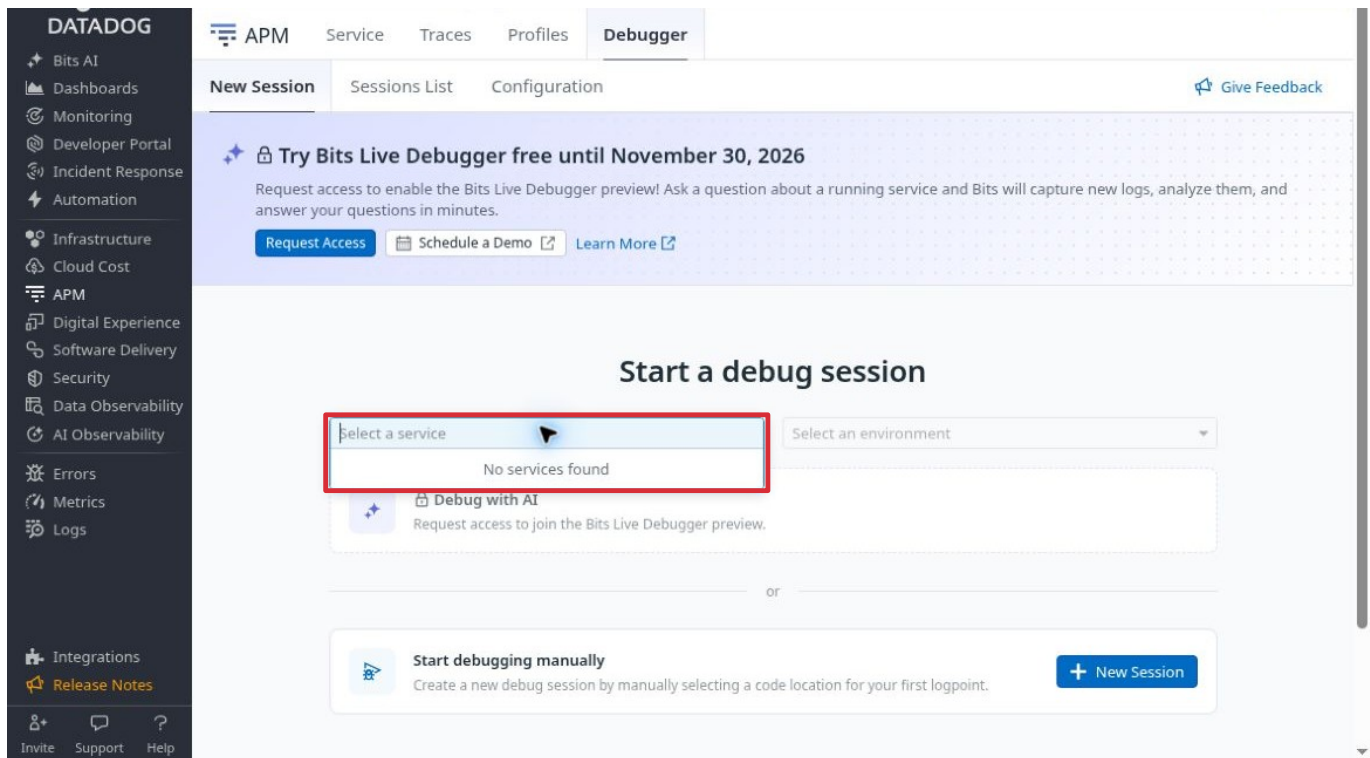

E10 · 03:21:54 UTC · Actual screenshot with top 76 pixels removed to exclude the account greeting. Remaining UI pixels are unchanged beneath the red border.

Online finding with both annotated screenshots

Reproduce Open New Session, inspect the empty service picker, enter the manual logpoint modal, close it, then inspect Configuration. The setup section reports No environments found.


Recommended experience The empty state should offer a concrete route to connect or troubleshoot the first service and explain which prerequisites are missing or not yet known.

Positive controls The modal requires a service and safely disables Start Debug Session. Close returns correctly. Manual debugging remains visible without source integration.

Boundary This earlier observation concerns a genuinely empty account. After service discovery, the wildcard-environment warning provides useful setup guidance. The finding is not evidence that a healthy service is incorrectly absent.

Invalid log template lacks an explanatory error message

An unmatched log template prevents submission and gets a red border after blur. In the tested view and recorded accessibility snapshot, no text explains the syntax error or the required correction.

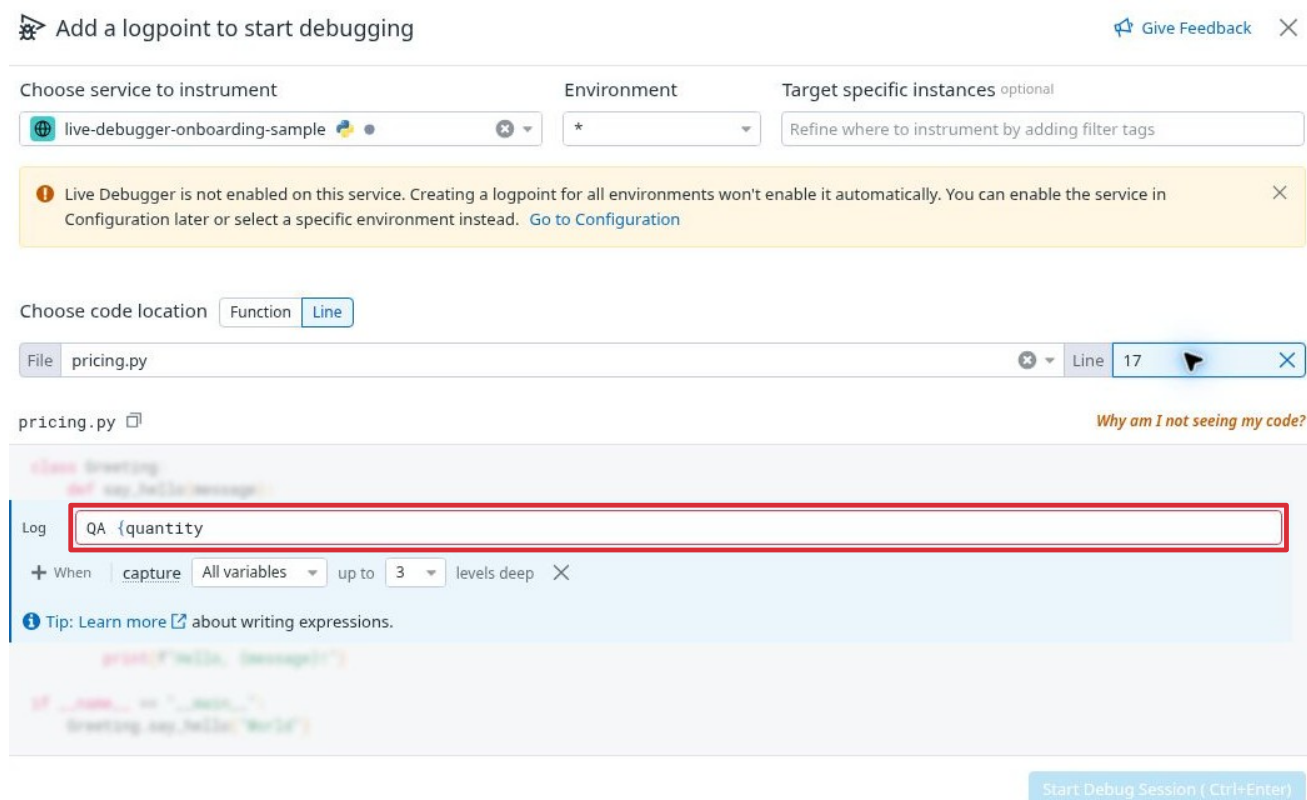

Source 58 file timestamp 06:26:32 UTC; interaction 06:25–06:28. Actual crop; no generated UI. The separate outline preserves the genuine application border.

Full-size original annotation and correction control

Reproduce and control Enter QA {quantity in the manual Line draft, then blur. Start is disabled and the border turns red. Add the closing brace: the border clears and Start enables. No submit.

Expected and actual Give a specific text explanation, associated with the field. The inspected textarea has a generic editor name and lacks the recorded error-related ARIA attributes; the captured alert addresses service setup instead.

Boundary W3C SC 3.3.1 motivates an explanatory text error. Missing aria-invalid alone is not proof of failure. This is not a screen-reader run or global WCAG verdict; a transient announcement and computed Line naming require retest.

Motion evidence Reviewed source 10 highlights show unmatched input at 00:29.30, blur feedback at 00:41.30 and correction at 00:53.30. The online finding links exact source clocks and the full retained recording.

Part 2 Professional QA

This part evaluates correctness and recovery using explicit preconditions, a known sample oracle, expected versus actual results, and reproducible evidence. The shared index links each confirmed finding to its detail page. Planned scenarios stay separate from executed outcomes.

All 63 original cases are accounted for: 2 scoped PASS, 4 FINDING and 57 BLOCKED. B04 and S01 pass only the route and pre-install scopes stated below. The appendix lists every case; the online matrix preserves full preconditions, steps, expected results and cleanup. No runtime capture or source-mapping pass is claimed.

Check	Outcome	Scope and remaining work
B02/B03/B09/S11	FINDING	UX02 guidance, DOC01 command, UX03 error explanation and SCI01 source recovery
B04	PASS scoped	Manual entry without SCI and visible Bits prerequisite; no successful session
S01	PASS scoped	Pre-install permission/cancel checks; later App grant verified separately, source association failed
F14	BLOCKED	Modal and draft navigation checks passed; saved-entity/runtime variants remain untested
C01/C03	BLOCKED	Zero-session inventory and local syntax controls passed; active cleanup and live correction retest unavailable
Runtime/source	BLOCKED	Initial approvals received; additional-destination boundary stopped runtime. Source association failure recorded in SCI01

Two baseline submissions, including a plain-message control, returned a visible instrumentation-invalid toast and HTTP 400. The fresh unfiltered list remained All 0 / Active 0 / Inactive 0. Wildcard-environment/runtime prerequisites remain unresolved; no cause or runtime defect is inferred.

Permission tests need precise interpretation

An organization integration can legitimately share access according to its grant model. Do not call lack of a per-user GitHub check a vulnerability without verifying that model. Old source may remain cached for up to seven days under the documented contract; revocation tests must distinguish cached content from a newly fetched, never-seen revision.

High risk tests before confidence in release readiness

- Capture actual quantity 3 locals at pricing.py line 17 and match the correct service, environment, and deployed revision.
- Confirm repo A works while never-granted private repo B cannot return source through the tested integration.
- Observe capture before and after real expiration, distinguishing late ingestion from late execution.
- Reload after stopping and verify every created test session/logpoint is inactive.

[See the beginner documentation navigation finding in Part 1](#)

Python quickstart contains an invalid module command

The launch example uses `python -m myapp.py`. Python's module switch expects a module name rather than a script filename.

The screenshot shows the Datadog Docs interface for the Python quickstart. The 'Python' tab is selected under the 'LANGUAGE' section. The 'Enable with environment variables' section is active, showing instructions to set environment variables and start the service with `ddtrace-run`. The terminal output section shows the following commands:

```
$ pip install ddtrace
$ export DD_SERVICE=<YOUR_SERVICE>
$ export DD_ENV=<YOUR_ENV>
$ export DD_VERSION=<YOUR_VERSION>
$ export DD_DYNAMIC_INSTRUMENTATION_ENABLED=true
$ ddtrace-run python -m myapp.py
```

The last line, `$ ddtrace-run python -m myapp.py`, is highlighted with a red rectangle. The 'ON THIS PAGE' sidebar on the right lists various sections, including 'Overview', 'Key capabilities', 'Requirements', 'Setup', 'Enable Live Debugger', and 'Create a'.

E04 · Official Live Debugger documentation, Python tab · Screenshot file 02:20:19 UTC. Red outline identifies the launch command.

Video evidence 00:58 to 01:20

Reproduce Open Live Debugger docs, select Python, then Enable with environment variables. Follow the final launch line with an ordinary `myapp.py` script.


Expected A copied quickstart command starts the intended Python application without a module-resolution error.

Actual The Python portion exits 1 for a minimal script. Import-time code runs before the error, so this check does not imply that no application code executes.

Fix and retest Use `ddtrace-run python myapp.py` for a script, or `ddtrace-run python -m myapp` for a module. Add a quickstart smoke test that asserts successful process startup.

Interrupted GitHub setup does not recover through Connect

GitHub verifies the approved A-only App installation and user authorization. Datadog remains unconnected, and its offered Connect action returns to unchanged installation settings without a usable completion route.

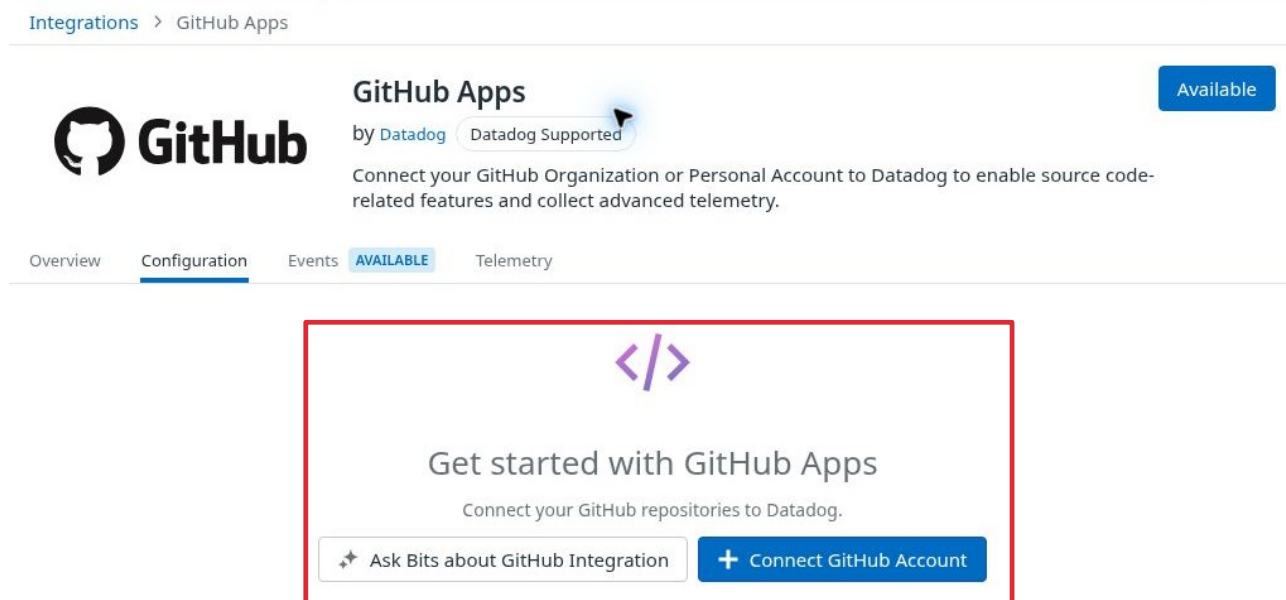

04:50:15 UTC · Actual sanitized screenshot. The installation form had been left open about 75 minutes. Delay is a precondition, not an established cause.

[Full-size annotated screenshot and installed authorized scope evidence](#)

Reproduce Complete the approved install after the pause, select the intended Datadog organization, then retry Connect. Re-enter fresh through the official integration catalog and verify the intended site/org.

Expected and actual Complete the association or explain a concrete recovery step/error. Instead, Datadog shows Get Started and the retry reaches GitHub settings with Save disabled. Fresh catalog navigation did not recover it.

Impact and boundary Source linking is blocked in this interrupted state. Manual debugger entry remains available; no source-association workaround was verified. Fresh uninterrupted installation and backend cause are unproven.

Recording scope Install/reauthentication before 04:49:33 is screenshot-only. Later recovery has reviewed recording 07 motion; the online finding links highlight 00:00 and 01:19.50, plus the full safe archive. No source retrieval or captured-value pass is claimed.

Reproduction and fixture oracle

Command isolation

Independent reproduction: 02:31:35 UTC on 8 October 2026. The file myapp.py contains one harmless print statement; no Datadog SDK or telemetry is involved.

```
myapp.py:
print("INERT_FIXTURE_EXECUTED")

$ python -m myapp.py
INERT_FIXTURE_EXECUTED
ModuleNotFoundError: __path__ attribute not found on myapp
Exit: 1

$ python myapp.py
INERT_FIXTURE_EXECUTED
Exit: 0

$ python -m myapp
INERT_FIXTURE_EXECUTED
Exit: 0
```

The error is abbreviated for readability. Python also suggests using myapp instead of myapp.py as the module name. The working alternatives establish the module-versus-filename distinction; neither has been claimed as an instrumented Datadog success.

Known sample behavior

The synthetic quote service intentionally uses quantity > 3 instead of quantity >= 3. It is a target bug in the demo application, not a Datadog defect. At pricing.py line 17 all calculated locals are available for the intended line logpoint.

Quantity	Subtotal	Discount eligible	Discount	Actual total
2	2400	false	0	2400
3	3600	false	0	3600
4	4800	true	480	4320

All monetary values are integer cents. The intended quantity 3 total is 3240. A valid debugger result should expose the actual 3600 and the false eligibility, making the boundary error explainable.

Local test rerun at 02:36 UTC: nine tests completed, eight passed and one intentional expected failure. HTTP tests bind to loopback and clean up their server.

Evidence and reference index

ID	Evidence	UTC time or recording location
E10	Empty service picker evidence crop	03:21:54 UTC; account greeting excluded
E13	No environments found configuration	03:23:59 UTC; clean scrolled screenshot
E08	Blank Datadog trial form video frame	Edited video 00:20; raw 00:50; approximately 02:15:17 UTC
E03	Python requirements and navigation	File timestamp 02:19:51; initial video approximately 05:15–05:45
E04	Python environment-variable launch example	File timestamp 02:20:19; initial video approximately 05:45–06:20
R01	Independent Python invocation reproduction	02:31:35; Python 3.12.14; bad form exits 1, alternatives exit 0
R02	Local fixture test rerun	02:36; 8 passes, 1 intentional expected failure

The 80-second public edited excerpt covers signup and documentation only. Its chapters are 00:20 region choice, 00:34 contents-rail wrapping, and 00:58 invalid Python command. Authenticated account-creation footage is not claimed by this excerpt.

The initial continuous recording began at 02:14:27 UTC and ended at 02:21:01 UTC. It is 393.7 seconds at 1364 × 1024 pixels, 20 fps. Edited-video offsets will differ from raw recording offsets. E03 and E04 are direct page captures; E08 is an extracted video frame. Published evidence excludes browser chrome.

Authenticated UI video with exact chapter and source times

Reviewed motion: authenticated UI QA 181.30 seconds; account/setup transitions 20.25 seconds, with identity masked and OAuth omitted. UX02 appears at 00:00 and 02:42.80 in the UI excerpt. Reviewed archives now account for sources 01–10, with exact omissions. Sources 06 and 08 are wholly withheld tooling preparation. Highlights overlap archive footage; no successful debugger capture is shown.

Primary product references

[Live Debugger setup and session behavior](#)

[Python source mapping](#)

[Source Code Management Providers and caching](#)

[GitHub integration](#)

[Live Debugger expression language](#)

References inform expected behavior and test design. They are not substitutes for observed product results. All current findings are limited to the captured site, viewport, and isolated runtime check.

Verified UI subchecks

These narrowly scoped observations preserve the work that actually ran. They do not promote all requirements of their parent cases or add to the 63-case denominator.

Check	UTC	Verified scope
U01 Informed navigation	03:33–03:40	Home → APM introduction → global search → Live Debugger reached the intended route. No blind timing claim.
U02 Manual entry without source	03:21–03:24	Manual session route opens without Source Code Integration. No successful runtime start.
U03 Missing service prevents submit	03:21–03:24; 04:01–04:02	Start is disabled without service; Ctrl+Enter does not submit.
U04 Actual 125 percent zoom	03:33–03:40	Native browser menu shows 125%; modal remains usable; reset to 100% verified. Failed shortcut attempt excluded.
U05 Modal focus and Escape	03:33–03:40	Tab focus cycles through modal controls; Escape closes and restores New Session focus.
U06 Modal history navigation	03:33–03:40	Back removes modal and reaches APM intro; Forward returns New Session without ghost modal. Empty-service context only.
U07 Refresh and repeated Close	04:01–04:02	Refresh dismisses the empty-service modal; two open/Close cycles return correctly. No editable saved configuration.
U08 Empty list filter persistence	03:56–03:58	Search/status/owner controls were exercised; status/owner persist on reload. No populated-result correctness.
U09 Clear Filter and custom dates	03:56–03:58	Clear Filter resets selections. October 1–7 custom range displays correctly. Zero-session list.
U10 Pre-install cancellation	03:59–04:00	Official/custom setup canceled; reload remains Not Connected. No App grant.

Verified setup and control checks

Check	UTC	Verified scope
U11 Final session inventory	04:12	All 0 / Active 0 / Inactive 0; filters cleared. Live accessibility observation after video stopped.
U12 Python command controls	02:31:35; 03:19:52	Invalid module command exits 1; script and suffix-free module alternatives exit 0. Local-only, not Datadog capture.
U13 Published finding images	Verified by 03:59	All four finding pages rendered their inline annotated image; the UX02 original-image link opened. Publication QA, not Datadog behavior.
U14 Temporary helper shutdown	04:22:42	Two completed local setup helpers stopped; each shows zero remaining owned processes. Private configuration retained without inspection.
U15 Service discovery	04:50:17	The synthetic sample became selectable; only wildcard environment was offered. No session or capture.
U16 Agent and sample snapshots	04:47:03; 04:54:47	Local Agent intake/sample startup and Agent RC org/key authorization verified at these instants. Debugger SDK client registration and current liveness remain unverified.
U17 A-only installed scope	04:51:29; 05:06:05	GitHub installation plus persisted one-repository selection verified, identified privately as A. B created afterward remains ungranted. Datadog association failed.
U18 Wildcard setup warning	04:53:17	Manual draft explains all-environment creation will not auto-enable the service and offers Configuration or a specific environment.
U19 Invalid line draft controls	04:54–04:55	Line 0, -1 and abc kept Start disabled; 9999 enabled an unsubmitted draft and 17 restored the baseline. No runtime target validation.
U20 Source guidance	04:55:34	Missing-source explanation identifies permissions or tags as possible causes and links Learn More; it does not claim fetched source.

Verified setup and control checks

Check	UTC	Verified scope
U21 Template rejection and recovery	05:06:52–05:38:08	An actual unmatched brace disabled Start; blur added a red field outline. Correcting the brace enabled Start. Initial auto-balanced attempt excluded.
U22 Fixture file integrity	By 05:10	Downloaded A pricing.py and app.py match the local baseline byte-for-byte; intended return target remains line 17. This is not Datadog source mapping.
U23 Python Function draft	05:39:50	Function mode accepts Module pricing and Function calculate_quote as an enabled draft. No submit or entry/exit capture.
U24 Edited draft cancellation	05:43	Closing and reopening resets to Line mode and empty File/Line, retaining service/environment. No unsaved draft was published; reopened draft closed.
U25 Latest zero inventory	By 05:45	After rejected creates and draft cancellation, All 0 / Active 0 / Inactive 0 remained. A-only installation unchanged; active lifecycle semantics untested.
U26 Historical APM ingestion	05:49–06:21	47 indexed spans recovered; an actual old span carries HTTP 200, Python, staging, version 0.1.0 and the baseline commit. No debugger capture or source retrieval.
U27 APM time-window recovery	05:55–06:21	Empty recent search offered a wider timeframe; one-hour history recovered spans. This is APM search behavior, not debugger result filtering.
U28 SDK freshness guidance	By 06:15	SDK Configurations states no data detected in the last 15 minutes and suggests runtime, telemetry and intake checks. Stopped runtime is compatible; no registration-failure conclusion.

[Open exact evidence for every supplemental check](#)

Authorization gates and resume order

Local Agent intake/sample startup and Agent RC authorization were verified briefly. Historical APM ingestion was later verified; debugger SDK client registration remains unverified. Runtime remains stopped at an additional telemetry-destination boundary. GitHub installation and authorization are verified; Datadog association remains unconnected. No debugger capture was proved. Earlier RC eligibility was unknown, not verified misconfiguration.

Gate	Concrete missing prerequisite
Runtime G1	Initial payload approved. Additional intake-destination boundary must be resolved, then continuous healthy runtime and a real captured event verified.
Source G2	A-only installation and user authorization verified; Datadog association must recover. B exists and remains ungranted. Exact source mapping unverified.
Access G3	Independent restricted test identities and approval for the exact test-only role/revocation changes.
Variants G4	Case-specific controlled deployment/restart/failure tests after a working baseline. Local prepared fixtures are not executed tests.
Study method	A fresh uninformed tester for blind navigation timing. Existing navigation observations are informed.

Resume in this order

After the current runtime boundary is resolved, establish F01 with actual quantity 3 locals and verified service/environment/version. Start F11 using the shortest available expiry and observe its terminal state. Validate S02 exact deployed SHA and S03 A allowed with B never granted. Run the other prerequisite-matched cases, then reconcile created entities and retained settings with C01–C03.

Retained state

Two baseline attempts were rejected with visible error toasts with console HTTP 400; the fresh unfiltered list remained All 0 / Active 0 / Inactive 0. Edited/reopened drafts and the later accessibility draft were closed; no entities were created. Runtime is stopped after an additional-destination boundary. The approved A-only App installation, A/B repositories and accounts are retained. The old no-App-grant inventory is historical. Current full inventory/cleanup remains incomplete under C02.

Original case outcomes 1 to 9

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
B01	BLOCKED	Blind timing needs a fresh tester. Informed navigation passed separately.
B02	FINDING	LOW UX02: natural first-run empty-state recovery guidance. Other causes untested.
B03	FINDING	MEDIUM DOC01: isolated invalid Python launch-command reproduction. No runtime start.
B04	PASS	Manual entry without SCI and visible Bits prerequisite only. No successful session.
B05	BLOCKED	One service discovered, only wildcard environment available. Two-target dependencies and populated-result correctness untested.
B06	BLOCKED	No restricted test identity or natural permission failure. Preflight explanation inspected.
B07	BLOCKED	G1 unavailable. Record time from creation to accepted/configured/installed/first event.
B08	BLOCKED	G1 unavailable. Find quantity 3 and inspect locals.
B09	FINDING	LOW UX03: invalid template has visible validation but no explanatory text in the observed state. Full screen-reader/Line naming coverage untested.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 10 to 18

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
B10	BLOCKED	G1 unavailable. From session and list views, find expiry, manual stop, what remains visible afterward, and route back tomorrow.
F01	BLOCKED	Numeric-template and plain-message submissions returned visible instrumentation-invalid errors and HTTP 400. All 0; enabled-target/runtime prerequisites unresolved.
F02	BLOCKED	G1 unavailable. Create condition quantity == 3; cycle 2/3/4; then change to quantity == 4, apply, wait for activation and repeat.
F03	BLOCKED	G1 unavailable. Set quantity == 101 with valid 2/3/4 traffic; then remove condition and reapply.
F04	BLOCKED	Unmatched template brace disables Start; correction enables it. Conditional-expression and runtime variants still need an enabled target/G1.
F05	BLOCKED	G1 unavailable. Reference nonexistent missing_qa_value; separately test isDefined(missing_qa_value); compare with an available local.
F06	BLOCKED	0, -1 and abc disable Start; 9999 enables an unsubmitted draft. Runtime out-of-range, blank/comment and relocation tests need G1.
F07	BLOCKED	Python Module pricing / Function calculate_quote enables a draft. No submission; entry/exit, method context and line comparison remain untested.
F08	BLOCKED	G1 unavailable. Rapidly double-click Create/Apply once; repeat Enter once during pending state; reload and inspect list.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 19 to 27

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
F09	BLOCKED	G1 unavailable. Two-tab stale edit and lost-update behavior require an existing logpoint and actual active-definition checks.
F10	BLOCKED	G1 unavailable. Disable logpoint in A; use stale edit/re-enable UI in B; reload.
F11	BLOCKED	G1 unavailable. Record expiry time; keep traffic before and after it; leave page open, then reload and reopen direct session link.
F12	BLOCKED	G1 unavailable. Use available re-enable/extend flow; inspect new deadline and resulting IDs; generate fresh traffic.
F13	BLOCKED	G1 unavailable. Disable one logpoint, then whole session; attempt documented re-enable paths; inspect sibling state each time.
F14	BLOCKED	Empty-modal navigation and edited Function-draft cancellation/reopen reset verified. Saved-entity and runtime persistence remain untested.
F15	BLOCKED	G1 unavailable. Attempt to edit original target service/environment/location on an existing logpoint; use the UI's supported alternate flow if blocked.
F16	BLOCKED	G1 unavailable. Turn variable capture off, apply, produce traffic, then turn back on and capture again.
F17	BLOCKED	G1 unavailable. Narrow time range to exclude newest events, pause/resume stream, change sorting, clear filters, reopen event.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 28 to 36

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
F18	BLOCKED	G1, G4 unavailable. While session is active, stop/restart only test process, then send traffic.
F19	BLOCKED	G1, G4 unavailable. Preserve config; deliberately stop only test Agent or use approved test-only disconnected state.
F20	BLOCKED	G1, G4 unavailable. Target one version/environment, produce traffic in both, inspect event tags and source view; then deliberately choose the other.
F21	BLOCKED	G1, G4 unavailable. Capture dummy numeric locals plus obvious dummy password/accessToken values and harmless string.
F22	BLOCKED	G1, G4 unavailable. Capture empty list/map, nested object, duplicate leaf names, long synthetic string, and bounded cyclic structure.
F23	BLOCKED	G1/G4 unavailable. Normal 1.1-second traffic versus a bounded burst; sampling and application health not tested.
S01	PASS	Original pre-install/cancel scope passes. Later GitHub grant is verified; Datadog association fails under S11.
S02	BLOCKED	G2 unavailable. Open source from actual capture; compare repository owner/name, full SHA, file, line, and nearby text with deployed C1.
S03	BLOCKED	A-only grant and ungranted private B are verified. A source retrieval and B-denied retrieval remain blocked until Datadog association/G2 works.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 37 to 45

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
S04	BLOCKED	G2, G4 unavailable. Map only a dedicated test instance to known B URL/SHA without granting B.
S05	BLOCKED	G2, G4 unavailable. In C2 shift the pricing lines and change a numeric marker; do not deploy C2.
S06	BLOCKED	G2, G4 unavailable. Independently test absent SHA, syntactically invalid SHA, valid-length nonexistent SHA, then real SHA with wrong repository.
S07	BLOCKED	G2, G4 unavailable. Show both versions under same service/environment.
S08	BLOCKED	G2, G4 unavailable. Test same basename in two directories, moved/renamed file across commits, and path with spaces or non-ASCII.
S09	BLOCKED	G1/G2/G4 unavailable. Compare HTTPS, trailing .git and supported SSH metadata forms with actual source mapping.
S10	BLOCKED	G2, G3 unavailable. Record before-state and known fetched files.
S11	FINDING	MEDIUM SCI01: installed/authorized A-only link cannot recover through Connect after an interrupted flow; fresh-install cause unproven.
S12	BLOCKED	G1, G3 unavailable. As read-only user, inspect session and attempt create/edit/disable through UI and copied direct page link.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 46 to 54

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
S13	BLOCKED	G1, G3 unavailable. Open an editable session, revoke only that user's write capability via approved admin, then apply from stale tab and reload.
S14	BLOCKED	G1, G3 unavailable. Open same session under both identities; test event/snapshot direct links and expand captured values.
S15	BLOCKED	G2, G3 unavailable. Compare source retrieval under user with GitHub access and user without it, using the same authorized Datadog org integration.
S16	BLOCKED	No second org/account and no genuine session/source direct-link target.
S17	BLOCKED	Bits gate visible; Strict-mode and full source/preview combinations not established.
S18	BLOCKED	G1, G2 unavailable. Ask why exactly three units cost 3600 instead of 3240.
C01	BLOCKED	Rejected submissions left All 0 / Active 0 / Inactive 0 after filter reset. Drafts closed by 05:45; no created-entity lifecycle cleanup.
C02	BLOCKED	Runtime stopped, A-only installation and A/B assets retained. Full latest settings/resource reconciliation incomplete.
C03	BLOCKED	Local invalid/valid command controls verified; live correction retest needs G1/G2.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 55 to 63

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
X01	BLOCKED	G1, G2, G4 unavailable. Keep both commits active under one service/environment; give each replica a unique numeric marker; capture bounded traffic and open each event source.
X02	BLOCKED	G1, G2, G4 unavailable. Use different numeric markers; switch environment/version/repository filters quickly and open each event directly.
X03	BLOCKED	G1, G4 unavailable. Install at the never-executed function; separately create a target known to fail installation; compare status; finally execute the healthy function once.
X04	BLOCKED	G1 unavailable. Record executions immediately before and after effective stop; inspect late arrivals and refresh/direct links.
X05	BLOCKED	G1, G2, G4 unavailable. Capture baseline at C1; deploy C2; inspect installed target, displayed source, and new captures.
X06	BLOCKED	G1, G4 unavailable. Send bounded overlapping requests carrying unique numeric correlation IDs; inspect local variables, trace/request context, and source per event.
X07	BLOCKED	G1, G4 unavailable. Exercise cyclic objects, Unicode keys/values, duplicate nested keys, and nested dummy password/accessToken identifiers without weakening redaction.
X08	BLOCKED	G2, G3 unavailable. Establish source baseline; remove one permitted prerequisite or revoke A; restore only its prior authorized scope; refresh and request fresh source.
X09	BLOCKED	G1 unavailable. Give session one condition quantity == 3 and session two quantity == 4; generate 2/3/4 traffic; edit one, then stop/expire one while the other remains active.

[Full case steps, gates, evidence and cleanup](#)

Beginner glossary

These terms describe the debugging workflow. A visible setup check is not the same as a captured event.

Term	Plain language meaning
APM	Application Performance Monitoring. Traces show how requests move through application operations.
Agent	A process near the application that receives and forwards supported telemetry and configuration.
SDK or tracer	A language-specific library in the application. Python uses ddtrace.
Trace and span	A trace follows a request or task; a span represents one operation within it.
Service	The named application or component being monitored. Names alone do not establish environment or source identity.
Environment and version	Tags identifying where the application runs, such as staging, and which release it runs.
Remote Configuration	A channel for supported configuration changes to reach a running Agent or SDK without a new deployment.
Debug session	A bounded investigation containing debugger configuration and related results. Check its actual expiry and active state.
Logpoint	A location and rule that collect a message or values without editing the deployed source for each observation.
Snapshot or captured locals	Values observed at a specific runtime execution. Availability, redaction, sampling, and truncation affect what appears.
Source Code Integration	Repository access plus mapping that connects runtime evidence to source files. A connected account alone is insufficient.
Commit SHA	A Git revision identifier. The source shown for a capture should match the deployed commit, not merely the latest branch.
Redaction	Protection that removes or masks selected data. Missing, unavailable, and redacted values mean different things.
ARIA	Labels, states and relationships that can help assistive technology interpret an interface. Missing one attribute alone does not prove an accessibility failure.
WCAG	Web Content Accessibility Guidelines. The focused checks in this report are not a complete conformance audit.