

Datadog Live Debugger onboarding audit

Beginner experience and professional QA for Live Debugger and Source Code Integration

Live QA checkpoint | 8 October 2026 at 13:15 UTC | 09:15 New York

Executive summary

Live capture, source, lifecycle, redaction and correlation controls work in the tested setup. Four Medium findings concern the quickstart, interrupted source linking, lost drafts and SDK missing-versus-null serialization. SDK verification is separately dated after the live-QA cutoff. Permission and deployment variants remain open.

- **Preserve dirty drafts.** A save in another tab erased an unsaved condition.
- **Distinguish missing locals.** ddtrace 4.11.0 conflates absence with None.
- **Repair source linking.** Same-scope reinstall repaired the interrupted association.
- **Fix the quickstart.** Its .py-suffixed module command fails.
- **Explain errors and recovery.** Template and direct-event feedback remain weak.
- **Clarify first choices.** Improve region, empty-state and navigation guidance.

Severity index below: HIGH 0 · MEDIUM 4 · LOW 5. Click a finding ID to jump to its detail page.

[Open the High severity only view](#)

63 cases: 16 PASS, 7 FINDING, 16 OPEN and 24 BLOCKED. OPEN comprises 8 in progress and 8 pending.

Decision boundaries

This is an ongoing audit, not release signoff. The live-case ledger stops at 13:15:00 UTC; SDK verification was confirmed separately at 13:16:33. Repository B boundaries, restricted identities and other controlled variants remain incomplete. Later My sessions inventory does not prove account-wide or runtime cleanup.

Severity ranked finding index

Record	Classification	Observed impact	Part
DOC01	MEDIUM · bug	Python portion fails the isolated module invocation check	2
SCI01	MEDIUM · recovery	Connect retry failed; same-scope reinstall restored association	2
FUNC01	MEDIUM · draft loss	Remote save silently discards an unsaved condition	2
FUNC02	MEDIUM · SDK values	Unbound/deleted locals serialize as explicit None	2
DOC02	LOW · bug	Navigation labels break mid-word at desktop width	1
UX01	LOW · UX	Permanent region choice precedes explanatory context	1
UX02	LOW · UX	Empty services and environments need a concrete setup recovery step	1
UX03	LOW · feedback	Invalid template leaves the correction implicit in the observed state	1
UX04	LOW · navigation	Direct event link needs an extra click to open its indexed snapshot	1

Scope and interpretation

The requested outcome is a real end-to-end debugging journey: create a fresh account, find the feature, prepare a simple application, observe runtime values, connect the matching source, and stop collection cleanly.

Two distinct review tracks

Beginner track. Assess what the page itself explains to someone unfamiliar with Datadog and APM. Record the first path, unclear terms, missing prerequisites, progress feedback, and recovery steps. Confusion is a UX assessment unless a specific promised behavior fails.

Professional QA track. Verify identity, configuration, deployed source revision, runtime state, error handling, permissions, lifecycle, and data presentation. A green badge or successful save is not evidence of a real event or correct source.

Evidence rules

- Actual browser screenshots and continuous screen capture support UI observations. Red outlines are editable report overlays; screenshot content is unchanged.
- The early Python command check isolates quickstart syntax. Later browser captures establish the live baseline. A separate actual-package SDK reproduction checks local-variable collection/serialization without transmitting telemetry; it does not inspect the hosted transport payload.
- Only observed states are called passed or failed. Blocked and not-run cases remain explicit, including parts of otherwise useful partial tests.
- Report clocks are UTC; some UI controls display UTC-07:00. Screenshot-file timestamps and recording offsets are identified separately and are not interchangeable.

Severity definitions

Severity	Meaning
HIGH	Core task blocked or significant incorrect behavior with no reasonable workaround
MEDIUM	Material task failure or misleading behavior with bounded demonstrated impact
LOW	Readability, discoverability, or localized friction without demonstrated task failure

Environment

The viewport is approximately 1180 × 757 pixels. Agent 7.84.2 and ddtrace 4.11.0 are used in the hosted tests; Python series 3.13 was requested and its exact hosted patch is not established here. The offline SDK reproduction used Python 3.13.5. The preview UI build visible in the later original screenshots is 35.143306223; earlier captures used 35.143254999. Authorization, SDK registration, actual captures and baseline source retrieval have been verified.

Part 1 New user usability study

This is a structured walkthrough from a complete beginner's perspective, rather than a recruited-participant study. It records what the interface explains, where prerequisite knowledge is assumed, and how recovery is presented. No population-wide usability rate or aggregate time-on-task claim is made.

Stage	What a beginner needs to understand	Observation
Choose region	Where the account lives and whether the decision can change	Permanent-choice warning is visible; choosing criteria are not explained in the captured form
Find the feature	How APM, Live Debugger, sessions, and logpoints relate	Informed navigation and manual entry verified; the blind first-path study requires a fresh tester
Prepare an app	Which commands run on the host, in the app, and in the Agent	Docs surface several independent prerequisites; Python launch syntax is faulty
Get a first result	Difference between service discovery, active logpoint, and captured data	Manual capture now matches the numeric oracle. Initial progress and Logs navigation observations remain scoped.
Connect source	Difference between repository access and exact deployed-commit mapping	Same-scope reinstall repaired the association; actual source matches the deployed revision.
Stop safely	How expiry and disable affect collection and old results	Expiry, explicit resume/stop and child/session hierarchy controls passed; full inventory and unexecuted variants remain open.

Make the first success concrete

Show a short path from one running test service to one visible captured value. State which setup checks are complete and which still need action. Keep the manual path visible when source integration is optional, then explain what source linking adds.

Do not collapse distinct states

A beginner should be able to tell whether an app is unknown, not instrumented, waiting for activation, receiving no matching traffic, or capturing data that is hidden by filters. These are test questions, not unverified defects.

[See the reproducible Python command finding in Part 2](#)

A permanent region choice needs decision support

The signup form clearly warns that the selected region cannot be changed later. The captured form does not explain what should drive that choice.

Datadog named a Leader in the Gartner® Magic Quadrant™ for Observability Platforms

PRODUCT CUSTOMERS

Start Your Free Trial Now

No credit card required

Try it free for 14 days and monitor as many servers as you like.

Select a Region *

United Kingdom (UK1)

Important: This can't be changed later

Business Email *

Full Name *

Company *

Password *

Use at least 8 characters containing at least 1 number and 1 lowercase letter

Phone

*Required Fields. By signing up, you agree to the [Master Subscription Agreement](#), [Privacy Policy](#), and [Cookie Policy](#)

Sign Up With Google

Sign Up

UX OBSERVATION | Permanent region choice appears during trial signup
The warning is clear; explaining how to choose could help a first-time user.

E08 · Actual edited-video frame at 00:20, sourced from raw capture 00:50, about 02:15:17 UTC. All identity fields are blank.

Video evidence 00:20 to 00:34

Reproduce Start a fresh trial and inspect Select a Region before submitting the form.


Recommended experience Give a short explanation or linked chooser covering account location and relevant selection criteria before the irreversible step.

Assessment The permanent-choice warning is explicit and useful. Additional decision support would reduce guesswork for a complete beginner.

Boundary This is an onboarding recommendation. No wrong-region account, data loss, or failed submission was demonstrated.

Documentation navigation breaks words at desktop width

The right-hand contents rail wraps ordinary section names in the middle of words, making the onboarding outline harder to scan.

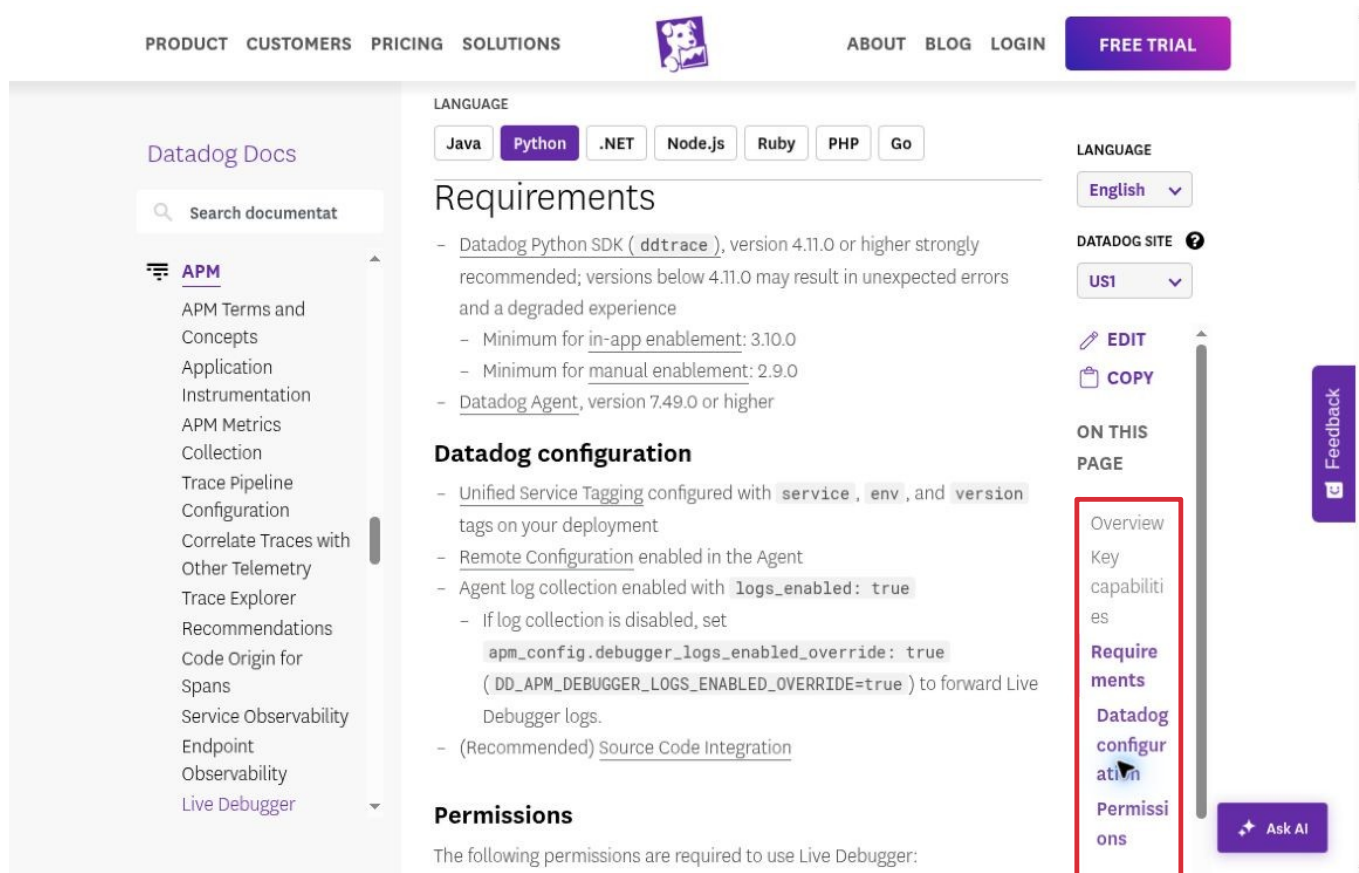

E03 · Requirements page · Screenshot file 02:19:51 UTC · 1165 × 747 captured page image; default browser zoom.

Video evidence 00:34 to 00:58

Reproduce Open the Python Live Debugger documentation at the observed desktop width and scroll to Requirements. Inspect the right-hand contents rail.


Expected Section names remain readable, either wrapping at word boundaries or collapsing into a usable navigation control.

Actual Labels such as Requirements, Permissions, and Datadog configuration split mid-word. The defect is visible in two separate scroll positions.

Fix and retest Reserve sufficient rail width or collapse the rail earlier. Retest default desktop widths and 125–150% zoom, including long translated labels.

Empty service states do not explain setup recovery

A fresh account reaches a manual-debugging path, but unavailable services and environments leave a newcomer without a concrete next step in the captured setup section.

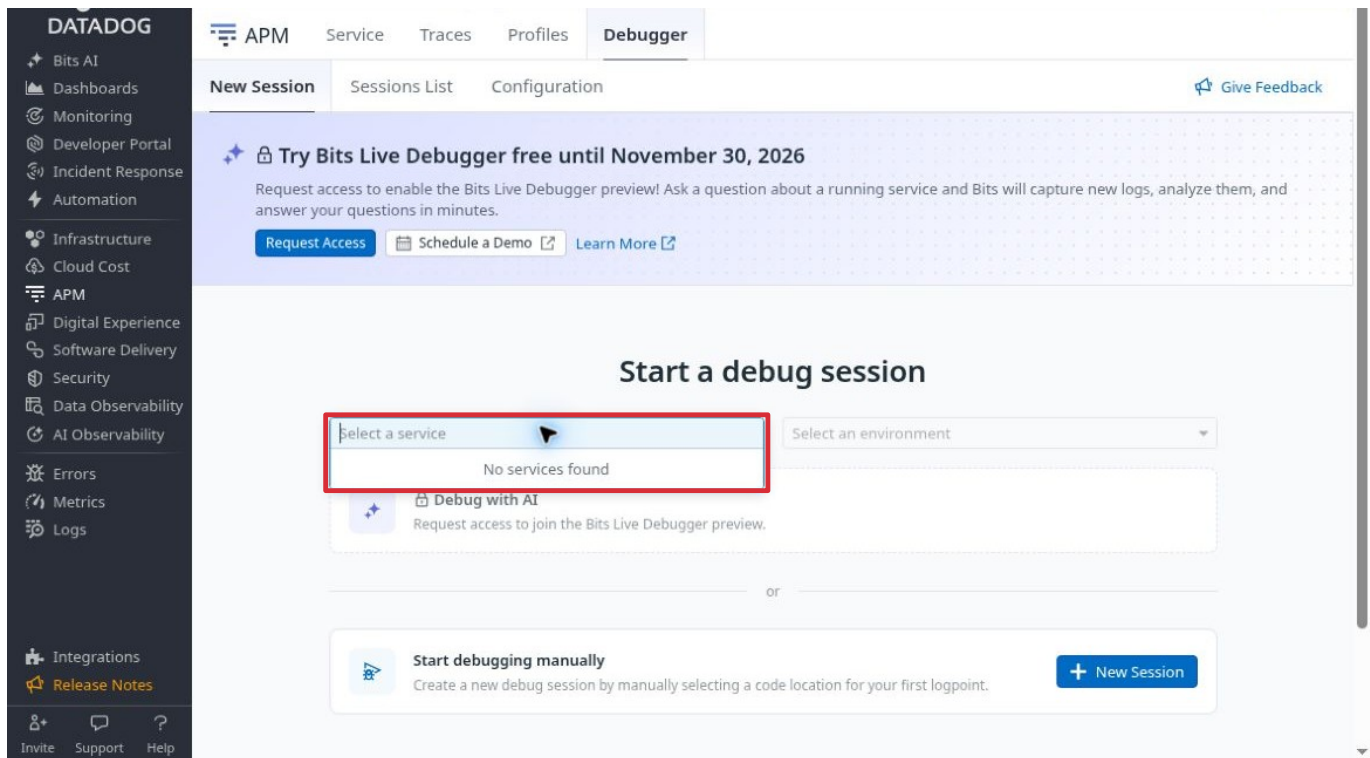

E10 · 03:21:54 UTC · Actual screenshot with top 76 pixels removed to exclude the account greeting. Remaining UI pixels are unchanged beneath the red border.

Online finding with both annotated screenshots

Reproduce Open New Session, inspect the empty service picker, enter the manual logpoint modal, close it, then inspect Configuration. The setup section reports No environments found.


Recommended experience The empty state should offer a concrete route to connect or troubleshoot the first service and explain which prerequisites are missing or not yet known.

Positive controls The modal requires a service and safely disables Start Debug Session. Close returns correctly. Manual debugging remains visible without source integration.

Boundary This earlier observation concerns a genuinely empty account. After service discovery, the wildcard-environment warning provides useful setup guidance. The finding is not evidence that a healthy service is incorrectly absent.

Invalid log template lacks an explanatory error message

An unmatched log template prevents submission and gets a red border after blur. In the tested view and recorded accessibility snapshot, no text explains the syntax error or the required correction.

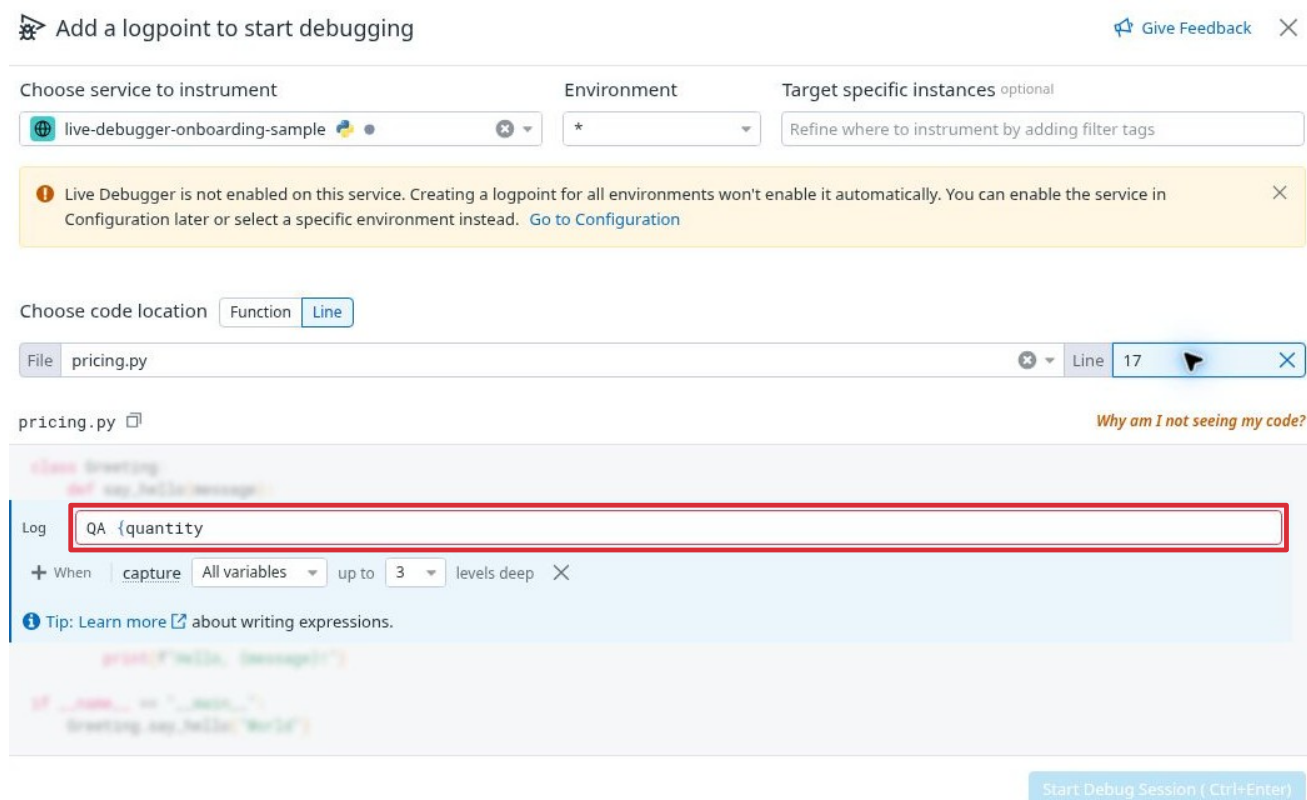

Source 58 file timestamp 06:26:32 UTC; interaction 06:25–06:28. Actual crop; no generated UI. The separate outline preserves the genuine application border.

Full-size original annotation and correction control

Reproduce and control Enter QA {quantity in the manual Line draft, then blur. Start is disabled and the border turns red. Add the closing brace: the border clears and Start enables. No submit.

Expected and actual Give a specific text explanation, associated with the field. The inspected textarea has a generic editor name and lacks the recorded error-related ARIA attributes; the captured alert addresses service setup instead.


Boundary W3C SC 3.3.1 motivates an explanatory text error. Missing aria-invalid alone is not proof of failure. This is not a screen-reader run or global WCAG verdict; a transient announcement and computed Line naming require retest.

Motion evidence Reviewed source 10 highlights show unmatched input at 00:29.30, blur feedback at 00:41.30 and correction at 00:53.30. The online finding links exact source clocks and the full retained recording.

View in Logs needs an extra indexed row click

LOW · UX04 · Navigation recovery friction · Part 1 beginner usability · B08

Across two tested snapshots, View in Logs opened “The requested event is not indexed” while the snapshot-targeted view contained the matching indexed log. Clicking that row recovered the same snapshot’s values, source and JSON.

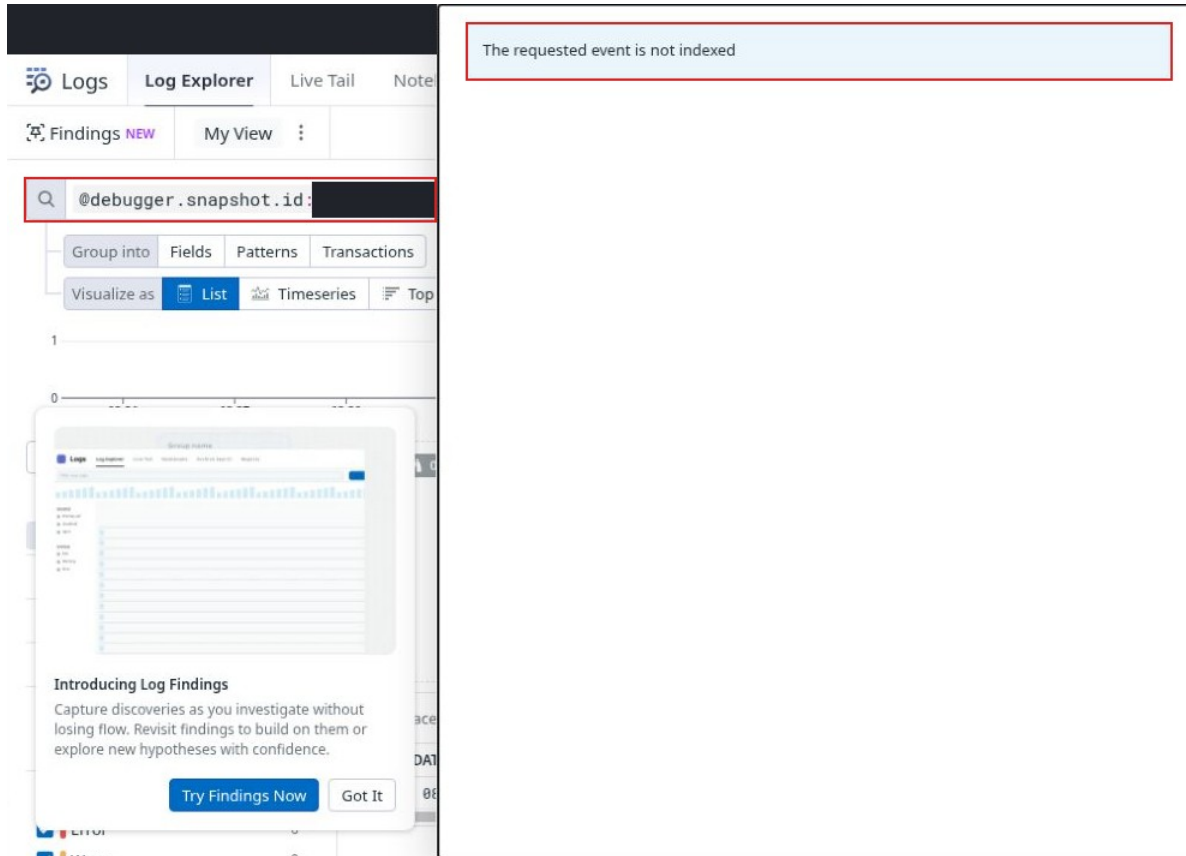

10:41 UTC observed state. Outlines mark the actual error and snapshot query. The results row/count is obscured; exact matching identity and repeatability are established separately.

Full-size annotated screenshot and exact evidence boundaries

Reproduce: select a captured debugger snapshot, use View in Logs, observe the error panel, then select the matching indexed row. Verify debugger.snapshot.id, probe and timestamp against the original capture.

Verification: independent reproductions used the control snapshot at 10:24 and the target snapshot at 10:41. The recovered JSON matched each originating snapshot identity exactly, not merely a similar message or time.

Expected and impact: a direct event link should open its available indexed target, or offer clear recovery. The extra row click is a verified workaround. Severity is Low because recovery succeeds; no data loss or broad indexing failure is established.

Limits: differing live/indexed UI event IDs are observations, not a proven cause. This still does not display the one matching row/count. Screenshots and separate UI/payload checks verify the case; only genuinely visible foreground steps are claimed by the reviewed video.

Part 2 Professional QA

This part evaluates correctness and recovery using explicit preconditions, a known sample oracle, expected versus actual results, and reproducible evidence. The shared index links each confirmed finding to its detail page. Planned scenarios stay separate from executed outcomes.

63 cases: 16 PASS, 7 FINDING, 16 OPEN and 24 BLOCKED. OPEN comprises 8 in progress and 8 pending. Every original definition is preserved. The online matrix retains full steps and cleanup. A PASS describes the executed scope, not every variant of a feature.

Check	Outcome	Scope and remaining work
7 case findings	FINDING	Original-case findings plus the separately verified SDK issue are tracked in a nine-finding index.
B04/S01	PASS scoped	Manual entry without SCI; actual manual capture subsequently succeeded before source association repair.
B07/C03	PASS scoped	Recorded first-success sequence and verified invocation/source-repair controls; no blind-user or causal claim.
Open variants	IN PROGRESS	Entry, parent/stale controls, complex values and never-called trigger completion remain partial.
C01/C02	IN PROGRESS	Control/experimental cleanup and full retained-resource/settings inventory remain open.
Runtime controls	PASS	Numeric/source/expiry plus resume, redaction, missing-value feedback and sampled request association passed in scoped controls.

Historical attempts at 05:15 and 05:19 returned a visible instrumentation-invalid error and HTTP 400. Later, a healthy SDK runtime with a specific staging environment created sessions and captured correct values. The earlier failure did not recur in that changed context; a sole cause was not isolated.

Permission tests need precise interpretation

An organization integration can legitimately share access according to its grant model. Do not call lack of a per-user GitHub check a vulnerability without verifying that model. Old source may remain cached for up to seven days under the documented contract; revocation tests must distinguish cached content from a newly fetched, never-seen revision.

Release confidence checklist

- Verified baseline: actual quantity 3 locals, selected service/environment and deployed source match the fixture.
- Still required: confirm never-granted private repository B cannot return source through the tested integration.
- Verified bounded expiry: distinguish SDK snapshot execution, UI row time and retained history; no instantaneous stop claim.
- Still required: finish the full inventory and outstanding behavior/settings checks; a filtered zero-active list is narrower than account-wide shutdown.

[See the beginner documentation navigation finding in Part 1](#)

Python quickstart contains an invalid module command

The launch example uses `python -m myapp.py`. Python's module switch expects a module name rather than a script filename.

The screenshot shows the Datadog Docs interface for the Python quickstart. The 'Python' tab is selected under the 'LANGUAGE' section. The page is titled 'Enable with environment variables'. It provides instructions on setting environment variables for `DD_SERVICE`, `DD_ENV`, `DD_VERSION`, and `DD_DYNAMIC_INSTRUMENTATION_ENABLED`. A terminal output section shows the commands to install `ddtrace` and run the application. The command `$ ddtrace-run python -m myapp.py` is highlighted with a red rectangle. The page also includes a sidebar with navigation links, a search bar, and a 'FREE TRIAL' button.

E04 · Official Live Debugger documentation, Python tab · Screenshot file 02:20:19 UTC. Red outline identifies the launch command.

Video evidence 00:58 to 01:20

Reproduce Open Live Debugger docs, select Python, then Enable with environment variables. Follow the final launch line with an ordinary `myapp.py` script.


Expected A copied quickstart command starts the intended Python application without a module-resolution error.

Actual The Python portion exits 1 for a minimal script. Import-time code runs before the error, so this check does not imply that no application code executes.

Fix and retest Use `ddtrace-run python myapp.py` for a script, or `ddtrace-run python -m myapp` for a module. Add a quickstart smoke test that asserts successful process startup.

Interrupted GitHub setup recovered after a controlled reinstall

The original interrupted flow left Datadog unconnected while GitHub showed the approved A-only installation. Connect retried into unchanged settings. A controlled same-scope uninstall/reinstall later reached connected configuration and verified source retrieval.

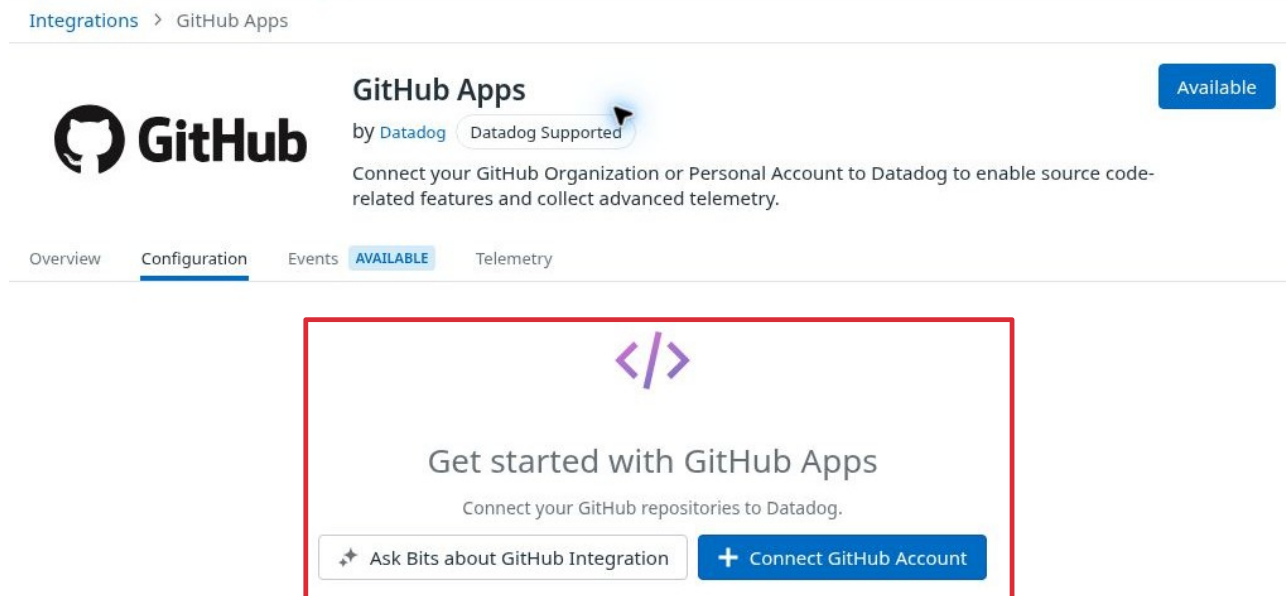

04:50:15 UTC · Actual sanitized screenshot. The installation form had been left open about 75 minutes. Delay is a precondition, not an established cause.

[Full-size annotated screenshot and installed authorized scope evidence](#)

Reproduce Complete the approved install after the pause, select the intended Datadog organization, then retry Connect. Re-enter fresh through the official integration catalog and verify the intended site/org.

Expected and actual Complete the association or explain a concrete recovery step. The interrupted flow showed Get Started and returned to GitHub settings with Save disabled. Fresh catalog navigation did not repair that state. A full approved reinstall subsequently did.


Impact and boundary The interrupted state blocked source linking. Connect/catalog retries failed; a privileged same-scope reinstall recovered it. The fresh A-only callback and deployed-source comparison now pass; B remains ungranted. The approximately 75-minute pause is a precondition, not an established cause. Fresh installation failure is not generalized from the original result.

Recording scope Original install/reauthentication before 04:49:33 is screenshot-only; later failed recovery has reviewed source 07 motion. Source 11 records the removal and fresh draft, then stops at 09:53:41.25 before the successful callback. The 09:55 connected configuration is screenshot-only; source 12 records later capture/source checks.

Remote save erases an unsaved condition

MEDIUM · FUNC01 · Two-tab dirty-draft loss · F09

A message-only save in tab A twice erased an unsaved condition in tab B. B visibly reverted from quantity == 3 to the stored quantity == 4, and Apply became disabled. No warning was observed. The saved condition remained correct; conflicting saved writes and capture corruption are not established.

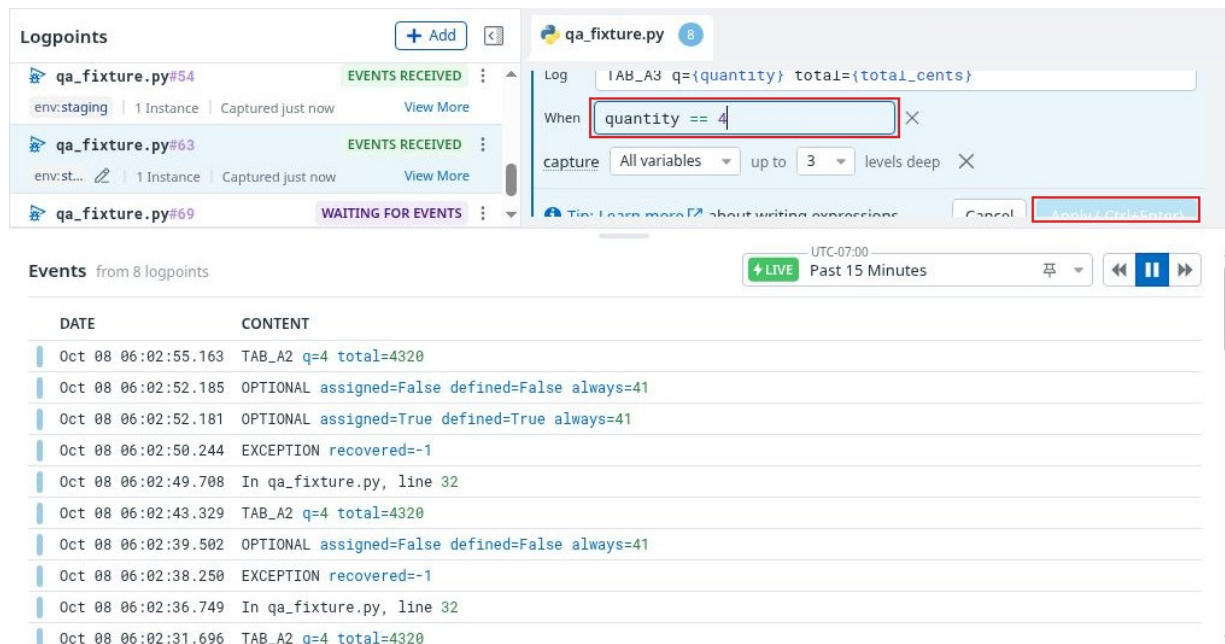

Second reproduction, 13:02:26–13:03:02 UTC. After the remote save, the editor shows TAB_A3 and quantity == 4. Apply is partly clipped; its disabled state was confirmed separately.

Full-size annotated before and after plus exact reproduction

Reproduce: open the same logpoint in two tabs; leave a quantity == 3 condition dirty in B; save only a message change in A; return to B. Preserve the draft or explain a reconciliation choice instead of silently discarding it.


Evidence: first reproduction 13:01:13–13:01:59; repeated clean sequence 13:02:26–13:03:02. Rendered pixels/editor text establish the changed value; a briefly stale accessibility value is excluded.

Motion limit: source 13 shows the dirty draft and a subsequent source/INSTRUMENTING view, not a complete foreground editor-overwrite transition. The reviewed before/after stills and interaction chronology support the finding. Further saved-write/reload/capture variants remain unexecuted.

Unbound Python locals serialize as null

MEDIUM · FUNC02 · ddtrace 4.11.0 SDK serialization · Separate verification addendum

An unbound or deleted local is different from a value explicitly assigned None. Actual ddtrace 4.11.0 helpers serialize all three as NoneType with isNull=true, although isDefined is false for absent names and true for explicit None. Assigned 42 and later-assigned 99 controls remain correct.

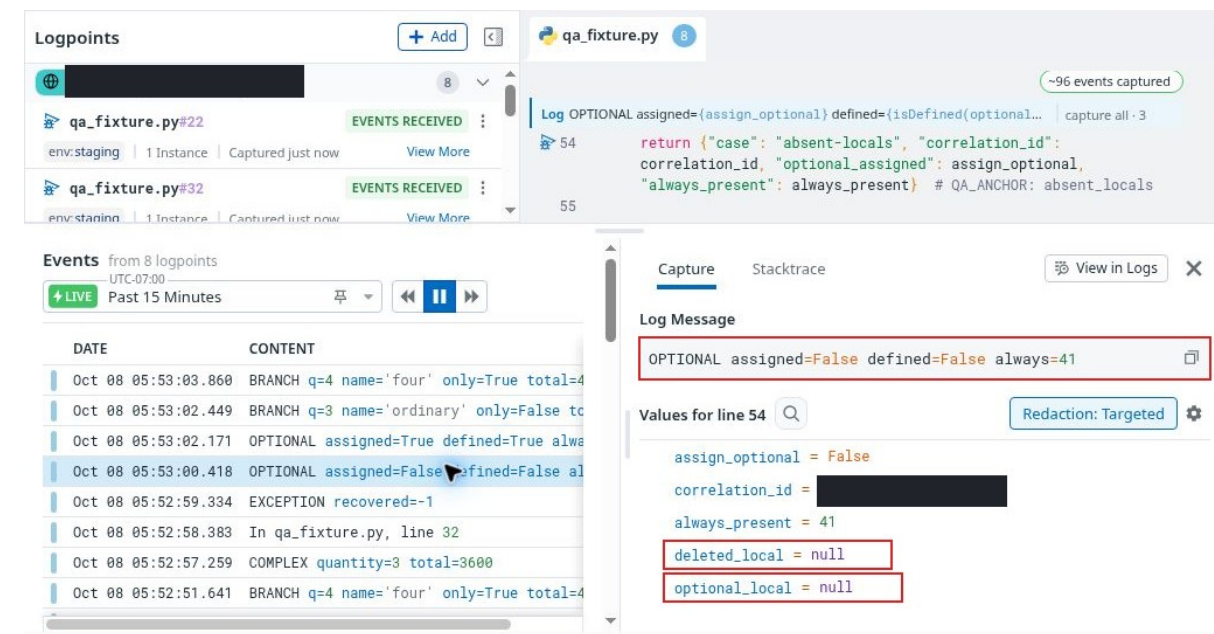

Live optional/deleted-local control before the 13:15 cutoff. The genuine message says defined=False while the values show null. Local SDK verification was confirmed separately at 13:16:33.

Full-size evidence, exact offline command, assertions and measured source hashes

Verified with actual ddtrace 4.11.0 on local Python 3.13.5. Both helper files match official version-tagged source byte-for-byte. Collection enumerates compiled names and uses a locals lookup whose missing default is None; the capture helper gives None its null representation.

Scope: three live UI contexts corroborate the discrepancy, with assigned 42/404 controls. The hosted transport payload was not inspected. This is a proven package behavior, not a UI-only attribution or a claim about every language/version. The local patch version does not establish the hosted patch.

Reproduction: tracing/telemetry/RC and related products were disabled in a clean environment; a pre-import audit guard reported zero blocked network/subprocess attempts. Source hashes cover two helpers, not a whole distribution. Preserve absence before serialization or provide a distinct unavailable marker.

Measured helper	SHA256 of installed and official file
safety helper	b143433011976416337413e53be18921be0a8c625c8339b1aa3604b5b00ec4ff
capture helper	a952f392c6b4dd1e1484622941cef12ab4a485024cf873a1b789d7e801f51cb6

[Official collection source](#) · [Official null serialization source](#)

Reproduction and fixture oracle

Command isolation

Independent reproduction: 02:31:35 UTC on 8 October 2026. The file myapp.py contains one harmless print statement; no Datadog SDK or telemetry is involved.

```
myapp.py:
print("INERT_FIXTURE_EXECUTED")

$ python -m myapp.py
INERT_FIXTURE_EXECUTED
ModuleNotFoundError: __path__ attribute not found on myapp
Exit: 1

$ python myapp.py
INERT_FIXTURE_EXECUTED
Exit: 0

$ python -m myapp
INERT_FIXTURE_EXECUTED
Exit: 0
```

The error is abbreviated for readability. Python also suggests using myapp instead of myapp.py as the module name. The working alternatives establish the module-versus-filename distinction; neither has been claimed as an instrumented Datadog success.

Known sample behavior

The synthetic quote service intentionally uses quantity > 3 instead of quantity >= 3. It is a target bug in the demo application, not a Datadog defect. At pricing.py line 17 all calculated locals are available for the intended line logpoint.

Quantity	Subtotal	Discount eligible	Discount	Actual total
2	2400	false	0	2400
3	3600	false	0	3600
4	4800	true	480	4320

All monetary values are integer cents. The intended quantity 3 total is 3240. A valid debugger result should expose the actual 3600 and the false eligibility, making the boundary error explainable.

Local test rerun at 02:36 UTC: nine tests completed, eight passed and one intentional expected failure. HTTP tests bind to loopback and clean up their server.

Evidence and reference index

ID	Evidence	UTC time or recording location
E10	Empty service picker evidence crop	03:21:54 UTC; account greeting excluded
E13	No environments found configuration	03:23:59 UTC; clean scrolled screenshot
E08	Blank Datadog trial form video frame	Edited video 00:20; raw 00:50; approximately 02:15:17 UTC
E03	Python requirements and navigation	File timestamp 02:19:51; initial video approximately 05:15–05:45
E04	Python environment-variable launch example	File timestamp 02:20:19; initial video approximately 05:45–06:20
R01	Independent Python invocation reproduction	02:31:35; Python 3.12.14; bad form exits 1, alternatives exit 0
R02	Local fixture test rerun	02:36; 8 passes, 1 intentional expected failure

The 80-second public edited excerpt covers signup and documentation only. Its chapters are 00:20 region choice, 00:34 contents-rail wrapping, and 00:58 invalid Python command. Authenticated account-creation footage is not claimed by this excerpt.

The initial continuous recording began at 02:14:27 UTC and ended at 02:21:01 UTC. It is 393.7 seconds at 1364 × 1024 pixels, 20 fps. Edited-video offsets will differ from raw recording offsets. E03 and E04 are direct page captures; E08 is an extracted video frame. Published evidence excludes browser chrome.

[Authenticated UI video with exact chapter and source times](#)

Sources 01–12 have reviewed archives. The source 12 highlights and the nine-finding web checkpoint are publicly verified at commit 9edb46e. Source 13 was finalized after the live cutoff; its motion review is ongoing. Genuine stills and rendered-UI observations support later findings. Missing foreground transitions are not reconstructed; the video catalog states availability and limits.

Primary product references

[Live Debugger setup and session behavior](#)

[Python source mapping](#)

[Source Code Management Providers and caching](#)

[GitHub integration](#)

[Live Debugger expression language](#)

References describe expected behavior, not execution. Results are limited to the tested account, site, versions and controlled synthetic fixtures.

Verified UI subchecks

These narrowly scoped observations preserve the work that actually ran. They do not promote all requirements of their parent cases or add to the 63-case denominator.

Check	UTC	Verified scope
U01 Informed navigation	03:33–03:40	Home → APM introduction → global search → Live Debugger reached the intended route. No blind timing claim.
U02 Manual entry without source	03:21–03:24	Manual session route opens without Source Code Integration. No successful runtime start.
U03 Missing service prevents submit	03:21–03:24; 04:01–04:02	Start is disabled without service; Ctrl+Enter does not submit.
U04 Actual 125 percent zoom	03:33–03:40	Native browser menu shows 125%; modal remains usable; reset to 100% verified. Failed shortcut attempt excluded.
U05 Modal focus and Escape	03:33–03:40	Tab focus cycles through modal controls; Escape closes and restores New Session focus.
U06 Modal history navigation	03:33–03:40	Back removes modal and reaches APM intro; Forward returns New Session without ghost modal. Empty-service context only.
U07 Refresh and repeated Close	04:01–04:02	Refresh dismisses the empty-service modal; two open/Close cycles return correctly. No editable saved configuration.
U08 Empty list filter persistence	03:56–03:58	Search/status/owner controls were exercised; status/owner persist on reload. No populated-result correctness.
U09 Clear Filter and custom dates	03:56–03:58	Clear Filter resets selections. October 1–7 custom range displays correctly. Zero-session list.
U10 Pre-install cancellation	03:59–04:00	Official/custom setup canceled; reload remains Not Connected. No App grant.

Verified setup and control checks

Check	UTC	Verified scope
U11 Final session inventory	04:12	All 0 / Active 0 / Inactive 0; filters cleared. Live accessibility observation after video stopped.
U12 Python command controls	02:31:35; 03:19:52	Invalid module command exits 1; script and suffix-free module alternatives exit 0. Local-only, not Datadog capture.
U13 Published finding images	Verified by 03:59	All four finding pages rendered their inline annotated image; the UX02 original-image link opened. Publication QA, not Datadog behavior.
U14 Temporary helper shutdown	04:22:42	Two completed local setup helpers stopped; each shows zero remaining owned processes. Private configuration retained without inspection.
U15 Service discovery	04:50:17	The synthetic sample became selectable; only wildcard environment was offered. No session or capture.
U16 Agent and sample snapshots	04:47:03; 04:54:47	Local Agent intake/sample startup and Agent RC org/key authorization verified at these instants. Debugger SDK client registration and current liveness remain unverified.
U17 A-only installed scope	04:51:29; 05:06:05	GitHub installation plus persisted one-repository selection verified, identified privately as A. B created afterward remains ungranted. Datadog association failed.
U18 Wildcard setup warning	04:53:17	Manual draft explains all-environment creation will not auto-enable the service and offers Configuration or a specific environment.
U19 Invalid line draft controls	04:54–04:55	Line 0, -1 and abc kept Start disabled; 9999 enabled an unsubmitted draft and 17 restored the baseline. No runtime target validation.
U20 Source guidance	04:55:34	Missing-source explanation identifies permissions or tags as possible causes and links Learn More; it does not claim fetched source.

Verified setup and control checks

Check	UTC	Verified scope
U21 Template rejection and recovery	05:06:52–05:38:08	An actual unmatched brace disabled Start; blur added a red field outline. Correcting the brace enabled Start. Initial auto-balanced attempt excluded.
U22 Fixture file integrity	By 05:10	Downloaded A pricing.py and app.py match the local baseline byte-for-byte; intended return target remains line 17. This is not Datadog source mapping.
U23 Python Function draft	05:39:50	Function mode accepts Module pricing and Function calculate_quote as an enabled draft. No submit or entry/exit capture.
U24 Edited draft cancellation	05:43	Closing and reopening resets to Line mode and empty File/Line, retaining service/environment. No unsaved draft was published; reopened draft closed.
U25 Latest zero inventory	By 05:45	After rejected creates and draft cancellation, All 0 / Active 0 / Inactive 0 remained. A-only installation unchanged; active lifecycle semantics untested.
U26 Historical APM ingestion	05:49–06:21	47 indexed spans recovered; an actual old span carries HTTP 200, Python, staging, version 0.1.0 and the baseline commit. No debugger capture or source retrieval.
U27 APM time-window recovery	05:55–06:21	Empty recent search offered a wider timeframe; one-hour history recovered spans. This is APM search behavior, not debugger result filtering.
U28 SDK freshness guidance	By 06:15	SDK Configurations states no data detected in the last 15 minutes and suggests runtime, telemetry and intake checks. Stopped runtime is compatible; no registration-failure conclusion.

[Open exact evidence for every supplemental check](#)

Authorization gates and resume order

G1/G2 support actual baseline capture and source matching. The extra synthetic runtime also supports redaction, complex-value and sampled-overlap checks. Expiry, explicit resume/stop and child/session hierarchy controls have executed. Case-specific access identities, repository boundaries, metadata/deployment and failure-injection variants remain separate prerequisites.

Gate	Current readiness or missing prerequisite
Runtime G1	G1 met for baseline: Agent and SDK registration plus actual numeric captures. Maintain healthy runtime/control traffic for lifecycle tests.
Source G2	G2 baseline met: A-only association, source text and followed deployed-SHA/file/line comparison. B remains ungranted; its boundary test is separate.
Access G3	Independent restricted identities and case-specific role/revocation setup are still needed. The approved A-only repair does not execute these other tests.
Variants G4	G4 is partly met: the extra synthetic fixture produced redaction, complex-value and overlapping-request captures. Other isolated deployment, failure-injection and metadata variants still need their specific setup and execution.
Study method	A fresh uninformed tester for blind navigation timing. Existing navigation observations are informed.

Resume in this order

Finish the never-granted B boundary and case-specific identity/deployment controls. Complete remaining stale-state, entry-context, filtering and value-depth branches. Reconcile final sessions, bounded runtime jobs, retained grants and settings under C01–C02. Optional variants do not expand the original 63-case denominator.

Retained state

At the 13:15 cutoff, the hierarchy-test session was stopped and its observed children disabled. At 13:17:59, the later My sessions view showed All 4 / Active 0 / Inactive 4. This is not an account-wide inventory or proof of runtime shutdown. The A-only integration, synthetic repositories and durable evidence remain audit assets; final settings/resource reconciliation is open.

Original case outcomes 1 to 9

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
B01	BLOCKED	Blind navigation timing needs a fresh uninformed tester; informed navigation is documented separately.
B02	FINDING	LOW UX02: natural first-run empty-state recovery guidance. Other causes untested.
B03	FINDING	MEDIUM DOC01: isolated invalid Python launch-command reproduction. No runtime start.
B04	PASS	Manual route/prerequisite clarity verified; later actual manual capture worked before source-association repair.
B05	BLOCKED	Needs additional populated service/environment/version combinations for the multi-value dependency checks.
B06	BLOCKED	No independent restricted identity or naturally occurring permission-error state is established.
B07	PASS	Recorded creation/progress/first-value sequence; operator navigation is included, not a performance benchmark.
B08	FINDING	Source/values and return context work; UX04 is repeated direct-event link friction with a one-click recovery.
B09	FINDING	LOW UX03: invalid template has visible validation but no explanatory text in the observed state. Full screen-reader/Line naming coverage untested.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 10 to 18

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
B10	IN PROGRESS	Stop/resume and hierarchy controls are verified; full list-view and service-wide guidance branches remain incomplete.
F01	PASS	Numeric message and actual locals match all three controls: 2 → 2400; 3 → 3600/false; 4 → 4320/true.
F02	PASS	3 → 4 predicate transition matched actual locals; retained old COND3 capture gained OUTDATED feedback.
F03	PASS	Never-match interval had no new matching rows while control traffic continued; removal restored 2/3/4 rows.
F04	FINDING	Invalid conditions/template were rejected and valid corrections worked. Existing UX03 feedback issue is retained.
F05	PASS	Missing expression error, absent isDefined=False and available-local True controls passed; distinct from FUNC02.
F06	PENDING	Line 9999 produced NoFunctionsAtLine; a separate valid line 17 probe captured. Blank/comment-line variants remain pending.
F07	IN PROGRESS	Function-exit @return and explicit line-context error verified. Entry mode remains untested.
F08	PENDING	Working baseline is available; remaining original steps are not yet executed.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 19 to 27

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
F09	FINDING	FUNC01: another tab's message-only save twice erased an unsaved condition. Saved-write branches remain untested.
F10	IN PROGRESS	Individual disabled-draft Apply resumed capture. Session-level stale branch/cleanup and feedback contract remain partial.
F11	PASS	Expired state/history survived reload/direct link. Last target execution and continuing control bound the stop; not instantaneous.
F12	PASS	Explicit resume preserved IDs, renewed one hour and produced a fresh SDK-timestamped capture; stopped again.
F13	PASS	Child disable preserved siblings; whole-session stop, child-only enable/capture and final session stop passed.
F14	PENDING	Earlier draft subchecks are preserved; the remaining runtime or saved-entity requirements are pending.
F15	PENDING	Working baseline is available; remaining original steps are not yet executed.
F16	PASS	New capture-off events were message-only; old event stayed OUTDATED after re-enable and future locals returned.
F17	PENDING	Working baseline is available; remaining original steps are not yet executed.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 28 to 36

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
F18	BLOCKED	Additional controlled fixture/deployment variant is not yet exercised: isolated runtime restart permitted.
F19	BLOCKED	Additional controlled fixture/deployment variant is not yet exercised: isolated forwarding failure permitted.
F20	BLOCKED	Additional controlled fixture/deployment variant is not yet exercised: two fixture versions/envs with distinct numeric outputs.
F21	PASS	Numeric/bool/harmless text visible; dummy sensitive names had explicit name-based redaction. Protection unchanged.
F22	IN PROGRESS	Typed empties and nested values observed; long-string/search and exact cycle/depth handling remain incomplete.
F23	BLOCKED	Additional controlled fixture/deployment variant is not yet exercised: tiny burst test approved.
S01	PASS	Pre-install permission/cancel scope verified; approved A-only repair and exact source retrieval are documented separately.
S02	PASS	Captured event, in-product source and followed provider link match the deployed SHA, pricing.py:17 and nearby code.
S03	PENDING	Working baseline is available; remaining original steps are not yet executed.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 37 to 45

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
S04	BLOCKED	Additional controlled fixture/deployment variant is not yet exercised: approved test service tagged to B.
S05	BLOCKED	Additional controlled fixture/deployment variant is not yet exercised: A has C1 and newer C2; C1 remains deployed.
S06	BLOCKED	Additional controlled fixture/deployment variant is not yet exercised: authorized fixture metadata variant.
S07	BLOCKED	Additional controlled fixture/deployment variant is not yet exercised: approved A/C1 and A/C2 deployments.
S08	BLOCKED	Additional controlled fixture/deployment variant is not yet exercised: available filename/path variants; G4 to create.
S09	BLOCKED	Additional controlled fixture/deployment variant is not yet exercised: mapping variants allowed.
S10	BLOCKED	Case-specific restricted identity/permission-revocation setup is not established.
S11	FINDING	Interrupted Connect retry failed; controlled A-only reinstall repaired association and baseline source retrieval.
S12	BLOCKED	Case-specific restricted identity/permission-revocation setup is not established.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 46 to 54

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
S13	BLOCKED	Case-specific restricted identity/permission-revocation setup is not established.
S14	BLOCKED	Case-specific restricted identity/permission-revocation setup is not established.
S15	BLOCKED	Case-specific restricted identity/permission-revocation setup is not established.
S16	PENDING	Signed-out deep-link branch awaits execution; wrong-org branch needs a second authorized context.
S17	BLOCKED	Targeted redaction is visible; Strict-mode and full source/preview gate combinations remain unverified.
S18	BLOCKED	Source baseline works; Bits preview availability and the approved assisted path remain unverified.
C01	IN PROGRESS	Observed hierarchy session was stopped at cutoff. Full inventory/behavior reconciliation remains incomplete.
C02	IN PROGRESS	Bounded runtime, A-only grant and retained assets are tracked; full resources/settings reconciliation remains open.
C03	PASS	Command workaround and controlled A-only repair are verified with actual capture/source; original causes/fixes are not overclaimed.

[Full case steps, gates, evidence and cleanup](#)

Original case outcomes 55 to 63

BLOCKED means the entire planned case was not established. Any useful narrower observation is named explicitly; no runtime/source result is inferred from it.

Case	Outcome	Scope or concrete missing gate
X01	BLOCKED	Additional controlled fixture/deployment variant is not yet exercised: two approved test replicas at C1/C2 during a rolling deployment.
X02	BLOCKED	Additional controlled fixture/deployment variant is not yet exercised: same service name across two test environments and two repository forks.
X03	IN PROGRESS	Never-called target waited with zero events while siblings captured; final healthy trigger remains untested.
X04	PASS	SDK snapshot time is separated from UI row time and retained history; later control executed after the target stopped.
X05	BLOCKED	Additional controlled fixture/deployment variant is not yet exercised: C2 shifts the original selected statement to a new line.
X06	PASS	Two sampled overlapping-request members matched locals, trace context and source links; not a complete captured pair.
X07	IN PROGRESS	Unicode/duplicate-leaf observations and redaction controls exist; nested-sensitive/cycle boundaries remain partial.
X08	BLOCKED	Case-specific restricted identity/permission-revocation setup is not established.
X09	PENDING	Working baseline is available; remaining original steps are not yet executed.

[Full case steps, gates, evidence and cleanup](#)

Beginner glossary

These terms describe the debugging workflow. A visible setup check is not the same as a captured event.

Term	Plain language meaning
APM	Application Performance Monitoring. Traces show how requests move through application operations.
Agent	A process near the application that receives and forwards supported telemetry and configuration.
SDK or tracer	A language-specific library in the application. Python uses ddtrace.
Trace and span	A trace follows a request or task; a span represents one operation within it.
Service	The named application or component being monitored. Names alone do not establish environment or source identity.
Environment and version	Tags identifying where the application runs, such as staging, and which release it runs.
Remote Configuration	A channel for supported configuration changes to reach a running Agent or SDK without a new deployment.
Debug session	A bounded investigation containing debugger configuration and related results. Check its actual expiry and active state.
Logpoint	A location and rule that collect a message or values without editing the deployed source for each observation.
Snapshot or captured locals	Values observed at a specific runtime execution. Availability, redaction, sampling, and truncation affect what appears.
Source Code Integration	Repository access plus mapping that connects runtime evidence to source files. A connected account alone is insufficient.
Commit SHA	A Git revision identifier. The source shown for a capture should match the deployed commit, not merely the latest branch.
Redaction	Protection that removes or masks selected data. Missing, unavailable, and redacted values mean different things.
ARIA	Labels, states and relationships that can help assistive technology interpret an interface. Missing one attribute alone does not prove an accessibility failure.
WCAG	Web Content Accessibility Guidelines. The focused checks in this report are not a complete conformance audit.

Verified live capture

F01 now passes the planned baseline. The live message template and captured locals agree for quantities 2, 3 and 4. Quantity 3 exposes the deliberately planted application boundary bug; it is not a Datadog defect.

Quantity	Subtotal	Discount eligible	Discount	Actual total
2	2400	false	0	2400
3	3600	false	0	3600
4	4800	true	480	4320

Logpoints

pricing.py#17

env:staging | 1 Instance | Captured just now

EVENTS RECEIVED

View More

This file was not found in your repository

This may be caused by missing permissions or incorrect source code integration tags.

Learn More

Log QA quantity={quantity} total={total_cents} | capture all:3

line 17

Events from 1 logpoint

UTC-07:00

LIVE Past 15 Minutes

DATE	CONTENT
Oct 08 03:03:44.158	QA quantity=2 total=2400
Oct 08 03:03:43.175	QA quantity=4 total=4320
Oct 08 03:03:41.556	QA quantity=3 total=3600
Oct 08 03:03:41.531	QA quantity=2 total=2400
Oct 08 03:03:38.917	QA quantity=4 total=4320
Oct 08 03:03:37.235	QA quantity=3 total=3600
Oct 08 03:03:36.679	QA quantity=2 total=2400
Oct 08 03:03:34.293	QA quantity=3 total=3600

Capture Stacktrace

View in Logs

Log Message

QA quantity=3 total=3600

Values for line 17

Redaction: Targeted

quantity = 3

discount_cents = 0

discount_eligible = False

subtotal_cents = 3600

total_cents = 3600

unit_price_cents = 1200

Source 12 · Numeric quantity-3 control observed 10:03:50.811 UTC. Exact event execution time is not inferred from the visible list or UI timestamp parameter. Source identity is masked; all shown values are genuine.

Full-size numeric capture and provenance

Check	UTC	Verified scope
U29 SDK registration	09:20:37	Agent authorization and matching SDK products registered; subsequent capture provides the functional proof.
U30 First capture	09:28–09:31	Manual creation, instrumenting, events and actual locals observed. Operator navigation is included; this is not measured ingestion latency.
U31 Numeric controls	10:03–10:04	Rendered template and six locals matched all 2/3/4 oracle cases. Exact observations are in the evidence ledger.

Verified source and ongoing lifecycle checks

S02 passes the baseline source comparison. A real post-handover snapshot has debugger.snapshot.timestamp 1791455041812, or 10:24:01.812 UTC. Datadog displays pricing.py source and captured values. Its provider link was followed and matched repository A, deployed revision f5061500e8bf30880aebcf7966ba64df44d2ccde, line 17 and the full nearby code.

Logpoints

pricing.py#17

env:staging | 1 Instance | Captured just now | View More

EVENTS RECEIVED

Events from 1 logpoint

UTC-07:00

LIVE

Past 15 Minutes

DATE	CONTENT
Oct 08 03:24:22.465	CONTROL quantity=4 total=4320
Oct 08 03:24:21.626	CONTROL quantity=3 total=3600
Oct 08 03:24:20.918	CONTROL quantity=2 total=2400
Oct 08 03:24:20.123	CONTROL quantity=4 total=4320
Oct 08 03:24:17.847	CONTROL quantity=3 total=3600
Oct 08 03:24:17.301	CONTROL quantity=2 total=2400
Oct 08 03:24:15.376	CONTROL quantity=3 total=3600
Oct 08 03:24:13.418	CONTROL quantity=2 total=2400

pricing.py

15 total_cents = subtotal_cents - discount_cents

16 # Place a line logpoint on the next line to inspect all computed locals.

Log CONTROL quantity={quantity} total={total_cents} | capture all - 3

17 return {

Capture

Stacktrace

View in Logs

Log Message

CONTROL quantity=3 total=3600

Values for line 17

Redaction: Targeted

quantity = 3

discount_cents = 0

discount_eligible = False

subtotal_cents = 3600

total_cents = 3600

unit_price_cents = 1200

Source 12 · Datadog source and post-handover control capture. The exact SDK snapshot timestamp is verified separately in Logs JSON and screenshot 82; it is not printed in this still.

Full-size source and capture evidence

Check	UTC	Verified scope
U32 Source repair	09:49–09:55	Controlled same-A-only removal/reinstall reached connected configuration. B remained ungranted; the successful callback is screenshot-only after source 11 stopped.
U33 Exact source	10:25:48	Provider link was followed to the deployed revision/file/line. The older file last-change commit is correctly distinct from the selected revision.
U34 Handover control	10:21–10:24	Run 2 registered and the later control produced a real snapshot after handover. Creation/status alone is not counted as capture.
U35 Verified expiry	10:45–10:50	Observed active → expired window 10:45:35.975–10:45:50.640. Last target execution 10:45:41.045; later control 10:47:30.402. Reload/direct link retained expiry.

SCI01 has a verified same-scope repair. Source 12 expiry is supported by separate screenshots/rendered UI and payload times; its movie shows an already-expired after-state rather than the active-to-expired transition. Explicit resume/stop and child/session controls later passed. The never-granted B boundary and remaining functional variants continue.

Connected configuration and recovery provenance

Additional checks and open observations

U36–U42 retain their earlier scopes. The online supplemental inventory now has 57 separately scoped checks, including later runtime controls and a separately dated SDK verification; they do not add original cases.

Check	UTC / source	Verified scope
U36 When editor operability	10:30:40	A normal supported click opened When; native disabled was false and no aria-disabled existed. Prior availability assessment was corrected.
U37 Invalid-line rejection and recovery	10:29–10:33	Line 9999 produced explicit NoFunctionsAtLine; a separate valid line 17 gutter probe captured. Blank/comment-line variants remain untested.
U38 Predicate revision control	10:33–10:35	COND3 and COND4 post-activation rows/locals matched predicates; old selected COND3 snapshot was labeled OUTDATED.
U39 No-match and restoration	10:36–10:39	Bounded NOMATCH interval had no new matching rows while baseline traffic continued; removing the predicate restored expected 2/3/4 rows.
U40 B discovery check	source 12	Ungranted B was not found in the source picker. This is discovery evidence, not proof of denied private-content retrieval.
U41 Direct event-link recovery	10:24; 10:41	Two View in Logs errors recovered through exact-identity indexed rows. UX04 is Low; no data loss or cause claimed.
U42 Source/value explanation and return	10:42:45	The same control snapshot/context survived return; Datadog source quantity > 3 and captured quantity 3/false/zero discount explained the planted application bug.

Unconfirmed observations

Five topics remain unconfirmed and are excluded from the nine findings: initial Enable logs feedback, earlier HTTP 400 guidance, countdown/child lifetimes, invalid-line marker position and disabled-draft Apply reactivation feedback. The previous null-display candidate is now the separately verified SDK finding FUNC02.

Initial Enable logs state: the first session offered this prompt before Logs was visited and the session refreshed. Capture then worked without an explicit Logs settings change. Initial activation, timing and staleness have not been separated.

Earlier HTTP 400 guidance: wildcard-environment attempts returned a visible instrumentation-invalid error while Configuration had no environment. A later healthy SDK/specific-staging baseline worked. The cause was not isolated; recovery-message clarity remains a retest question.

Countdown and child lifetimes: the original session expired around 10:45 after a 09:45 Apply. A later 11:33 follow-up found the older failed 9999 probe expired while edited line 17 still captured and the header showed 6 minutes. Edits did not renew every sibling; the countdown appears tied to active child lifetimes. This later unscored observation narrows the question; it does not prove a session-wide TTL defect.

Invalid-line marker position: the 9999 marker appeared near the file end while the runtime explicitly rejected line 9999. No relocation or capture at a different line was proved. Check visual placement separately from installation.

Applying a pre-disable draft resumed capture after both tabs showed DISABLED. General editing documentation allows modification to instrument code, but does not settle disabled-edit semantics; this remains a feedback/contract question. The Line input naming assessment is incomplete, and the earlier condition-unavailability interpretation was a corrected tooling observation, not a product finding.

[Full unconfirmed-observation inventory and retest boundaries](#)

Further runtime controls and remaining scope

The following results extend the baseline without changing the 63 original case definitions. Complete steps, evidence links and cleanup limits remain in the online matrix. The 57-check supplemental ledger is separately scoped.

Case	Observed UTC	Executed scope
F04	11:34–11:36	Invalid and non-Boolean predicates rejected; valid quantity 2 correction captured. Existing template-feedback finding retained.
F05	11:38–11:40	Missing expression error and absent/present definedness controls distinguished.
F12	11:29–11:31	Explicit resume produced SDK execution 11:29:48.334, same IDs, then explicit stop and inactive reload.
F16	11:42–11:43	Message-only new events with capture off; OUTDATED history and fresh locals after re-enable.
F21	12:20–12:21	Ordinary controls visible and synthetic sensitive names explicitly redacted; mode unchanged.
X06	12:23 / 12:32	Sampled A/B overlap members match values, trace correlation and deployed source links. Different pair indices.
F07	By 13:12	Full function-exit return message and explicit @return-on-line error; entry untested.
F13	13:10–13:13	Child/session hierarchy and child-only capture controls; final session stop 13:13:55.
F22/X03/X07	At cutoff	Complex/cycle, never-called final trigger and nested protection branches remain partial.

Later unscored inventory: at 13:17:59, My sessions showed All 4 / Active 0 / Inactive 4. This does not establish account-wide inactivity or runtime/settings/grant cleanup. Source 13 was finalized after the scored cutoff; its reviewed media totals were still pending during preparation.

Data boundaries: UI row times are not automatically SDK execution times. The X06 samples are not a complete captured pair. New-event rows are not evidence that an OUTDATED selected pane contains that new event. Screenshots prove only their visible fields.

[Full original case matrix and separately scoped checks](#)

[Supplemental execution ledger](#)