
Hermes: fixed T3 and T17 executed trajectories

Cases fixed before the rerun. T17 retains a higher-cost memory branch; every movement and station operation is shown.

T3 / Retained memory

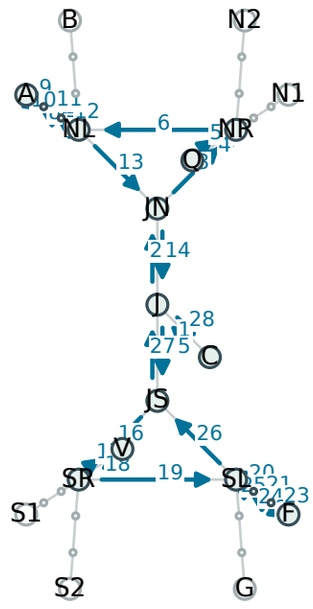


Path: C > J > JN > NR > Q > NR > NL > ap1 > ap2 > A > ap2 > ap1 > NL > JN > J > JS > SR > V > SR > SL > fp1 > fp2 > F > fp2 > fp1 > SL > JS > J > C

A: process OK; F: process OK

Success=True | distance=36 | moves=28 | ops=31

T3 / Baseline-memory probe

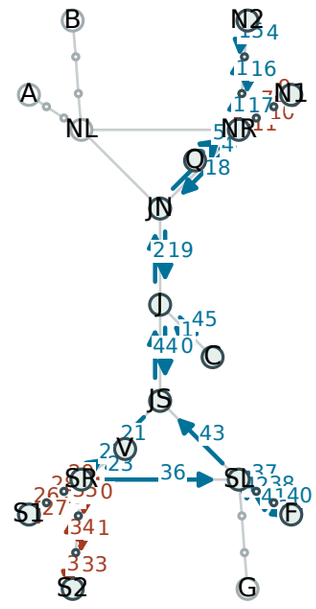


Path: C > J > JN > NR > Q > NR > n1p1 > n1p2 > N1 > n1p2 > n1p1 > NR > n2p1 > n2p2 > N2 > n2p2 > n2p1 > NR > JN > J > JS > SR > V > SR > s1p1 > s1p2 > S1 > s1p2 > s1p1 > SR > s2p1 > s2p2 > S2 > s2p2 > s2p1 > SR > SL > fp1 > fp2 > F > fp2 > fp1 > SL > JS > J > C

N1: process unsupported; N2: process OK; S1: process unsupported; S2: process unsupported; F: process OK

Success=True | distance=55 | moves=45 | ops=51

T17 / Retained memory

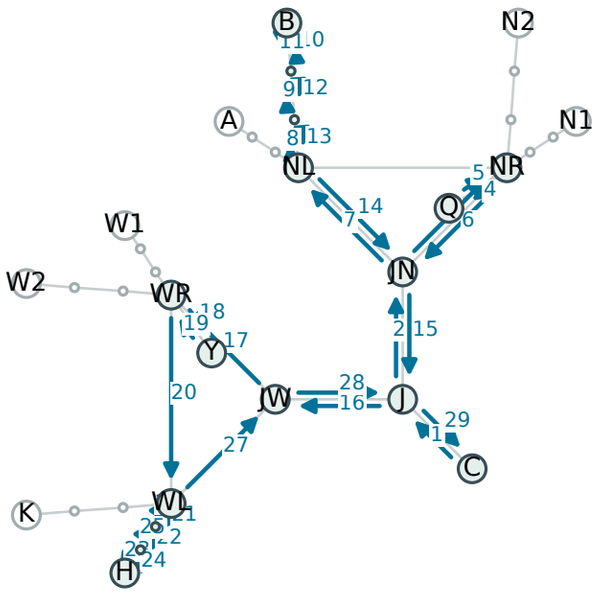


Path: C > J > JN > NR > Q > NR > JN > NL > bp1 > bp2 > B > bp2 > bp1 > NL > JN > J > JW > WR > Y > WR > WL > hp1 > hp2 > H > hp2 > hp1 > WL > JW > J > C

B: process OK; H: process OK

Success=True | distance=39 | moves=29 | ops=32

T17 / Baseline-memory probe

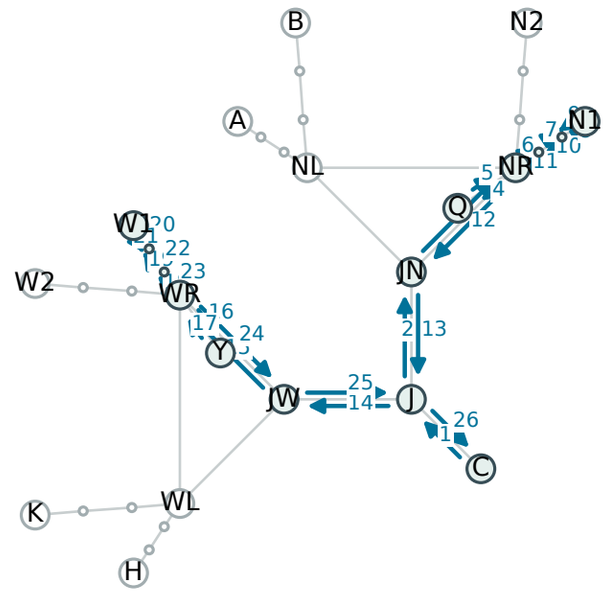

Path: C > J > JN > NR > Q > NR > n1p1 > n1p2 > N1 > n1p2 > n1p1 > NR > JN > J > JW > WR > Y > WR > w1p1 > w1p2 > W1 > w1p2 > w1p1 > WR > JW > J > C

N1: process OK; W1: process OK

Success=True | distance=30 | moves=26 | ops=29

Arrow numbers: actual movement order. Brown dashed: trip with unsupported processing. Grey: public roads.
Both conditions succeed in all tasks. One world and one history; compatible behavior is not proof of internal memory causality.