
Native Hermes: executed cross-session trajectories

One world, one pilot. Selected T3 and T17 examples; all 39 sessions are reported separately.

T3 / Retained native memory

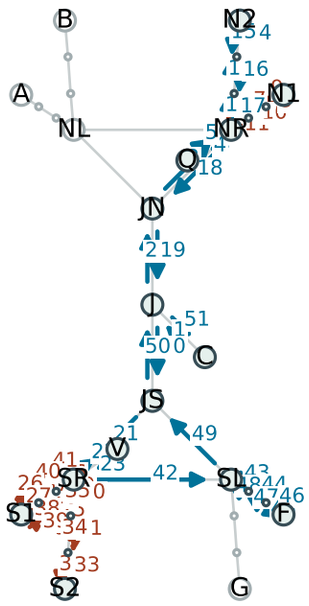


Path: C > J > JN > NR > Q > NR > n1p1 > n1p2 > N1 > n1p2 > n1p1 > NR > n2p1 > n2p2 > N2 > n2p2 > n2p1 > NR > JN > J > JS > SR > V > SR > s1p1 > s1p2 > S1 > s1p2 > s1p1 > SR > s2p1 > s2p2 > S2 > s2p2 > s2p1 > SR > s1p1 > s1p2 > S1 > s1p2 > s1p1 > SR > SL > fp1 > fp2 > F > fp2 > fp1 > SL > JS > J > C

N1: process unsupported; N2: process OK; S1: process unsupported; S2: process unsupported; S1: process unsupported; F: process OK

Success=True | distance=61 | moves=51 | ops=58

T3 / Baseline native memory

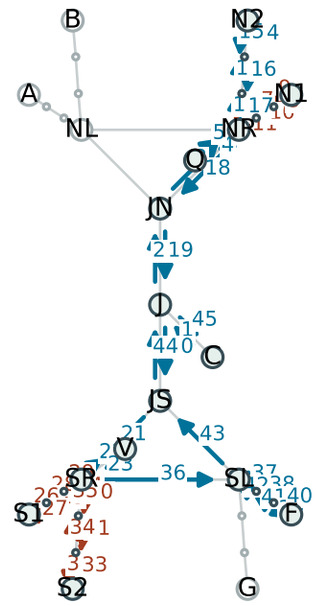


Path: C > J > JN > NR > Q > NR > n1p1 > n1p2 > N1 > n1p2 > n1p1 > NR > n2p1 > n2p2 > N2 > n2p2 > n2p1 > NR > JN > J > JS > SR > V > SR > s1p1 > s1p2 > S1 > s1p2 > s1p1 > SR > s2p1 > s2p2 > S2 > s2p2 > s2p1 > SR > SL > fp1 > fp2 > F > fp2 > fp1 > SL > JS > J > C

N1: inspect profile; N1: process unsupported; N2: process OK; S1: process unsupported; S2: process unsupported; F: process OK

Success=True | distance=55 | moves=45 | ops=52

T17 / Retained native memory

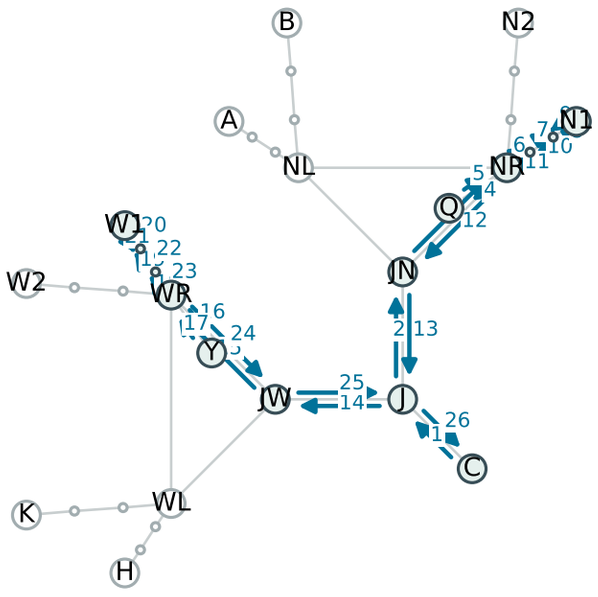


Path: C > J > JN > NR > Q > NR > n1p1 > n1p2 > N1 > n1p2 > n1p1 > NR > JN > J > JW > WR > Y > WR > w1p1 > w1p2 > W1 > w1p2 > w1p1 > WR > JW > J > C

N1: process OK; W1: process OK

Success=True | distance=30 | moves=26 | ops=29

T17 / Baseline native memory

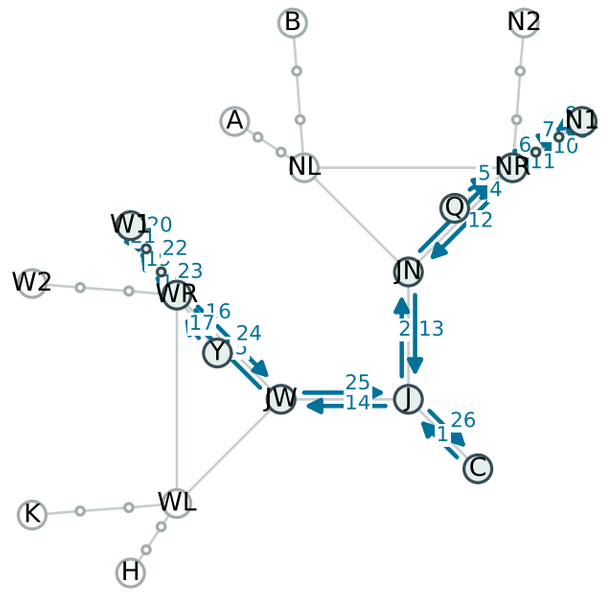

Path: C > J > JN > NR > Q > NR > n1p1 > n1p2 > N1 > n1p2 > n1p1 > NR > JN > J > JW > WR > Y > WR > w1p1 > w1p2 > W1 > w1p2 > w1p1 > WR > JW > J > C

N1: process OK; W1: process OK

Success=True | distance=30 | moves=26 | ops=29

Arrows are actual moves; numbers show movement order. Node operations are listed beneath each graph.
Dashed red: station trip containing unsupported processing. Blue: other moves. Grey: public roads in the task-region context.
All executed edges are shown, including any outside that region. Incomplete paths end at task termination.