Native GA: executed cross-session trajectories

One world, one pilot. Selected T3 and T17 examples; all 39 sessions are reported separately.

T3 / Retained native memory

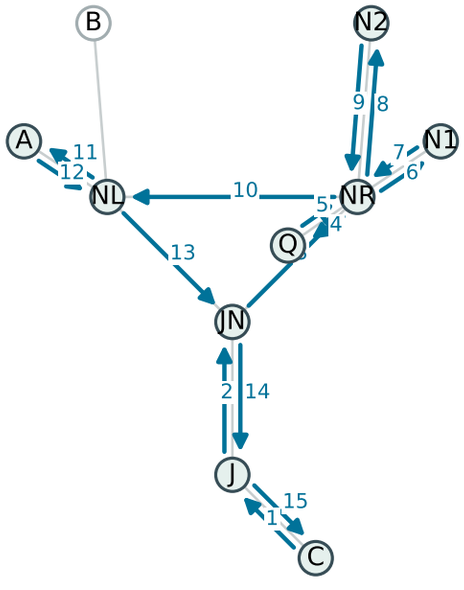

Path: C > J > JN > NR > Q > NR > N1 > NR > N2 > NR > NL > A > NL > JN > J > C

N1: inspect profile; N2: inspect profile; A: inspect shore; A: process OK

Success=True | distance=21 | moves=15 | ops=20

T3 / Baseline native memory
Stopped: model_budget

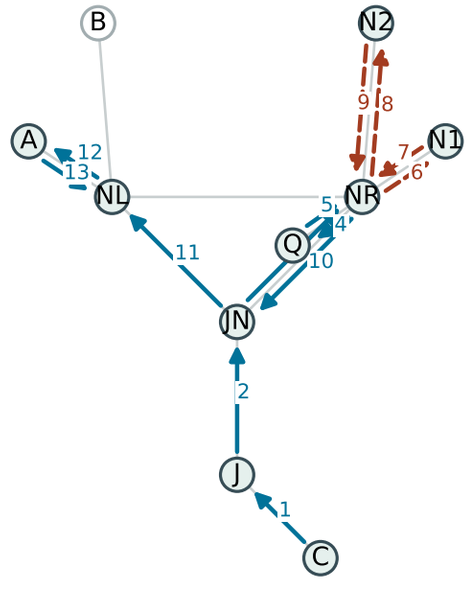

Path: C > J > JN > NR > Q > NR > N1 > NR > N2 > NR > JN > NL > A > NL

N1: process unsupported; N2: process unsupported; A: process OK

Success=False | distance=18 | moves=13 | ops=16

T17 / Retained native memory

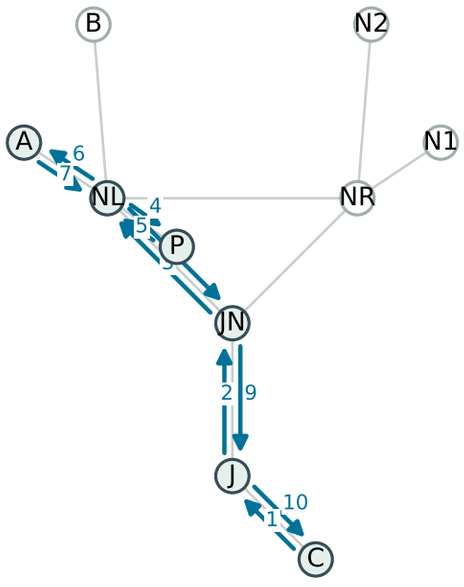

Path: C > J > JN > NL > P > NL > A > NL > JN > J > C

A: inspect shore; A: process OK

Success=True | distance=12 | moves=10 | ops=13

T17 / Baseline native memory

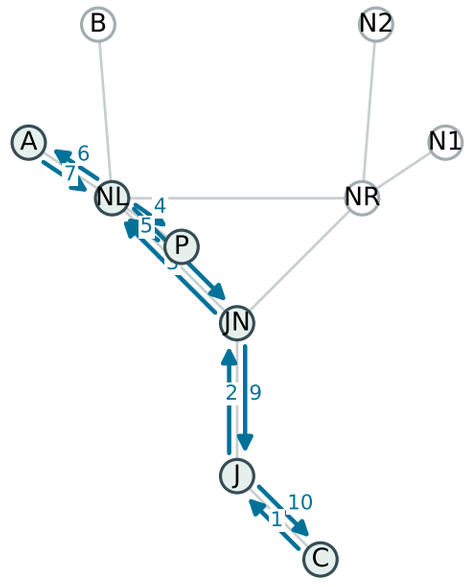

Path: C > J > JN > NL > P > NL > A > NL > JN > J > C

A: inspect shore; A: process OK

Success=True | distance=12 | moves=10 | ops=13

Arrows are actual moves; numbers show movement order. Node operations are listed beneath each graph.
Dashed red: station trip containing unsupported processing. Blue: other moves. Grey: public roads in the task-region context.
All executed edges are shown, including any outside that region. Incomplete paths end at task termination.