

Vegetables Classification using Deep Convolutional Neural Network

VeggieLKa is set to make a significant impact in the agri-tech sector by promoting sustainable agriculture and healthy eating. Their goal is to introduce an innovative system that enhances the classification and sorting of vegetables on a granular level, ultimately improving the efficiency and precision of global vegetable supply chains.

As the latest recruit, you are tasked with spearheading this groundbreaking project. Your mission is to develop a Python-based program utilizing the TensorFlow library to craft a Deep Convolutional Neural Network (DCNN) model. This advanced model will specialize in accurately distinguishing between **four primary vegetable classes**: Broccoli, Carrot, Cucumber, and Tomato. Your task as a deep learning engineer is to develop a Python-based program using the **TensorFlow library** to create a **Deep Convolutional Neural Network (DCNN) model** that meets the following requirements:

- **Load and Split Dataset**

- **Load Dataset**

In this section, you are required to:

- **Assign** the dataset path to the previously declared PATH variable.
- **Populate** the CLASS_NAMES variable with the appropriate class names based on the provided information.
- **Load** the image from the given dataset into an array using grayscale as the color mode.
- **Randomly** shuffle the dataset.

- **Split Dataset**

You are tasked to **split** the given dataset into 3 main parts which are training, validation, and testing sets with the proportion of 80/10/10.

- **Data Preprocessing**

You are tasked with **reshaping** the given dataset, which includes the training, validation, and testing sets, by converting the data type to float32. Following this, you will need to **normalize** the dataset, comprising the training, validation, and testing sets, by dividing the values of all image pixels by 255. As an optional but potentially beneficial step, consider utilizing **categorical encoding** for the target variables in the training, validation, and testing sets.

- **DCNN Architecture (Model Architecture Visualization, Initialization, and Configuration)**
 - **Model Visualization**

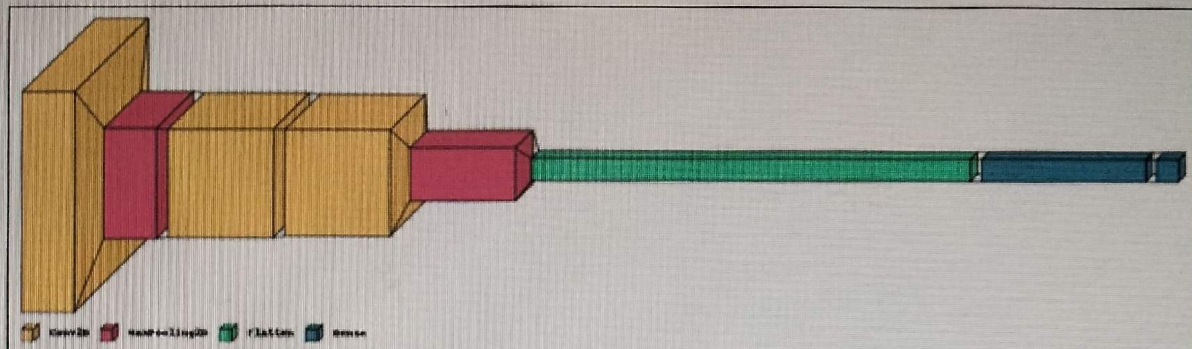


Figure 1. Model Visualization

- **Model Initialization and Configuration – Input Layer**
In this section, you are tasked with initializing the **input layer** of the model. You need to define the dimensions of the image and the channel to be processed by the input layer.
- **Model Initialization and Configuration – Hidden Layer**
In this section, your responsibility is to outline the configurations of the hidden layers of the DCNN model. The architecture comprises a sequence of components including **convolutional layers**, **max pooling layers**, and a **flatten layer**. These layers are essential in extracting and reducing the dimensions of the feature maps as the data progresses through the network.
- **Model Initialization and Configuration – Output Layer**
In this section, you are tasked with describing the output layer of the DCNN model. The output section of the model consists of **two dense layers**: one employing a **ReLU** activation function and the final layer utilizing a **Softmax** activation function to classify the input into one of several categories.
- **Model Training**
You are tasked with **training the model** that you previously constructed. Utilize the Adam optimizer and **select** the appropriate loss function based on the specifics of your case. **Monitor** the performance using accuracy as the metric. Ensure that the training process spans a minimum of 10 epochs. You have the flexibility to set the batch size and learning rate for the optimizer according to your judgment.

```

Epoch 1/10
50/50 [=====] - 363s 7s/step - loss: 1.1905 - accuracy: 0.4984 - val_loss: 0.8457 - val_accuracy: 0.7500
Epoch 2/10
50/50 [=====] - 340s 7s/step - loss: 0.6550 - accuracy: 0.7625 - val_loss: 0.5102 - val_accuracy: 0.8200
Epoch 3/10
50/50 [=====] - 336s 7s/step - loss: 0.4181 - accuracy: 0.8547 - val_loss: 0.4239 - val_accuracy: 0.8350
Epoch 4/10
50/50 [=====] - 326s 7s/step - loss: 0.3162 - accuracy: 0.8963 - val_loss: 0.4272 - val_accuracy: 0.8350
Epoch 5/10
50/50 [=====] - 342s 7s/step - loss: 0.2493 - accuracy: 0.9150 - val_loss: 0.3381 - val_accuracy: 0.8700
Epoch 6/10
50/50 [=====] - 393s 8s/step - loss: 0.1905 - accuracy: 0.9372 - val_loss: 0.2730 - val_accuracy: 0.8850
Epoch 7/10
50/50 [=====] - 355s 7s/step - loss: 0.1495 - accuracy: 0.9531 - val_loss: 0.2819 - val_accuracy: 0.8950
Epoch 8/10
50/50 [=====] - 361s 7s/step - loss: 0.1162 - accuracy: 0.9688 - val_loss: 0.2582 - val_accuracy: 0.9075
Epoch 9/10
50/50 [=====] - 368s 7s/step - loss: 0.0818 - accuracy: 0.9797 - val_loss: 0.2468 - val_accuracy: 0.9175
Epoch 10/10
50/50 [=====] - 366s 7s/step - loss: 0.0667 - accuracy: 0.9853 - val_loss: 0.2539 - val_accuracy: 0.9125

```

Figure 2. Model Training

- **Predicting Data Using Created Model and Model Evaluation**

- **Predict Data**

You are tasked with **predicting** the outcomes of the testing sets using the model that you previously constructed. Please print out both the loss and accuracy values.

```

13/13 [=====] - 13s 1s/step
13/13 [=====] - 13s 964ms/step - loss: 0.2857 - accuracy: 0.9150

```

Figure 3. Model Prediction

- **Model Evaluation**

You are tasked with **evaluating** the testing sets using the model that you previously constructed. Please print out both the loss and accuracy values.

```

Test Accuracy : 0.9150000214576721
Test Loss      : 0.28565454483032227

```

Figure 4. Model Evaluation

- **Plot of Evaluation Metrics**

You are tasked with creating a **plot** of the evaluation metrics. This plot should include a loss graph, which displays both the training and validation losses, as well as an accuracy graph that illustrates the training and validation accuracies.

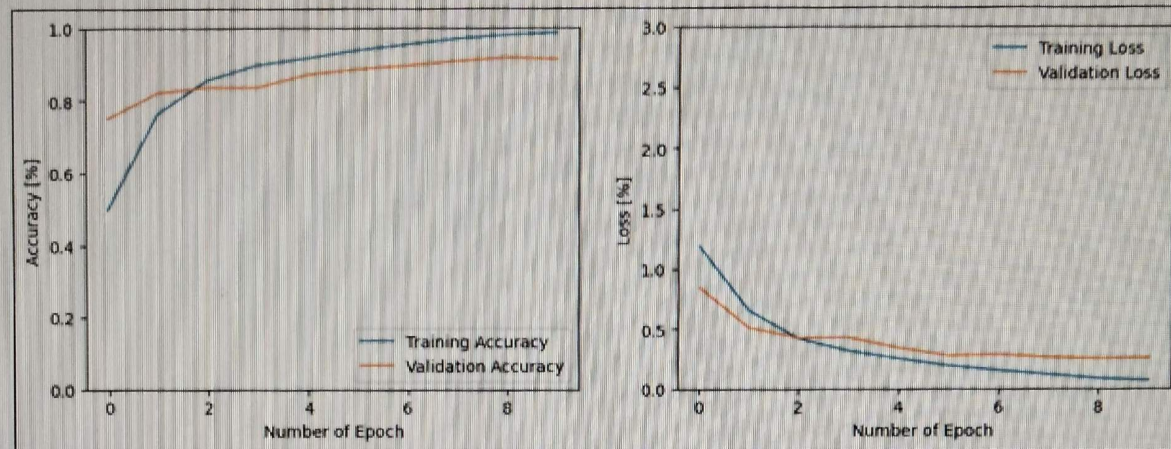


Figure 5. Plot of Evaluation Metrics