

TTK4147 - Lab 0

TASK A

For `sleep(1)` :

```
real 0m1.005s
user 0m0.001s
sys 0m0.004s
```

For `busy_wait(1)` with `clock_gettime(CLOCK_MONOTONIC, ...)` :

```
real 0m1.004s
user 0m1.003s
sys 0m0.001s
```

For `busy_wait(1)` with `times()`:

```
real 0m0.004s
user 0m0.001s
sys 0m0.004s
```

`busy_wait(1)` with `times()` og `sleep(1)` bruker (ca) same sys tid.
`times()` opererer hovedsakelig i kernel space.


TASK B

Estimert **access latency** for `_rdtsc()`:

real 0m0.111s / (10 * 1000 * 1000)

$$= 1.11 * 10^{-8} \text{s}$$

Resolution:

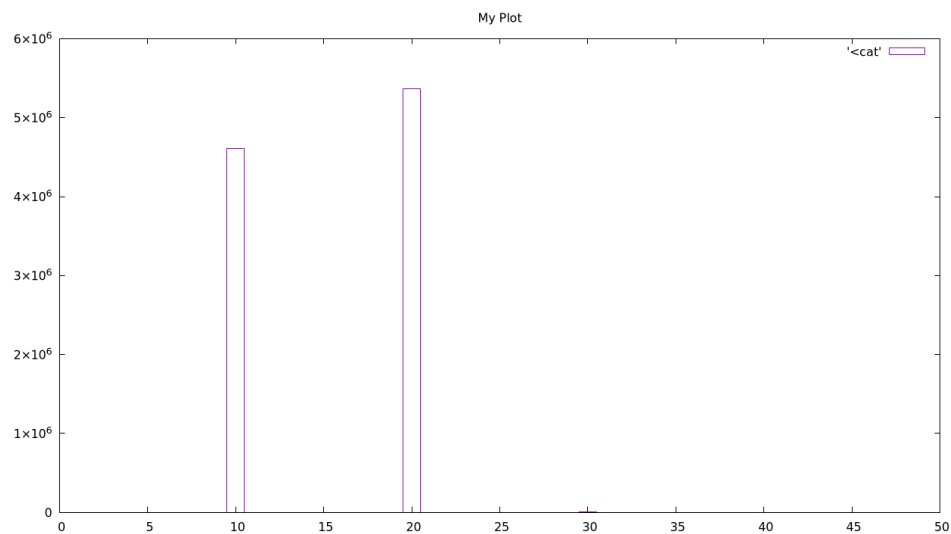


Estimert **access latency** for `clock_gettime(CLOCK_MONOTONIC, &now)`:

real 0m0.359s / (10 * 1000 * 1000)

$$= 3.59 * 10^{-8} \text{s}$$

Resolution:

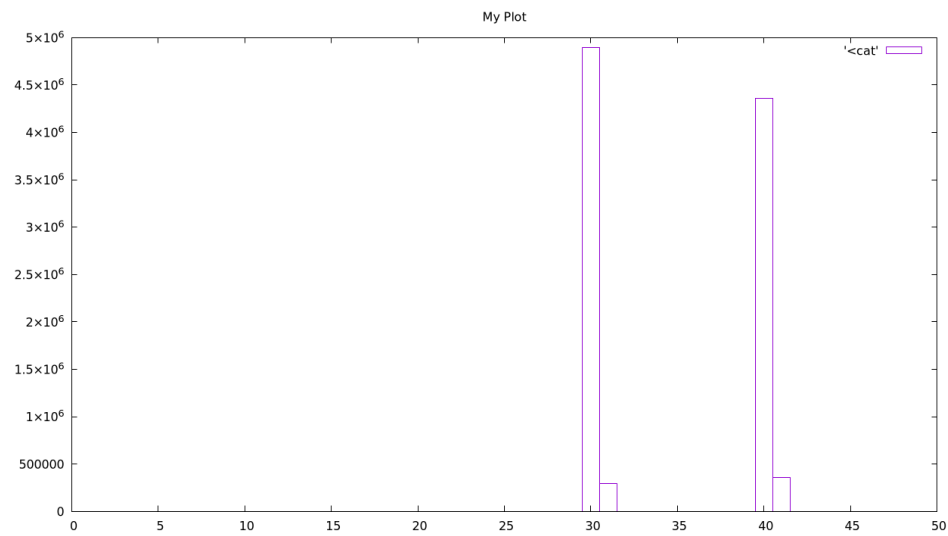

Estimert **access latency** for `times()`:

real 0m10.467s / (10 * 1000 * 1000)

= 0.0010467s

Resolution

