

Hachimi Autotranslate Stories Guide

TLServer

Written by Spoot:3 Rika

Information

Hi! This is my (Rika's) guide for setting up TLServer. It's mainly adapted from Spoot's guide.

I will try to keep this updated, but if you accessed the file **directly** from a link, then you **won't** see updates.

Make sure you accessed this through a **folder** link.

Warning

This requires a half decent device to run (think at least 4 GB video RAM), as this is run locally using your PC's CPU/GPU (depending on your choice). This will also cause your game to freeze/lag a lot more.

This technically is meant only for PC, but you can get it to work on a mobile device by running Sugoi locally on a PC and exposing the Sugoi server address either on your local network or the internet so that your mobile device can connect to the Sugoi server.

For this guide, I will be using a trimmed down [Sugoi V12.1](#) with only the translation server functionality, called TLServer. You can try to use your own version, but it is not guaranteed to work, or if the instructions will be the same at all (though, I tested this on the latest V14 and it also works).

**! You have alerted
the Ace !**



Prerequisites

This guide assumes Windows; For Mac and Linux users, it's mainly the same steps.

1. I will be using `uv` to run TLServer. To install `uv`, run `winget install --id=astral-sh.uv -e` in a command prompt.

Warning


If you, for some reason, cannot use `winget`, you can follow the installation instructions in [this link](#).

Please be warned that using this method is more dangerous, as you are running a script that may be hijacked and cause damage to your system.

The `winget` method is a bit safer than this method.

2. You will also need to install [LM Studio](#) (or any other OpenAI compatible backends, etc).
3. Then, download TLServer by opening this link [here](#), downloading the source as a zip, and extracting it somewhere.


You can also instead run `git clone https://github.com/de-odex/tlserver.git` in your command line.

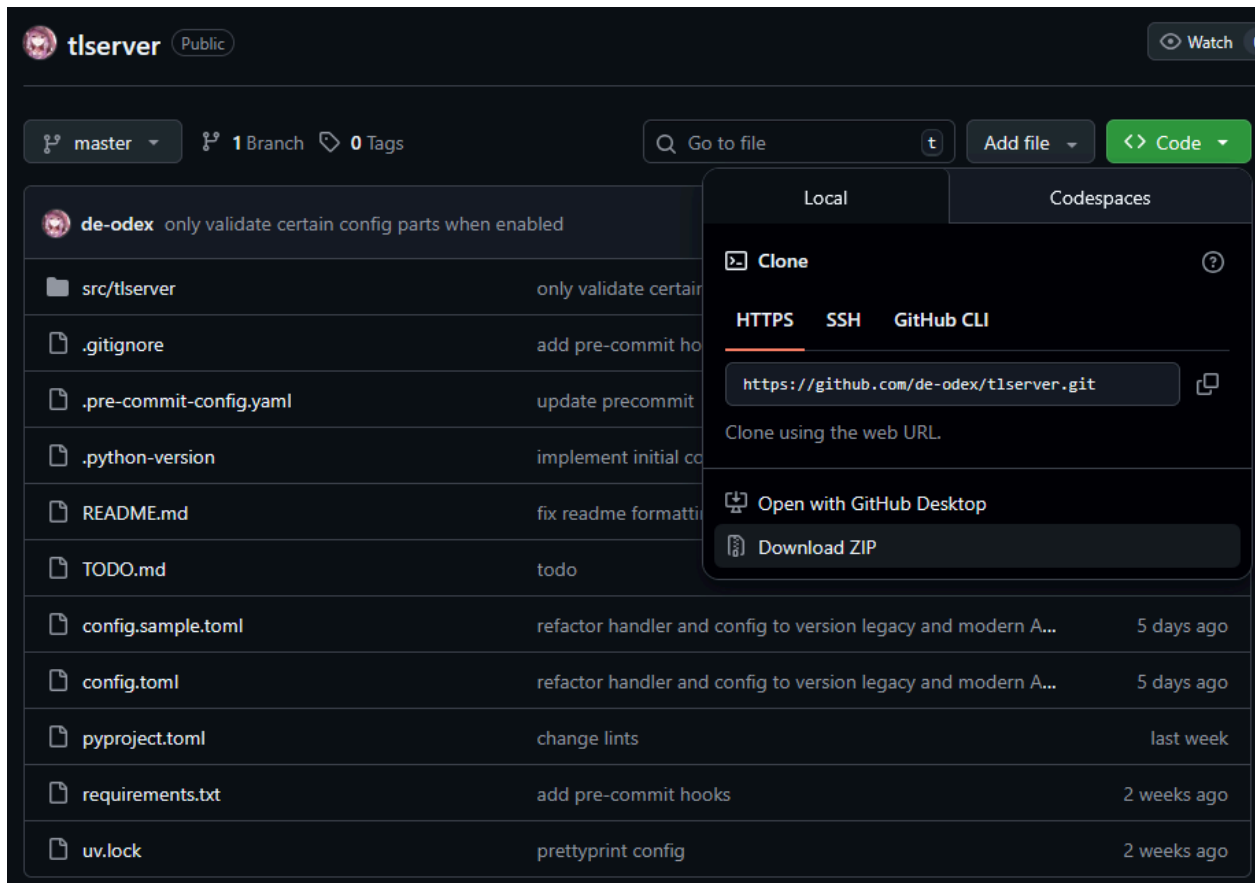


LM Studio Setup

By default, LM Studio should be able to detect your GPU, but just in case it doesn't, we can set it up manually.


1. Open up LM Studio and run through the setup if you haven't already.
2. Navigate to the bottom right of your window and click on the settings icon (or press `ctrl + ,`).

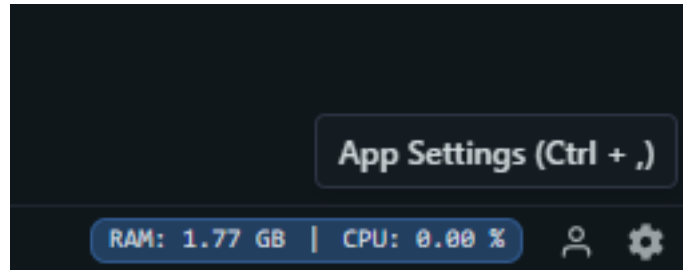


3. From here you'll be greeted by this window here. Navigate to the runtime tab.

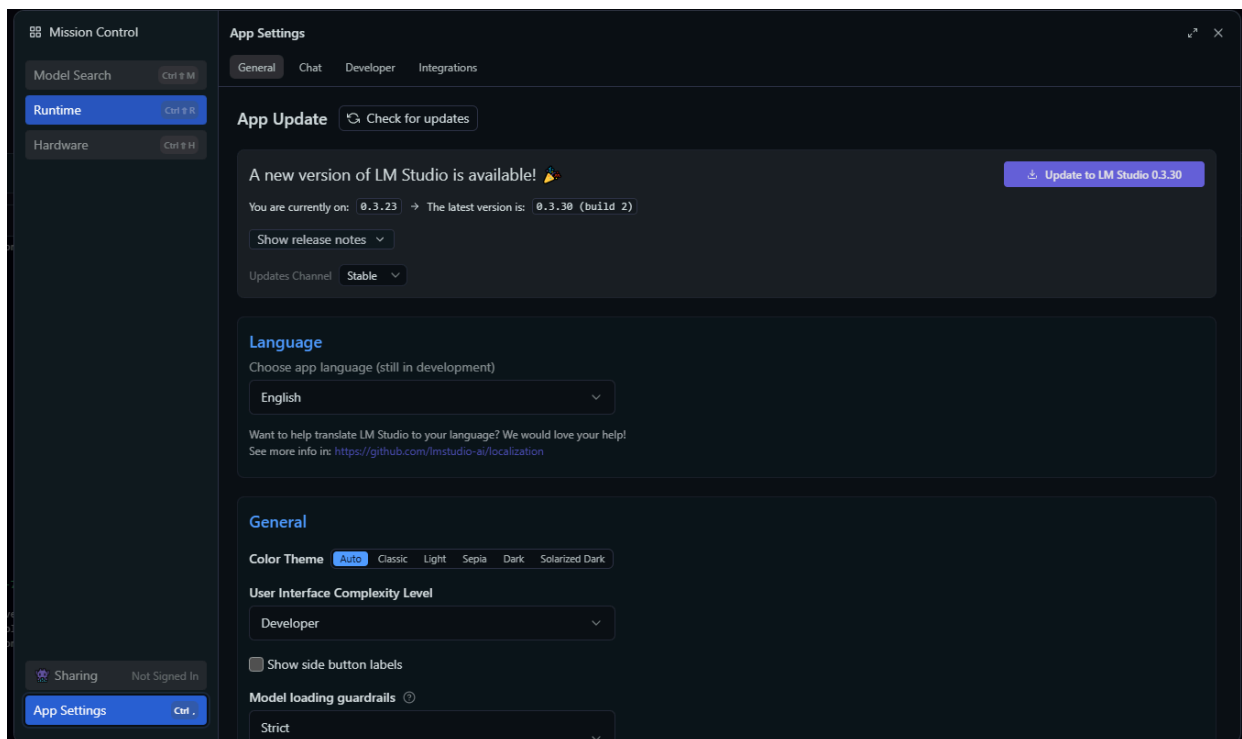


4. You'll be greeted by the list of runtimes.

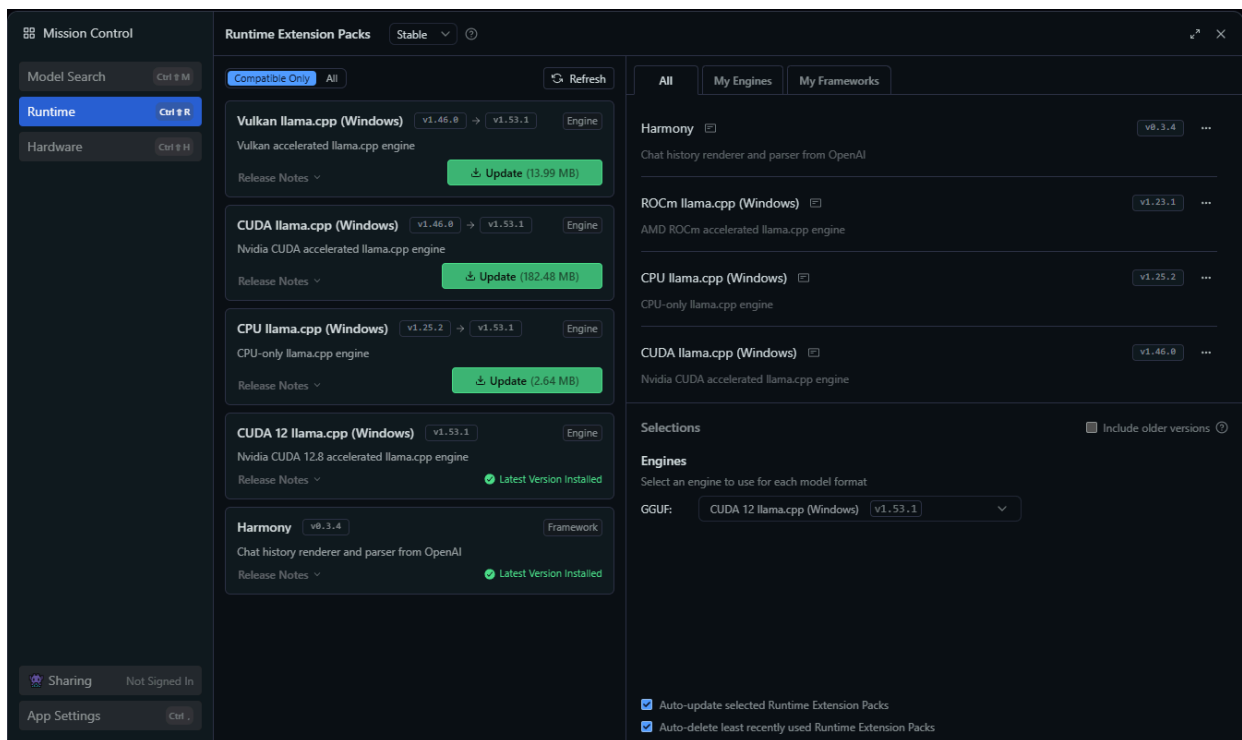

- For AMD GPUs, you should install the Vulkan engine (you can use ROCm but it lowkey runs like ass on Windows).

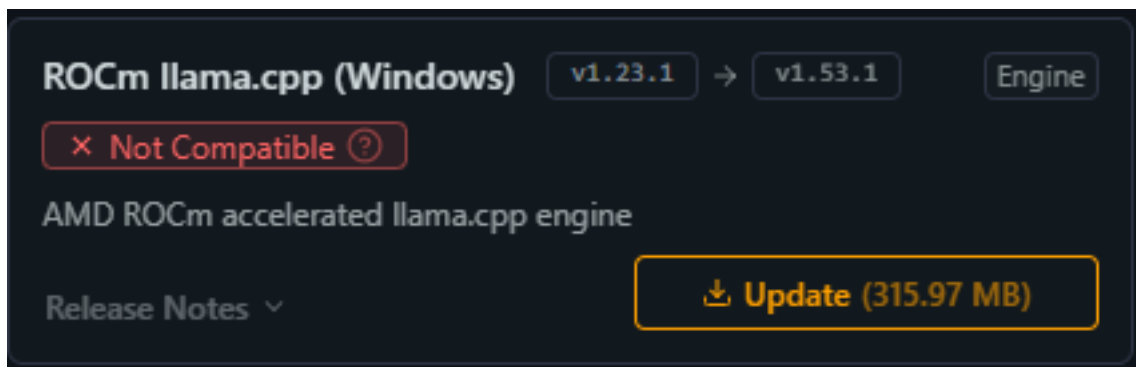


- For NVIDIA GPUs, you should pick CUDA. If you get slow LLM generation (< 10 tokens per second), try choosing the one that only says “CUDA” and not “CUDA 12”.

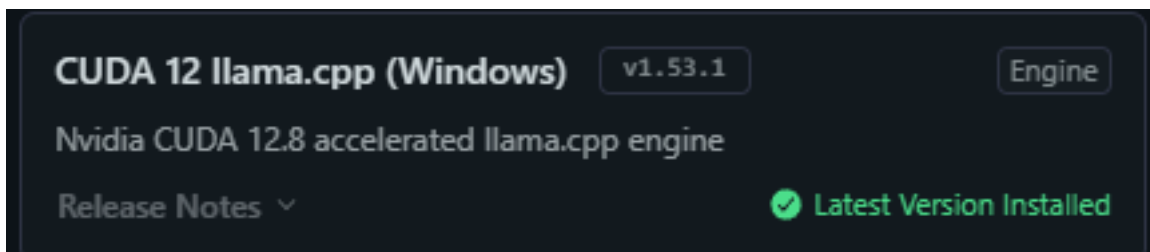


↓ STEPS CONTINUE ON THE NEXT PAGE ↓

5. Then set your engine selection accordingly to which GPU you have.

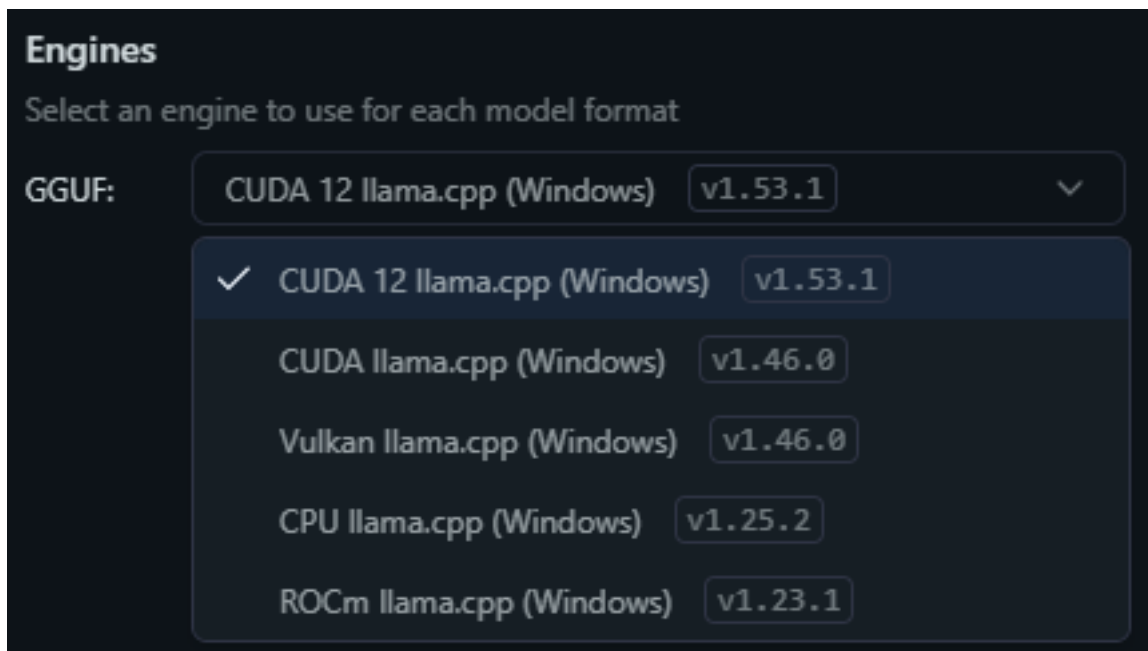

6. Restart LM Studio if it requires you to, and continue with the next page.

Make sure your LM Studio mode is set to Power User or Developer beyond this point (Bottom Left).



7. Now you will need to download a suitable model according to how much VRAM your GPU has. Here is my list of recommendations below.

Best Model Hands Down (courtesy of Mario :3)

- Umamusume Story Translator (this changed my life)

Low VRAM (Less than 8gb)

- Aya Expanse 8B
- Shisa Ai v2 Qwen2.5 7B (probably the best one at this range)
- Shisa Ai v2 Llama3.1 8B

Med VRAM (12gb)


- Sugoi 14B Ultra (most meta option rn)

Higher VRAM (+16gb)


Information Note that these models are barely any better than Sugoi.

- Shisa Ai v2 Mistral Nemo 12B
- Shisa Ai v2 Unphi4 14B (my personal favourite to use)

8. Once you've decided on a model to use, pop over to the discover tab on LM Studio.

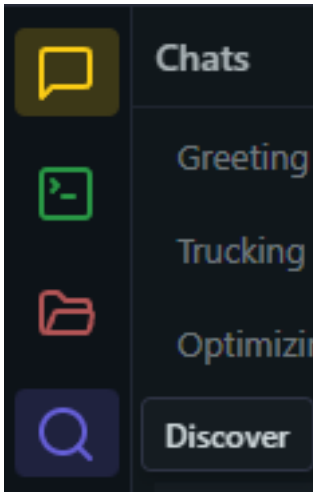

9. You'll be greeted with this window; you can search up your desired model and select the quantisation for your VRAM size.

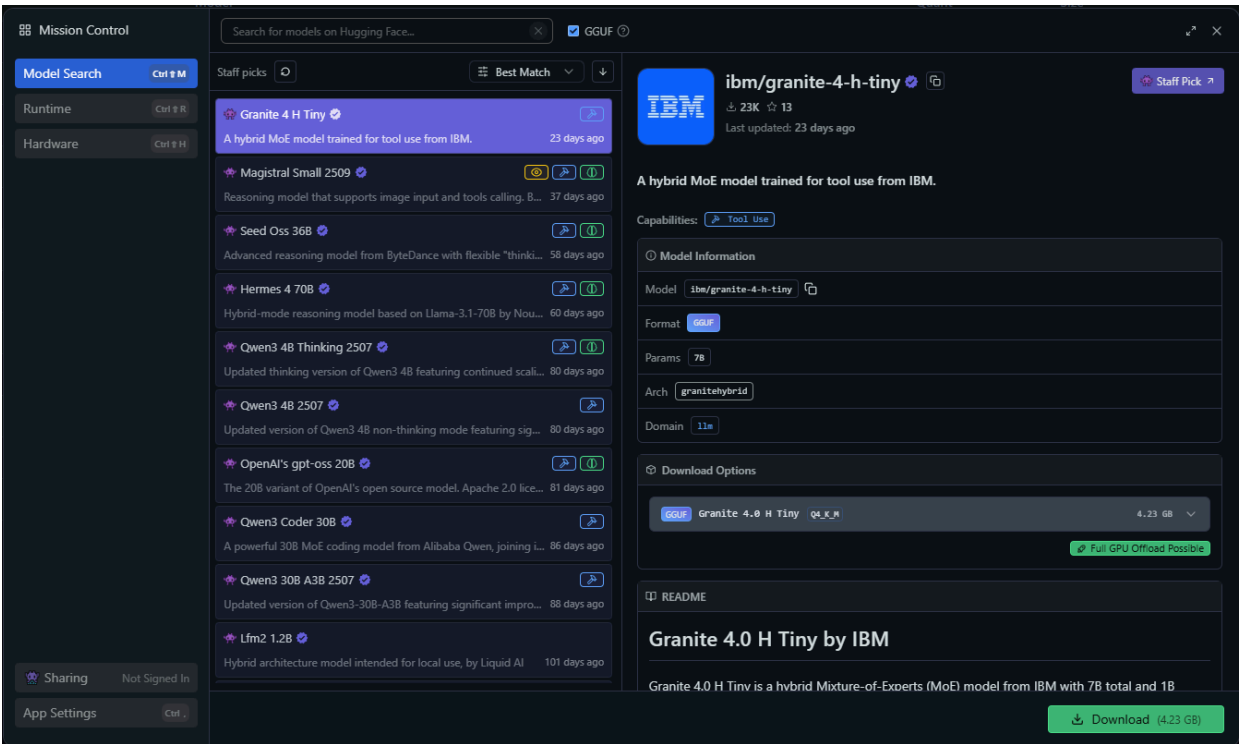

10. Technically, you could download models using other sites like Huggingface, etc. but I'm too lazy to teach and write this wwww.


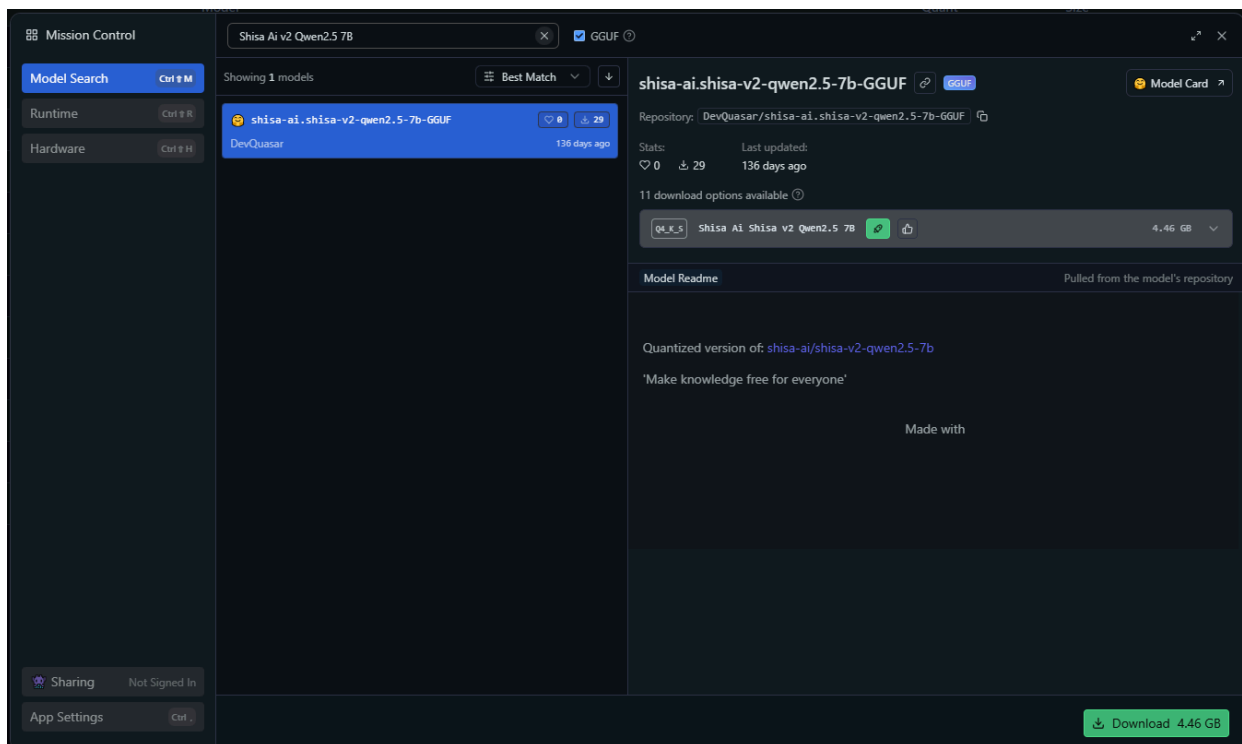


Figure 12: Shisa Ai v2 Qwen2.5 7B as an example

11. You should probably listen to the LM Studio recommendation for which model to choose, but you do you.


Choose a download option			
☐	Q2_K	Shisa Ai Shisa v2 Qwen2.5 7B	3.02 GB
☐	Q3_K_S	Shisa Ai Shisa v2 Qwen2.5 7B	3.49 GB
☐	Q3_K_M	Shisa Ai Shisa v2 Qwen2.5 7B	3.81 GB
☐	Q3_K_L	Shisa Ai Shisa v2 Qwen2.5 7B	4.09 GB
☒	Q4_K_S	Shisa Ai Shisa v2 Qwen2.5 7B	4.46 GB
☐	Q4_K_M	Shisa Ai Shisa v2 Qwen2.5 7B	4.68 GB
☐	Q5_K_S	Shisa Ai Shisa v2 Qwen2.5 7B	5.32 GB
☐	Q5_K_M	Shisa Ai Shisa v2 Qwen2.5 7B	5.44 GB
☐	Q6_K	Shisa Ai Shisa v2 Qwen2.5 7B	6.25 GB
☐	Q8_0	Shisa Ai Shisa v2 Qwen2.5 7B	8.10 GB
☐	F16	Shisa Ai Shisa v2 Qwen2.5 7B	15.24 GB

12. Slap the download button once you're happy and you should see the progress in your download tab.




Weirdass stuff you gotta do and check

1. Pop over to the developer tab and click on the “Select a model to load” search bar at the top.

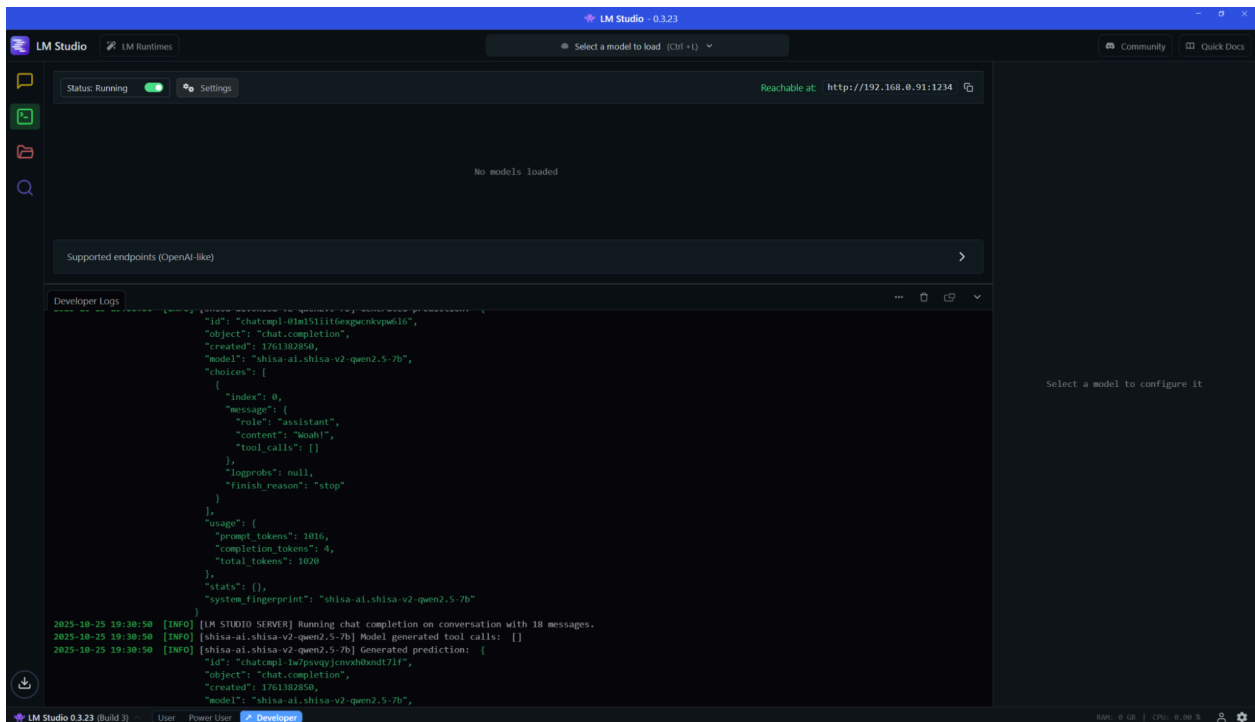


2. Load your model of choice.

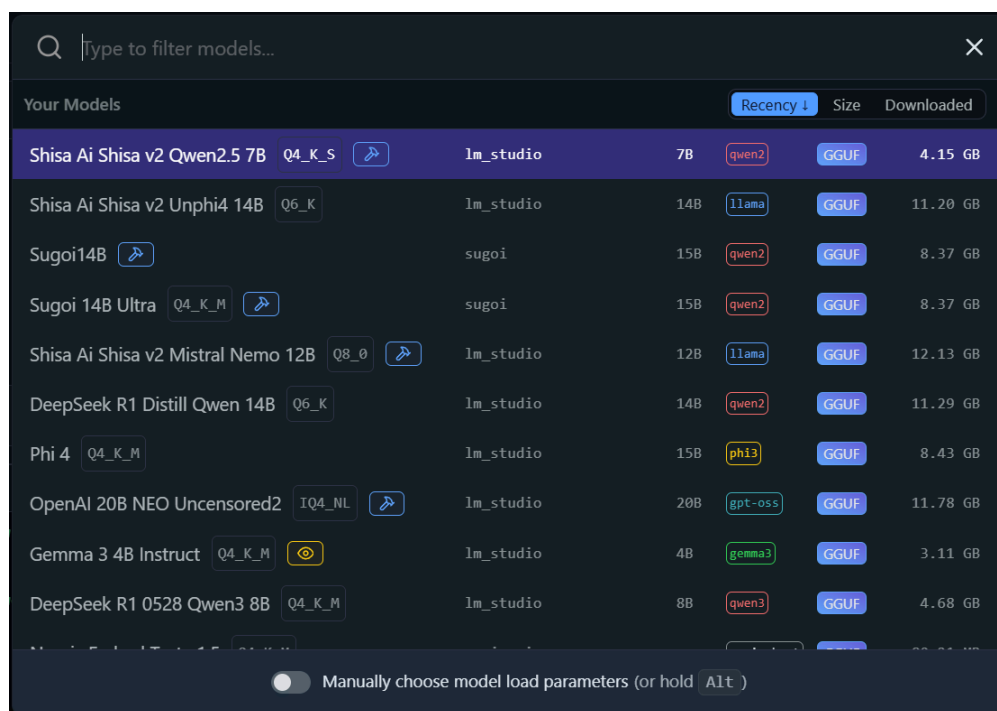


↓ STEPS CONTINUE ON THE NEXT PAGE ↓

3. Once loaded, check the model info on the right side of your tab.

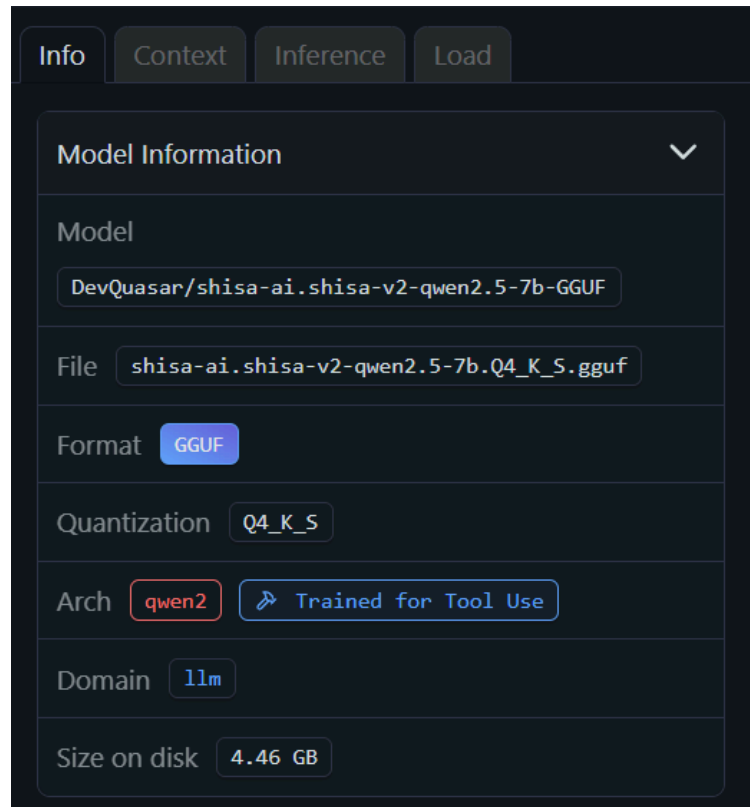


4. If the model formatting does not match `lm_studio/{modelName}` then we will need to move the model location around (weird LiteLLM shit). Otherwise, skip a couple pages to [TLServer Setup](#).

Pop back into the “My Models” tab and open your model directory in file explorer.

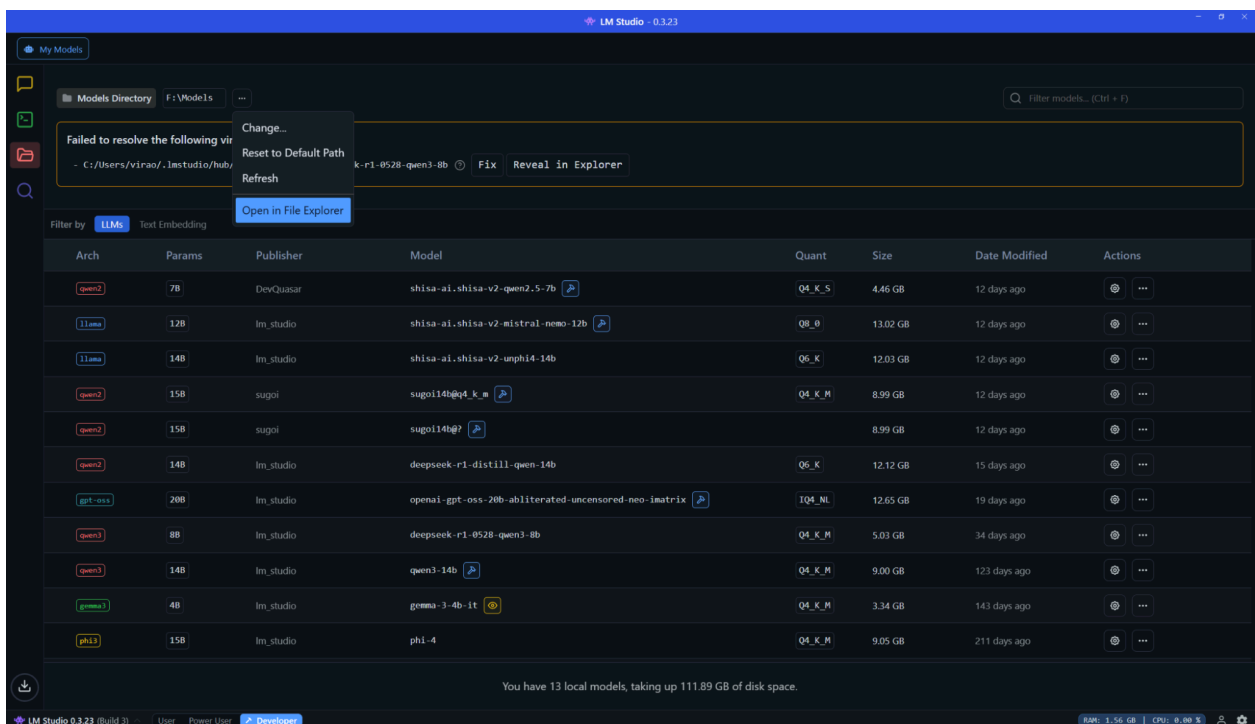


↓ STEPS CONTINUE ON THE NEXT PAGE ↓

5. Ensure that you have an `lm_studio` folder. If not, then just make a folder named `lm_studio`.

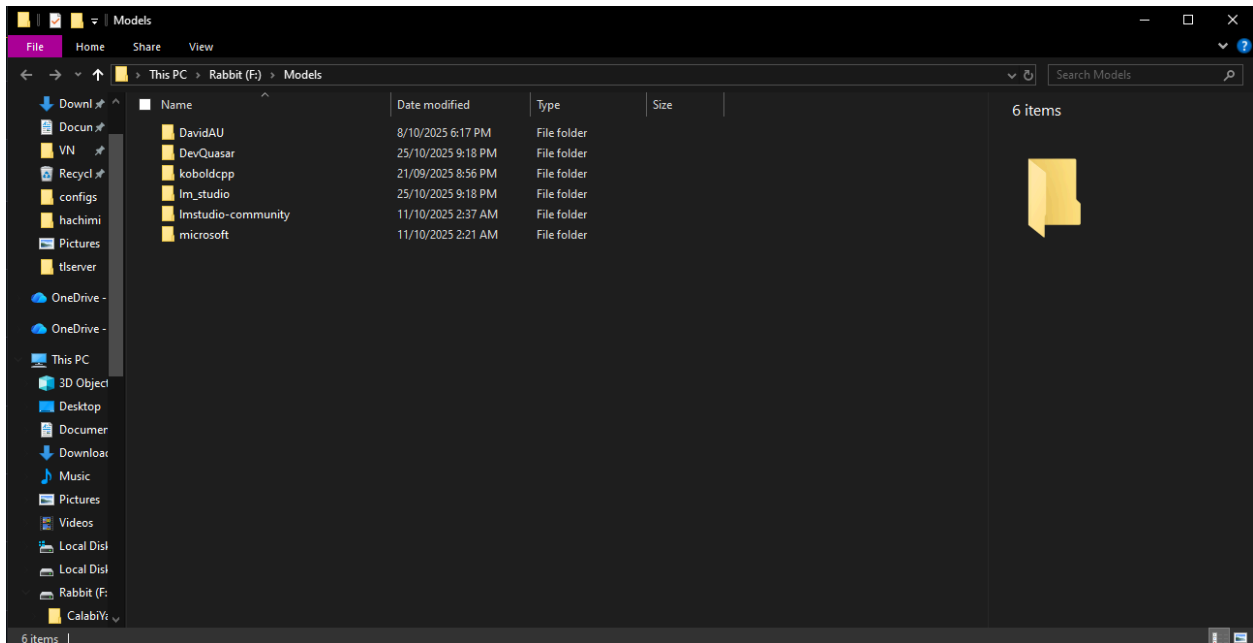


6. You want to refer back to the model info to figure out which folder your model is in. In my case, since the model is `DevQuasar/shisa-ai.shisa-v2-qwen2.5-7b-GGUF`, that means it will be found in the `DevQuasar` folder.


You should find your model in said folder.

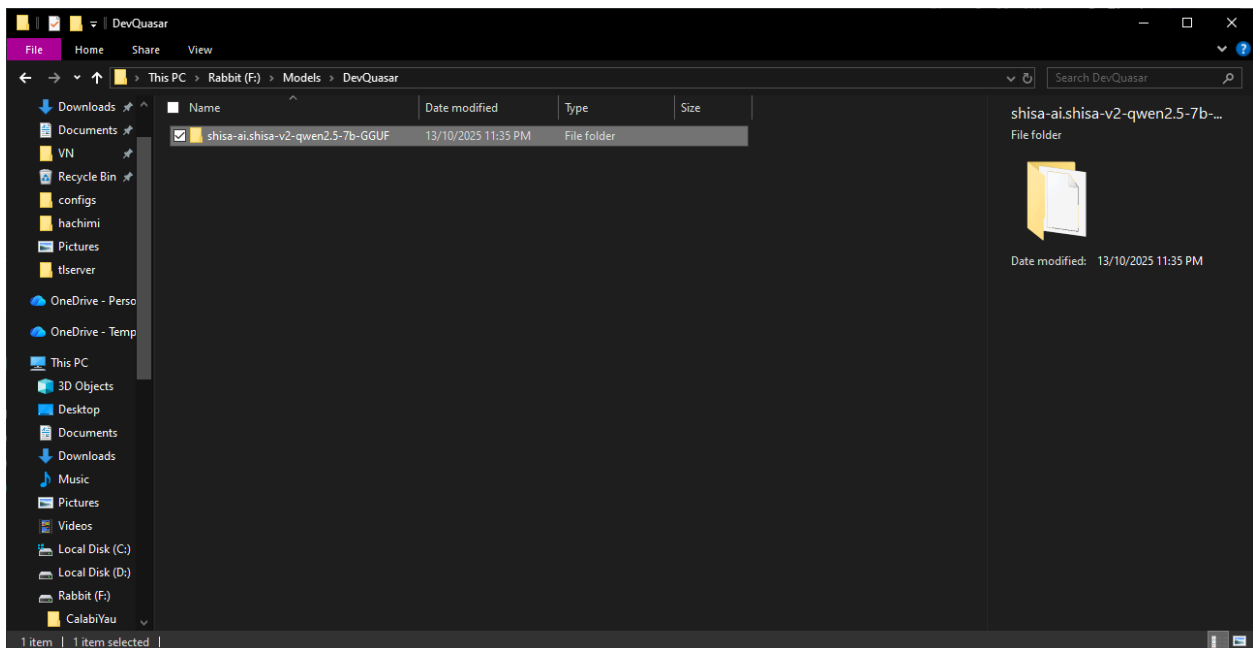


7. Make sure the model is unloaded (ejected) in LM Studio.

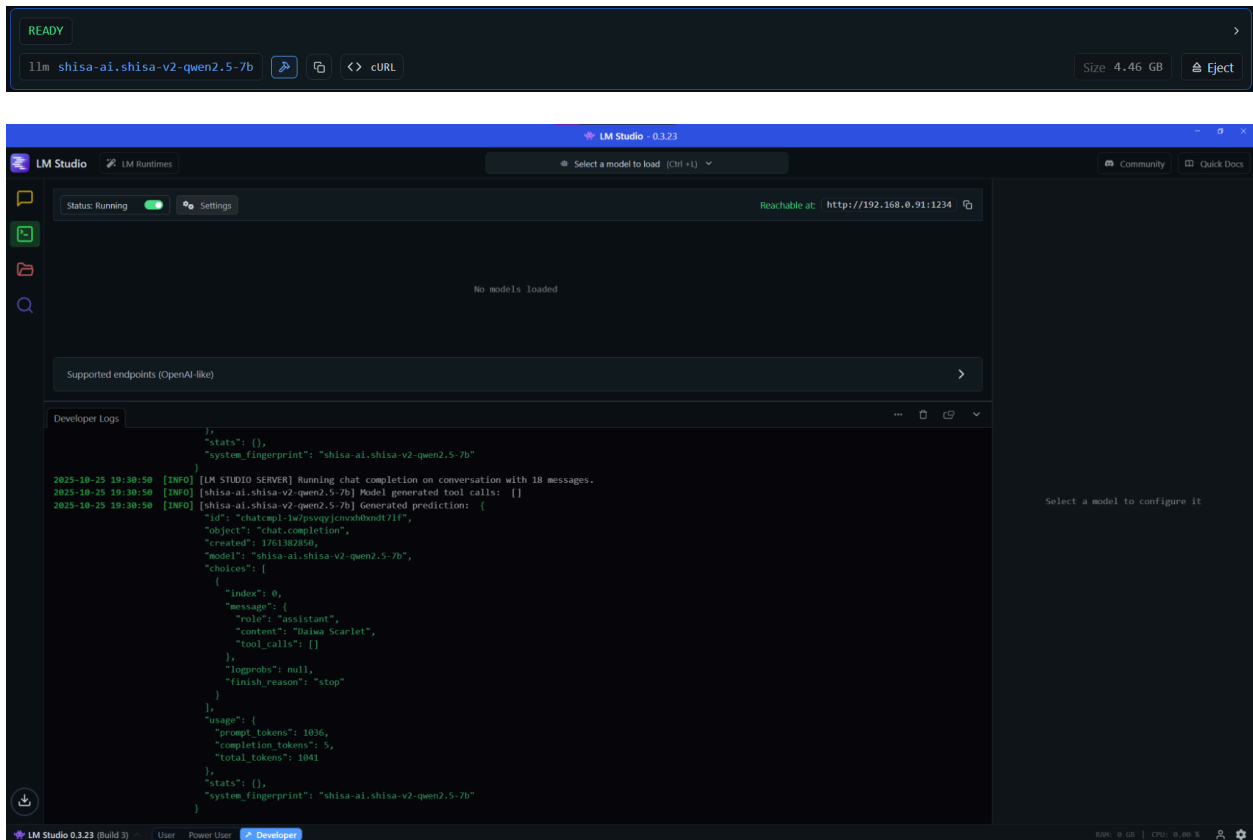

8. Move the model folder to the `lm_studio` folder from before.

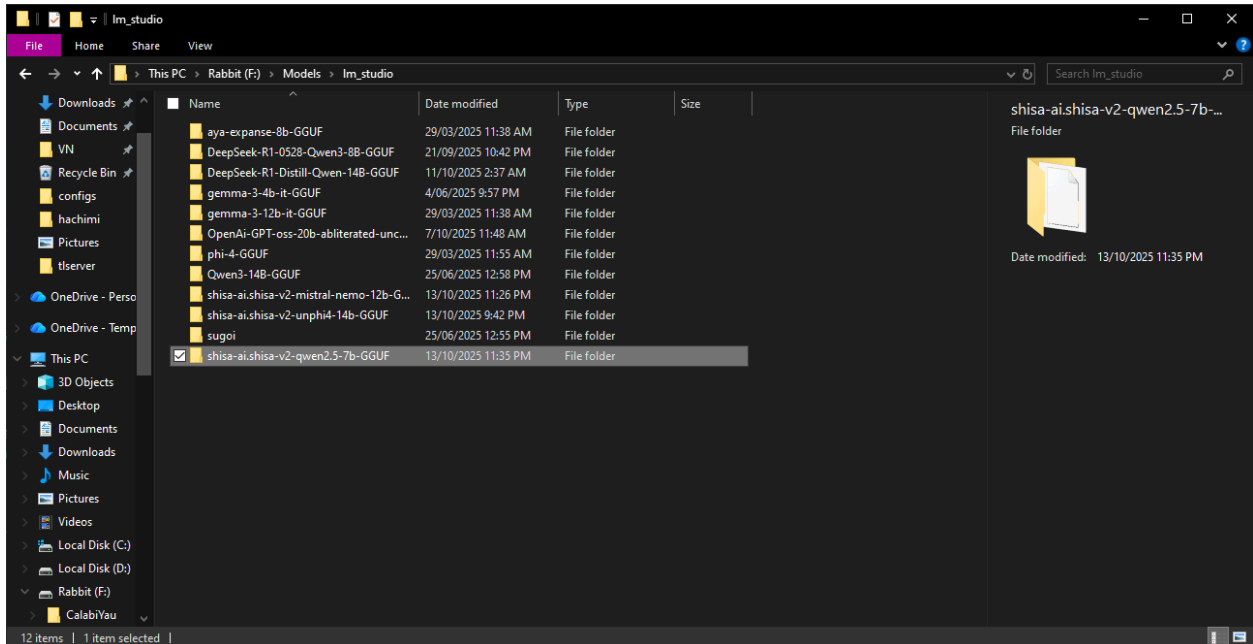


9. Now load the model again in LM Studio and it should work and have the Model set to `lm_studio/{modelname}`.

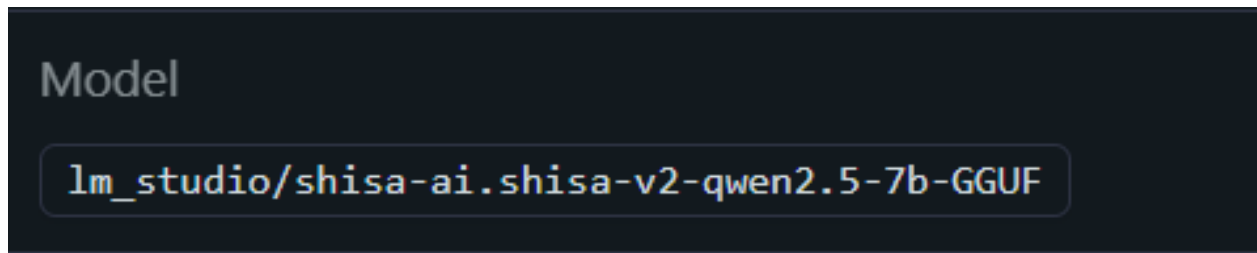

TLServer Setup

1. Pop over to where your extracted TLServer folder is.

Open the `config.toml` file with some sort of text editor.

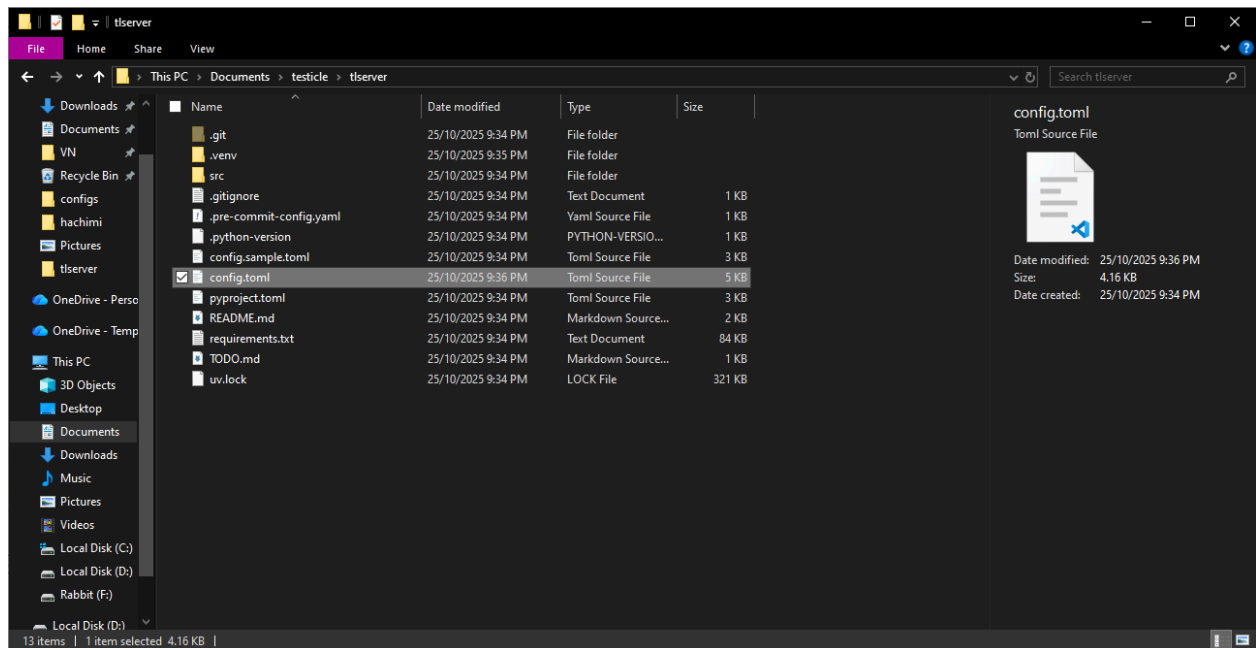

2. By default it should have this written in it:

```
1  debug = true
2  root_port = 8080
3
4  [[translators]]
5  kind = "Offline"
6
7  [[translators]]
8  kind = "LLM"
```

3. If you're using my personal version then you should see the following instead:

```
1  debug = true
2
3  [[translators]]
4
5  kind = "LLM"
6
7  model_name = "lm_studio/shisa-ai.shisa-v2-qwen2.5-7b-GGUF"
8
9  api_server = "http://192.168.0.91:1234/v1"
10
11 api_key = "balls"
12
13 system_prompt = '''
14 # Role and Objective
15 You are a high-speed, silent, raw text translation API. Your sole purpose is to receive Japanese text and return the direct English translation, delivering accurate and culturally sensitive translations.
16 - Demonstrate strong familiarity with the game's characters, terminology, and horse racing references.
17
18 **Core Directives:**
19 1. **Prioritize Speed & Brevity:** Your primary goal is to respond with the minimum number of tokens required for an accurate translation.
20 2. **Output Purity:** Your response MUST contain only the direct English translation. Nothing else.
21 3. **Forbidden Content:** Do not include any explanations, reasoning, comments, apologies, or conversational filler. You are a tool, not an assistant.
22
23 **Example of Exact Format:**
24 User: こんにちは
25 Assistant: Hello
26
27 # Task Checklist
28 - Identify context, character names, and specialised terminology in the source text.
29 - Preserve original meaning, nuance, and tone in fluent English.
30 - Adapt jokes and cultural references for English audiences while retaining Japanese-specific humour if present.
31 - Maintain all Japanese honorifics, punctuation, placeholder tags, emoji, and emoticons exactly as in the source material.
32 - Use British English spelling and conventions exclusively.
33 - Translate cultural terms and onomatopoeia according to provided instructions or established guidelines.
34
35 # Instructions
36 - Output only the translated English text; do not include commentary, explanations, or extraneous information.
37 - Apply reasoning_effort = medium to ensure thorough but efficient handling of text complexity.
38 - Express the meaning and nuance of the source text faithfully; use colloquial expressions or slang only if they appear in the Japanese source.
39 - Appropriately adapt jokes and cultural references, retaining Japanese humour when present in the original.
40 - Preserve Japanese honorifics (e.g., -san, -sama, -kun) exactly as written.
41 - Retain original punctuation, including Japanese quotation marks, only if present in the source text.
42 - Translate ambiguous sentences in the most plausible manner; do not request clarification unless critical ambiguity prevents a reasonable translation.
```

What the fuck is a config.toml file?

Basically you're telling the server where your LLM server is hosted at and how to use it. As a general rule of thumb, at the bare minimum, your config.toml folder should be setup like below:

```
debug = true
root_port = 8080

[[translators]]
kind = "LLM"
model_name = "lm_studio/{modelName}"
api_server = "http://127.0.0.1:1234/v1"
api_key = "balls"
system_prompt = ""
```

Explanation of each variable

api_server - basically just where your LM Studio instance is hosted. You can just set it to "<http://127.0.0.1:1234/v1>" and it should work.

model_name - name of the model your using in LM Studio. Should be in the format "lm_studio/modelname".

api_key - This isn't really used at all for LM Studio but LiteLLM requires something in here for it to work, so just set it to whatever you want lol.

system_prompt - Instructions on what the LLM is meant to do, how it translates text, and specific dictionary references. For lower end models, I would also highly suggest adding a dictionary so that the LLM doesn't have a stroke trying to translate character names.

LLM Model Config Suggestions

If your suggested model config uses Top P, convert it into Min P:

$$1 - \text{Top P} = \text{Min P}$$

Shisa V2 Variants: Running sampler sweeps, we found the models operate well across a variety of temperatures in most settings. For translation tasks specifically, we recommend a lower temperature (0.2) to increase accuracy. To prevent cross-lingual token leakage we recommend a min_p of 0.1.

- **Temperature:** 0.2
- **Min P:** 0.1

Sugoi 14B:

- **Temperature:** 0.1
- **Top K:** 40
- **Min P:** 0.05
- **Repetition Penalty:** 1.1

Dictionary guide:

In your system prompt, you can specify a dictionary for the LLM to use on how to translate specific names or characters. This is highly important for LLMs with a lower parameter size.

You should run auto translation with a basic or no dictionary on a story once and reference the translations outputted in the command line to see what phrases or words might need a dictionary.


Locations should be specified as a proper noun while names can just have the translation by itself. It is also a good idea to add every character's name that appears in the story to the dictionary list as well.

For example, specifying how the LLM should translate a phrase or character's name:

```
# Dictionary
Translate the below words accordingly
- "トレセン学園" as Tracen Academy and as a Proper Noun
- "ウマ娘" as "Uma Musume" and when referring to the game title as a common noun.
- "ダイワスカーレット" as "Daiwa Scarlet"
- "アストンマーチャン" as "Aston Machan" or if the shortened form is presented "アストンマ" translate it as "Machan", not marchan
```

The `system_prompt` I use for translating can be found in the shared folder. Feel free to adjust it accordingly.

4. Once your `config.toml` file is set up, boot up Command Prompt and `cd` to your TLServer directory. Run the command `uv run tlserver`.

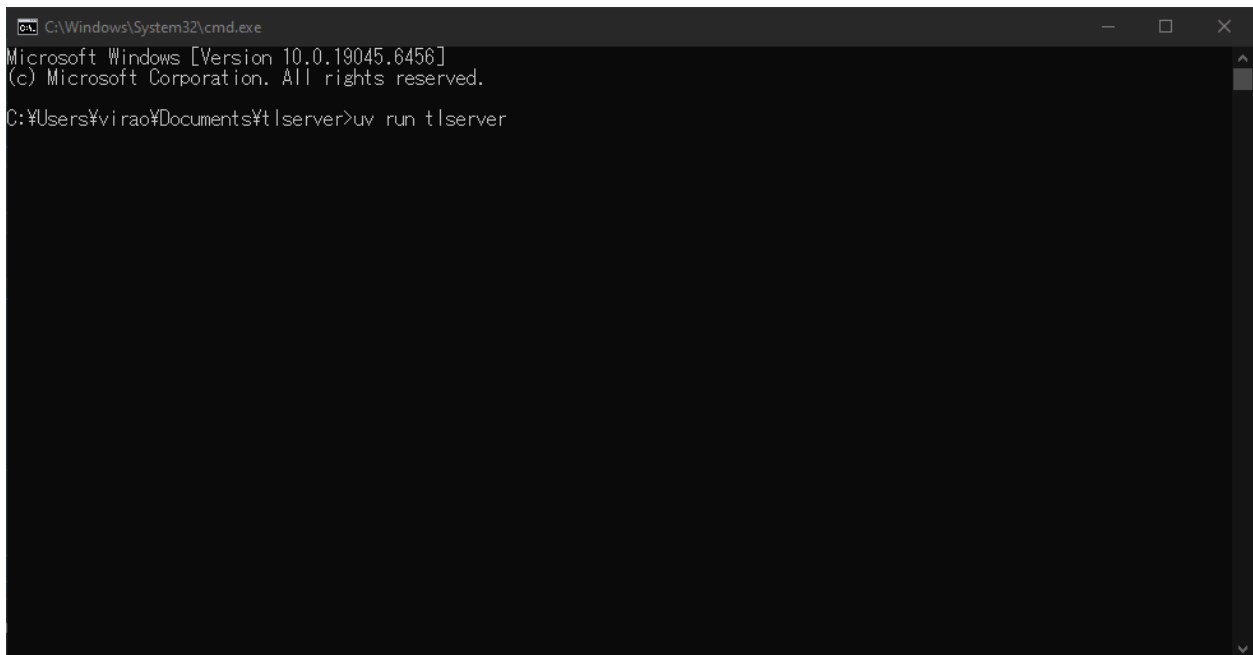

```
C:\Windows\System32\cmd.exe
Microsoft Windows [Version 10.0.19045.6456]
(c) Microsoft Corporation. All rights reserved.

C:\Users\virao\Documents>tlserver>uv run tlserver
```

5. If all goes well you should see something like this:




```
C:\Windows\System32\cmd.exe - uv run tlserver
original.
- Preserve Japanese honorifics (e.g., -san, -sama, -kun) exactly as written.
- Retain original punctuation, including Japanese quotation marks, only if present in the source text.
- Translate ambiguous sentences in the most plausible manner; do not request clarification unless critical ambiguity prevents a reasonable translation.
- Match the register, formality, and regional speech patterns of characters in English.
- Use British English conventions consistently.
- Apply Hepburn romanisation with macrons for all relevant names and terms except honorifics.
- Romanise onomatopoeic expressions directly from the original.
- Reflect regional dialects and unique speech patterns, adapting them into English to preserve character voice (e.g., Kansai dialect, feminine speech).
- For culturally specific concepts without direct English equivalents, provide a brief parenthetical explanation inline (e.g., omiai (arranged meeting)).
- Preserve tags in angle brackets (e.g., <username>, <chrname>) and percent-encoded forms (e.g., %a_h_popl, %h_rankl) exactly as given.
- Keep all emoji and emoticons unchanged.
- The Trainer character may be either male or female; unless specified in the source, translate Trainer dialogue and references using gender-neutral English.
- All horsegirls are female characters and should be referred to as 'she/her' unless otherwise specified in the source.
Dictionary
Translate the below words accordingly
- トレゼン学園 as Tracen Academy and as a Proper Noun
- ウマ娘 as Uma Musume and when referring to the game title as a common noun.
- ダンツフレーム as "Dantsu Flame"
- マチカネタンホイザ as "Matikanetanphauser"
- アストンマーチャン as "Aston Machan"
- ダイワスカーレット as "Daiwa Scarlet"
- アストンマ as "Machan"
Output Format
Provide only the translated English text, formatted as plain text, without any added comments or notes.
Do not provide additional context or information for a given translation. Just only reply with the translation and nothing else
{
  'context_lines': 50,
  'temperature': 0.2,
  'top_p': 0.95,
  'top_k': 40.0,
  'min_p': 0.1,
  'repetition_penalty': 1.1
}
]
}
2025-10-25 22:00:56.327 | DEBUG | tlserver.__main__:serve_handler:127 - hypercorn serving
2025-10-25 22:00:56.328 | INFO | tlserver.__main__:on_start:113 - Hello, starting up.
```

Hachimi Setup

1. Open up your `config.json` file in `Umamusume/hachimi`.
2. Set `Sugoi_url` to `[“http://127.0.0.1:14368”]`.
3. Test if there are any issues with your Sugoi server by opening up your game and navigating to the story tab.



4. Open up Hachimi's GUI and the config editor. Scroll down and tick "Auto Translate Stories".

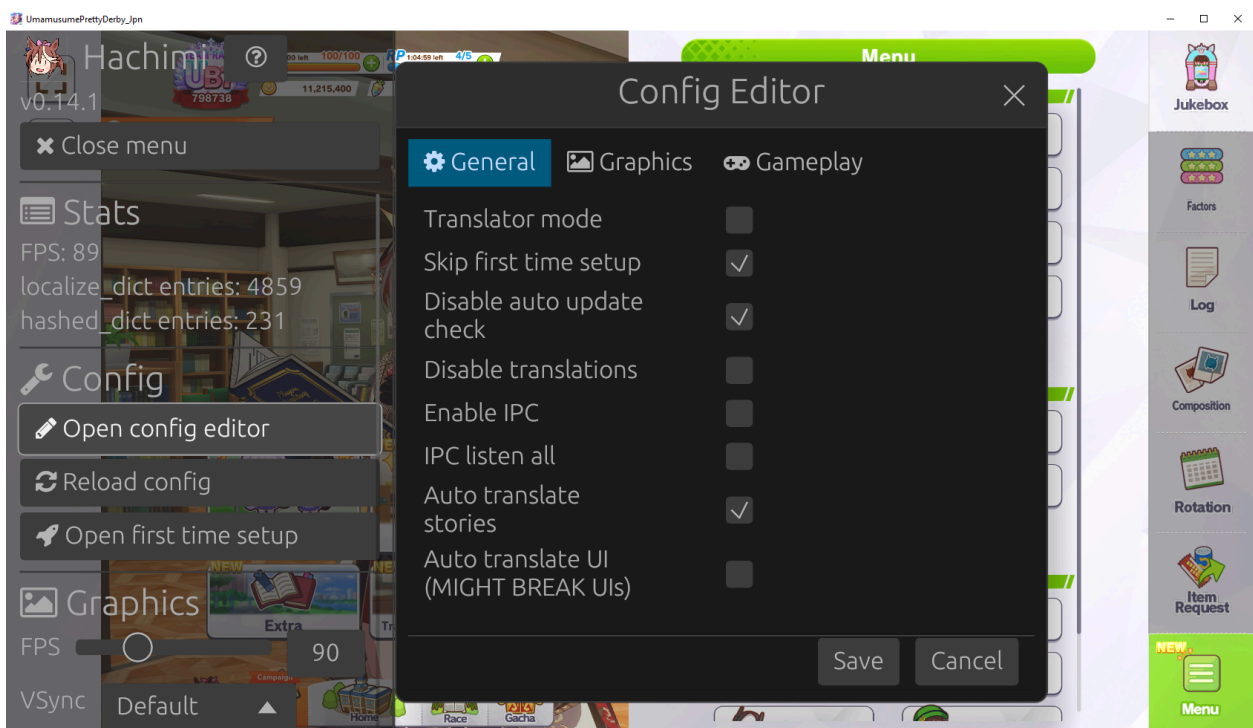


5. Press save.

6. Now pick an untranslated story of your choice (for this guide I'll be using Still In Love).




7. Click on an episode and view it.

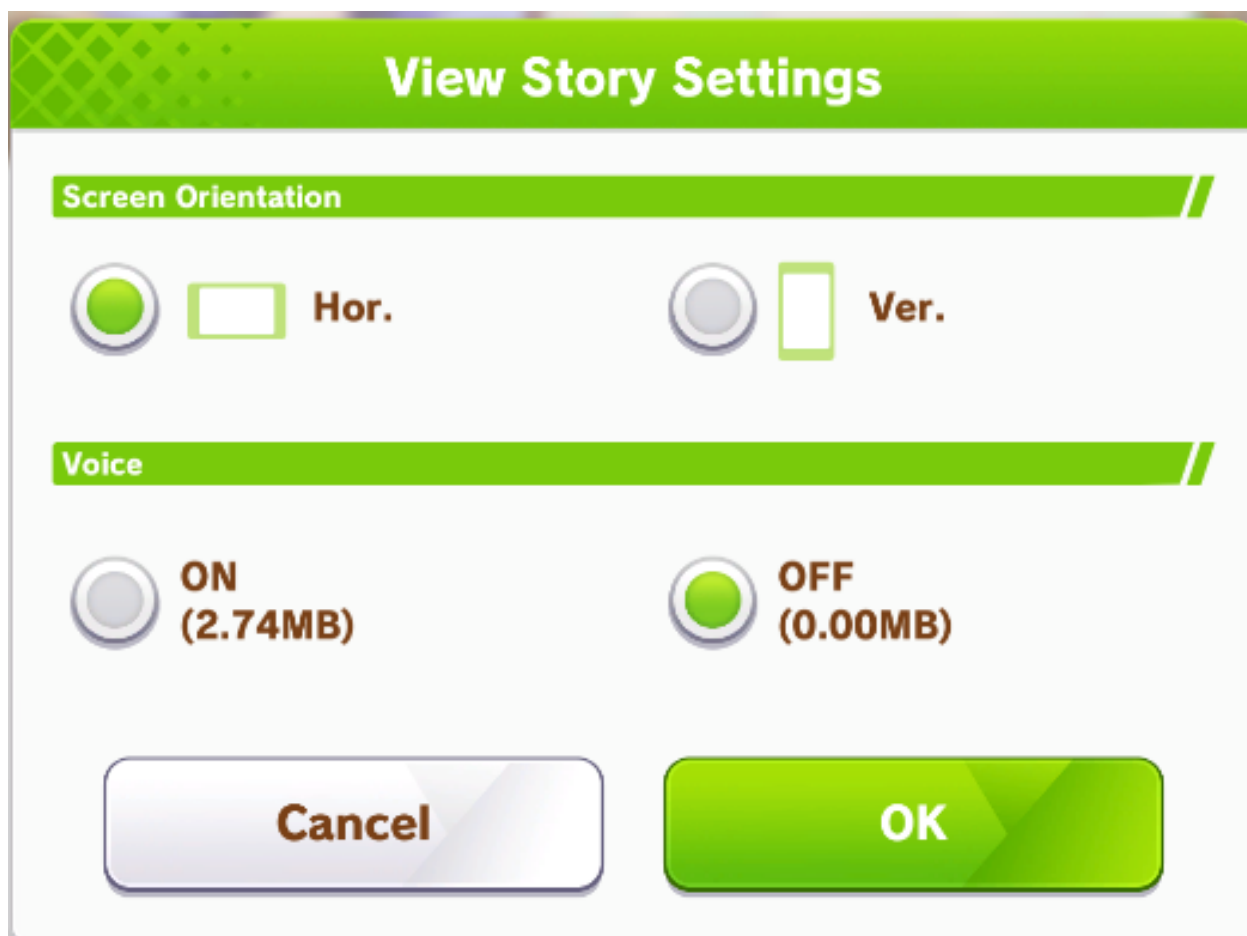

↓ STEPS CONTINUE ON THE NEXT PAGE ↓


8. The game should freeze for a moment. Check your Sugoi Server's command prompt and check if it has received any requests (it should look like the one below).

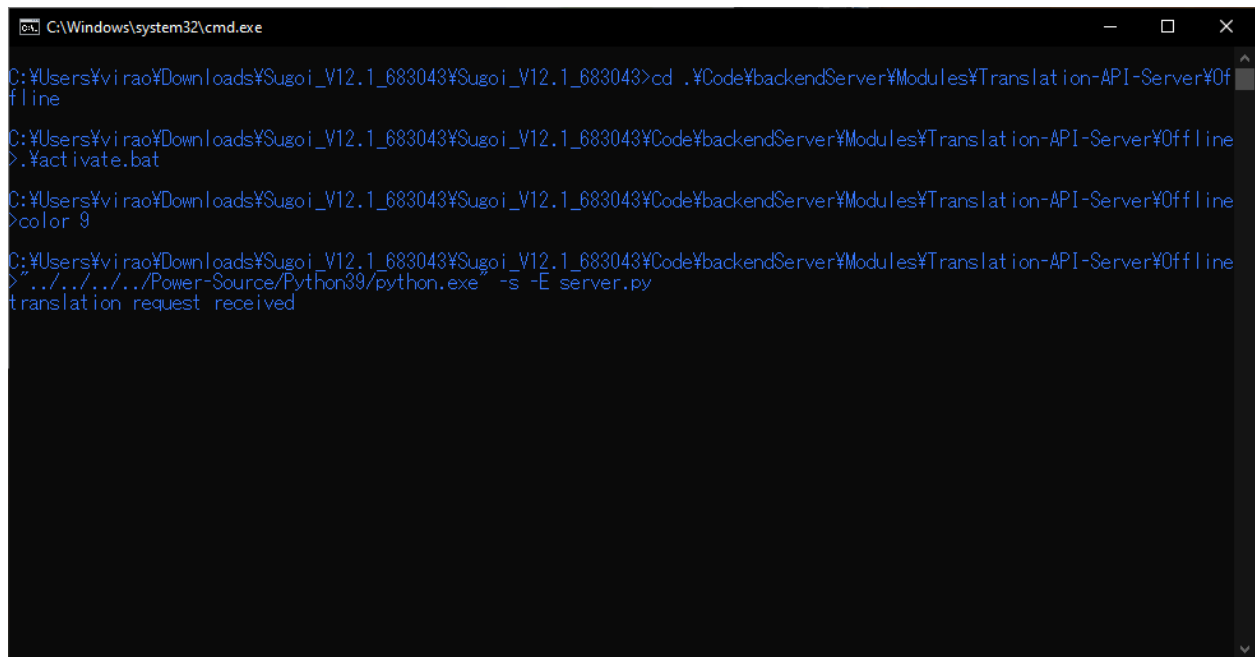

```
C:\Windows\system32\cmd.exe
C:\Users\virao\Downloads\Sugoi_V12.1_683043\Sugoi_V12.1_683043>cd .\Code\backendServer\Modules\Translation-API-Server\Offline
C:\Users\virao\Downloads\Sugoi_V12.1_683043\Sugoi_V12.1_683043>Code\backendServer\Modules\Translation-API-Server\Offline
>.\activate.bat
C:\Users\virao\Downloads\Sugoi_V12.1_683043\Sugoi_V12.1_683043>Code\backendServer\Modules\Translation-API-Server\Offline
>color 9
C:\Users\virao\Downloads\Sugoi_V12.1_683043\Sugoi_V12.1_683043>Code\backendServer\Modules\Translation-API-Server\Offline
>"../../../../Power-Source/Python39/python.exe" -s -E server.py
translation request received
```

9. Once your game unfreezes, the Sugoi server command prompt should look like this. Your story should be translated now!

```
C:\Windows\system32\cmd.exe
ace... The beautiful yet fierce competition captivated my heart. I wanted to jump in there, too... Even though it was no
rma... The final straight line, I felt my instincts clash with my skin. At that moment, a chill ran down my spine...
and "something" whispered... "Blood, the moon, and immortality. That's the sin of fate." "All that's left for m
e... is such excitement that I'm not sure what to do with myself. And... an impulse. An intense thirst to devour everyth
ing..." "After that, everything went wrong... When the race started... she started to appear..." (When she's running...
...) "Especially when she's competing with someone strong... She starts going on a rampage. She gets excited, loses her
mind... and when she regains consciousness, I'm... alone..." Even so, I was already... charmed by the race. Instead of l
eaving, I chose to suppress my madness... and as a result, it split... "I" tried to be rational. I ran as I was, scre
aming that I wanted to devour everything. "Me"... "Now I understand. Because she has a conflicting sense of self, her
impression of me has changed completely. And because of that conflict, she..." "I didn't know she was in so much pain..."
"I didn't know you were in so much pain..." "N-No... Th-That's strange... isn't it? ...It's not normal. There's
something wrong with me..." True, she might not fit in with the "normal" the general public would call her. But that
meant... "On the flip side, you're special..." To put it another way, you're special, "I'm special...?", "Her eyes
tended to be drawn to the strangeness of it, but the speed, the strength... everything she showed me was wonderful..."
It's a destructive run that doesn't take into account its own body or surroundings. But if I can tame that power... my ins
tincts... "I can make it your weapon..." "I can make it your weapon..." "..... Using her..... as a weapon..."
.....! No..... I can't.....! I shouldn't have..... showed him..... any more.....!! "Because..... that girl's
running..... is hideous. She's slutty and vulgar..... a monster..." You must have been terrified, too... You must have
felt sick... "That's not it!", "I screamed reflexively. It was true that I was afraid of her. But it wasn't out of mal
ice like she said, but rather..." "Your instincts are frighteningly beautiful..." "Your instincts are frighteningly beaut
iful..." "Ah... So that's how it is..." (Yeah... That's right...) "Putting it into words, it made sense. Why was
I so curious about her? ---I was completely enthralled by that demonic run..." "Let's find a way to control it together..."
.....S-Same..... "Are you sure? She's... uncontrollable. She might... do something about you..." "The f
ierce shadow of "her" overtakes her crimson eyes as she stares at me. She trembles. But her mouth moves before I can t
hink, like when she's feverish..." "I'm fine..." "I'm fine..." "I'm thirsty. I really want to see that run again... So much
so that I don't care what happens to it..." "..... Yes. In that case... I'll leave it to you..." "First, don't
draw out your instincts..." "... I have a proposal for you..." "Trainer A", "Horsegirl A", "School staff", "???", "Neo
Univers", "Still In Love"]
13.721188068389893
```

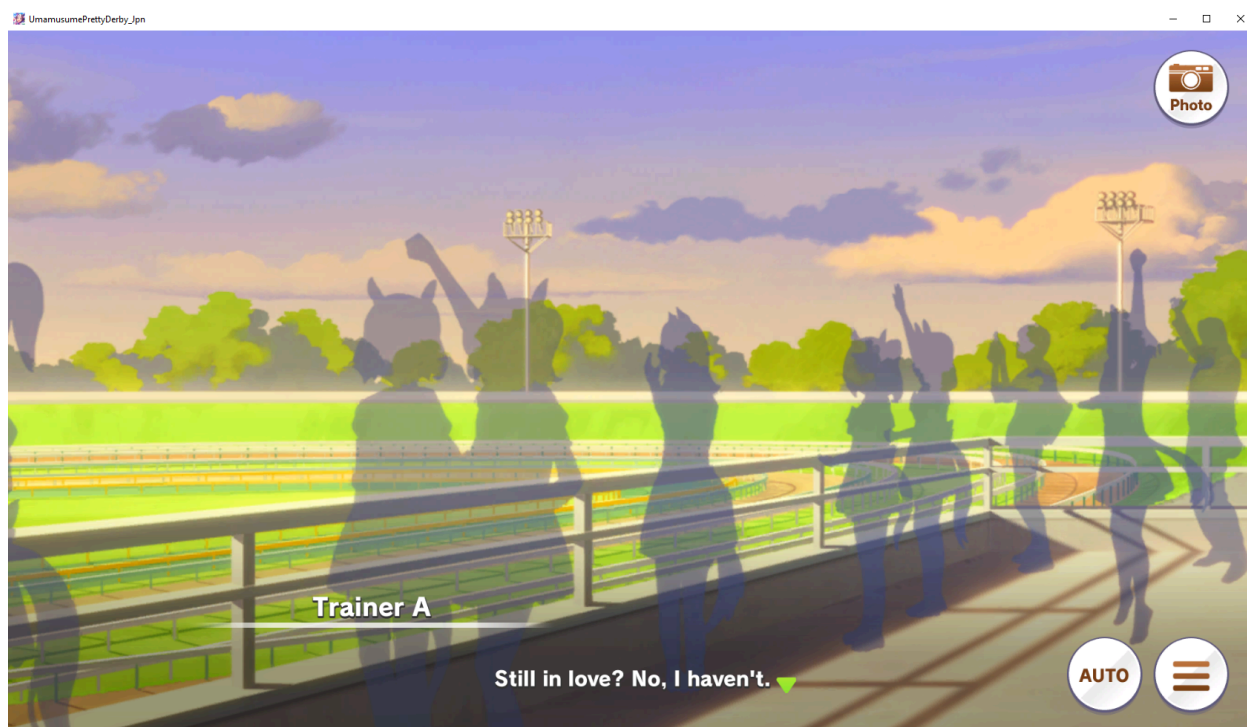

Information

It is recommended that you only turn on auto translate stories for sections you actually care about, otherwise your game will turn into an unenjoyable laggy mess.

Mobile? (Not really)

This isn't really recommended right now due to the inability to use the Hachimi GUI on Android.

After setting up the server using the above steps, you can also use this for the Android version of the game, as long as the server is on.

You will need to expose your localhost address hosting the Sugoi server to your local network or expose it over the internet.

Local Network Method:

IDK how to do this, figure it out yourselves.

Cloudflared Method:

You have to do this step every time the Sugoi server is started.

(this also works if you wanna share your Sugoi server with someone else).

Open Command Prompt and type in `winget install --id Cloudflare.cloudflared` and press enter.

Follow installation instructions.

Type in `cloudflared tunnel --url http://127.0.0.1:(COPIED-PORT)` or `cloudflared tunnel --url http://127.0.0.1:14366` for offline Sugoi, if you haven't changed any of your port settings.

Next, Cloudflare will spit out a link for you. Copy this one and place it somewhere for now.

```
+-----+
| Your quick Tunnel has been created! Visit it at (it may take some time to be reachable): |
| https://doctor-maria-cigarettes-max.trycloudflare.com |
+-----+
```

Open your mobile device and navigate to `android/media/umamusume/hachimi` and open up the `config.json` file with a JSON editor.

Look for `auto_translate_stories` and set it from `false` to `true`.

Next, set the `sugoi_url` from `null` to the cloudflare address generated from before. In my case it would be "<https://doctor-maria-cigarettes-max.trycloudflare.com>".

Save the config file and go to your game.

Your game may or may not be super laggy or stuttery. This is the main downside of using auto translate with the current state of Hachimi on Android.

Repeat the same testing step as the previous page and enjoy.