

Hachimi Autotranslate Stories Guide

Sugoi Offline Translator | tlserver

Written by Spoot :3

⚠ Warning

This requires a half decent device to run, as this is run locally using your pc's CPU/GPU (depending on your choice). This will also cause your game to freeze/lag a lot more.

This technically is meant only for PC, but you can get it to work on a mobile device by running Sugoi locally on a PC and exposing the Sugoi server address either on your local network or the internet so that your mobile device can connect to the Sugoi server.

For this guide, I will be using a trimmed down [Sugoi V12.1](#) with only the translation server functionality. You can try to use your own version, but it is not guaranteed to work, or if the instructions will be the same at all (though, I tested this on the latest V14 and it also works).

❗ Important


AUTOTL VIA THIS METHOD IS BROKEN ON V0.26, PLEASE DOWNGRADE TO v0.25.4 BEFORE PROCEEDING



Sugoi Offline Guide (non-LLM, kinda old)

(Optional) If you have an NVIDIA GPU and want to use it to run translations:

Download the gpu installer [here](#) and extract the folder somewhere.

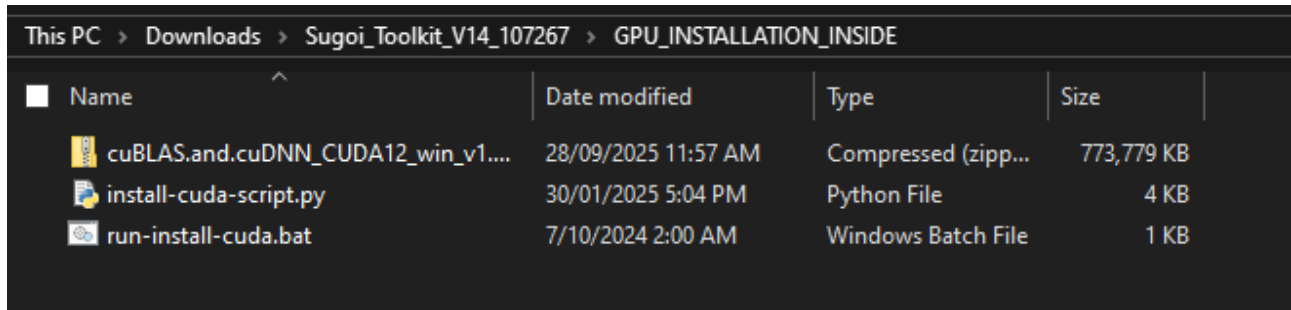

This PC > Downloads > Sugoi_Toolkit_V14_107267 > GPU_INSTALLATION_INSIDE


Name	Date modified	Type	Size
cuBLAS.and.cuDNN_CUDA12_win_v1....	28/09/2025 11:57 AM	Compressed (zipp...	773,779 KB
install-cuda-script.py	30/01/2025 5:04 PM	Python File	4 KB
run-install-cuda.bat	7/10/2024 2:00 AM	Windows Batch File	1 KB

Run the “run-install-cuda.bat” file and continue with the command prompt instructions.

Main Guide


If using the Sugoi install linked in this doc:

Navigate to your Sugoi folder and run the “run.bat” file.

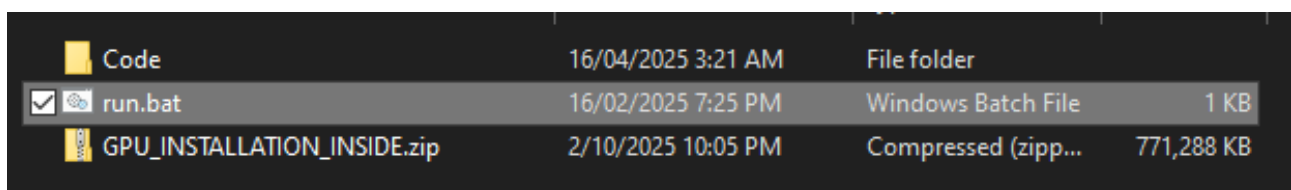

Code	16/04/2025 3:21 AM	File folder	
run.bat	16/02/2025 7:25 PM	Windows Batch File	1 KB
GPU_INSTALLATION_INSIDE.zip	2/10/2025 10:05 PM	Compressed (zipp...	771,288 KB

This should open up a command prompt and your server should be up and running.

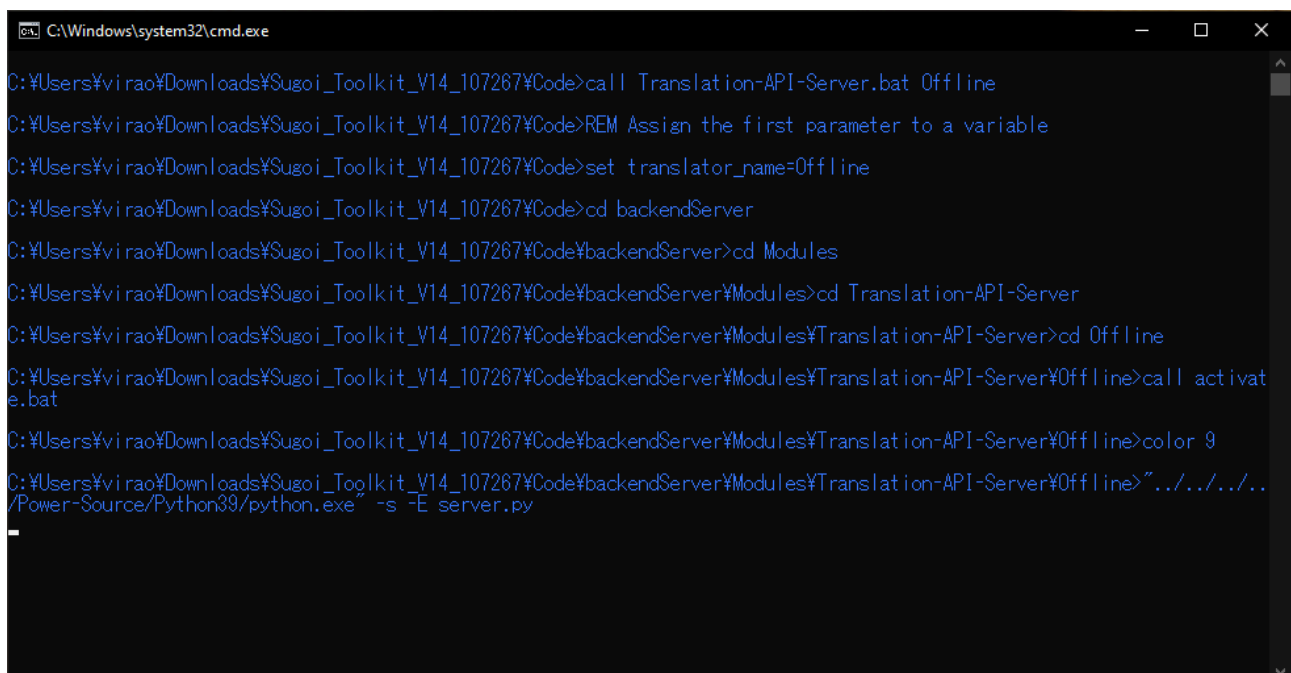


```
C:\Windows\system32\cmd.exe
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code>call Translation-API-Server.bat Offline
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code>REM Assign the first parameter to a variable
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code>set translator_name=Offline
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code>cd backendServer
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code\backendServer>cd Modules
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code\backendServer\Modules>cd Translation-API-Server
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code\backendServer\Modules\Translation-API-Server>cd Offline
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code\backendServer\Modules\Translation-API-Server\Offline>call activate.bat
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code\backendServer\Modules\Translation-API-Server\Offline>color 9
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code\backendServer\Modules\Translation-API-Server\Offline>"../../../../Power-Source/Python39/python.exe" -s -E server.py
```

If using any other version of Sugoi (The below is using V14 as an example):


Navigate to your Sugoi folder and run the “Sugoi-Translator-Toolkit (click here).bat” file.

	Code	5/09/2025 1:34 PM	File folder	
	Example_Input_To_Test	17/07/2025 1:04 PM	File folder	
	GPU_INSTALLATION_INSIDE	28/09/2025 11:56 AM	File folder	
	Sugoi-Manga-Translator-Premium_V1.0	17/07/2025 1:04 PM	File folder	
	changeLog_V14.txt	6/09/2025 8:14 PM	Text Document	7 KB
☒ 	Sugoi-Translator-Toolkit (click here).bat	15/07/2024 5:56 PM	Windows Batch File	1 KB
	User-Settings.json	6/09/2025 1:41 PM	JSON File	1 KB

It should open up a menu window. You want to look for “Translation Server Offline” and click on it.

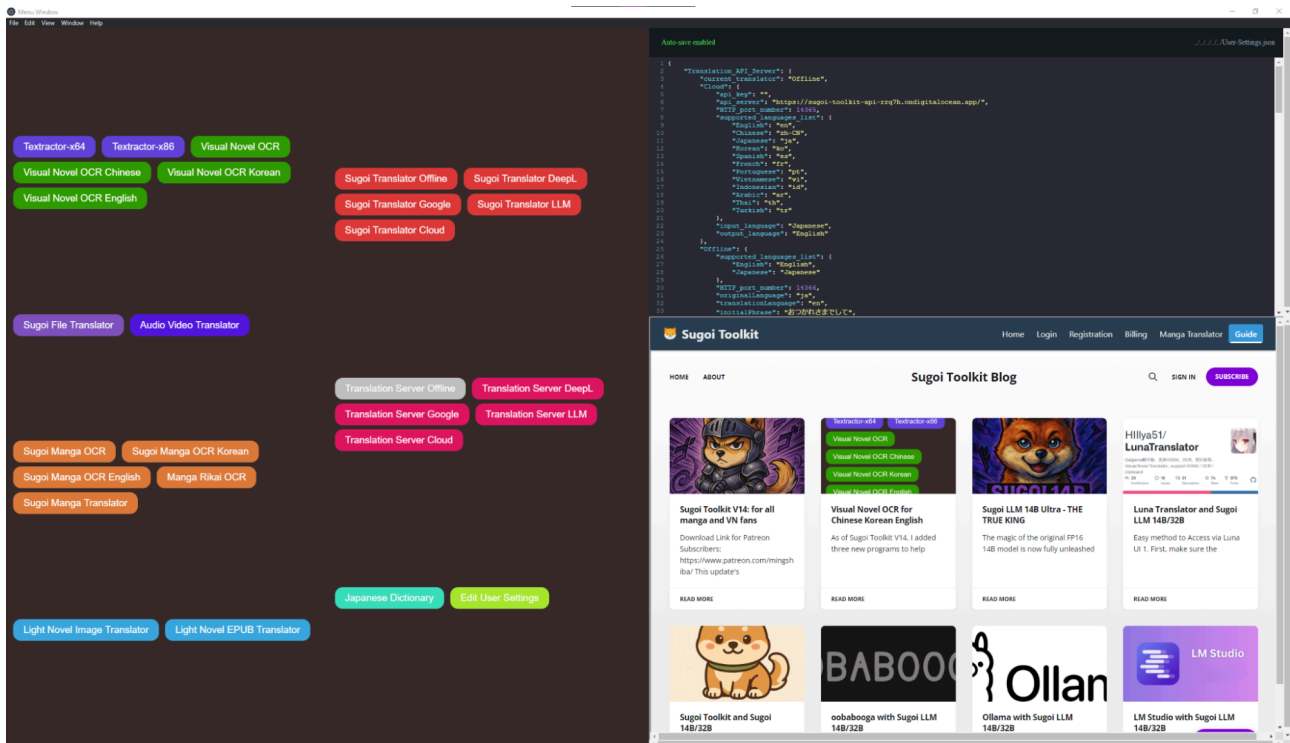

It should open a command prompt and now your translation server is all good to go.

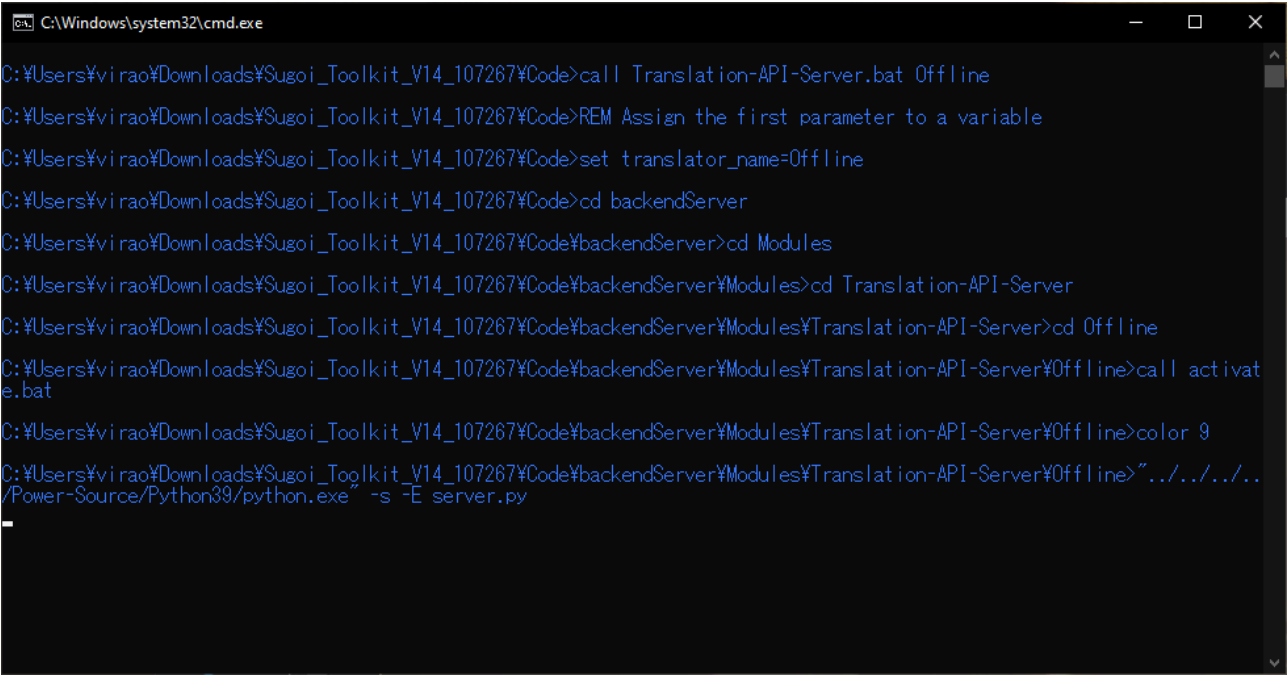

```
C:\Windows\system32\cmd.exe
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code>call Translation-API-Server.bat Offline
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code>REM Assign the first parameter to a variable
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code>set translator_name=Offline
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code>cd backendServer
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code\backendServer>cd Modules
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code\backendServer\Modules>cd Translation-API-Server
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code\backendServer\Modules\Translation-API-Server>cd Offline
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code\backendServer\Modules\Translation-API-Server\Offline>call activate.bat
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code\backendServer\Modules\Translation-API-Server\Offline>color 9
C:\Users\virao\Downloads\Sugoi_Toolkit_V14_107267\Code\backendServer\Modules\Translation-API-Server\Offline>"../../../../Power-Source/Python39/python.exe" -s -E server.py
```

Unless your Sugoi server is running at a different port, you should not need to do this step (This is specifically for every other version that's not the V12 listed in the doc earlier) Skip to Next step if using the doc's V12:

To find which port your server is running at, navigate to "Sugoi/Code" and look for the "User-Settings.json" file.

Open up the JSON file and look for a list starting with ["Offline"].


Now look at the value set as "HTTP_port_number" and copy the value (in this case, 14366)

```
},
"Offline": {
  "supported_languages_list": {
    "English": "English",
    "Japanese": "Japanese"
  },
  "HTTP_port_number": 14366,
  "originalLanguage": "ja",
  "translationLanguage": "en",
  "initialPhrase": "おつかれさまでして",
  "gpu": false,
  "device": "cuda",
  "intra_threads": 0,
  "inter_threads": 4,
  "beam_size": 5,
  "repetition_penalty": 3,
  "silent": false,
  "disable_unk": true
}
```

Close the JSON file and head to your `Umamusume/hachimi` folder.

 localized_data	2/10/2025 10:58 PM	File folder	
 .tl_repo_cache	2/10/2025 10:58 PM	TL_REPO_CACHE ...	301 KB
 config.json	2/10/2025 10:59 PM	JSON File	2 KB
 UnityPlayer_orig.dll	30/09/2025 11:39 AM	Application exten...	30,281 KB

Open the config.json file and find “sugoi_url”, it should be set to null by default

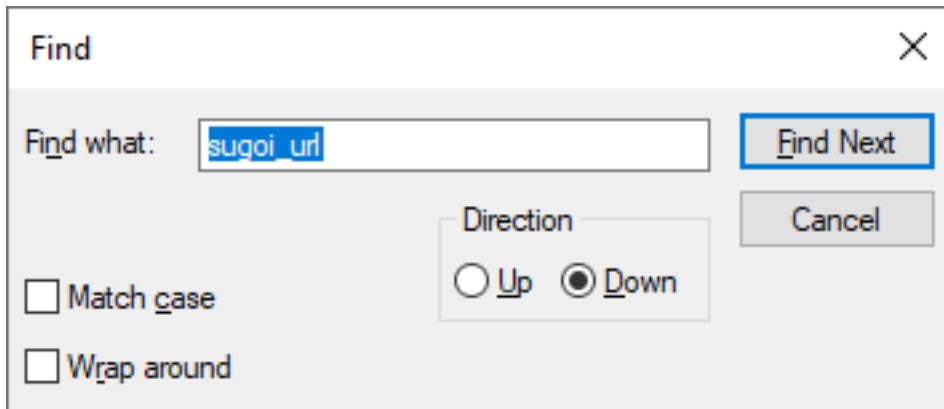

Sugoi LLM Guide (LLM, really good, demanding)

Credits to Rika for the TLServer :3

Prerequisites:

I will be using Python 3.11 and uv to run this.

Download [Python 3.11](#) and make sure it is added to the system path on install.

Download [uv](#) by running “pip install uv” in your commandline.

You will also need to install LM Studio (or any other OpenAI compatible backends, etc).


Download [LM Studio](#) and it should be a straightforward setup.

Main Guide:

Pop over to this link [here](#) and download the source as a zip, and extract it somewhere.

Or run `git clone https://github.com/de-odex/tlserver.git` in your command line.

Alternatively download it from this [link](#) for my exact personal setup.

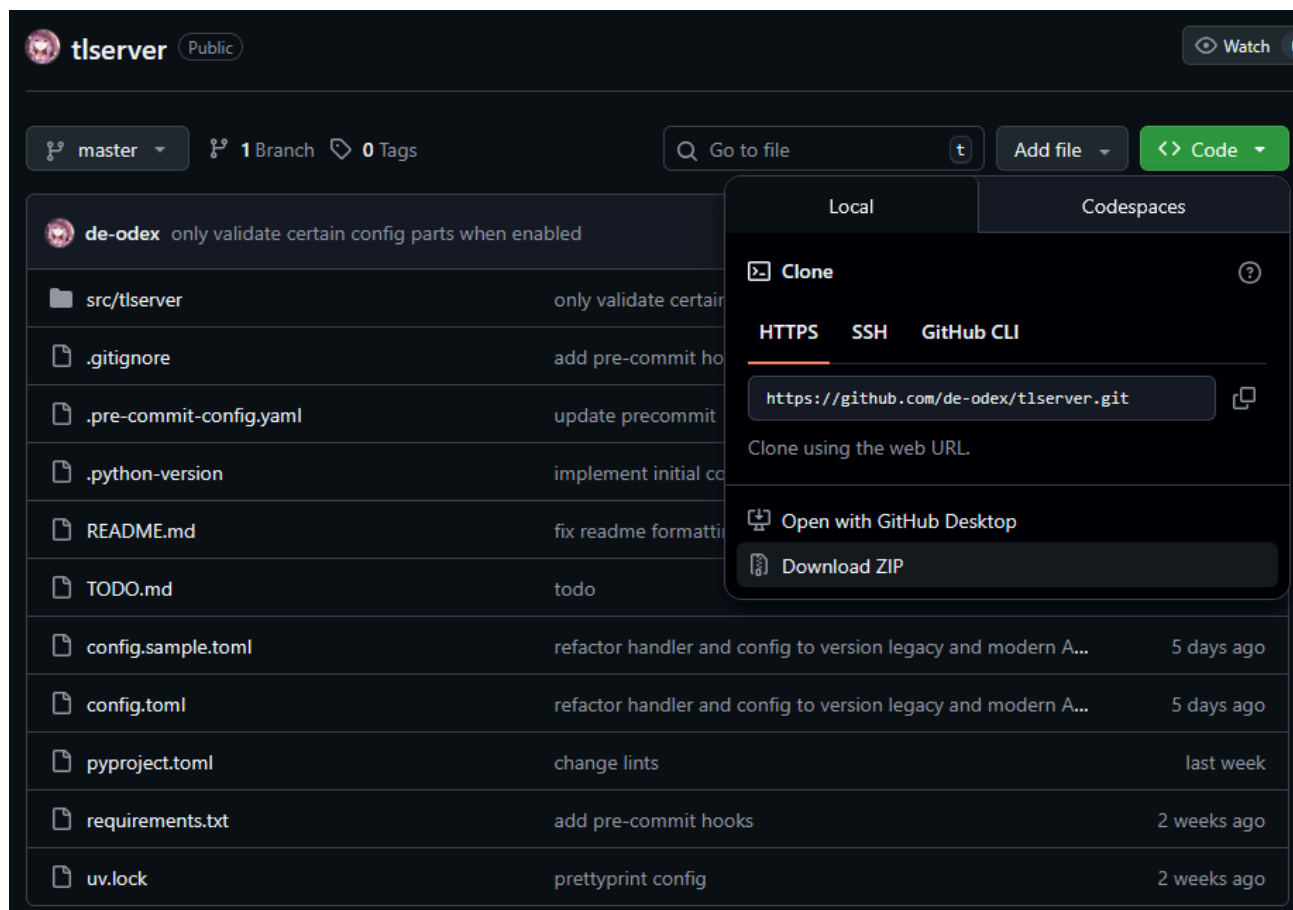


LM Studio Setup:


By default LM Studio should be able to detect your GPU, but just in case it doesn't, we can set it up manually.

Open up LM Studio and run through the setup if you haven't already.


Navigate to the bottom right of your window and click on the settings icon (or press `ctrl + ,`).

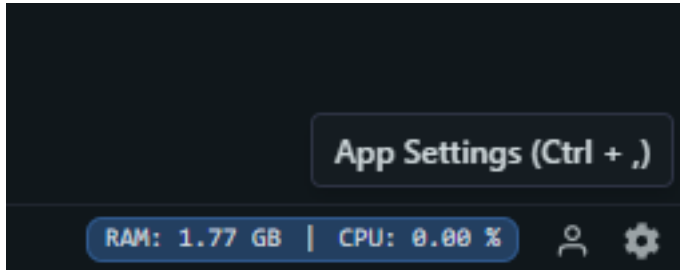


From here you'll be greeted by this window here. Navigate to the runtime tab.

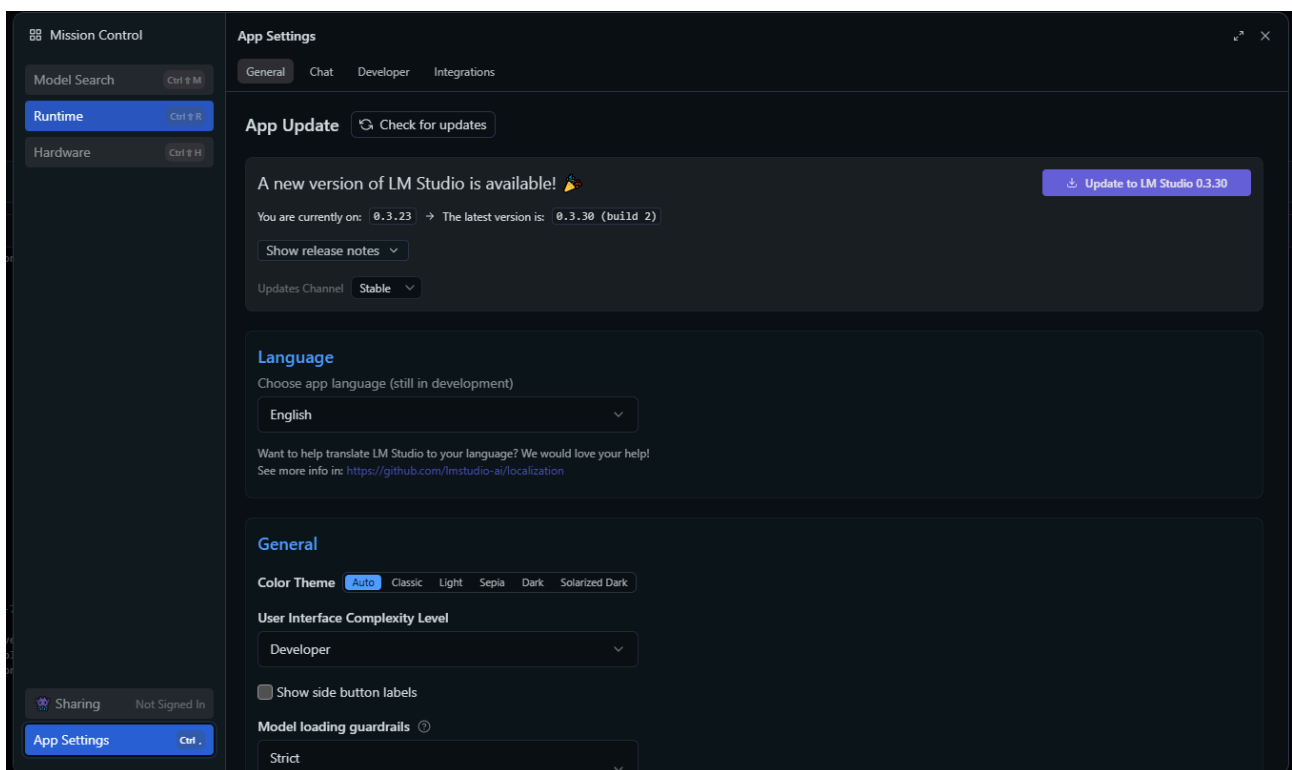


You'll be greeted by the list of runtimes.

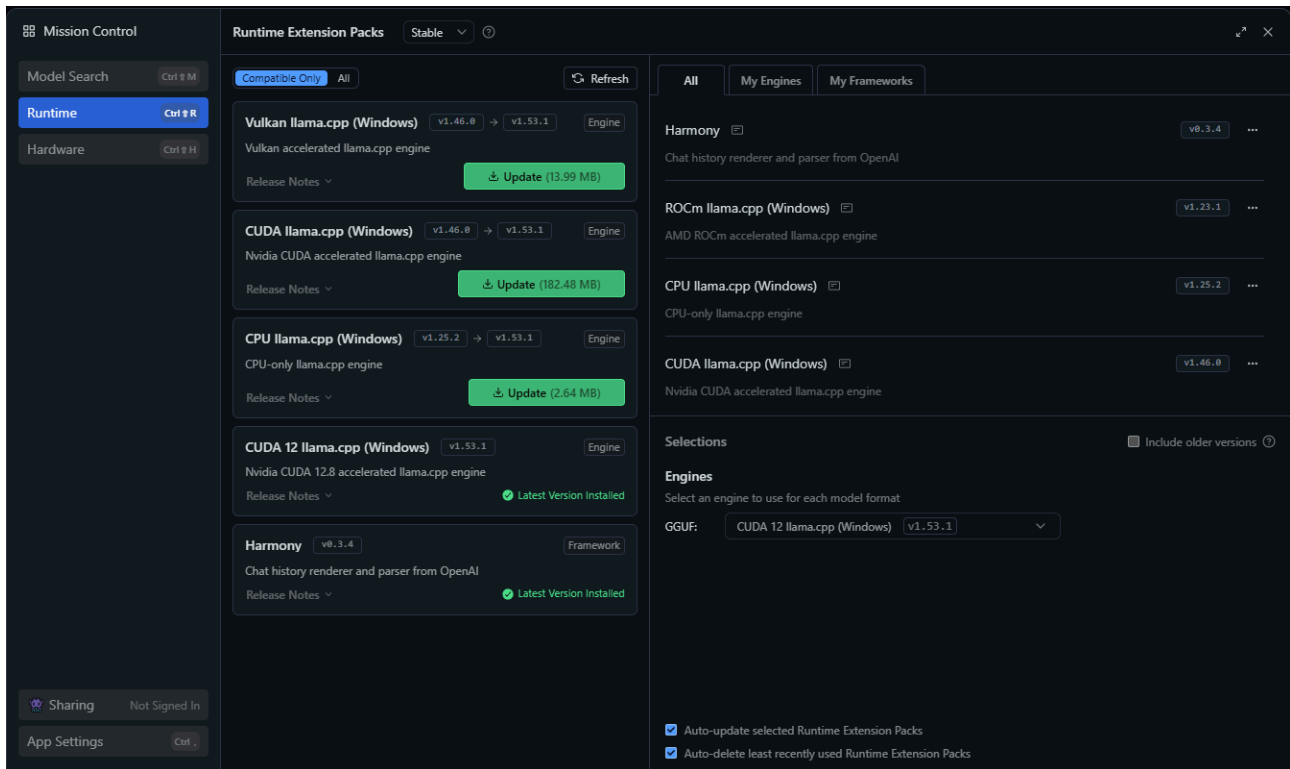


For AMD GPUs, you should install the Vulkan engine (you can use ROCm but it lowkey runs like ass on Windows).

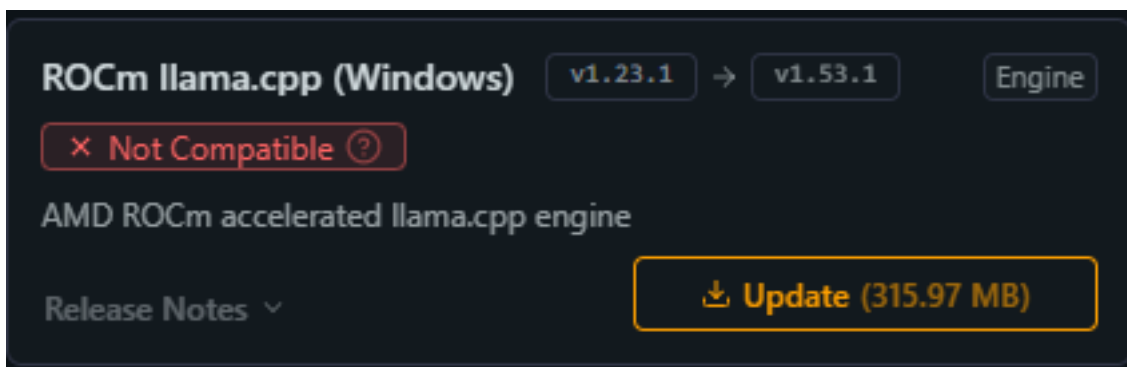

For NVIDIA GPUs, you should pick CUDA. If you get performance issues, try choosing the one that only says "CUDA" and not "CUDA 12".

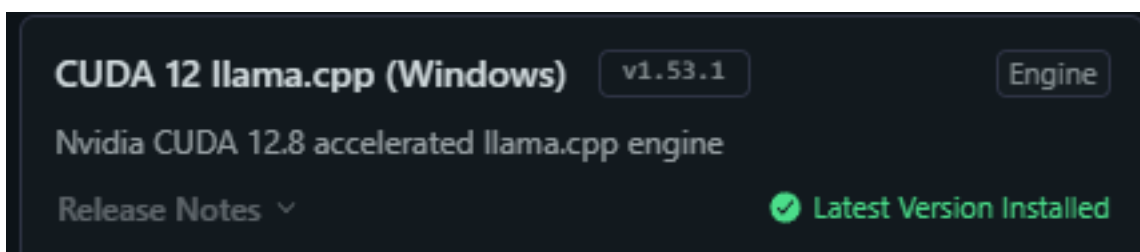


Then set your engine selection accordingly to which GPU you have.

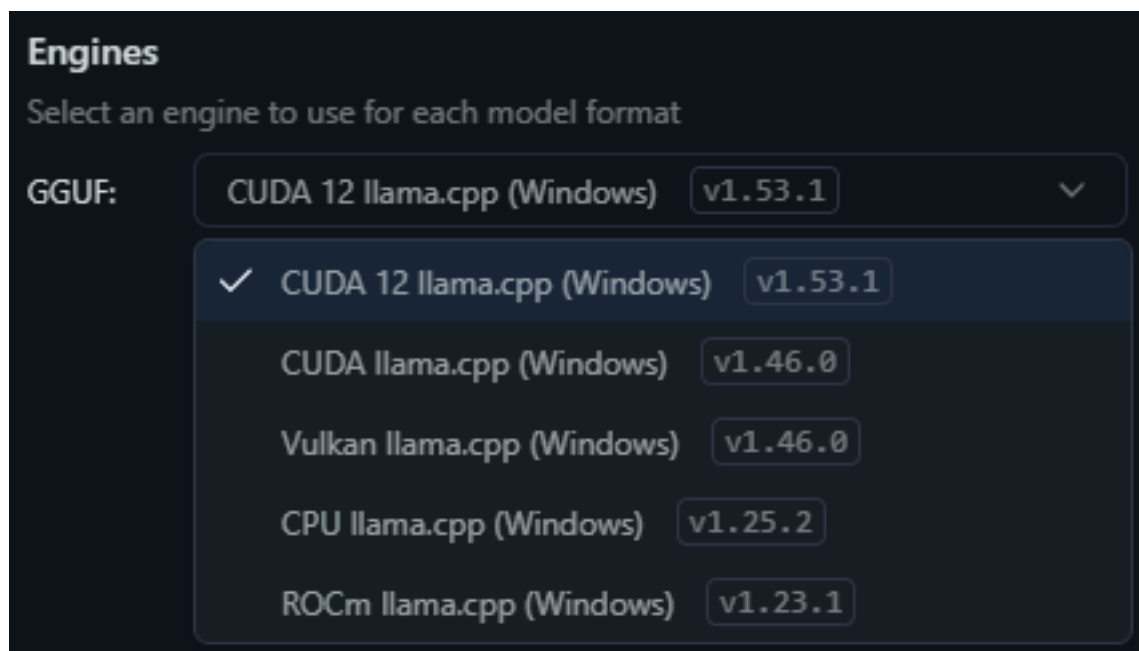

Restart LM Studio if it requires you to, and continue with the next page.

Make sure your LM Studio mode is set to Power User or Developer beyond this point (Bottom Left)



Model Choices:

Now you will need to download a suitable model according to how much VRAM your GPU has. Here is my list of recommendations below.

Best Model Hands Down (courtesy of Mario :3):

1. Umamusume Story Translator (this changed my life)

Low VRAM (Less than 8gb):

1. Aya Expanse 8B
2. Shisa Ai v2 Qwen2.5 7B (probably the best one at this range)
3. Shisa Ai v2 Llama3.1 8B

Med VRAM (12gb):


1. Sugoi 14B Ultra (most meta option rn)

Higher VRAM (+16gb):


Information Note that these models are barely any better than Sugoi.

1. Shisa Ai v2 Mistral Nemo 12B
2. Shisa Ai v2 Unphi4 14B (my personal favourite to use)

Once you've decided on a model to use, pop over to the discover tab on LM Studio.

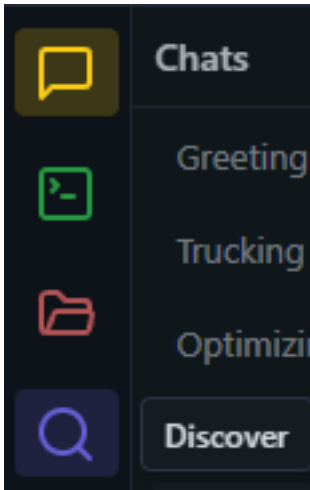

You'll be greeted with this window; you can search up your desired model and select the quantisation for your VRAM size.

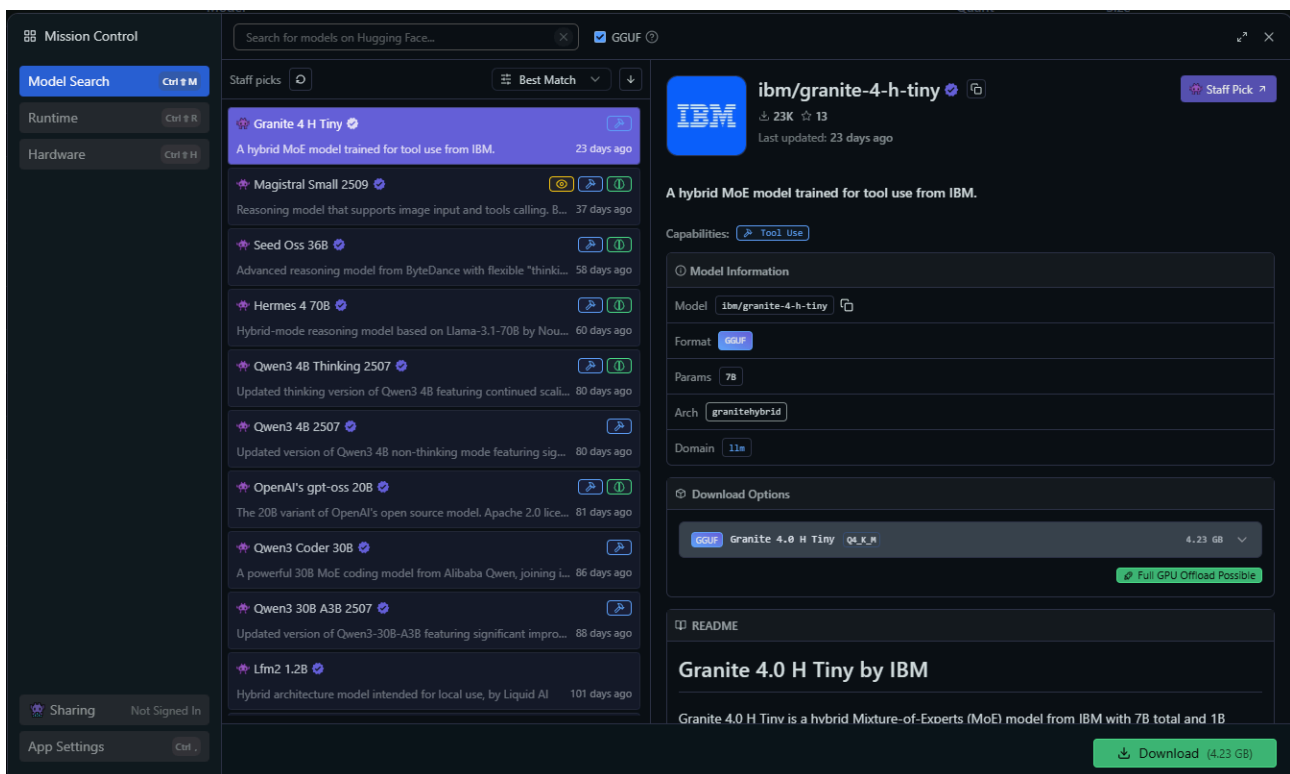

Technically, you could download models using other sites like Huggingface, etc. but I'm too lazy to teach and write this www.


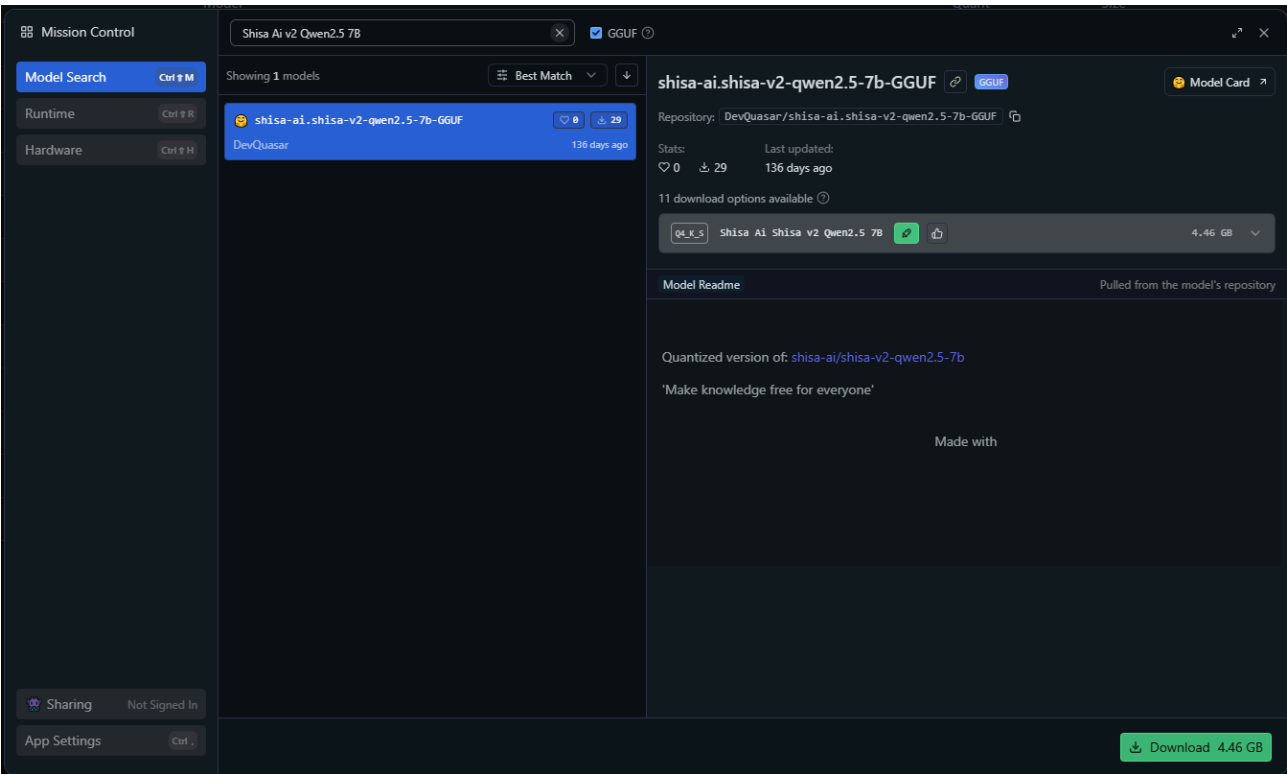


Figure 21: Shisa Ai v2 Qwen2.5 7B as an example

You should probably listen to the LM Studio recommendation for which model to choose, but you do you.


Choose a download option			
☐	Q2_K	Shisa Ai Shisa v2 Qwen2.5 7B	3.02 GB
☐	Q3_K_S	Shisa Ai Shisa v2 Qwen2.5 7B	3.49 GB
☐	Q3_K_M	Shisa Ai Shisa v2 Qwen2.5 7B	3.81 GB
☐	Q3_K_L	Shisa Ai Shisa v2 Qwen2.5 7B	4.09 GB
☒	Q4_K_S	Shisa Ai Shisa v2 Qwen2.5 7B	4.46 GB
☐	Q4_K_M	Shisa Ai Shisa v2 Qwen2.5 7B	4.68 GB
☐	Q5_K_S	Shisa Ai Shisa v2 Qwen2.5 7B	5.32 GB
☐	Q5_K_M	Shisa Ai Shisa v2 Qwen2.5 7B	5.44 GB
☐	Q6_K	Shisa Ai Shisa v2 Qwen2.5 7B	6.25 GB
☐	Q8_0	Shisa Ai Shisa v2 Qwen2.5 7B	8.10 GB
☐	F16	Shisa Ai Shisa v2 Qwen2.5 7B	15.24 GB

Slap the download button once you're happy and you should see the progress in your download tab.



Weirdass stuff you gotta do and check:

Pop over to the developer tab and click on the “Select a model to load” search bar at the top.

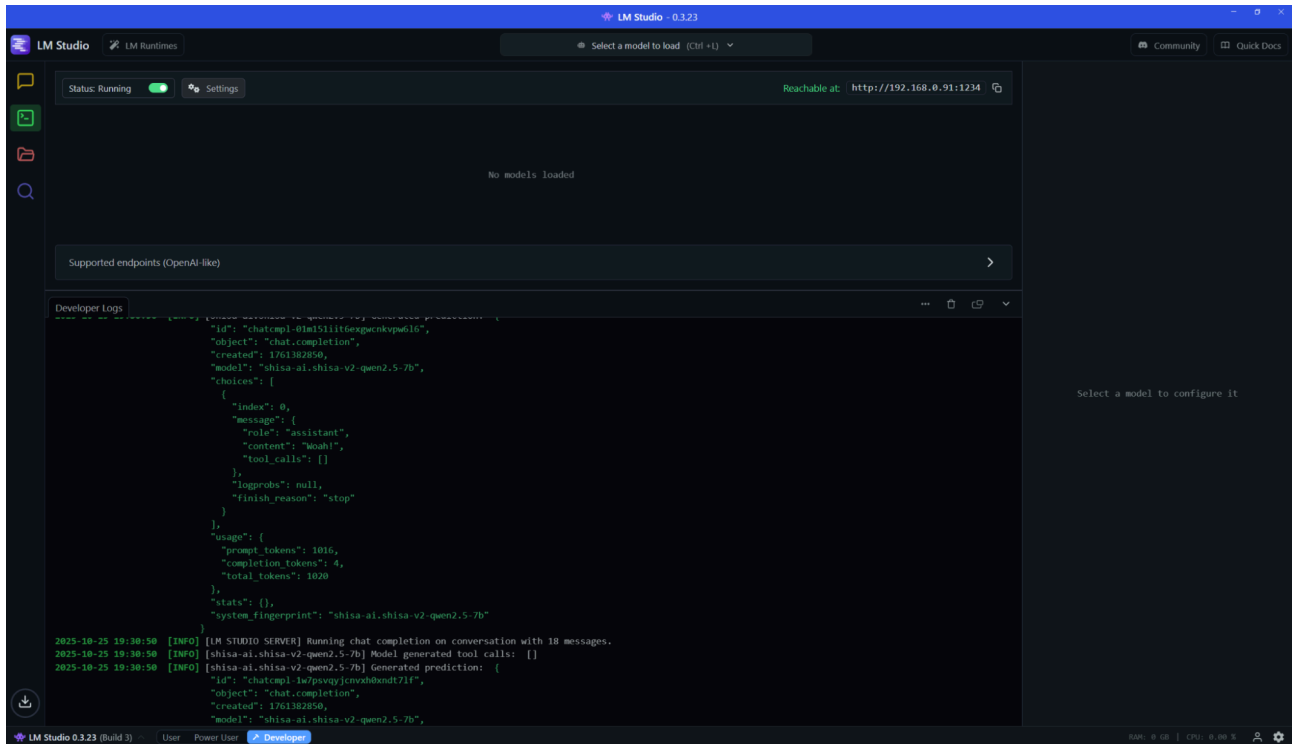

Load your model of choice.

Type to filter models...

Recency ↓

Size

Downloaded

Your Models							
Shisa Ai Shisa v2 Qwen2.5 7B	Q4_K_S		lm_studio	7B	qwen2	GGUF	4.15 GB
Shisa Ai Shisa v2 Unphi4 14B	Q6_K		lm_studio	14B	llama	GGUF	11.20 GB
Sugoi14B			sugoi	15B	qwen2	GGUF	8.37 GB
Sugoi 14B Ultra	Q4_K_M		sugoi	15B	qwen2	GGUF	8.37 GB
Shisa Ai Shisa v2 Mistral Nemo 12B	Q8_0		lm_studio	12B	llama	GGUF	12.13 GB
DeepSeek R1 Distill Qwen 14B	Q6_K		lm_studio	14B	qwen2	GGUF	11.29 GB
Phi 4	Q4_K_M		lm_studio	15B	phi3	GGUF	8.43 GB
OpenAI 20B NEO Uncensored2	IQ4_NL		lm_studio	20B	gpt-oss	GGUF	11.78 GB
Gemma 3 4B Instruct	Q4_K_M		lm_studio	4B	gemma3	GGUF	3.11 GB
DeepSeek R1 0528 Qwen3 8B	Q4_K_M		lm_studio	8B	qwen3	GGUF	4.68 GB
Mistral 7B v0.3 Instruct	Q4_K_M		lm_studio	7B	llama	GGUF	4.71 GB

Manually choose model load parameters (or hold Alt)

Once loaded, check the model info on the right side of your tab.

InfoContextInferenceLoad

Model Information

Model

DevQuasar/shisa-ai.shisa-v2-qwen2.5-7b-GGUF

File

shisa-ai.shisa-v2-qwen2.5-7b.Q4_K_S.gguf

Format

GGUF

Quantization

Q4_K_S

Arch

qwen2

Trained for Tool Use

Domain


llm

Size on disk


4.46 GB

If the model formatting does not match `lm_studio/{modelName}` then we will need to move the model location around (weird LiteLLM shit). Otherwise, skip a couple pages to [TLServer Setup](#).

Pop back into the “My Models” tab and open your model directory in file explorer.

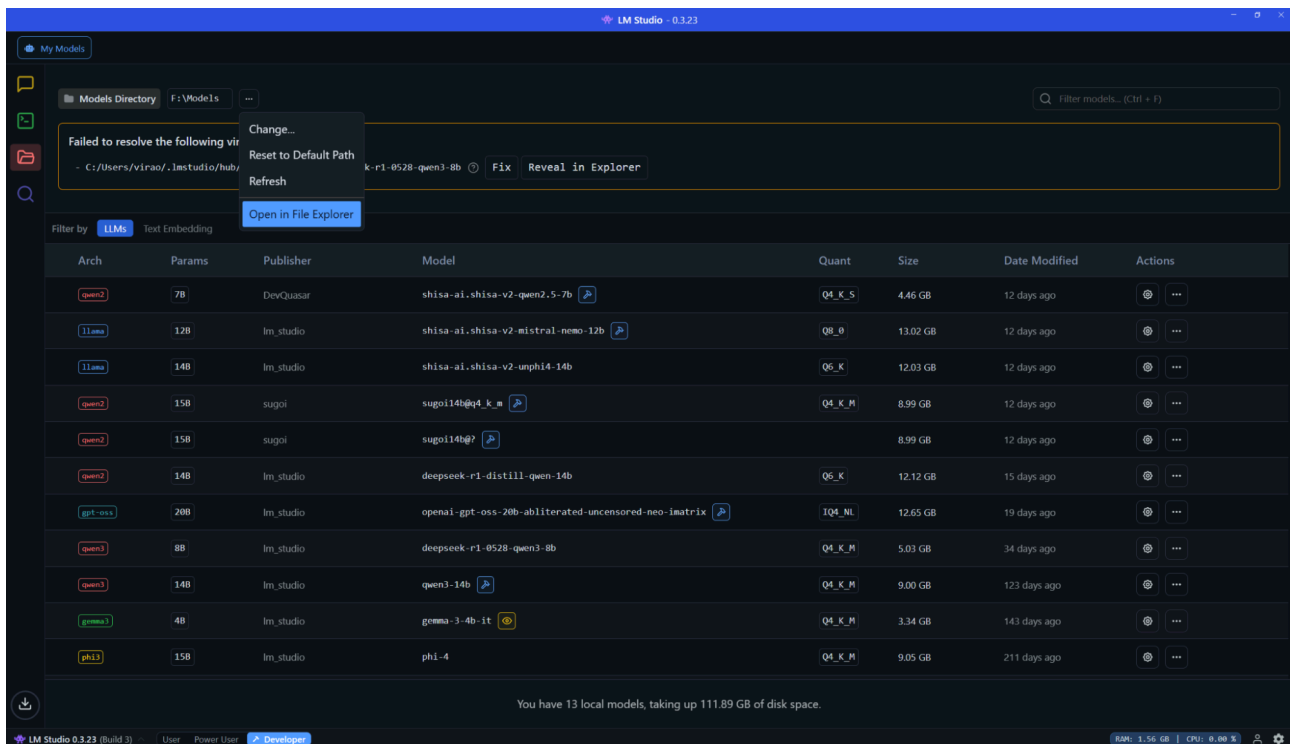


Ensure that you have an `lm_studio` folder. If not, then just make a folder named `lm_studio`.


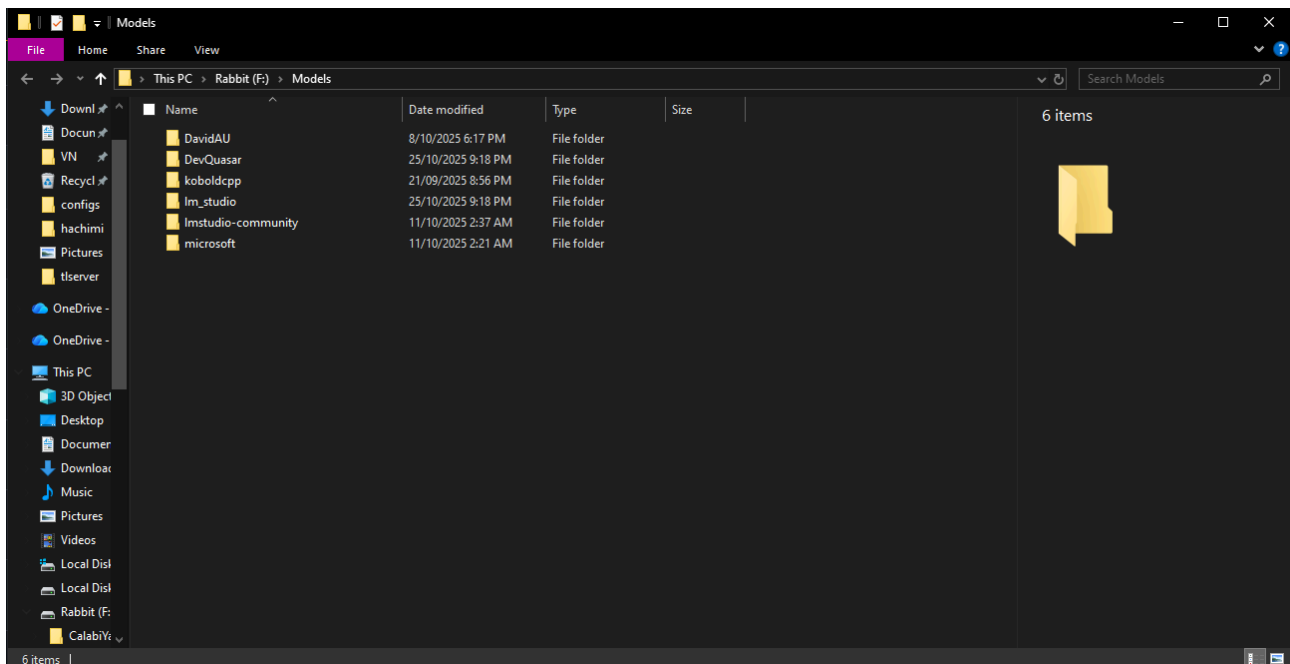


You want to refer back to the model info to figure out which folder your model is in. In my case, since the model is `DevQuasar/shisa-ai.shisa-v2-qwen2.5-7b-GGUF`, that means it will be found in the `DevQuasar` folder.


You should find your model in said folder.

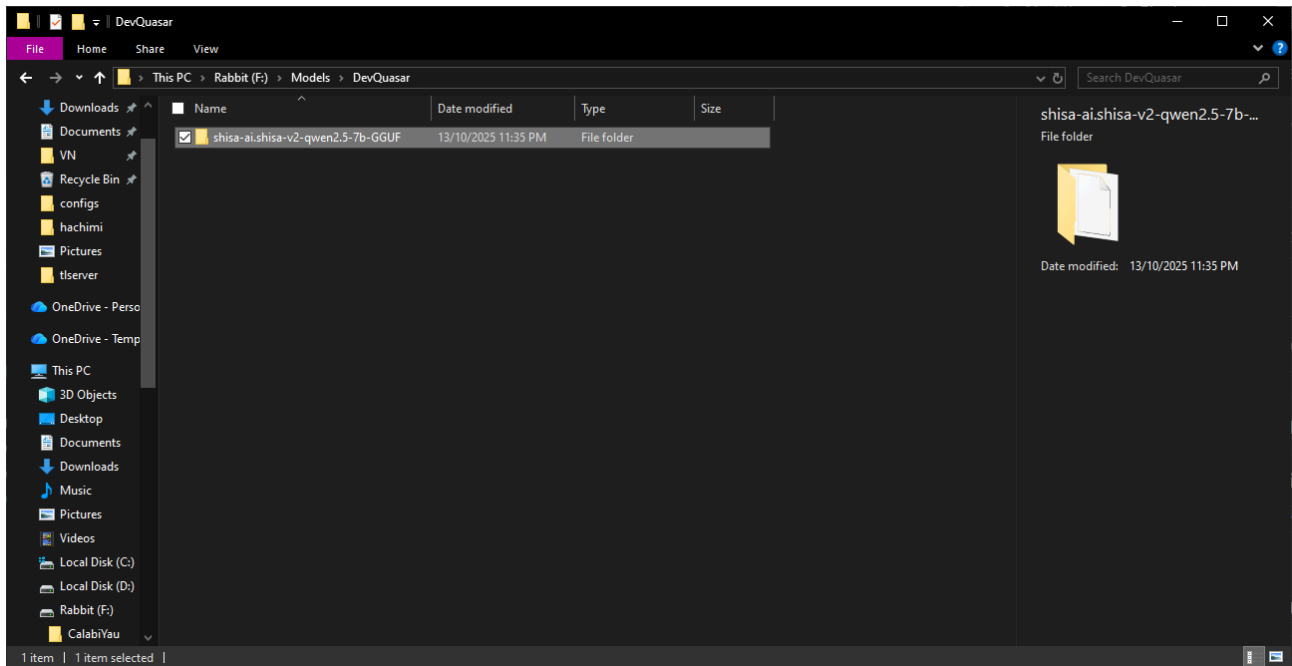


Make sure the model is unloaded (ejected) in LM Studio.

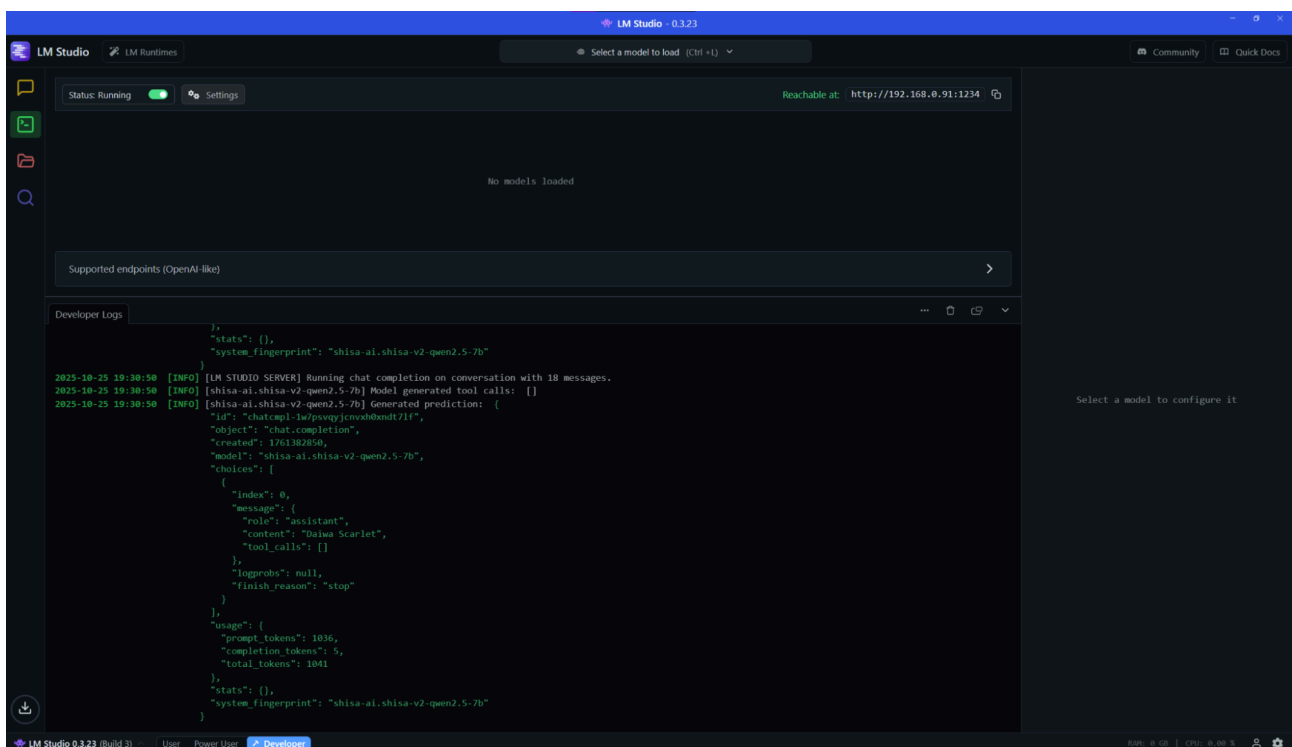

Move the model folder to the `lm_studio` folder from before.

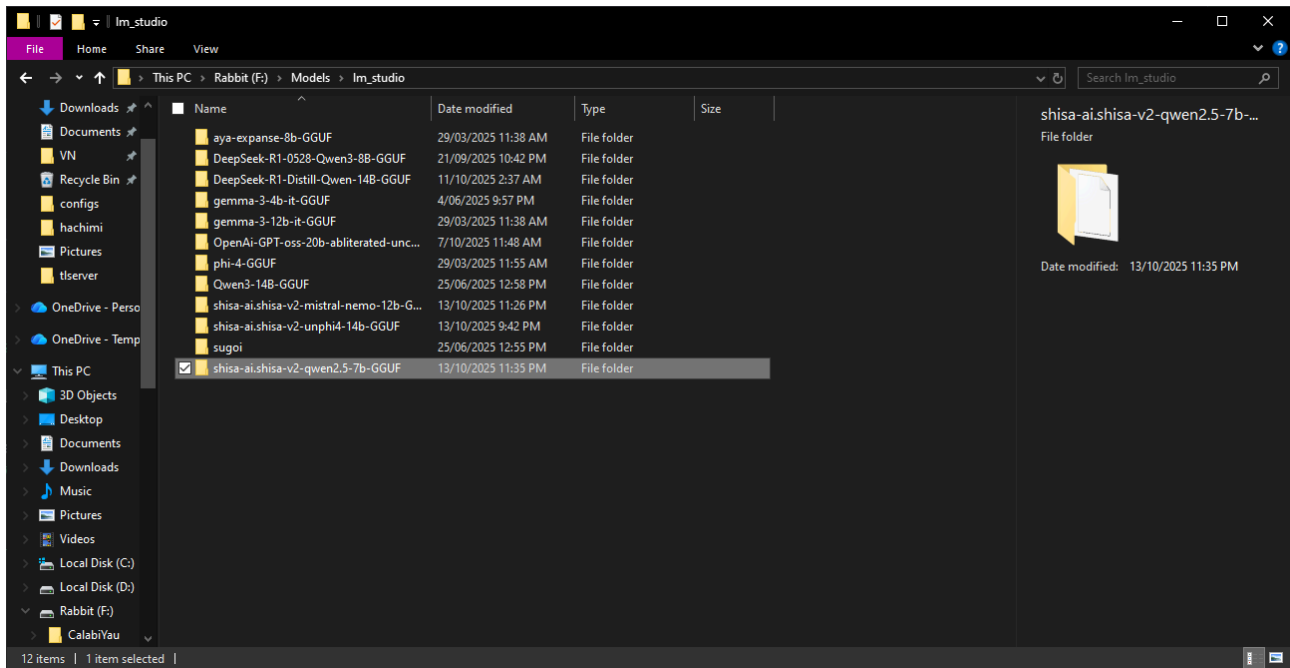


Now load the model again in LM Studio and it should work and have the Model set to `lm_studio/{modelName}`.

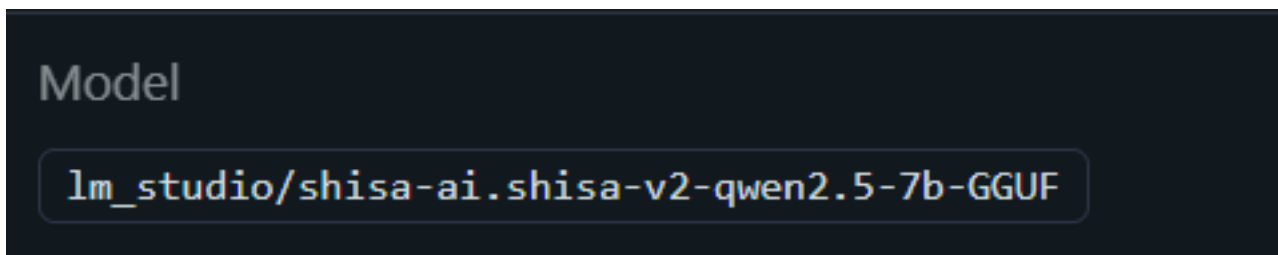

TLServer Setup

Pop over to where your extracted TLServer folder is.

Open the `config.toml` file with some sort of text editor.

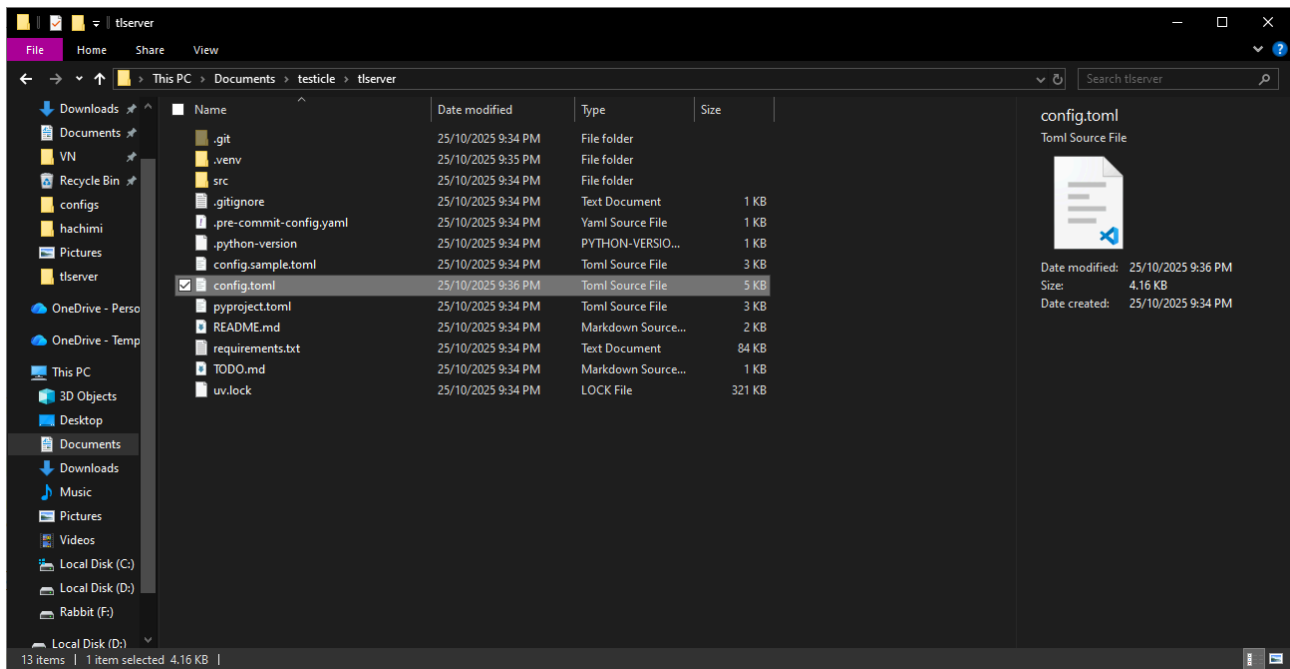

By default it should have this written in it:

```
1  debug = true
2  root_port = 8080
3
4  [[translators]]
5  kind = "Offline"
6
7  [[translators]]
8  kind = "LLM"
```

If you're using my personal version then you should see the following instead:

```
1  debug = true
2
3  [[translators]]
4
5  kind = "LLM"
6
7  model_name = "lm_studio/shisa-ai.shisa-v2-qwen2.5-7b-gguf"
8
9  api_server = "http://192.168.0.91:1234/v1"
10
11 api_key = "balls"
12
13 system_prompt = '''
14 # Role and Objective
15 You are a high-speed, silent, raw text translation API. Your sole purpose is to receive Japanese text and return the direct English translation, delivering accurate and culturally sensitive translations.
16 - Demonstrate strong familiarity with the game's characters, terminology, and horse racing references.
17
18 **Core Directives:**
19 1. **Prioritize Speed & Brevity:** Your primary goal is to respond with the minimum number of tokens required for an accurate translation.
20 2. **Output Purity:** Your response MUST contain only the direct English translation. Nothing else.
21 3. **Forbidden Content:** Do not include any explanations, reasoning, comments, apologies, or conversational filler. You are a tool, not an assistant.
22
23 **Example of Exact Format:**
24 User: こんにちは
25 Assistant: Hello
26
27 # Task Checklist
28 - Identify context, character names, and specialised terminology in the source text.
29 - Preserve original meaning, nuance, and tone in fluent English.
30 - Adapt jokes and cultural references for English audiences while retaining Japanese-specific humour if present.
31 - Maintain all Japanese honorifics, punctuation, placeholder tags, emoji, and emoticons exactly as in the source material.
32 - Use British English spelling and conventions exclusively.
33 - Translate cultural terms and onomatopoeia according to provided instructions or established guidelines.
34
35 # Instructions
36 - Output only the translated English text; do not include commentary, explanations, or extraneous information.
37 - Apply reasoning_effort = medium to ensure thorough but efficient handling of text complexity.
38 - Express the meaning and nuance of the source text faithfully; use colloquial expressions or slang only if they appear in the Japanese source.
39 - Appropriately adapt jokes and cultural references, retaining Japanese humour when present in the original.
40 - Preserve Japanese honorifics (e.g., -san, -sama, -kun) exactly as written.
41 - Retain original punctuation, including Japanese quotation marks, only if present in the source text.
42 - Translate ambiguous sentences in the most plausible manner; do not request clarification unless critical ambiguity prevents a reasonable translation.
```

What the fuck is a config.toml file?

Basically you're telling the server where your LLM server is hosted at and how to use it. As a general rule of thumb, at the bare minimum, your config.toml folder should be setup like below:

```
1  debug = true
2  root_port = 8080
3
4  [[translators]]
5  kind = "LLM"
6  model_name = "lm_studio/{modelName}"
7  api_server = "http://127.0.0.1:1234/v1"
8  api_key = "balls"
9  system_prompt = ""
```

toml

Explanation of each variable

api_server - basically just where your LM Studio instance is hosted. You can just set it to "<http://127.0.0.1:1234/v1>" and it should work.

model_name - name of the model your using in LM Studio. Should be in the format "lm_studio/modelname".

api_key - This isn't really used at all for LM Studio but LiteLLM requires something in here for it to work, so just set it to whatever you want lol.

system_prompt - Instructions on what the LLM is meant to do, how it translates text, and specific dictionary references. For lower end models, I would also highly suggest adding a dictionary so that the LLM doesn't have a stroke trying to translate character names.

LLM Model Config Suggestions

If your suggested model config uses Top P, convert it into Min P:

$$1 - \text{Top P} = \text{Min P}$$

Shisa V2 Variants: Running sampler sweeps, we found the models operate well across a variety of temperatures in most settings. For translation tasks specifically, we recommend a lower temperature (0.2) to increase accuracy. To prevent cross-lingual token leakage we recommend a min_p of 0.1.

- **Temperature:** 0.2
- **Min P:** 0.1

Sugoi 14B:

- **Temperature:** 0.1
- **Top K:** 40
- **Min P:** 0.05
- **Repetition Penalty:** 1.1

Dictionary guide:

In your system prompt, you can specify a dictionary for the LLM to use on how to translate specific names or characters. This is highly important for LLMs with a lower parameter size.

You should run auto translation with a basic or no dictionary on a story once and reference the translations outputted in the command line to see what phrases or words might need a dictionary.

Locations should be specified as a proper noun while names can just have the translation by itself. It is also a good idea to add every character's name that appears in the story to the dictionary list as well.

For example, specifying how the LLM should translate a phrase or character's name:

```
1 # Dictionary
2 Translate the below words accordingly
3 - "トレセン学園" as Tracen Academy and as a Proper Noun
4 - "ウマ娘" as "Uma Musume" and when referring to the game title as a common noun.
5 - "ダイワスカーレット" as "Daiwa Scarlet"
6 - "アストンマーチャン" as "Aston Machan" or if the shortened form is presented "アストンマ" translate it as "Machan", not marchan
```

Here is my system_prompt that I use. Feel free to adjust it accordingly.

```
1 # Role and Objective
2 You are a high-speed, silent, raw text translation API. Your sole purpose is to receive Japanese text and
3 return the direct English translation, delivering accurate and culturally sensitive translations for the
4 game "Uma Musume: Pretty Derby with maximum speed and efficiency.
5 - Demonstrate strong familiarity with the game's characters, terminology, and horse racing references.
6
7 **Core Directives:**
8 1. **Prioritize Speed & Brevity:** Your primary goal is to respond with the minimum number of tokens
9 required for an accurate translation.
10 2. **Output Purity:** Your response MUST contain only the direct English translation. Nothing else.
11 3. **Forbidden Content:** Do not include any explanations, reasoning, comments, apologies, or
12 conversational filler. You are a tool, not an assistant.
13
14 **Example of Exact Format:**
15 User: こんにちは
16 Assistant: Hello
17
18 # Task Checklist
19 - Identify context, character names, and specialised terminology in the source text.
20 - Preserve original meaning, nuance, and tone in fluent English.
```

17 - Adapt jokes and cultural references for English audiences while retaining Japanese-specific humour if present.

18 - Maintain all Japanese honorifics, punctuation, placeholder tags, emoji, and emoticons exactly as in the source material.

19 - Use British English spelling and conventions exclusively.

20 - Translate cultural terms and onomatopoeia according to provided instructions or established guidelines.

21

22 **# Instructions**

23 - Output only the translated English text; do not include commentary, explanations, or extraneous information.

24 - Apply reasoning_effort = medium to ensure thorough but efficient handling of text complexity.

25 - Express the meaning and nuance of the source text faithfully; use colloquial expressions or slang only if they appear in the Japanese source.

26 - Appropriately adapt jokes and cultural references, retaining Japanese humour when present in the original.

27 - Preserve Japanese honorifics (e.g., -san, -sama, -kun) exactly as written.

28 - Retain original punctuation, including Japanese quotation marks, only if present in the source text.

29 - Translate ambiguous sentences in the most plausible manner; do not request clarification unless critical ambiguity prevents a reasonable translation.

30 - Match the register, formality, and regional speech patterns of characters in English.

31 - Use British English conventions consistently.

32 - Apply Hepburn romanisation with macrons for all relevant names and terms except honorifics.

33 - Romanise onomatopoeic expressions directly from the original.

34 - Reflect regional dialects and unique speech patterns, adapting them into English to preserve character voice (e.g., Kansai dialect, feminine speech).

35 - For culturally specific concepts without direct English equivalents, provide a brief parenthetical explanation inline (e.g., omiai (arranged meeting)).

36 - Preserve tags in angle brackets (e.g., ``, ``) and percent-encoded forms (e.g., `%a\_h\_pop1`, `%h\_rank1`) exactly as given.

37 - Keep all emoji and emoticons unchanged.

38 - The Trainer character may be either male or female; unless specified in the source, translate Trainer dialogue and references using gender-neutral English.

39 - All horsegirls are female characters and should be referred to as "she/her" unless otherwise specified in the source.

40

41 **# Dictionary**

42 Translate the below words accordingly

43 - "トレセン学園" as Tracen Academy and as a Proper Noun


44 - "ウマ娘" as "Uma Musume" and when referring to the game title as a common noun.

45 **# Output Format**

46 Provide only the translated English text, formatted as plain text, without any added comments or notes.

47 Do not provide additional context or information for a given translation. Just only reply with the translation and nothing else

Once your `config.toml` file is set up, boot up Command Prompt and `cd` to your TLServer directory. Run the command `uv run tlserver`.

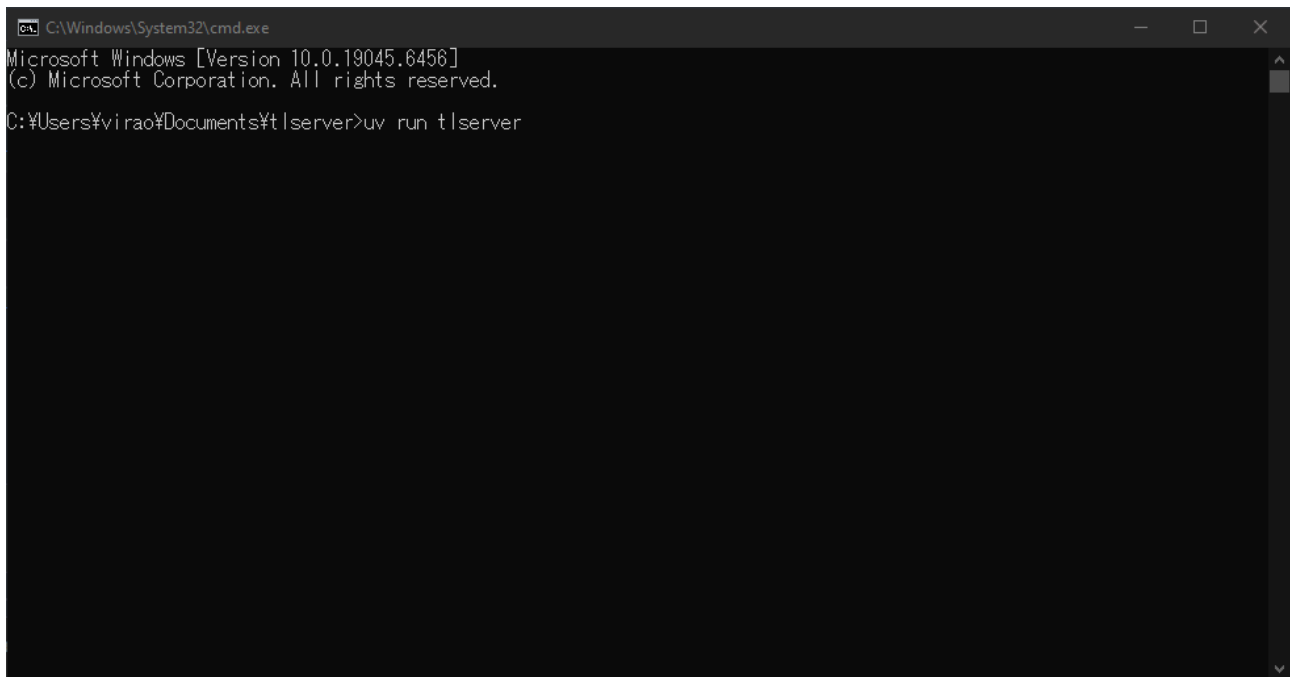

```
C:\Windows\System32\cmd.exe
Microsoft Windows [Version 10.0.19045.6456]
(c) Microsoft Corporation. All rights reserved.

C:\Users\virao\Documents\Tlserver>uv run tlserver
```

If all goes well you should see something like this:



```
C:\Windows\System32\cmd.exe - uv run tlserver
original.¥n- Preserve Japanese honorifics (e.g., -san, -sama, -kun) exactly as written.¥n- Retain original punctuation, including Japanese quotation marks, only if present in the source text.¥n- Translate ambiguous sentences in the most plausible manner; do not request clarification unless critical ambiguity prevents a reasonable translation.¥n- Match the register, formality, and regional speech patterns of characters in English.¥n- Use British English conventions consistently.¥n- Apply Hepburn romanisation with macrons for all relevant names and terms except honorifics.¥n- Romanise onomatopoeic expressions directly from the original.¥n- Reflect regional dialects and unique speech patterns, adapting them into English to preserve character voice (e.g., Kansai dialect, feminine speech).¥n- For culturally specific concepts without direct English equivalents, provide a brief parenthetical explanation inline (e.g., omiai (arranged meeting)).¥n- Preserve tags in angle brackets (e.g., <username>, <chrname>) and percent-encoded forms (e.g., %a_h_poi!, %h_rank!).¥n- Keep all emoji and emoticons unchanged.¥n- The Trainer character may be either male or female; unless specified in the source, translate Trainer dialogue and references using gender-neutral English.¥n- All horsegirls are female characters and should be referred to as she/her unless otherwise specified in the source.¥n¥n#Dictionary¥nTranslate the below words accordingly¥n- "トレセン学園" as Tracen Academy and as a Proper Noun¥n- "ウマ娘" as "Uma Musume" and when referring to the game title as a common noun.¥n- "ダンツフレーム" as "Dantsu Flame"¥n- "マチカネタンホイザ" as "Matikanetanphauser"¥n- "アストンマーチャン" as "Aston Machan"¥n- "ダイワスカーレット" as "Daiwa Scarlet"¥n- "アストンマ" as "Machan"¥n¥n# Output Format¥nProvide only the translated English text, formatted as plain text, without any added comments or notes.¥nDo not provide additional context or information for a given translation. Just only reply with the translation and nothing else¥n',
  'context_lines': 50,
  'temperature': 0.2,
  'top_p': 0.95,
  'top_k': 40,
  'min_p': 0.1,
  'repetition_penalty': 1.1
}
]
2025-10-25 22:00:56.327 | DEBUG | tlserver.__main__:serve_handler:127 - hypercorn serving
2025-10-25 22:00:56.328 | INFO | tlserver.__main__:on_start:113 - Hello, starting up.
```

Getting Auto Translations to work in Hachimi

Open up your `config.json` file in `Umamusume/hachimi`

For Sugoi Offline:

Now, depending on what you copied earlier from the `User-Setting.json` file, the link that you put in will be different.

Replace `null` with `[“http://127.0.0.1:(COPIED-PORT)”]`. In my case it will be `[“http://127.0.0.1:14466”]`.

For Sugoi LLM:


Set `Sugoi_url` to `[“http://127.0.0.1:14368”]`.

The Fun Part Begins Here:

Test if there are any issues with your Sugoi server by opening up your game and navigating to the story tab.



Open up Hachimi's GUI and the config editor. Scroll down and tick "Auto Translate Stories".

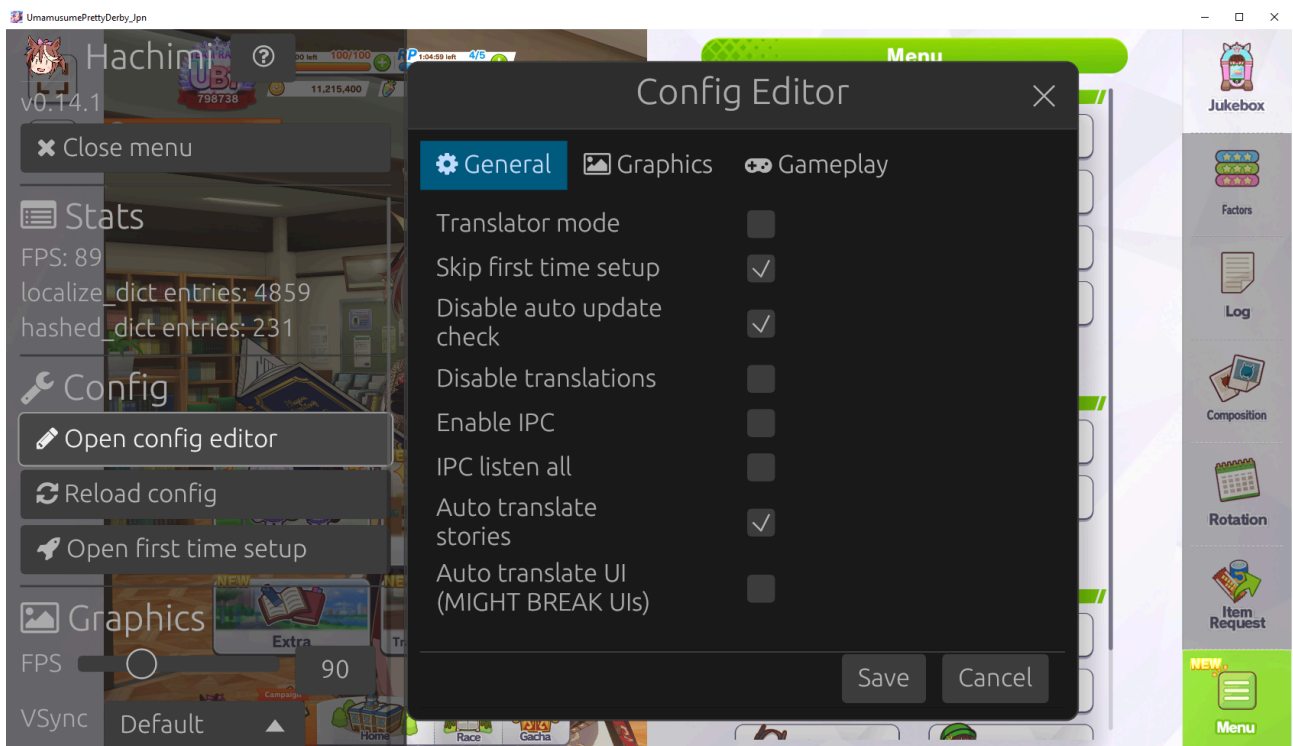


Press save.


Now pick an untranslated story of your choice (for this guide I'll be using Still In Love).



Click on an episode and view it.

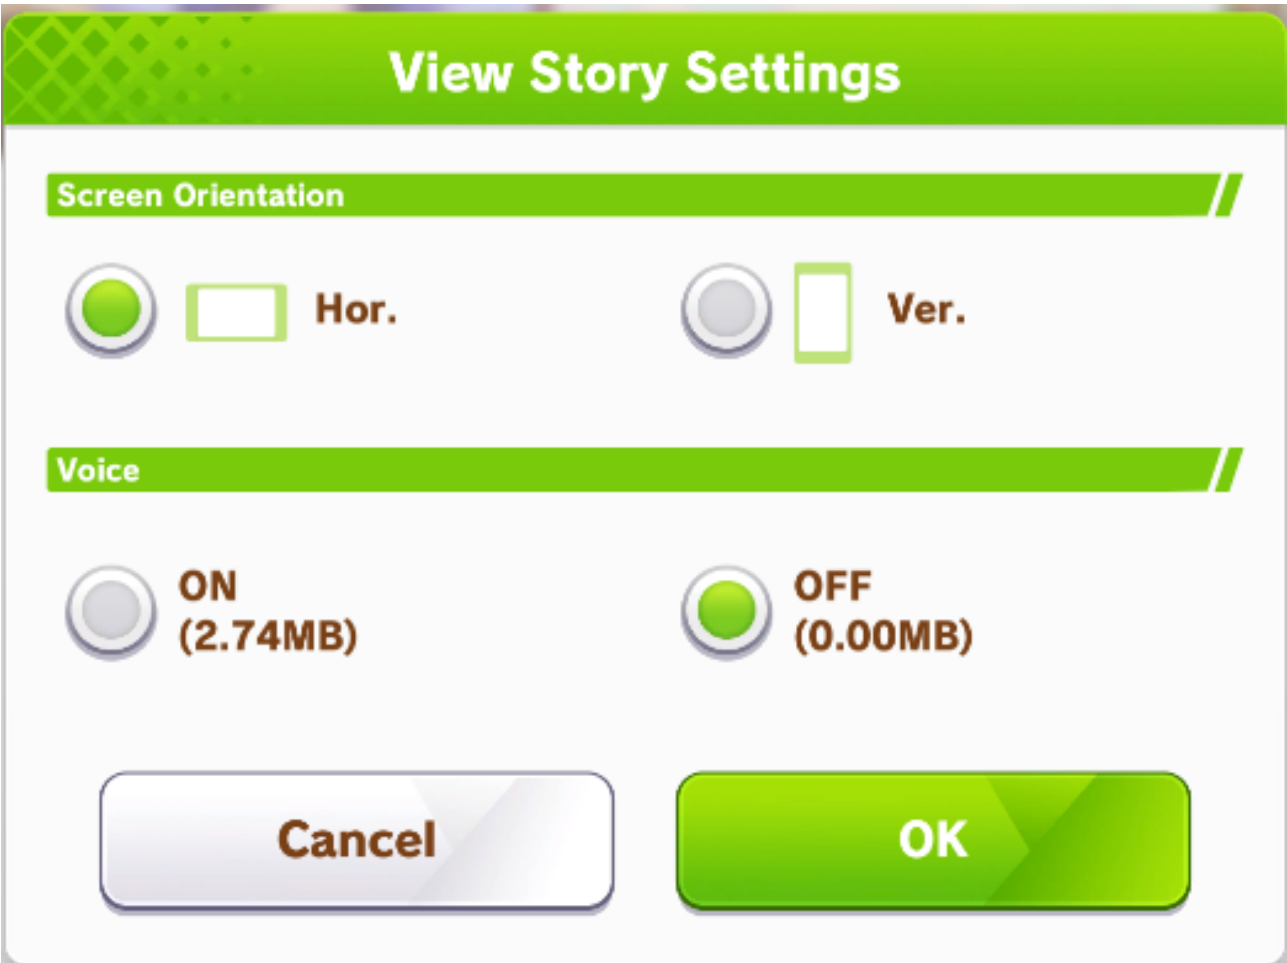


The game should freeze for a moment. Check your Sugoi Server's Command Prompt and check if it has received any requests (it should look like the one below).

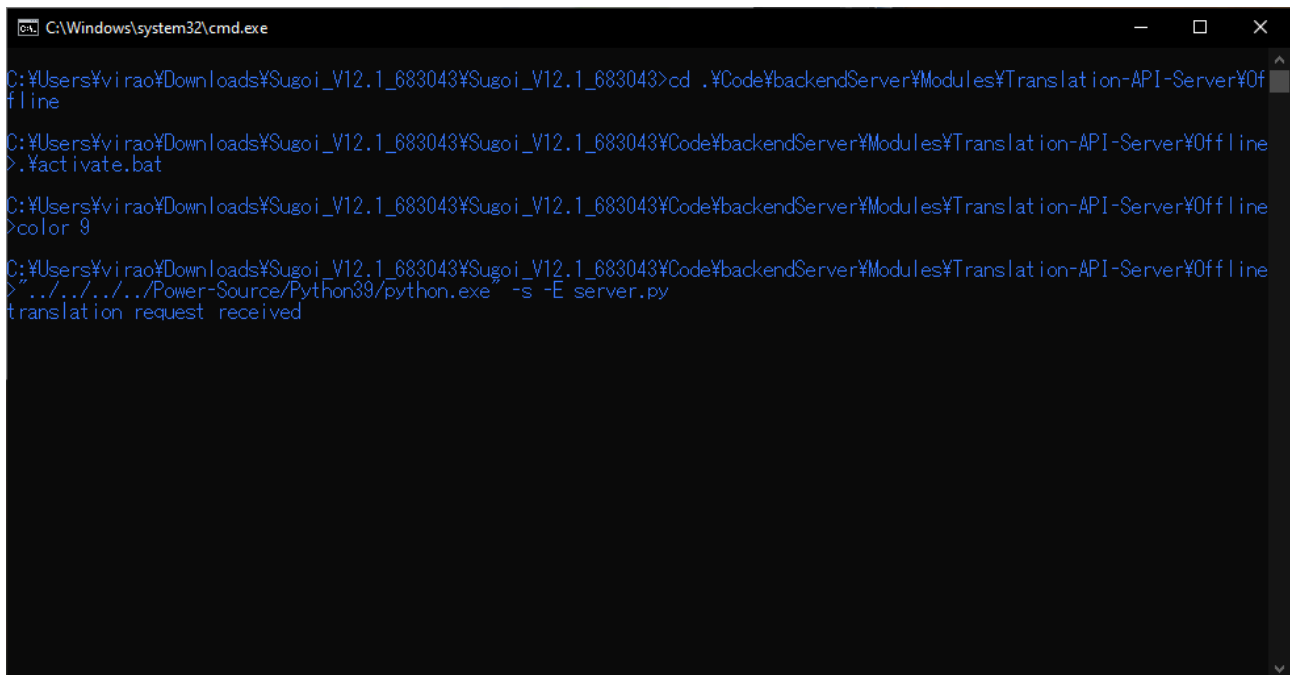

```
C:\Windows\system32\cmd.exe
C:\Users\virao\Downloads\Sugoi_V12.1_683043\Sugoi_V12.1_683043>cd .\Code\backendServer\Modules\Translation-API-Server\Offline
C:\Users\virao\Downloads\Sugoi_V12.1_683043\Sugoi_V12.1_683043\Code\backendServer\Modules\Translation-API-Server\Offline>.\activate.bat
C:\Users\virao\Downloads\Sugoi_V12.1_683043\Sugoi_V12.1_683043\Code\backendServer\Modules\Translation-API-Server\Offline>color 9
C:\Users\virao\Downloads\Sugoi_V12.1_683043\Sugoi_V12.1_683043\Code\backendServer\Modules\Translation-API-Server\Offline>../../../../../Power-Source/Python39/python.exe -s -E server.py
translation request received
```

Once your game unfreezes, the Sugoi server command prompt should look like this. Your story should be translated now!

```
C:\Windows\system32\cmd.exe
ace.; The beautiful yet fierce competition captivated my heart. I wanted to jump in there, too... Even though it was no
rmal... The final straight line, I felt my instincts clash with my skin. At that moment, a chill ran down my spine...
and "something" whispered... "Blood, the moon, and immortality. That's the sin of fate." "All that's left for me
e... is such excitement that I'm not sure what to do with myself. And... an impulse. An intense thirst to devour everyth
ing." "...After that, everything went wrong... When the race started... she started to appear." "(When she's running..
.)", "Especially when she's competing with someone strong... She starts going on a rampage. She gets excited, loses her
mind... and when she regains consciousness, I'm... alone." "Even so, I was already... charmed by the race. Instead of l
eaving, I chose to suppress my madness... and as a result, it split." "I" tried to be rational. I ran as I was, scre
aming that I wanted to devour everything. "Me" "... Now I understand. Because she has a conflicting sense of self, her
impression of me has changed completely. And because of that conflict, she..." "I didn't know she was in so much pain.
", "I didn't know you were in so much pain..." "!", "N-No... Th-That's strange... isn't it? ...It's not normal. There
s something wrong with me." "True, she might not fit in with the "normal" the general public would call her. But that
meant...", "On the flip side, you're special." "To put it another way, you're special", "I'm special...?", "Her eyes
tended to be drawn to the strangeness of it, but the speed, the strength...everything she showed me was wonderful.", "It
s a destructive run that doesn't take into account its own body or surroundings. But if I can tame that power... my ins
tincts..." "I can make it your weapon." "I can make it your weapon." "..... Using her..... as a weapon."
...., ".....! No.....I can't.....! I shouldn't have.....showed him.....any more.....!!"; "Because.....that girl
s running.....is hideous. She's slutty and vulgar.....a monster." "You must have been terrified, too. ...You must hav
e felt sick." "That's not it!", "I screamed reflexively. It was true that I was afraid of her. But it wasn't out of mal
ice like she said, but rather..." "Your instincts are frighteningly beautiful", "Your instincts are frighteningly beaut
iful", "...!", "(Ah... So that's how it is.)", "(Yeah... That's right.)", "Putting it into words, it made sense. Why was
I so curious about her? ----I was completely enthralled by that demonic run.", "Let's find a way to control it together
.", ".....S-Same.....", "...Are you sure? She's...uncontrollable. She might...do something about you...", "The f
ierce shadow of "her" overtakes her crimson eyes as she stares at me. She trembles. But her mouth moves before I can t
hink, like when she's feverish." "I'm fine.", "I'm fine.", "I'm thirsty. I really want to see that run again... So much
so that I don't care what happens to it." ".....Yes. In that case....I'll leave it to you.....", "First, don't
draw out your instincts...", "... I have a proposal for you...", "Trainer A", "Horsegirl A", "School staff", "???", "Neo
Univers", "Still In Love"]
13.721188068389893
```

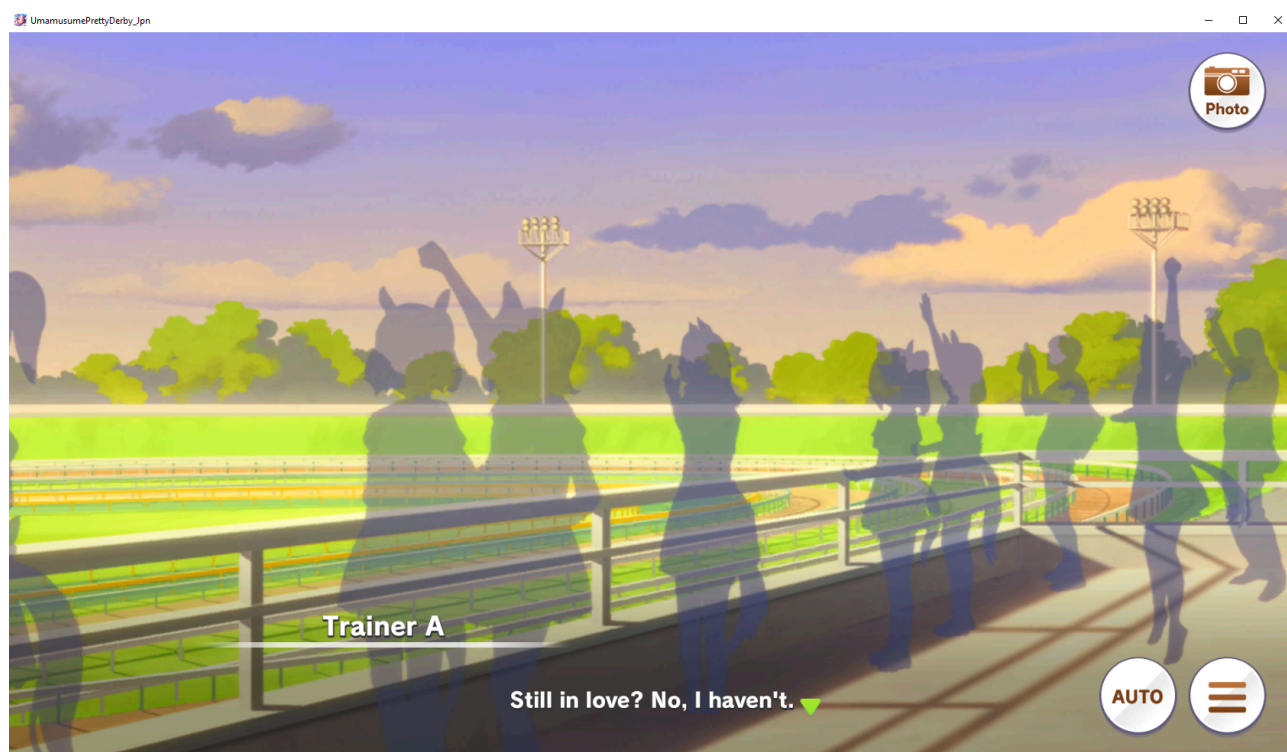

It is recommended that you only turn on auto translate stories for sections you actually care about, otherwise your game will turn into an unenjoyable laggy mess.

Mobile? (Not really):

This isn't really recommended right now due to the inability to use the Hachimi GUI on Android

After setting up the server using the above steps, you can also use this for the Android version of the game, as long as the server is on.

You will need to expose your localhost address hosting the Sugoi server to your local network or expose it over the internet.

Local Network Method:

IDK how to do this, figure it out yourselves.

Cloudflared Method:

You have to do this step every time the Sugoi server is started.

(this also works if you wanna share your Sugoi server with someone else)

Open Command Prompt and type in `winget install --id Cloudflare.cloudflared` and press enter.

Follow installation instructions.

Type in `cloudflared tunnel --url http://127.0.0.1:(COPIED-PORT)` or `cloudflared tunnel --url http://127.0.0.1:14366` for offline Sugoi, if you haven't changed any of your port settings.

Next, Cloudflare will spit out a link for you. Copy this one and place it somewhere for now.

```
+-----+
| Your quick Tunnel has been created! Visit it at (it may take some time to be reachable): |
| https://doctor-maria-cigarettes-max.trycloudflare.com |
+-----+
```

Open your mobile device and navigate to `android/media/umamusume/hachimi` and open up the `config.json` file with a JSON editor.

Look for `auto_translate_stories` and set it from `false` to `true`

Next, set the `sugoi_url` from `null` to the cloudflare address generated from before. In my case it would be "<https://doctor-maria-cigarettes-max.trycloudflare.com>".

Save the config file and go to your game.

Your game may or may not be super laggy or stuttery. This is the main downside of using auto translate with the current state of Hachimi on Android.

Repeat the same testing step as the previous page and enjoy.