

Instantly book your 2W orders
by integrating with
PORTER°



Porter API Contract

Latest version : 1.0

Host name

Production : pfe-apigw.porter.in

UAT testing Environment : pfe-apigw-uat.porter.in



What's New ?

Simulator on UAT for testing the APIs:

We have built a Simulator on UAT Environment that allows clients to simulate the order lifecycle. Please refer to the [Testing the APIs](#) subsection below for more details.

Order Reopened Status in Webhook:

In certain cases where cancellation is attempted and the driver is at fault, we will be attempting to reassign another driver to this Order. In such cases, we will be passing an `order_reopened` event via webhooks to notify that the order has been reopened and the previously assigned driver will no longer be fulfilling this order.

More information about this can be found under the [Webhook - Order Update](#) subsection. Please contact pfe_kam@theporter.in regarding any queries.

▼ Get Quote API

▼ Request Details

Http method : `POST`

URI : `/v1/get_quote`

Request Parameters Description:

Name	Type	Description
pickup_details	json	REQUIRED - pickup latitude and longitude
pickup_details.lat	double	REQUIRED - latitude for pickup location, should be given upto at least 4 decimal places
pickup_details.lng	double	REQUIRED - longitude for pickup location, Should be given upto at least 4 decimal

Name	Type	Description
drop_details	json	REQUIRED - drop latitude and longitude
drop_details.lat	double	REQUIRED - latitude for drop location, should be given upto at least 4 decimal places
drop_details.lng	double	REQUIRED - longitude for drop location,Should be given upto at least 4 decimal
customer	json	REQUIRED - customer name , customer number , country_code
customer.name	string	REQUIRED - customer name
customer.mobile	json	REQUIRED - country_code ,phone number of customer
customer.mobile.country_code	string	REQUIRED - customer provide the country code as an string for ex = "+91"
customer.mobile.number	string	REQUIRED - phone number should be without country code
Token (HEADER)	String	REQUIRED - token for authentication

Request Data Class:

```

data class FareEstimateRequest(
    val pickup_details : AddressLatLng,
    val drop_details: AddressLatLng,
    val customer: CustomerDetails
)

data class AddressLatLng(
    val lat: Double,
    val lng: Double
)

```

```

data class CustomerDetails(
    val name: String,
    val mobile: ContactDetails
)

data class ContactDetails(
    val country_code: String,
    val number: String
)

```

Sample Request

```

curl --location --request POST 'https://{porter_host}/v1/get_quote' \
  --header 'X-API-KEY: 08AJTXXXXXXXXXX-UA1LiA' \
  --header 'Content-Type: application/json' \
  --data-raw '{
    "pickup_details": {
      "lat" : 12.935025018880504,
      "lng" : 77.6092605236106
    },
    "drop_details": {
      "lat" : 12.947146336879577,
      "lng" : 77.62102993895199
    },
    "customer": {
      "name" : "salik",
      "mobile" : {
        "country_code" : "+91",
        "number" : "7678139714"
      }
    }
  }'

```

▼ Response Details

Response Parameters Description:

NAME	TYPE	DESCRIPTION
vehicles	list<json>	vehicles with fare estimation.

Response Data Class:

```
data class FareEstimateResponse(  
    val vehicles: List<VehicleDetails>  
)  
data class VehicleDetails(  
    val type: String,  
    val eta: Eta?,  
    val fare: Fare,  
    val capacity: Capacity?,  
    val size: SizeDetails?  
)  
data class Eta(  
    val value: Double,  
    val unit: String  
)  
data class Capacity(  
    val value: Double,  
    val unit: String  
)  
data class Fare(  
    val currency: String,  
    val minorAmount: Int  
)  
data class SizeDetails(  
    val length: DimensionDetails,  
    val breadth: DimensionDetails,  
    val height: DimensionDetails  
)  
data class DimensionDetails(  

```

```
    val value: Double,  
    val unit: String  
  )
```

Sample Success Response



All `minor_amount` values are in paise

Response Code - 200 Success

Response Body - {

```
  "Vehicles": [  
    {  
      "type": "2 Wheeler",  
      "eta": {  
        "value": 10,  
        "unit": "minute"  
      },  
      "fare": {  
        "currency": "INR",  
        "minor_amount": 35000  
      },  
      "capacity": {  
        "value": 20,  
        "unit": "kg"  
      },  
      "size": {  
        "length": {  
          "value": 40,  
          "unit": "cm"  
        },  
        "breadth": {  
          "value": 40,
```

```

        "unit": "cm"
      },
      "height": {
        "value": 40,
        "unit": "cm"
      }
    }
  },
  {
    "type": "3 Wheeler Helper",
    "eta": {
      "value": 10,
      "unit": "minute"
    },
    "fare": {
      "currency": "INR",
      "minor_amount": 35000
    },
    "capacity": {
      "value": 500,
      "unit": "kg"
    },
    "size": {
      "length": {
        "value": 6,
        "unit": "ft"
      },
      "breadth": {
        "value": 5,
        "unit": "ft"
      },
      "height": {
        "value": 5,
        "unit": "ft"
      }
    }
  }
}

```

```

    },
    {
      "type": "Pickup 8ft",
      "eta": {
        "value": 10,
        "unit": "minute"
      },
      "fare": {
        "currency": "INR",
        "minor_amount": 35000
      },
      "capacity": {
        "value": 500,
        "unit": "kg"
      },
      "size": {
        "length": {
          "value": 8,
          "unit": "ft"
        },
        "breadth": {
          "value": 4.5,
          "unit": "ft"
        },
        "height": {
          "value": 5.5,
          "unit": "ft"
        }
      }
    }
  ]
}

```

Response Code - 200 Success

Response Body -

```
{
  "vehicles": [
    {
      "type": "3 Wheeler",
      "eta": null,
      "fare": {
        "currency": "INR",
        "minor_amount": 361
      },
      "capacity": {
        "value": 1,
        "unit": "ton"
      },
      "size": {
        "length": {
          "value": 7.2,
          "unit": "ft"
        },
        "breadth": {
          "value": 4.9,
          "unit": "ft"
        },
        "height": {
          "value": 4.9,
          "unit": "ft"
        }
      }
    },
    {
      "type": "Tata 407",
      "eta": null,
      "fare": {
        "currency": "INR",
```

```

        "minor_amount": 637
      },
      "capacity": {
        "value": 2500,
        "unit": "kg"
      },
      "size": {
        "length": {
          "value": 9,
          "unit": "ft"
        },
        "breadth": {
          "value": 5.5,
          "unit": "ft"
        },
        "height": {
          "value": 6,
          "unit": "ft"
        }
      }
    }
  }
]
}

```

Sample Failure Response

Response Code - 500 Internal Server Error

```

{
  "type": "internal_server_error",
  "message": "Something went wrong!! "
}

```

Response Code - 400 Bad Request
 status_code - 400 duplicate request

```

{

```

```
    "type": "duplicate_request",
    "message": "Request with request id has already been
processed"
}

status_code - 400 different city error
{
    "type": "different_city_error",
    "message": "pickup and drop address belongs to differ
ent cities",
}

status_code - 400 Bad Request
{
    "type": "bad_request",
    "message": "Request is malformed",
}
}
```

```
Response Code - 401 Unauthorized
{
    "type": "missing_auth_token",
    "message": "Missing Auth Token"
}

{
    "type": "auth_token_invalid",
    "message": "Invalid Api Token"
}
```

```
status_code - 422
{
    "type": "restricted_location",
    "message": "Sorry. We do not have API support for the
```

```

pickup/drop you've chosen"
}

status_code - 422
{
  "type": "restricted_location",
  "message": "Sorry! We do not allow service in the are
a you have selected"
}

status_code - 422
{
  "type": "restricted_location",
  "message": "restricted pickup location"
}

status_code - 422
{
  "type": "restricted_location",
  "message": "restricted drop location"
}

```

▼ Create Order API

▼ Request details

Http method : HTTP

URI : `/v1/orders/create`

Request Parameters Description:

NAME	TYPE	DESCRIPTION
request_id	string (UUID)	REQUIRED - client request id which is used by client to track their request. It should be a uuid with maximum 32 characters.

pickup_details	json	REQUIRED - The pickup address for a potential delivery.
pickup_details.address	json	REQUIRED - street_address1, contact_details, lat, lng are mandatory fields. lat, lng should be given till 6 decimals. More than 6 decimals will get truncated by using floor function.OPTIONAL - apartmentAddress, streetAddress2, landmark, city, state, pincode, country
pickup_details.address.contact_details	json	REQUIRED - name and phone number of sender.Note - phone number should always include country code. (91) - ex - 919898989898
drop_details	json	REQUIRED - The drop address for a potential delivery.
drop_details.address	json	REQUIRED - street_address1, contact_details, lat, lng are mandatory fields.lat, lng should be given till 6 decimals. More than 6 decimals will get truncated by using floor function.OPTIONAL - apartmentAddress, streetAddress2, landmark, city, state, pincode, country

drop_details.address.contact_details	json	REQUIRED - name and phone number of receiver. Note - phone number should always include country code. (91) - ex - 919898989898
additional_comments	string	OPTIONAL - string used to identify an order for administrative purposes. The same will show up in the PFE dashboard . Maximum length is 256 characters.
delivery_instructions	json	OPTIONAL -
delivery_instructions.instructions_list		<code>type - text</code> is the only value supported for now. <code>description</code> is the actual delivery instruction which would be communicated to the delivery partner.

Request Data Class

```
data class CreateOrderRequest(
    val requestId: UUID,
    val pickupDetails: Address,
    val dropDetails: Address,
    val additionalComments: String?
)
data class Address(
    val address: AddressDetails
)
data class AddressDetails(
    val apartmentAddress: String?,
    val streetAddress1: String,
    val streetAddress2: String?,
```

```

        val landmark: String?,
        val city: String?,
        val state: String?,
        val pincode: String?,
        val country: String?,
        val lat: Double,
        val lng: Double,
        val contactDetails: ContactDetails
    )
    data class ContactDetails(
        val name: String,
        val phoneNumber: String
    )
    data class DeliveryInstructions(
        val instructionsList: List<Instruction>
    )
    sealed class Instruction {
        data class Message(
            val type: String,
            val description: String
        ): Instruction()
    }
}

```

Sample Request

```

curl --location --request POST 'https://pfe-apigw-uat.porter.in/v1/orders/create' \
--header 'x-api-key: 68db3908-6cb4-4413-899c-d23e472c2711' \
--header 'Content-Type: application/json' \
--data-raw '{
    "request_id": "TEST_0_8236098bfc-87e0-11ec-a8a3-0242ac120004",
    "delivery_instructions": {
        "instructions_list": [
            {

```

```

        "type": "text",
        "description": "handle with care"
    }
}
},
"pickup_details": {
    "address": {
        "apartment_address": "27",
        "street_address1": "Sona Towers",
        "street_address2": "Krishna Nagar Industrial
Area",
        "landmark": "Hosur Road",
        "city": "Bengaluru",
        "state": "Karnataka",
        "pincode": "560029",
        "country": "India",
        "lat": 12.935025018880504,
        "lng": 77.6092605236106,
        "contact_details": {
            "name": "Test Sender",
            "phone_number": "+919876543210"
        }
    }
},
"drop_details": {
    "address": {
        "apartment_address": "this is apartment addr
ess",
        "street_address1": "BTM Layout",
        "street_address2": "This is My Order ID",
        "landmark": "BTM Layout",
        "city": "Bengaluru",
        "state": "Karnataka",
        "pincode": "560029",
        "country": "India",
        "lat": 12.947146336879577,

```

```

        "lng": 77.62102993895199,
        "contact_details": {
            "name": "Test Receiver",
            "phone_number": "+919876543210"
        }
    },
    "additional_comments": "This is a test comment"
}'

```

▼ Response Details

Response Parameters Description:

NAME	TYPE	DESCRIPTION
request_id	string (UUID)	Client request id which is used by the client to track their request. It should be a uuid with 32 characters.
order_id	string	Unique order id
estimated_pickup_time	long	Epoch timestamp in milliseconds. Specifies the estimated time when the partner will pick up the items. Note - estimated_pickup_time is null when supply is not available
estimated_fare_details	json	Fare details for the order. Note - minor_amount will always be in the minor amount of the currency. For ex - It will be paise for INR.
tracking_url	string	url for tracking the order

Response Data Class:

```

data class CreateOrderResponse(
    val requestId: String,
    val orderId: String,
    val estimatedPickupTime: Long,
    val estimatedFareDetails: EstimatedFareDetails,

```

```

        val trackingUrl: String
    )
    data class EstimatedFareDetails(
        val currency: String,
        val minorAmount: Int
    )

```

Sample Success Response

```

Response Code - 201 Created
Response Body -
{
    "request_id": "86098bfc-87e0-11ec-a8a3-0242ac120002",
    "order_id": "CRN17855725",
    "estimated_pickup_time": 1642473111,
    "estimated_fare_details":
    {
        "currency": "INR",
        "minor_amount": 35000
    },
    "tracking_url": "https://porter.in/track_live_order?booking_id=CRN83543479&customer_uuid=0337fe22-0745-4d5c-8514-3003912be89a"
}

```

Sample Failure Response

```

Response Code - 400 Bad Request
{
    "type": "bad_request",
    "message": "Invalid pickup lat long"
}

{
    "type": "bad_request",

```

```

    "message": "Invalid pickup Street address 1 "
  }

  {
    "type": "bad_request",
    "message": "Invalid pickup contact details "
  }

  {
    "type": "bad_request",
    "message": "Invalid drop lat long"
  }

  {
    "type": "bad_request",
    "message": "Invalid drop Street address 1 "
  }

  {
    "type": "bad_request",
    "message": "Invalid drop contact details "
  }

  {
    "type": "bad_request",
    "message": "Missing required property lat"
  }

  {
    "type": "bad_request",
    "message": "Missing required property lng"
  }

  {
    "type": "bad_request",
    "message": "Missing required property street_address

```

```
1"
}

{
  "type": "bad_request",
  "message": "Missing required property contact_details"
}

{
  "type": "bad_request",
  "message": "Missing required property name"
}

{
  "type": "bad_request",
  "message": "Missing required property phone_number"
}

{
  "type": "bad_request",
  "message": "Missing a request parameter"
}
```

Response Code - 401 Unauthorized

```
{
  "type": "missing_auth_token",
  "message": "Missing Auth Token"
}

{
  "type": "auth_token_invalid",
```

```
"message": "Invalid Api Token"
}
```

Response Code - 422 - Unprocessable Entity

```
{
  "type": "restricted_location",
  "message": "Sorry. We do not have API support for the
pickup/drop location
you've chosen"
}
```

```
{
  "type": "restricted_location",
  "message": "Sorry! We do not allow service in the ar
ea you have selected"
}
```

```
{
  "type": "restricted_location",
  "message": "restricted pickup location"
}
```

```
{
  "type": "restricted_location",
  "message": "restricted drop location"
}
```

```
{
  "type": "vehicle_not_found",
  "message": "No drivers available in the vicinity. Ple
ase try after some time"
}
```

```
{
  "type": "similar_order_exception",
```

```

    "message": "You have created a similar order recently"
  }

  {
    "type": "insufficient_wallet_balance",
    "message": "Please clear your dues and then try placing an order"
  }

  {
    "type": " ",
    "message": "sorry, failed to create order"
  }

```

```

Response Code - 500 Internal Server Error
{
  "type": "internal_server_error",
  "message": "Something went wrong!! "
}

```

▼ Track Order API

▼ Request Details

Http method : **HTTP**

URI : **/v1.1/orders/{order_id}**

Request Parameters Description:

NAME	TYPE	DESCRIPTION
order_id	string	REQUIRED - CRN number which was sent as part of create_order response

Sample Request

```

curl --location -g --request GET 'https://{porter_host}/v1/orders/{order_id:

```

```
string}' \
--header 'X-API-KEY: 08AJTXXXXXXXXXX-UA1LiA'
```



Calls to this API are rate limited to once per minute per order

▼ Response Details

Response Parameters Description:

NAME	TYPE	DESCRIPTION
order_id	string	Unique order id
status	enum	One of [open, accepted, live, ended, cancelled]*
partner_info	json	Info. related to the partner
partner_info.name	string	Name registered with porter
partner_info.vehicle_number	string	Vehicle registration number
partner_info.vehicle_type	string	Vehicle type like two_wheeler or others
partner_info.mobile	json	Country_code, mobile_number
partner_info.partner_secondary_mobile	json	Country_code, mobile_number
partner_info.location	json	Current location of the partner. latitude and longitude values of the current location.
order_timings	json	All timings related to the order. Timings are in epoch seconds.

Response Data Class:

```

data class OrderResponse(
    val orderId: String,
    val status: Status,
    val partnerInfo: PartnerInfo?,
    val orderTimings: OrderTimings,
    val fareDetails: FareDetails
)
enum class Status{
    open,
    accepted,
    live,
    ended,
    cancelled
}
data class PartnerInfo(
    val name: String,
    val vehicleNumber: String,
    val vehicleType: VehicleType,
    val mobile: Mobile,
    val partnerSecondaryMobile: Mobile,
    val location: Location?
)
enum class VehicleType {
    OTHERS,
    TWO_WHEELER
}
data class Mobile(
    val countryCode: String,
    val mobileNumber: String
)
data class Location(
    val lat: Double,
    val long: Double
)
data class OrderTimings(

```

```

        val pickupTime: Long,
        val orderAcceptedTime: Long?,
        val orderStartedTime: Long?
    )
    data class FareDetails(
        val estimatedFareDetails: EstimatedFareDetails?,
        val actualFareDetails: ActualFareDetails?
    )
    data class EstimatedFareDetails(
        val currency: String,
        val minorAmount: Long
    )

```

Sample Success Responses

```

Response Code - 200 OK
LIVE ORDER
{
    "order_id": "CRN93814651",
    "status": "live",
    "partner_info": {
        "name": "Anupam Patel",
        "vehicle_number": "AK-02-HH-2020",
        "vehicle_type": "TWO_WHEELER",
        "mobile": {
            "country_code": "91",
            "mobile_number": "9535321734"
        },
        "partner_secondary_mobile": {
            "country_code": "91",
            "mobile_number": "9535321734"
        },
        "location": {
            "lat": 12.934672,
            "long": 77.6093797
        }
    }
}

```

```

    },
    "order_timings": {
      "pickup_time": 1669879581,
      "order_accepted_time": 1669877932,
      "order_started_time": 1669877997,
      "order_ended_time": null
    },
    "fare_details": {
      "estimated_fare_details": {
        "currency": "INR",
        "minor_amount": 8400
      },
      "actual_fare_details": null
    }
  }
}, {
  "order_id": "CRN93814651",
  "status": "live",
  "partner_info": {
    "name": "Anupam Patel",
    "vehicle_number": "AK-02-HH-2020",
    "vehicle_type": "TWO_WHEELER",
    "mobile": {
      "country_code": "91",
      "mobile_number": "9535321734"
    },
    "partner_secondary_mobile": {
      "country_code": "91",
      "mobile_number": "9535321734"
    },
    "location": null
  },
  "order_timings": {
    "pickup_time": 1669879581,
    "order_accepted_time": 1669877932,
    "order_started_time": 1669877997,

```

```
        "order_ended_time": 1669878042
    },
    "fare_details": {
        "estimated_fare_details": null,
        "actual_fare_details": {
            "currency": "INR",
            "minor_amount": 5500
        }
    }
}
```

Response Code - 200 OK

OPEN ORDER

```
{
    "order_id": "CRN93814651",
    "status": "open",
    "partner_info": null,
    "order_timings": {
        "pickup_time": 1669879581,
        "order_accepted_time": null,
        "order_started_time": null,
        "order_ended_time": null
    },
    "fare_details": {
        "estimated_fare_details": {
            "currency": "INR",
            "minor_amount": 8400
        },
        "actual_fare_details": null
    }
}
```

Response Code - 200 OK

ACCEPTED ORDER

```

{
  "order_id": "CRN93814651",
  "status": "accepted",
  "partner_info": {
    "name": "Anupam Patel",
    "vehicle_number": "AK-02-HH-2020",
    "vehicle_type": "TWO_WHEELER",
    "mobile": {
      "country_code": "91",
      "mobile_number": "9535321734"
    },
    "partner_secondary_mobile": {
      "country_code": "91",
      "mobile_number": "9535321734"
    },
    "location": {
      "lat": 12.934672,
      "long": 77.6093797
    }
  },
  "order_timings": {
    "pickup_time": 1669879581,
    "order_accepted_time": 1669877932,
    "order_started_time": null,
    "order_ended_time": null
  },
  "fare_details": {
    "estimated_fare_details": {
      "currency": "INR",
      "minor_amount": 8400
    },
    "actual_fare_details": null
  }
}

```

Response Code - 200 OK

ENDED ORDER

Response Body -

```
{
  "order_id": "CRN93814651",
  "status": "ended",
  "partner_info": {
    "name": "Anupam Patel",
    "vehicle_number": "AK-02-HH-2020",
    "vehicle_type": "TWO_WHEELER",
    "mobile": {
      "country_code": "91",
      "mobile_number": "9535321734"
    },
    "partner_secondary_mobile": {
      "country_code": "91",
      "mobile_number": "9535321734"
    },
    "location": null
  },
  "order_timings": {
    "pickup_time": 1669879581,
    "order_accepted_time": 1669877932,
    "order_started_time": 1669877997,
    "order_ended_time": 1669878042
  },
  "fare_details": {
    "estimated_fare_details": null,
    "actual_fare_details": {
      "currency": "INR",
      "minor_amount": 5500
    }
  }
}
```

Response Code - 200 OK
CANCELLED after accepting ORDER

Response Body -

```
{
  "order_id": "CRN74531802",
  "status": "cancelled",
  "partner_info": {
    "name": "Test Partnerr",
    "vehicle_number": "HY-45-YU-5677",
    "vehicle_type": "TWO_WHEELER",
    "mobile": {
      "country_code": "91",
      "mobile_number": "6100001111"
    },
    "partner_secondary_mobile": {
      "country_code": "91",
      "mobile_number": "6100001111"
    },
    "location": null
  },
  "order_timings": {
    "pickup_time": 1658401121,
    "order_accepted_time": 1658397546,
    "order_started_time": null
  },
  "fare_details": {
    "estimated_fare_details": {
      "currency": "INR",
      "minor_amount": 6600
    },
    "actual_fare_details": null
  }
}
```

Response Code - 200 OK

CANCELLED ORDER

Response Body -

```
{
  "order_id": "CRN15372139",
  "status": "cancelled",
  "partner_info": null,
  "order_timings": {
    "pickup_time": 1658392782,
    "order_accepted_time": null,
    "order_started_time": null
  },
  "fare_details": {
    "estimated_fare_details": {
      "currency": "INR",
      "minor_amount": 6600
    },
    "actual_fare_details": null
  }
}
```

Sample Failure Response

Response code - 404

```
{
  "type": "crn_number_not_found",
  "message": "crn_number: CRN2345 not found for accountId: 3"
}
```

Response code - 400

```
{
  "type": "bad_request",
```

```
{
  "message": "Invalid order id"
}
```

Response code - 401

```
{
  "type": "missing_auth_token",
  "message": "Missing Auth Token"
}

{
  "type": "auth_token_invalid",
  "message": "Invalid Api Token"
}
```

▼ Webhook - Order Update

Please fill [this](#) form to start receiving webhooks for order status updates from Porter.

The status update for a live order can also be delivered via webhooks in addition to fetching it using the Track Order API.

We would need a URL and a token(optional) for authentication in order to be able to deliver status updates for orders.

- Method: can be GET/POST
- The `Content-Type` should be `application/json`
 - if authentication is to be supported,
 - authentication key name : eg `x-api-key`
 - authentication token value: eg: `93b193f2-e1a9-40e9-9a9e-9370e90ba0b0`
 - authentication location : `header / params`

- avoid doing heavy task in webhook , before sending response [webhook should not time out]. Response for webhook is expected within 15 seconds of sending it. Else we would retry for a maximum of 2 times.

A webhook will be delivered whenever the order moves into the following stages

Stage	Meaning
Accepted	A driver has accepted the order and is moving towards the pickup location
Live	The consignment has been picked up by the driver and the driver is moving towards the drop location
Ended	The consignment has been dropped off at the drop location
Reopened	Previously assigned driver had to cancel the order and we are attempting to assign a new driver to this order.
Cancelled	The order has been cancelled

We expect a response once the webhook has been received at the clients end. In case of non-2xx responses, same webhook would be retried again for a maximum of 2 times.

Example

URL : client.com/porter/order_update
Token : e0c177b1-1847-4a01-b898-33f3hw72i119

▼ Webhook payload format

```
sealed class WebhookPayload {
```

```

data class Accepted(
    val status: String,
    val orderId: String,
    val orderDetails: OrderDetails.Accepted
) : WebhookPayload()

data class StartTrip(
    val status: String,
    val orderId: String,
    val orderDetails: OrderDetails.StartTrip
) : WebhookPayload()

data class EndTrip(
    val status: String,
    val orderId: String,
    val orderDetails: OrderDetails.EndTrip
) : WebhookPayload()

data class CancelTrip(
    val status: String,
    val orderId: String,
    val orderDetails: OrderDetails.CancelTrip
) : WebhookPayload()

    data class ReOpenTrip(
        val status: String,
        val orderId: String,
        val orderDetails: OrderDetails.ReOpenTrip
    ) : WebhookPayload()
}

```

```

sealed class OrderDetails {
    data class Accepted(
        val eventTs: Long?,
        val partnerLocation: Location?,

```

```

        val driverDetails: DriverDetails?
    ) : OrderDetails()

    data class StartTrip(
        val partnerLocation: Location?,
        val estimatedTripFare: Int
    ) : OrderDetails()

    data class EndTrip(
        val eventTs: Long?,
        val actualTripFare: Long?
    ) : OrderDetails()

    data class CancelTrip(
        val eventTs: Long?
    ) : OrderDetails()

        data class ReOpenTrip(
            val eventTs: Long?
        ) : OrderDetails()
}

```

```

data class Location(
    val lat: Double,
    val long: Double
)

data class DriverDetails(
    val driverName: String,
    val vehicleNumber: String,
    val mobile: String
)

```

Sample Webhook

Accepted:

```
{
  "status": "order_accepted",
  "order_id": "CRN123456789",
  "order_details":
    {
      "event_ts": 1664457558,
      "partner_location":
        {
          "lat": 12.93468735,
          "long": 77.6095961
        },
      "driver_details":
        {
          "driver_name": "Test Partnerr",
          "vehicle_number": "HY-45-YU-567
7",
          "mobile": "6100001111"
        }
    }
}
```

Trip Started:

```
{
  "status": "order_start_trip",
  "order_id": "CRN123456789",
  "order_details":
    {
      "event_ts": 1664458905,
      "partner_location":
        {
          "lat": 12.93468735,
```

```
        "long": 77.6095961
      },
      "estimated_trip_fare": 77
    }
  }
}
```

Order Ended:

```
{
  "status": "order_end_job",
  "order_id": "CRN123456789",
  "order_details":
    {
      "event_ts": 1664458152,
      "actual_trip_fare": 77
    }
}
```

Order ReOpened:

```
{
  "status": "order_reopen",
  "order_id": "CRN123456789",
  "order_details":
    {
      "event_ts": 1664458152
    }
}
```

Order Cancelled:

```
{
  "status": "order_cancel",
  "order_id": "CRN123456789",
  "order_details":
    {
      "event_ts": 1664458152
    }
}
```

```
}  
}
```

▼ Cancel Order API

▼ Request Details

Http method : HTTP

URI : `/v1/orders/{order_id: string}/cancel`

Request Parameters Description:

NAME	TYPE	DESCRIPTION
order_id	string	REQUIRED - CRN number which was sent as part of create_order response

Sample Request

```
curl --location -g --request POST 'https://{porter_host}/v1/orders/{order_id:  
string}/cancel' \  
--header 'X-API-KEY: 08AJTXXXXXXXXXX-UA1LiA'
```

▼ Response Details

Sample Success Responses

Response Code - 200

```
{  
  "code": 200,  
  "message": "order got cancelled successfully!!"  
}
```

Sample Failure Response

Response Code - 400

```
{
```

```
    "type": "bad_request",
    "message": "Invalid order id"
}
```

Response Code - 401

```
{
  "type": "missing_auth_token",
  "message": "Missing Auth Token"
}

{
  "type": "auth_token_invalid",
  "message": "Invalid Api Token"
}
```

Response Code - 404

```
{
  "type": "no_content_found",
  "message": "order not found for customer"
}
```

Response Code - 422

```
{
  "type": "cannot_process",
  "message": "order has already been cancelled"
}

{
  "type": "cannot process",
  "message": "order has already started"
}

{
  "type": "cannot_process",
```

```

    "message": "order has already ended"
  }

  {
    "type": "cannot process",
    "message": "order has already completed"
  }

  {
    "type": "cannot process",
    "message": "order can not be cancelled"
  }

```

```

Response Code - 500
{
  "type": "internal_server_error",
  "message": "Something went wrong!!"
}

```

▼ Testing the APIs

We have a `/initiate_order_flow` API that is currently live only on our UAT environment. The purpose of this API is to help you test out the order flow on the UAT environment. When this API is called for an order that has been created on the UAT environment, it ensures that the order moves from one status to another depending on the `flow_type` chosen.

▼ Request Details

Http method : `HTTP`

URI : `/v1/simulation/initiate_order_flow`

Request Parameters Description:

Name	Type	Description
order_id	string	The order_id of an order that has already been

Name	Type	Description
		created in the UAT environment
flow_type	integer	This value indicates the flow that the order is supposed to flow through.

Sample Request

```
curl --location --request POST 'https://pfe-apigw-uat.porter.in/v1/simulation/initiate_order_flow' \
--header 'X-API-KEY: 8c18d7ac-38a8-4930-a020-149b0fdf45d5' \
--header 'Content-Type: application/json' \

--data-raw '{
  "order_id": "CRN1670492101720",
  "flow_type": 0
}'
```

▼ Response Details

NAME	TYPE	DESCRIPTION
message	string	The error message in case there is an error

Sample Success Response

Response Code - 200

```
{}
```

Sample Failure Response

Response Code - 400

```
{
  "type": "flow_already_initiated",
```

```
"message": "Flow for this order has already been initiated"
}
```

▼ Flows




The time taken to go from one status to another in any of the flows below is ~1-2 min

flow_type	Flow name	Sequence of Order Statuses
0	Happy flow	open → accepted → live → completed
1	Cancelled before driver found	open → cancelled
2	Cancelled after driver found	open → accepted → cancelled
3	Cancelled post trip going live	open → accepted → live → cancelled
4	Fulfilled post reopening order	open → accepted → open → accepted → live → completed
5	Cancelled after reopening order before 2nd driver could accept	open → accepted → open → cancelled
6	Cancelled after reopening order and 2nd driver accepted	open → accepted → open → accepted → cancelled
7	Cancelled post trip going live after 2nd driver accepting order	open → accepted → open → accepted → live → cancelled

▼ Order Statuses and their Meanings

Order Status	Meaning
open	looking for partners to be assigned to the order
accepted	order accepted by partner
live	partner has picked up the order and started trip
ended	partner has been paid and marked the order as paid
cancelled	order cancelled

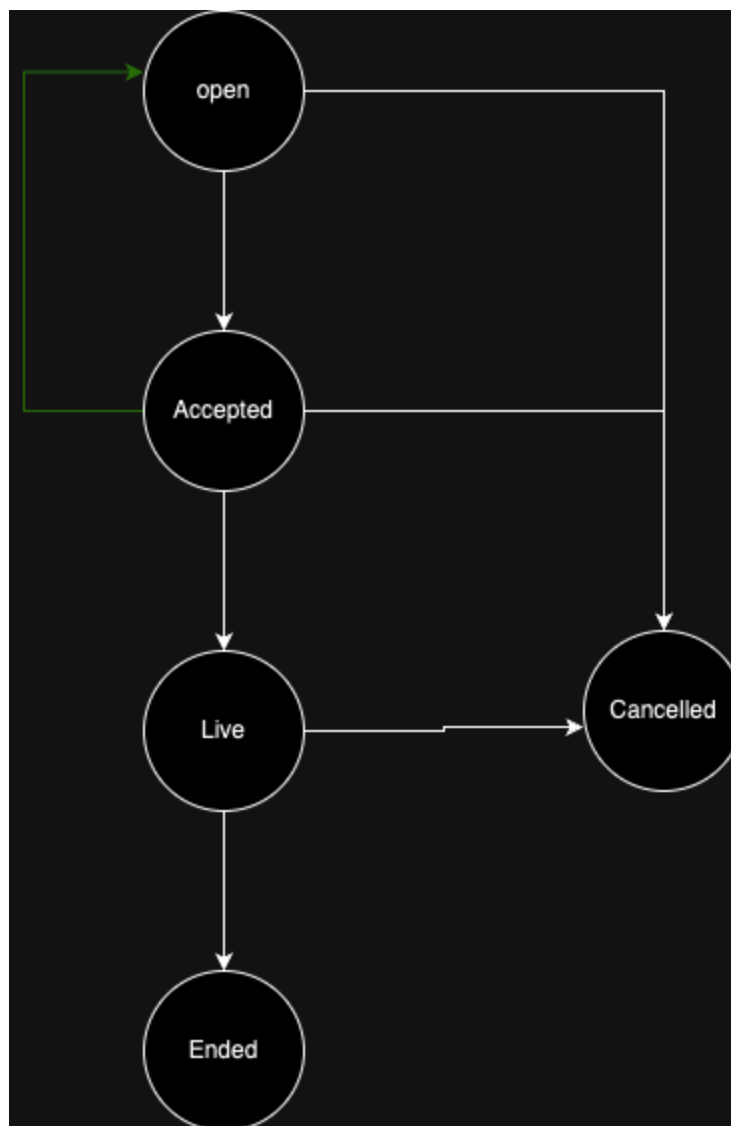

▼ Status Codes & their explanation

Status Code	Meaning
200	OK. Everything went as planned

201	Success. Order created.
304	Not Modified
400	Bad Request: Often missing argument or parameter
401	Unauthorised: Authentication failed
404	Page not found
406	Not Acceptable
422	Unprocessable entity
429	Too many Requests
500	Internal Server Error: Some error Occured
502	Bad Gateway: Service in maintenance
503	Service Unavailable: Try in sometime