

# Database Basics

## Database Management Systems and SQL



**SoftUni Team**  
**Technical Trainers**



**SoftUni**



**Software University**

<https://softuni.bg>

Have a Question?

[sli.do](https://sli.do)

**#fund-common**

1. Databases: Introduction
2. SQL vs. NoSQL Databases
3. DBMS Systems (Database Engines)
4. Relational Databases, SQL and MySQL Database
5. NoSQL Databases and MongoDB





# **Databases: Introduction**

Data Storage and Data Management

# What is a Database?

- A **database** is a collection of data, organized to be easily accessed, managed and updated
- Modern databases are managed by **Database Management Systems** (DBMS)
  - Define database **structure**, e.g. tables, collections, columns, relations, indexes
  - Create / Read / Update / Delete data (CRUD operations)
  - Execute **queries** (filter / search data)



- Databases hold and manage data in the back-end systems
- **Relational databases** (RDBMS)
  - Hold data in **tables** + **relationships**
  - Use the **SQL** language to query / modify data
  - Examples: MySQL, PostgreSQL, Web SQL in HTML5
- **NoSQL databases**
  - Hold **collections** of documents or key-value pairs
  - Examples: MongoDB, IndexedDB in HTML5



- Conventional data storage
  - Orders
  - Receipts



# From Data Storage to Databases

- We can **group related pieces of data** into separate columns:


Order#	Date	Customer	Product	S/N	Unit Price	Qty	Total
315	07/16/2016	David Rivers	Oil Pump	OP147-0623	69.90	1	69.90





# Why Do We Need Databases?

- Storing data is **not** the primary reason to use a database
- Flat storage runs into **issues** with
  - Ease of searching
  - Ease of updating
  - Performance
  - Accuracy and consistency
  - Security and access control
  - Redundancy

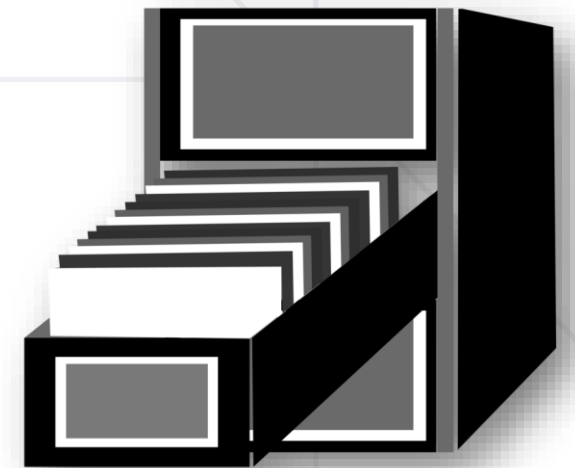



# **SQL vs. NoSQL Databases**

# SQL Databases (Relational Databases)

- Relational (**SQL**) databases organize data in **tables**
  - Tables have strict structure (**columns** with certain **data types**)
  - Can have **relationships** to other tables
- Relational databases use the **structured query language** (SQL) for defining and manipulating data
  - Extremely powerful for complex queries
- **Relational databases** are the most widely used data management technology



# SQL Databases (Relational Databases)

- Relational DB model organizes data into one or more **tables** of columns and rows with a **unique key** identifying each row and **foreign keys** defining **relationships**

Items

ID	Order ID	Name	Quantity	Price
5	1	Table	1	200.00
6	1	Chair	1	123.12

Customers

ID	Name	Email
5	Peter	peter@gmail.com
6	Jayne	jayne@gmail.com

Orders

ID	Customer ID	Date	Total Price
1	5	11/1/17	323.12
2	1	11/15/17	13.99



# NoSQL Databases (Non-Relational Databases)

- A **NoSQL** databases have dynamic schema for **unstructured** data
- Data is stored in many ways
  - Document-oriented
  - Column-oriented
  - Graph-based
  - Key-value store



# Scalability: Relational vs. NoSQL

- SQL are **vertically** scalable
  - You can increase the load on a single server by **increasing its resources** (CPU, RAM, SSD)
  - Or you can **replicate the data** to a cluster of several servers
- NoSQL are **horizontally** scalable
  - You handle more traffic by **sharding** and adding more servers in your NoSQL database cluster



# Structure: Relational vs. NoSQL

- SQL databases are **table-based**
- Better option for:
  - Applications that require multi-row transactions, such as an accounting system
  - Complex transaction processing systems
- SQL databases hold **dynamic data**
- NoSQL databases implement **four main data models**
  - Document store
  - Wide-column store
  - Key-value data store
  - Graph store



- **SQL databases** examples

- MySQL
- PostgreSQL
- Oracle
- Microsoft SQL Server
- SQLite and Web SQL

- **NoSQL databases** examples

- MongoDB
- Redis
- Google BigTable
- Amazon DynamoDB
- Azure Cosmos DB
- Cassandra









# **Database Management Systems (DBMS)**

- A Database Management System (**DBMS**) is a software, used to **define, manipulate, retrieve** and **manage** data in a database
- DBMS generally **manipulates** the data itself, the data format, field names and data types, record structure and file structure
- DBMS examples
  - MySQL, MS SQL Server, Oracle, PostgreSQL
  - MongoDB, Cassandra, Redis, HBase
  - Amazon DynamoDB, Azure Cosmos DB

- DBMS servers use the **client-server model**:

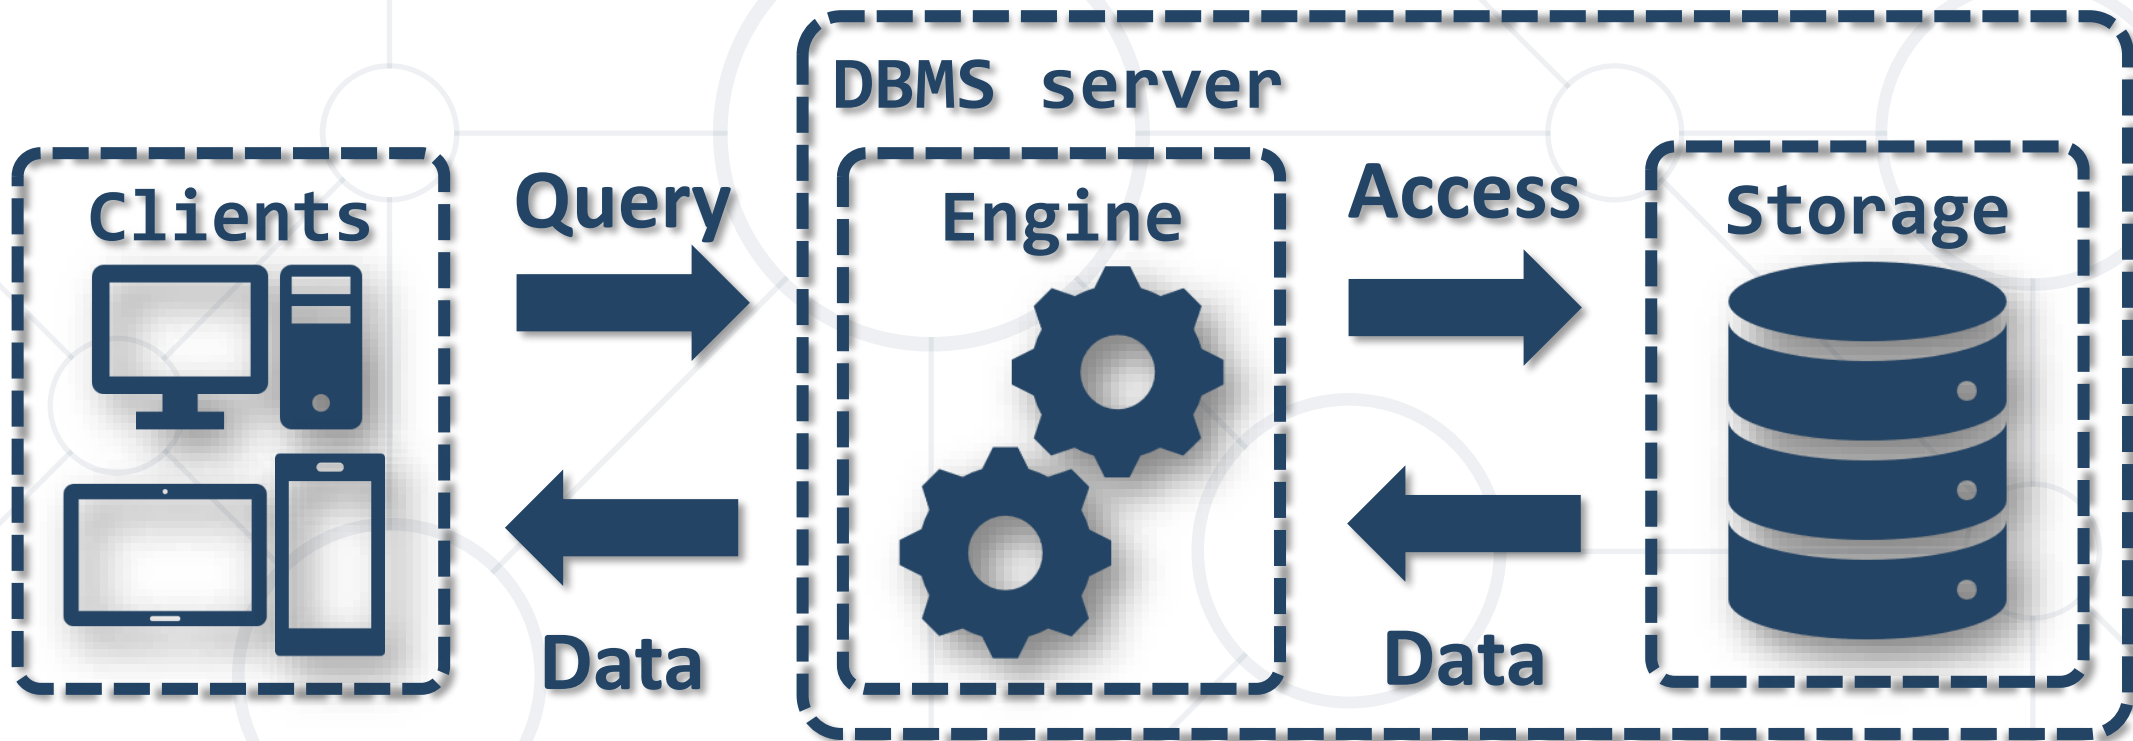

# DBMS Server Architecture

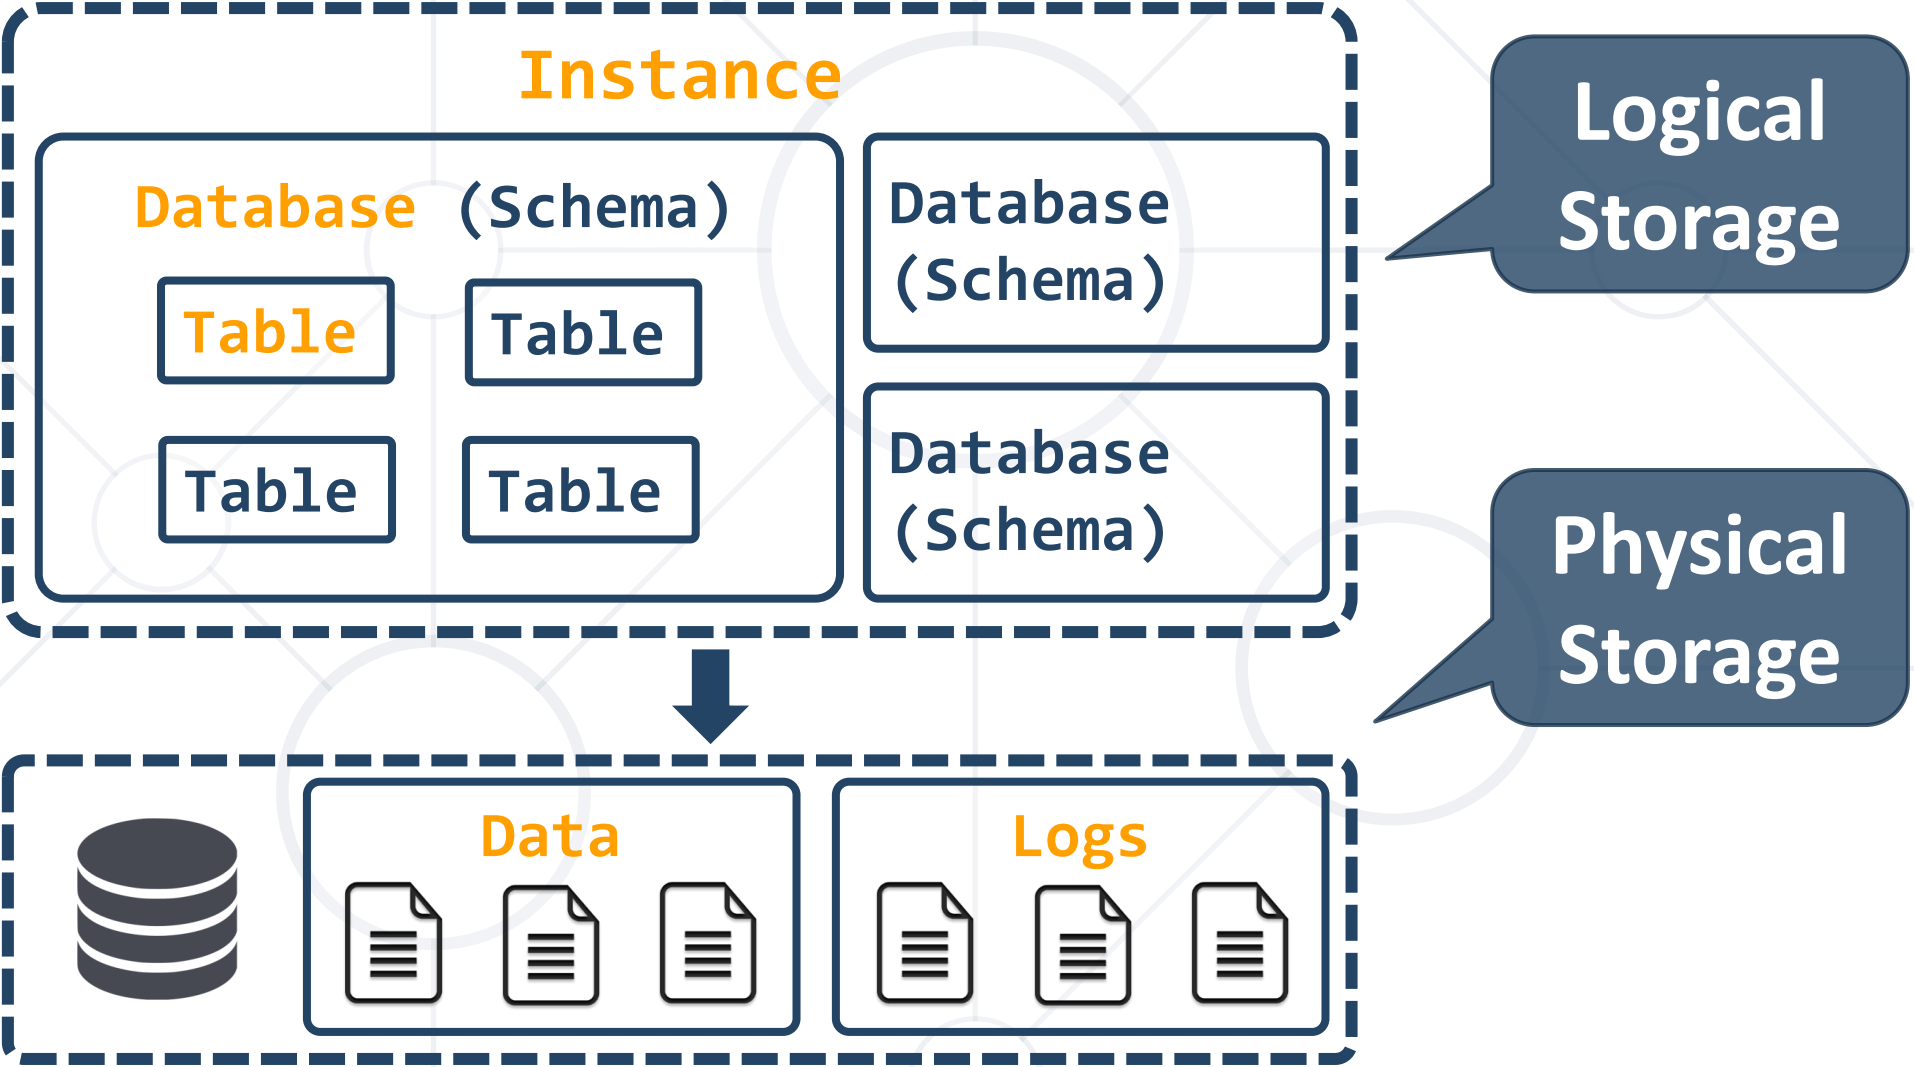




# **Relational Databases**

RDBMS, the SQL Language and MySQL Database

- The **table** is the main **building block** in the relational databases

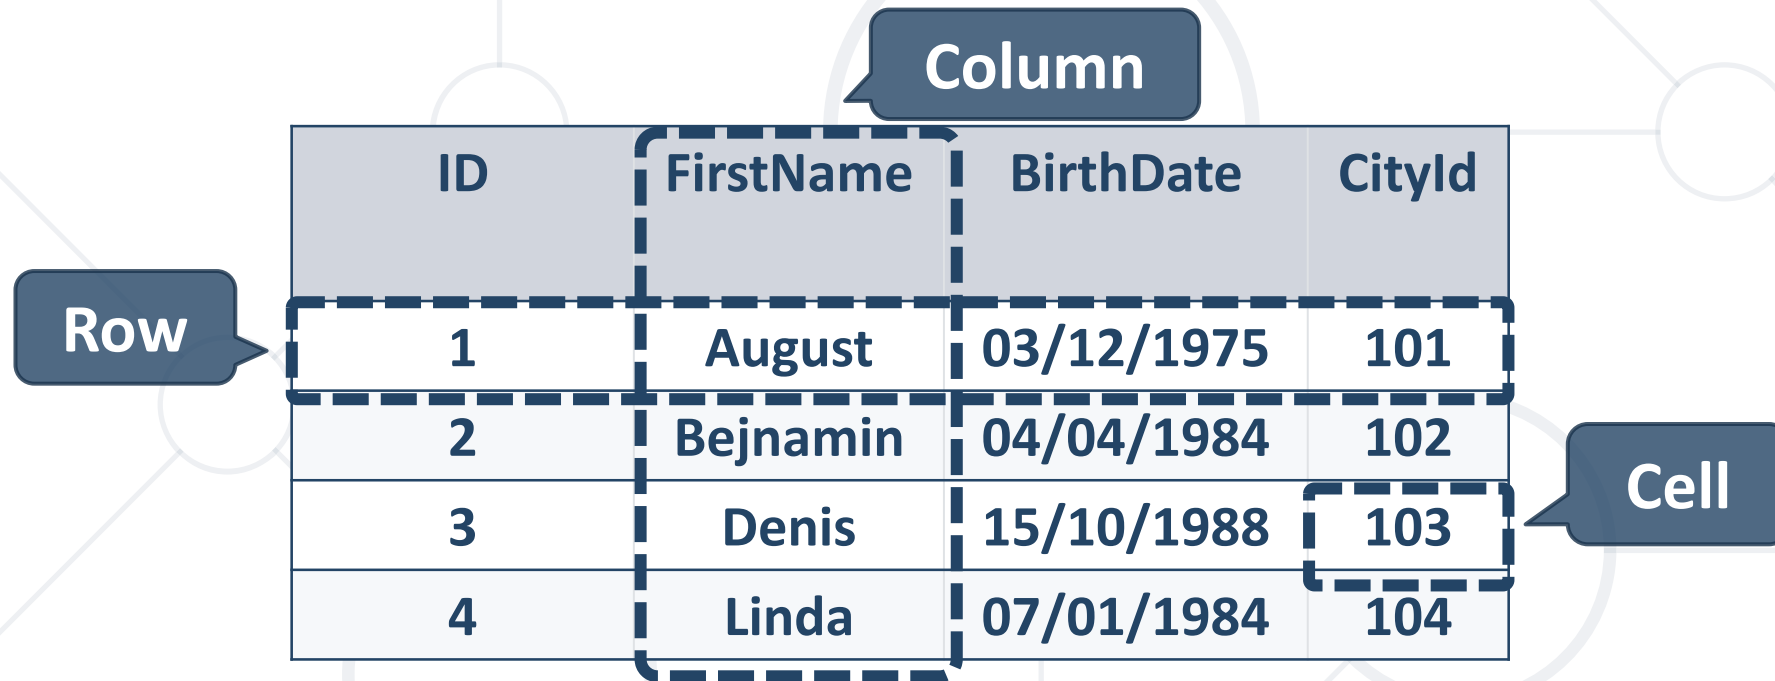

ID	FirstName	BirthDate	CityId
1	August	03/12/1975	101
2	Bejnamin	04/04/1984	102
3	Denis	15/10/1988	103
4	Linda	07/01/1984	104

- Each **row** is called a **record** or **entity**
- Columns (**fields**) define the **type** of data they contain

# Structured Query Language (SQL)

- **SQL** == query language designed for managing data in **relational** databases (RDBMS)
  - Used to communicate with the database engine
- Logically, SQL is divided into four sections
  - **Data definition**: describe the **structure** of data
  - **Data manipulation**: **store** and **retrieve data**
  - **Data control**: define who can **access the data**
  - **Transaction control**: bundle **operations** together and perform **commit** / **rollback**



- Example of SQL query

```
SELECT * FROM people
```

- The query is executed by the DBMS system
  - It returns a sequence of data rows, e.g.,

id	email	first_name	last_name
1	smith@yahoo.co.uk	John	Smith
2	pwh@gmail.com	Peter	White
3	anne@anne.com	Anne	Green
4	jason.jj@gmail.com	Jason	Anderson





- **MySQL** == **open-source** relational database management system (RDBMS), very popular, also known as MariaDB
  - Runs on **most** server platforms: Linux, Windows, macOS
- Used in many **large-scale** software projects
  - Amazon, Apple, Facebook, others
- In MySQL data is stored in **tables** with **relationships** between them
  - SQL is used to query / manipulate data



- phpMyAdmin (part of XAMPP)
  - **phpMyAdmin** is Web-based MySQL admin tool
  - **XAMPP** == Web server development stack
    - Apache + MariaDB + PHP + phpMyAdmin
- HeidiSQL
  - GUI tool for managing MySQL, MSSQL and PostgreSQL
  - Query / modify database
  - Explore database objects



- We can **communicate** with the database engine via **SQL**
- SQL commands provide greater **control** and **flexibility**
- To **create** a database in MySQL

```
CREATE DATABASE employees
```

Database  
name

- **Display** all databases in MySQL

```
SHOW DATABASES
```

# Creating Table and Inserting Values

## ■ Creating tables

Table name

```
CREATE TABLE people (  
  id INT NOT NULL PRIMARY KEY AUTO_INCREMENT,  
  email VARCHAR(40) NOT NULL,  
  first_name VARCHAR(40) NOT NULL,  
  last_name VARCHAR(40) NOT NULL  
)
```

Primary  
key  
definition

Column name

Data type

## ■ Inserting values

```
INSERT INTO people(email, first_name, last_name)  
VALUES ('john@gmail.com', 'John', 'Smith')
```

- **Retrieve** all records from a table

```
SELECT * FROM people
```

\* retrieves all columns

- You can **limit** (select) **the columns** to retrieve

```
SELECT first_name, last_name FROM people
```

List of columns

- You can **limit the number of rows**

```
SELECT first_name, last_name FROM people  
LIMIT 5
```

Number of rows to return

- Retrieve all records, matching a **filter**

```
SELECT * FROM people  
WHERE email = 'peter@gmail.com'
```

**Filter** the returned rows by a condition

- Filter** and **sort** data

```
SELECT * FROM people  
WHERE id > 10 AND id < 20  
ORDER BY id
```

**Filter** by multiple conditions

**Sort** by given column / expression

- **Updating** rows

Updates the last name of person

```
UPDATE people  
SET last_name = 'Adams'  
WHERE first_name = 'John'
```

```
UPDATE people  
SET first_name = 'Peter',  
    last_name = 'White',  
    email = 'pw@email.com'  
WHERE id = 42
```

Update multiple fields

# Deleting Data and Objects

- **Deleting** table rows

```
DELETE FROM people WHERE id = 42
```

- Deleting (**dropping**) database objects

- Table

Delete all records in a table

```
TRUNCATE TABLE people
```

Delete the table itself

```
DROP TABLE people
```

- Entire database

```
DROP DATABASE employees
```

- These actions **cannot be undone**





# NoSQL Databases

Using MongoDB


- **NoSQL databases** don't use tables and SQL
  - Instead, use **document collections** or **key-value pairs**
- More **scalable** and provide **superior performance**
- Examples: **MongoDB**, **Cassandra**, **Redis**, etc.

```
{  
  ObjectId("59d3fe7ed81452db0933a871"),  
  "email": peter@gmail.com,  
  "age": 22  
}
```

Example of JSON  
document in MongoDB



- **MongoDB** == free **open-source** cross-platform **document-oriented database**
  - Keeps collections of **JSON** documents (with or without schema)
- Sample usages: **mobile app** backend, product **catalog**, **poll** system, **blog** system, Web content management system (**CMS**)
- Supports evolving data requirements
  - The DB structure **may change** over the time
- Supports **indexing** for increased performance

- MongoDB Compass
- Robo 3T
  - Powerful **GUI tool** for MongoDB
  - Fully-featured IDE with embedded **shell**
- NoSQLBooster (alternative)
  - Shell-centric cross-platform GUI tool
  - Object explorer and query builder

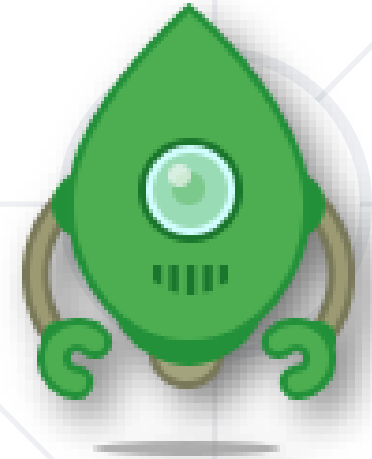

# Creating a Database

- **Creating a MongoDB database** in Robo 3T is done using the GUI
- Right click on [**New Connection**] and select [**Create Database**]

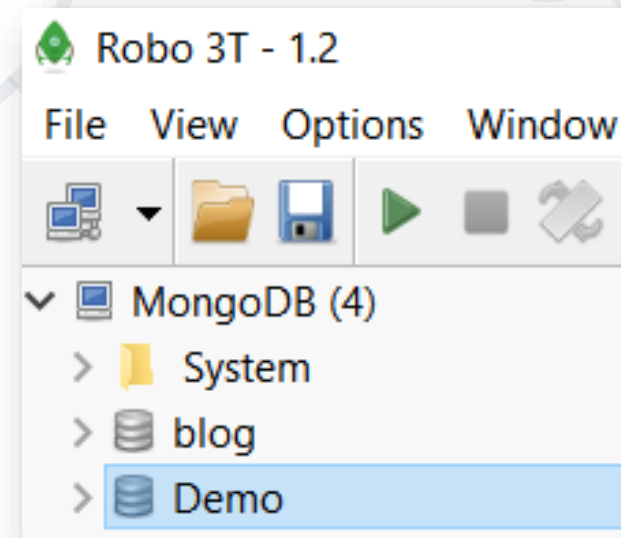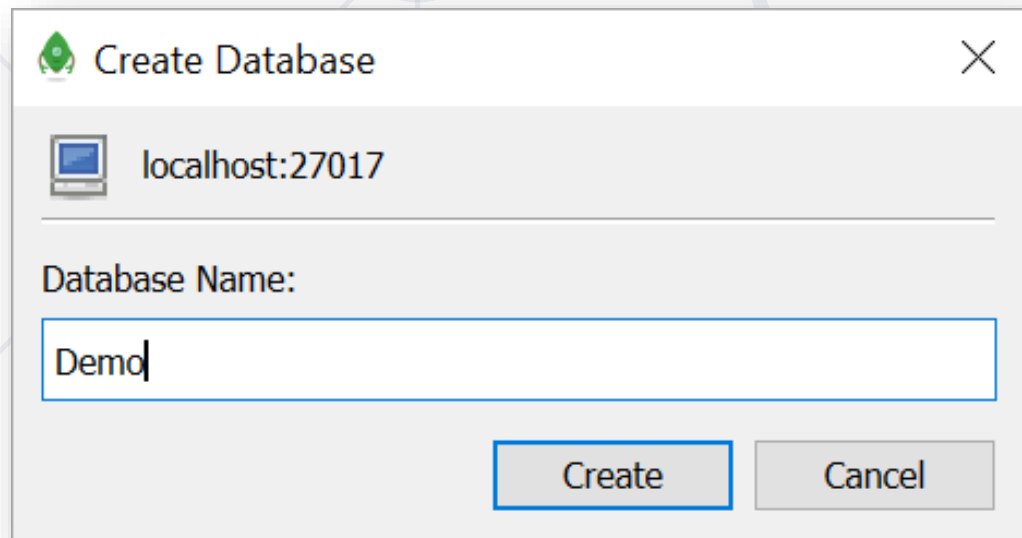

# Creating a Collection and Inserting Values

- **Creating a collection**

Collection name

```
db.createCollection('people')
```

- **Inserting a document** to existing collection

```
db.getCollection('people')  
  .insert({  
    firstName: 'Michael',  
    lastName: 'Smith',  
    email: 'michael@gmail.com'  
  })
```

Data is inserted as  
**JSON object**

- Get **all entries** from a collection

```
db.getCollection('people').find({})
```

- Filter elements by **given criteria**

```
db.getCollection('people').find({ firstName: 'Michael' })
```

- Return **specified** fields

```
db.getCollection('people').find(  
  { firstName: 'Michael' },  
  { lastName: 1 }  
)
```

Retrieves an **entity** with  
the desired **fields only**

- Update the **first** entry

```
db.getCollection('people').updateOne(  
  { firstName: 'Kate' },  
  { $set: { firstName: 'George', age: 25 } }  
)
```

New object (replacement)

Old values  
(filter)

```
db.getCollection('people').updateOne(  
  { firstName: 'Kate' },  
  { $set: { firstName: 'George', lastName:  
    'Doe' } },  
  { multi: true }  
)
```

Update **all matching entries**



- Delete the **first entry** that matches given criteria

```
db.getCollection('people').deleteOne(  
  { firstName: 'George' }  
)
```


- Delete **all entries** that match given criteria

```
db.getCollection('people').deleteMany(  
  { firstName: 'George' }  
)
```

- Database management systems (DBMS) **store** and **manage data**
  - Developers **communicate** with the DB engine via **SQL** commands or via **API**
- **MySQL** is open-source RDBMS: data is stored in **tables** and accessed via **SQL**
- **NoSQL** databases are more **flexible**
  - **MongoDB** stores entries in **JSON** format



# Questions?

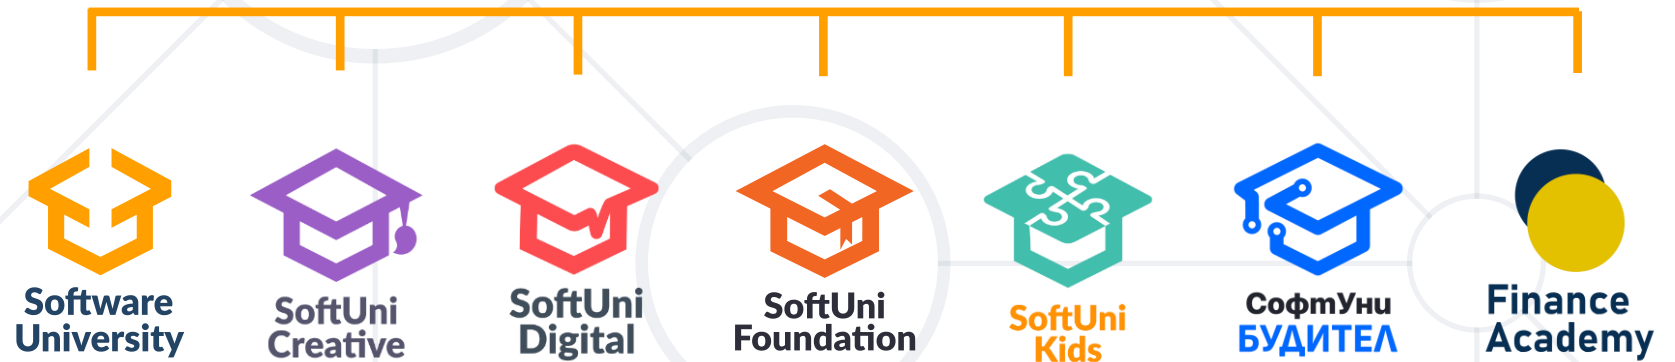

# SoftUni Diamond Partners



- Software University – High-Quality Education, Profession and Job for Software Developers

- [softuni.bg](http://softuni.bg), [about.softuni.bg](http://about.softuni.bg)

- Software University Foundation

- [softuni.foundation](http://softuni.foundation)

- Software University @ Facebook

- [facebook.com/SoftwareUniversity](https://facebook.com/SoftwareUniversity)



- This course (slides, examples, demos, exercises, homework, documents, videos and other assets) is **copyrighted content**
- Unauthorized copy, reproduction or use is illegal
- © SoftUni – <https://about.softuni.bg>
- © Software University – <https://softuni.bg>

