

Caméléon Creator Tutorials
Chapitre 2
Explore the glossary


All right reserved - Olivier Cugnon de Sévricourt & Vincent Tariel - 2012

Caméléon Creator Tutorials
Chapter 2
Explore the glossary


By Olivier Cugnon de Sévricourt

In this tutorial, we see how Caméléon dictionaries can be learned empirically.

You should follow the previous tutorial.

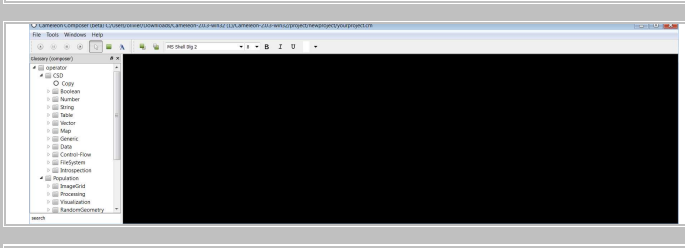

Create a new project.

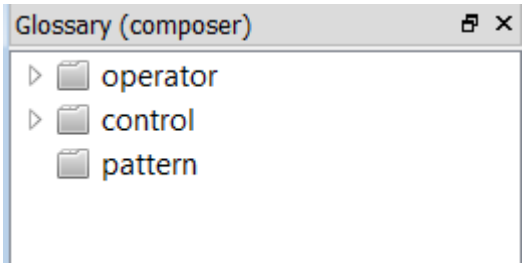

In the glossary, you find operator, control, pattern & ressource.


An operator is an elementary & reusable technical or business operation written in C++.

A control is a data view or a data editor.

A pattern is an elementary & reusable operation written in Caméléon language.

A ressource is a Caméléon instance data dependency.


All right reserved - Olivier Cugnon de Sévricourt & Vincent Tariel - 2012

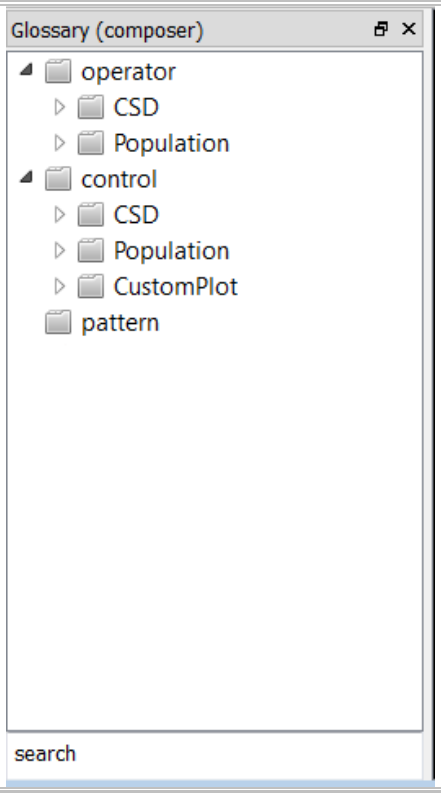

Open operator & control directory.


Operator directory is divided in business directories containing business operators.

Control directory is divided in business directories containing business controls (data views & data editors).

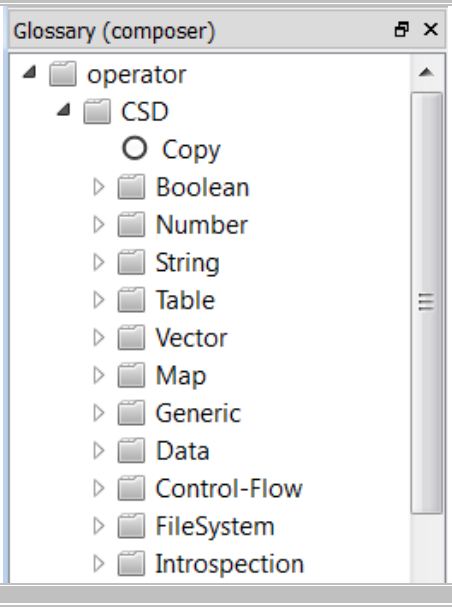


CSD, Caméléon Standard Dictionary, implements operators concerning elementary data types (String, Number ...).


All right reserved - Olivier Cugnon de Sévricourt & Vincent Tariel - 2012

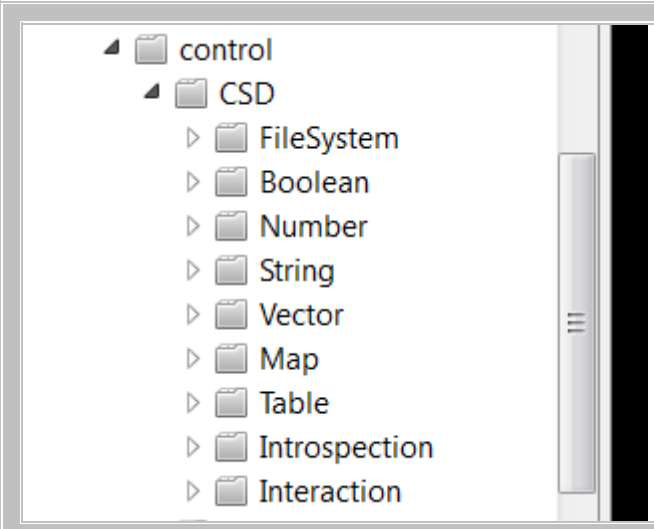

CSD, Caméléon Standard Dictionary, implements controls concerning elementary data types (String, Number ...).

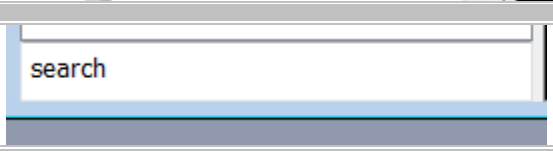

At the bottom of the glossary, you can see the search edit box.

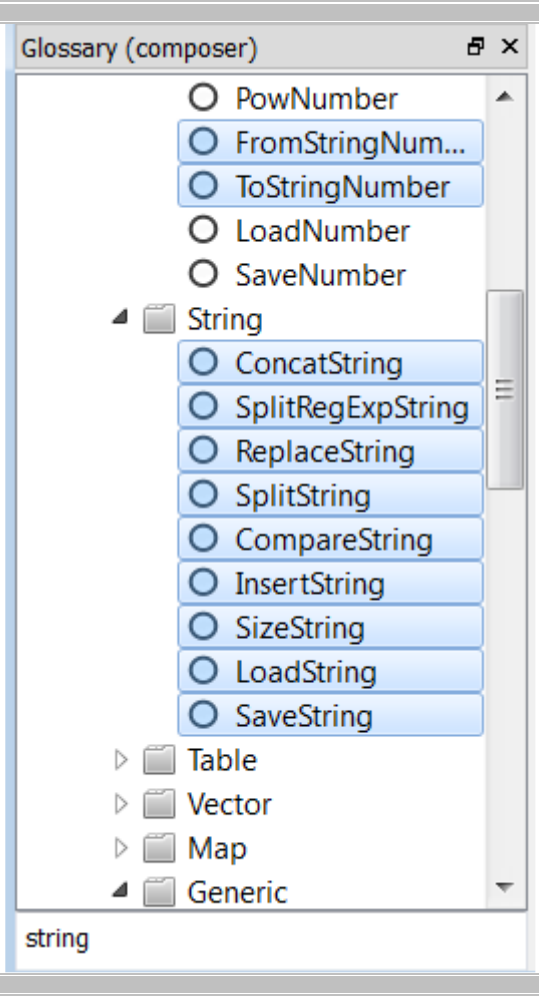


Click left on it and **type** "string".

The search feature show you operators & controls regarding String data type.

You can use the slide bar to show selected controls.


All right reserved - Olivier Cugnon de Sévricourt & Vincent Tariel - 2012

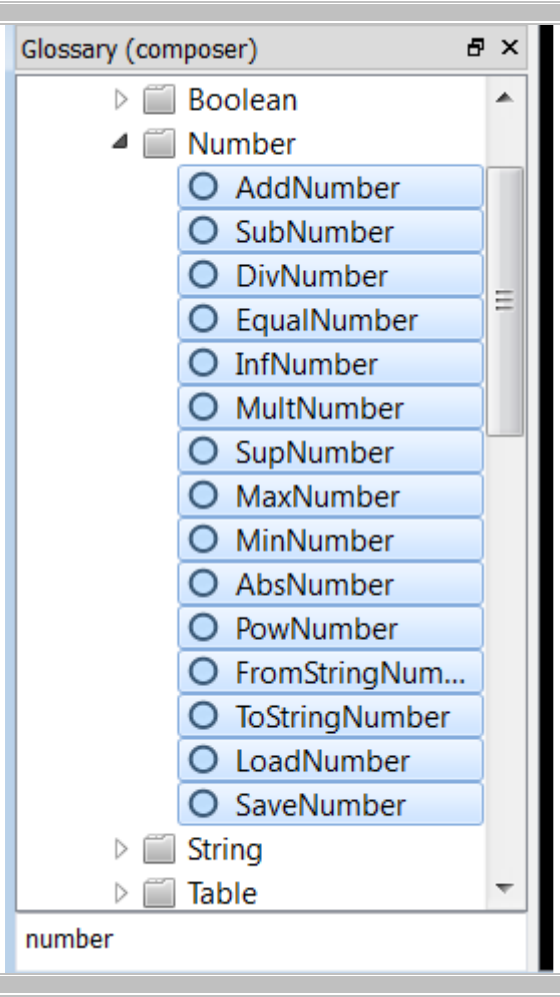


Search "number".

This illustrate our main naming rule.

An operator or a control name is composed by a functional name & the main data name.

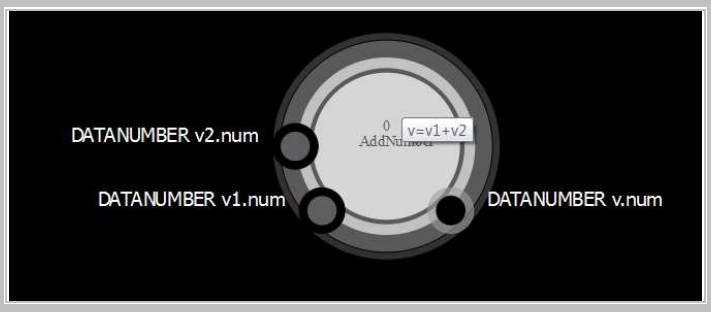


Create AddNumber & **show** its information.



You can see a tool tip information if you hover your mouse on the operator.

It's a simple addition.


All right reserved - Olivier Cugnon de Sévricourt & Vincent Tariel - 2012

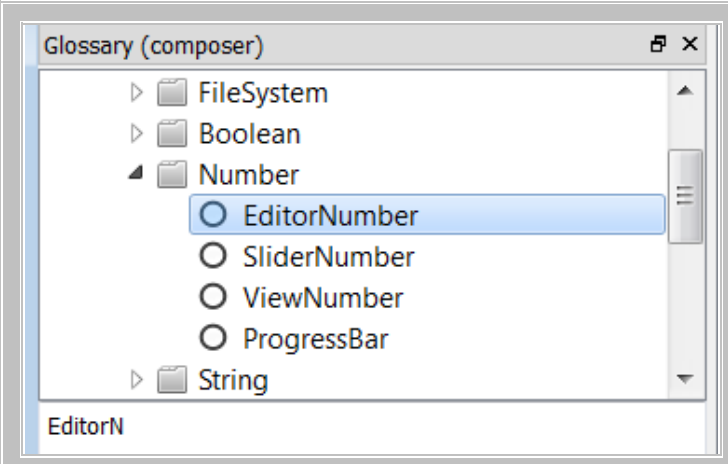

Find EditorNumber control.

All elementary editors has "editor" in their names.

Idem for views.

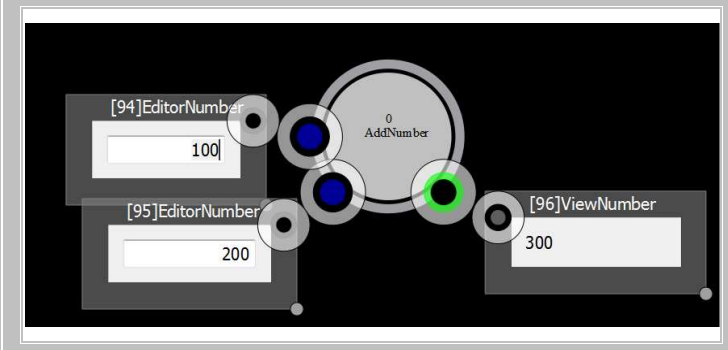

You want to see how AddNumber works.

So, **create** 2 EditorNumber & 1 ViewNumber.


Connect input, output,
set EditorNumber values,
And **click** on play.

You see the result.



For instance, you want to see how data Table looks.

Create EditorTable & ViewTable.




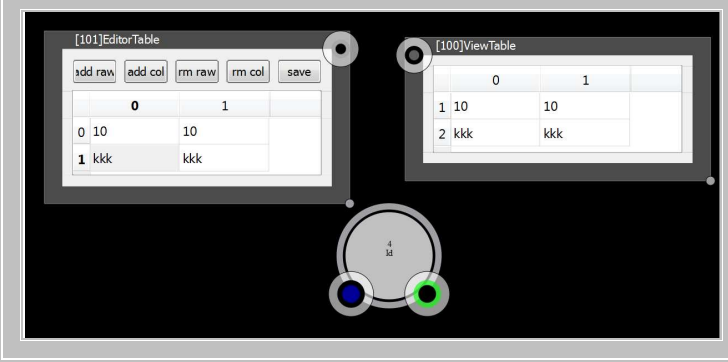


Create an id. It's a simple copy.

Edit and **save** the table on EditorTable.

Connect and **play**.

All right reserved - Olivier Cugnon de Sévricourt & Vincent Tariel - 2012

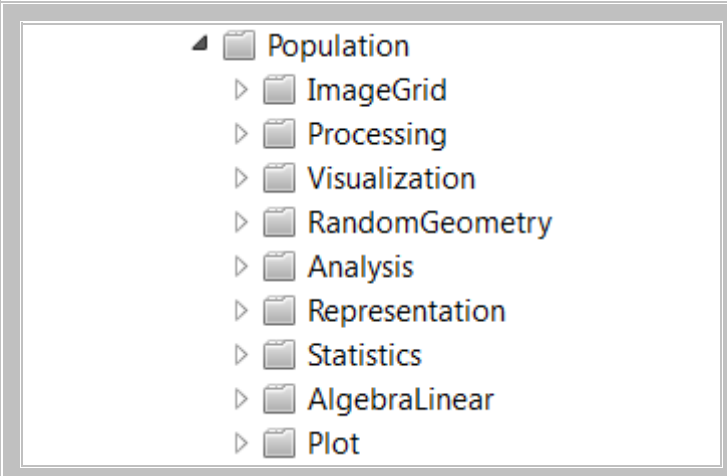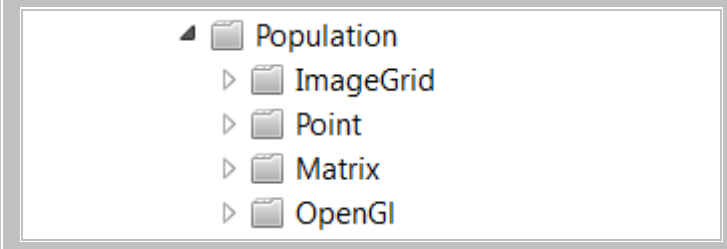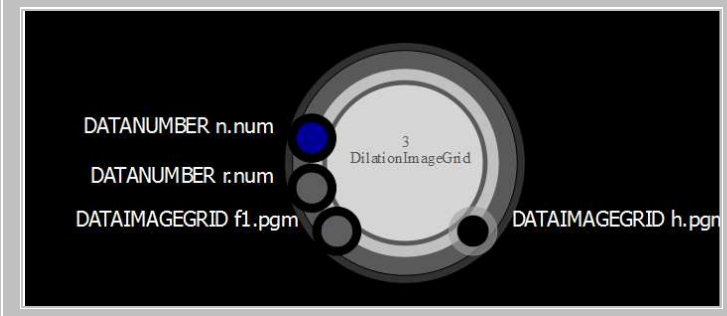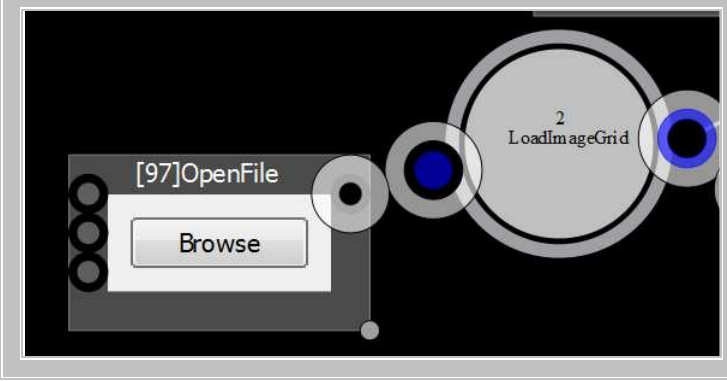	Population implements more than 200 algorithms in the image processing & analysis field.
	And some useful editors & views.
	**Find** & **Create** Dilation operator. You want to know what it does.
	**Create** Load control to load an image. All datas has a save & load operator to read & write data on hard drive. **Find** OpenFile control. **Create** it & **connect** it. **Select** your image and press **play**.


All right reserved - Olivier Cugnon de Sévricourt & Vincent Tariel - 2012



Find 2 ViewImageGrid2D, **create** them & **connect** them.




Idem with EditorNumber ...

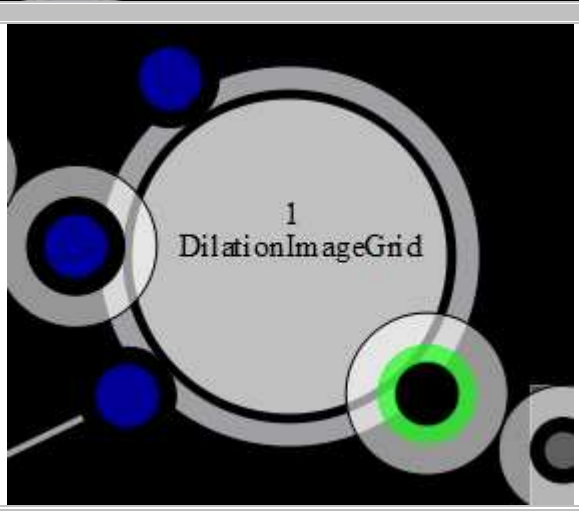

... & Dilation.


Connect Load to the Dilation no default connector.

All right reserved - Olivier Cugnon de Sévricourt & Vincent Tariel - 2012

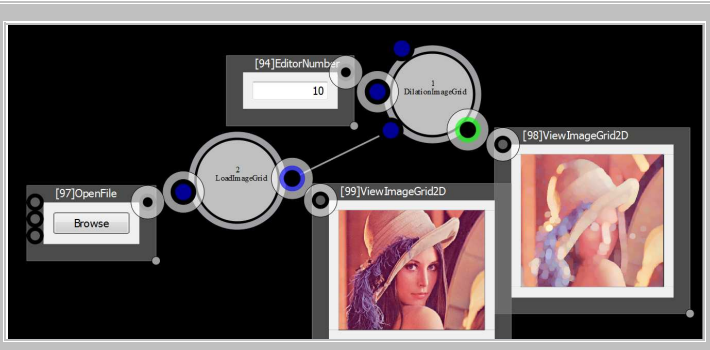

Changing inputs, you can **see** what your operator do.

By experience, you **learn** how to use it.

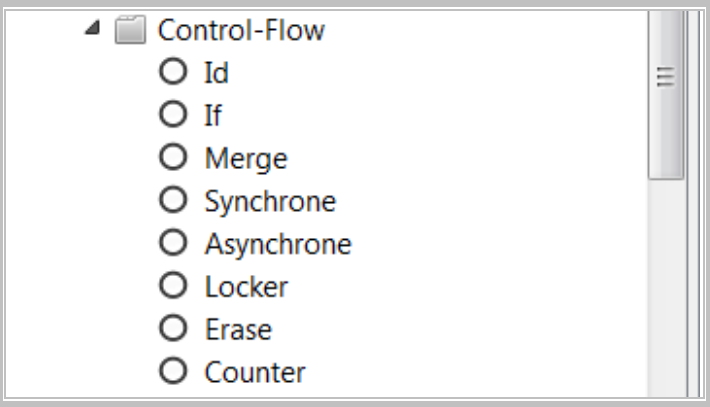

In CSD dictionary, you have a Control-Flow operator dictionary containing structural operators based on a generic data type.




Id is a simple copy from input data to output data. It copies any data type from the input to the output. All operators from Control-Flow & Generic works for all data types.

Merge allow you to merge data-flows.

If is a conditional copy.

All right reserved - Olivier Cugnon de Sévricourt & Vincent Tariel - 2012

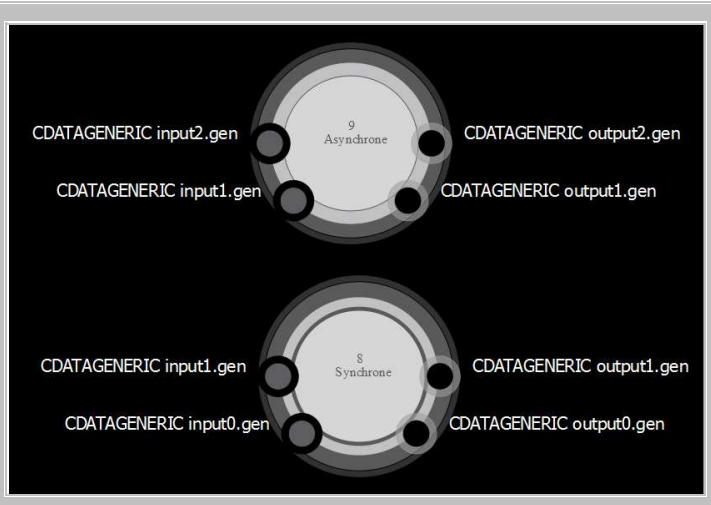

Asynchrone is a simple copy. Each input must be at a NEW state to proceed the copy.

Synchrone is a simple copy. At least one input must be at a NEW state to proceed copy.

The end.

In next tutorials, we have some sections about how to use Control-Flow operators to build conditional loops & to structure a complex prototype. For further information about generic based operators, see the SCD reference manual.

All right reserved - Olivier Cugnon de Sévricourt & Vincent Tariel - 2012