nucleus-based bootstrap Diagnostics

Method: nucleus-based bootstrap
Fit method: trf
Parameters: 5
Requested samples: 4
Completed samples: 4
chisqr mean: 41.284
chisqr median: 41.284
chisqr min: 41.284
chisqr max: 41.284

Correlation threshold: |r| >= 0.5
No parameter pairs exceeded the correlation threshold.

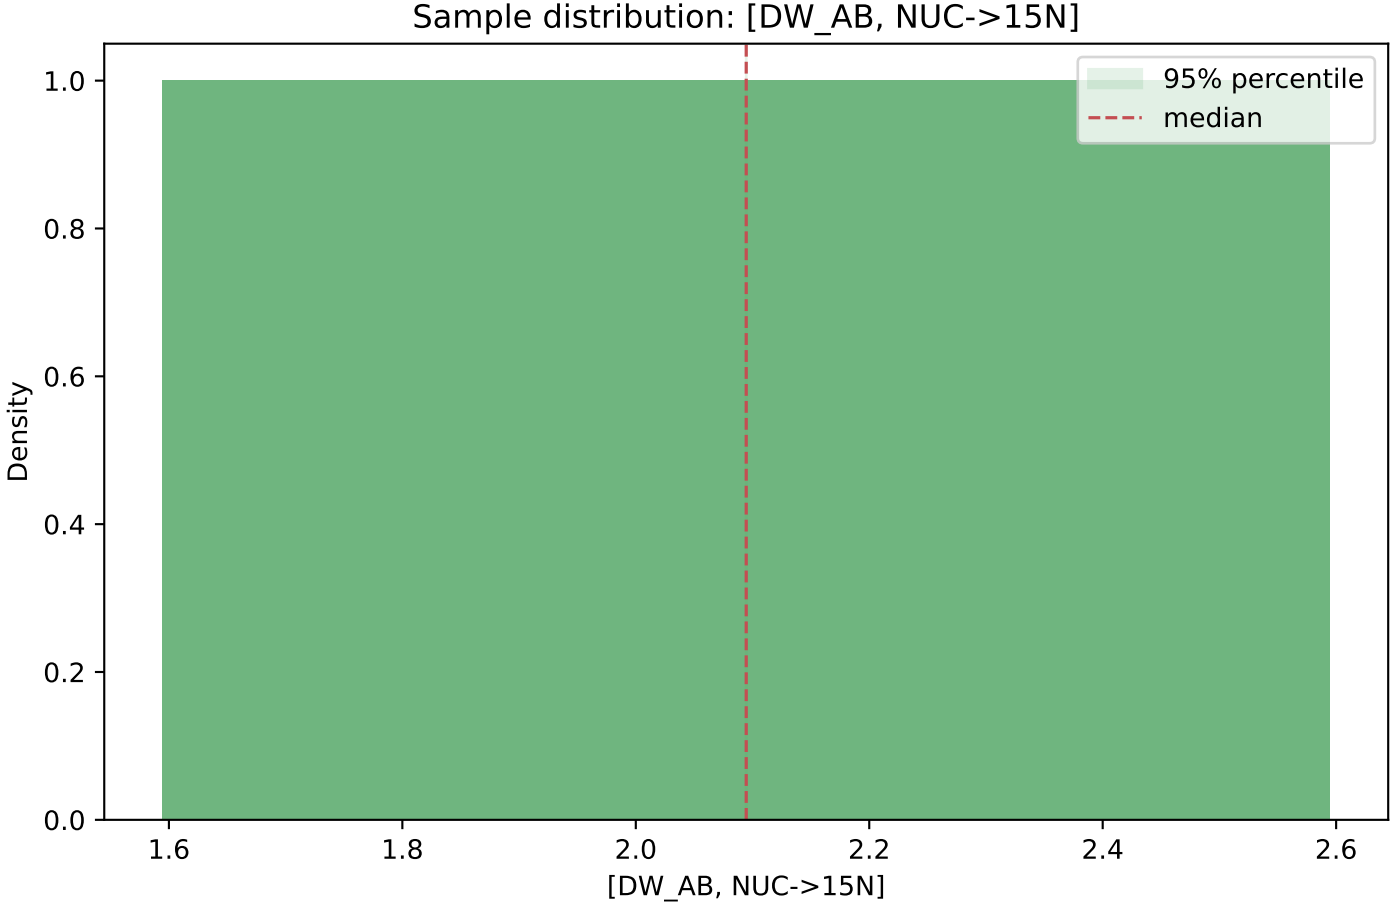
Sample distribution: [DW_AB, NUC->15N]
95% percentile
median
Density
1.0
0.8
0.6
0.4
0.2
0.0
1.6
1.8
2.0
2.2
2.4
2.6
[DW_AB, NUC->15N]

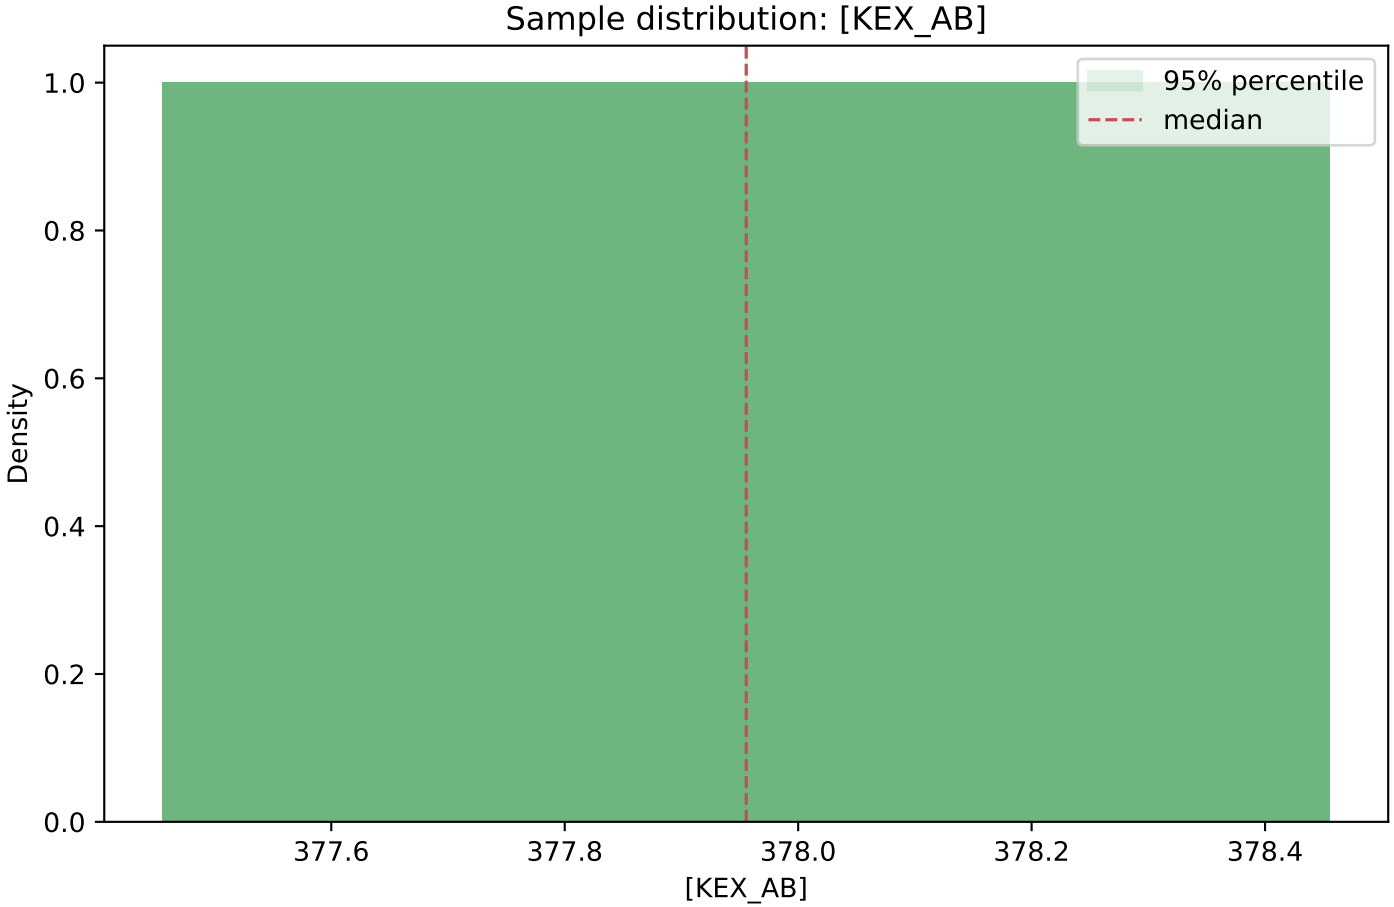
Sample distribution: [KEX_AB]
95% percentile
median
Density
1.0
0.8
0.6
0.4
0.2
0.0
377.6
377.8
378.0
378.2
378.4
[KEX_AB]

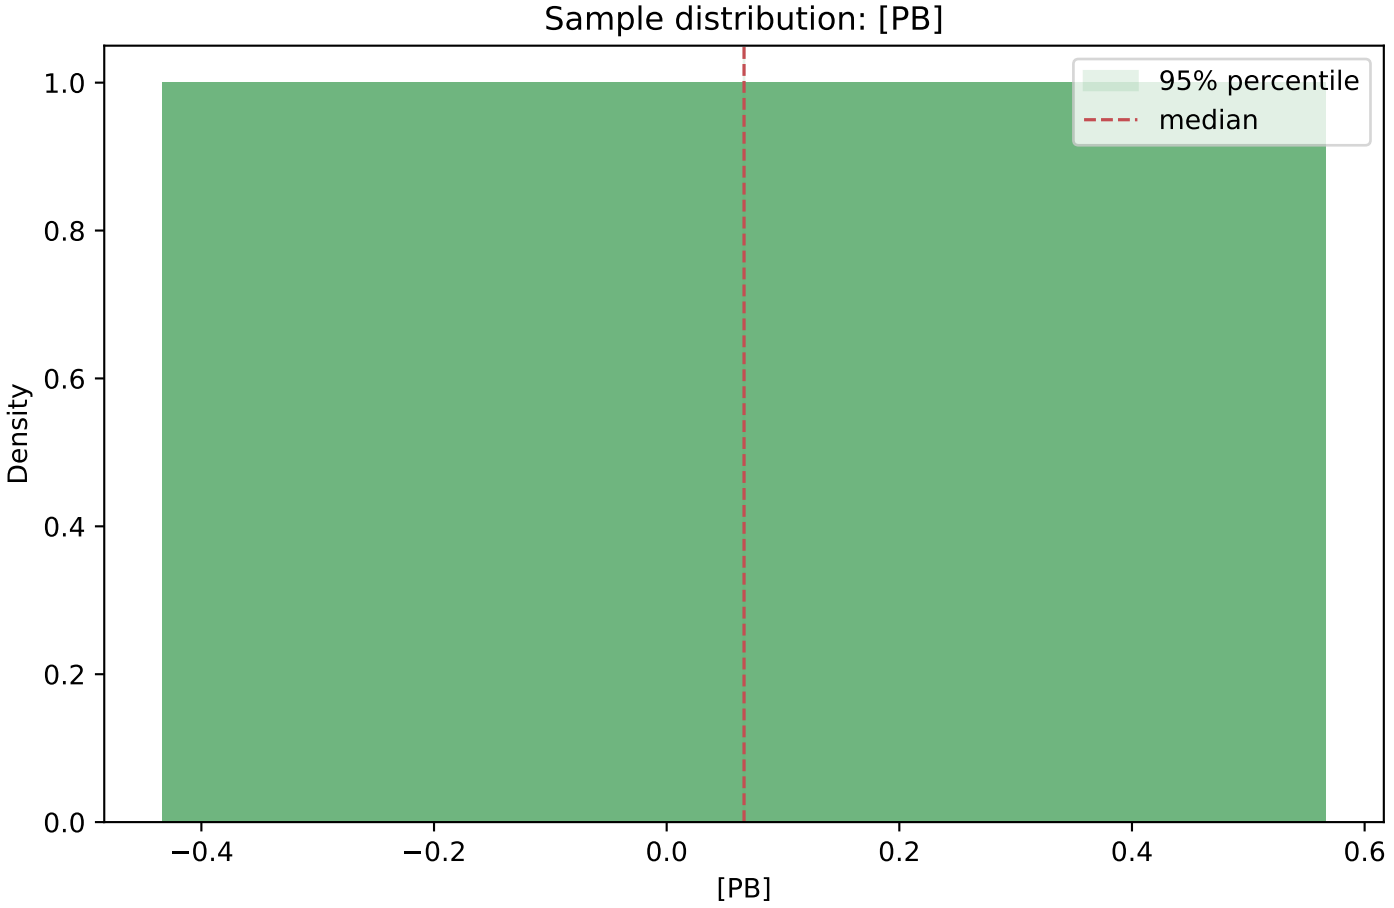
Sample distribution: [PB]
95% percentile
median
Density
1.0
0.8
0.6
0.4
0.2
0.0
−0.4
−0.2
0.0
0.2
0.4
0.6
[PB]

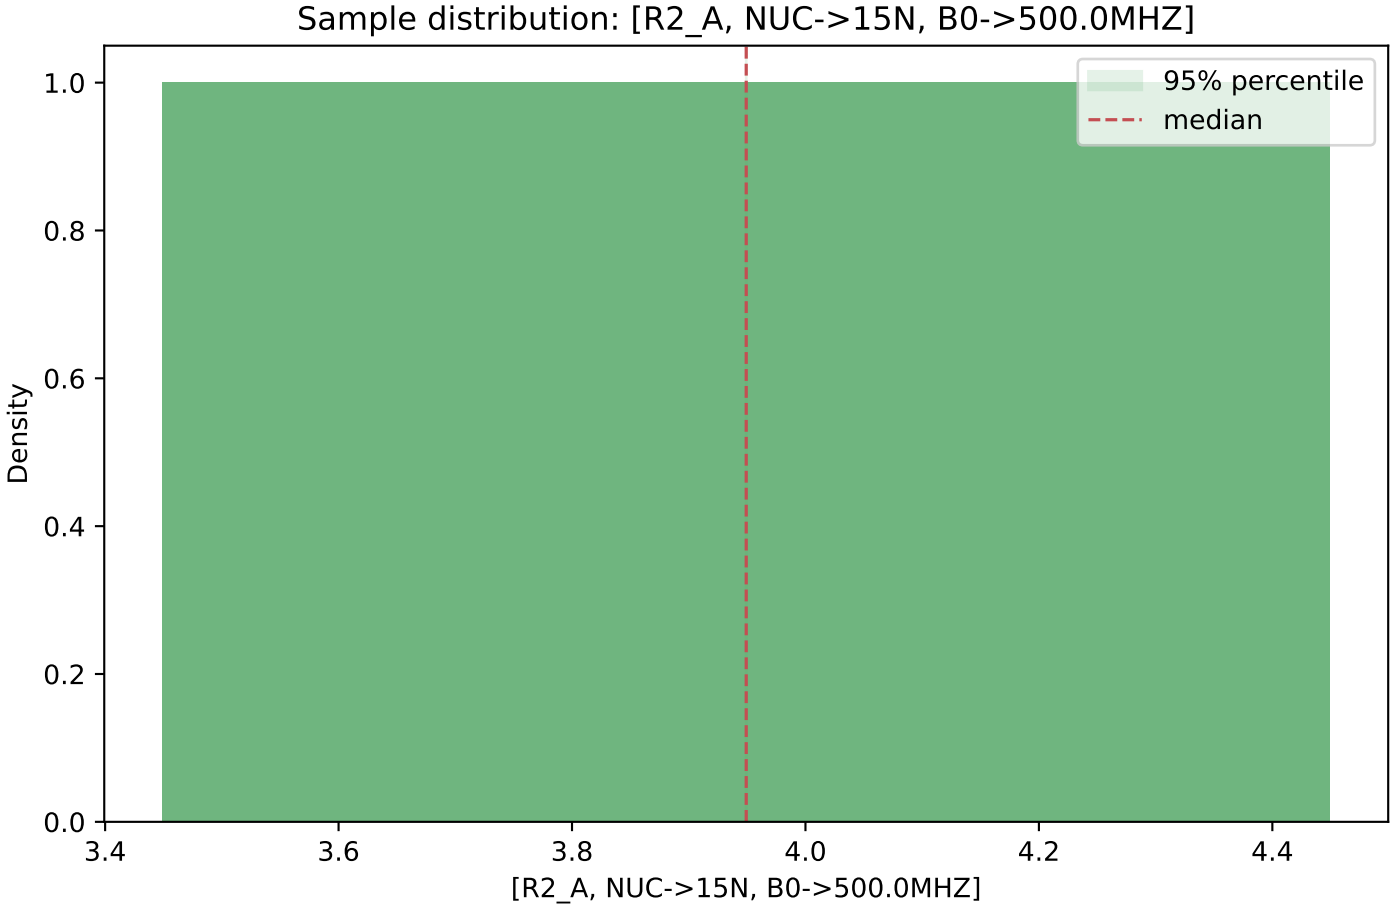
Sample distribution: [R2_A, NUC->15N, B0->500.0MHZ]
95% percentile
median
Density
1.0
0.8
0.6
0.4
0.2
0.0
3.4
3.6
3.8
4.0
4.2
4.4
[R2_A, NUC->15N, B0->500.0MHZ]

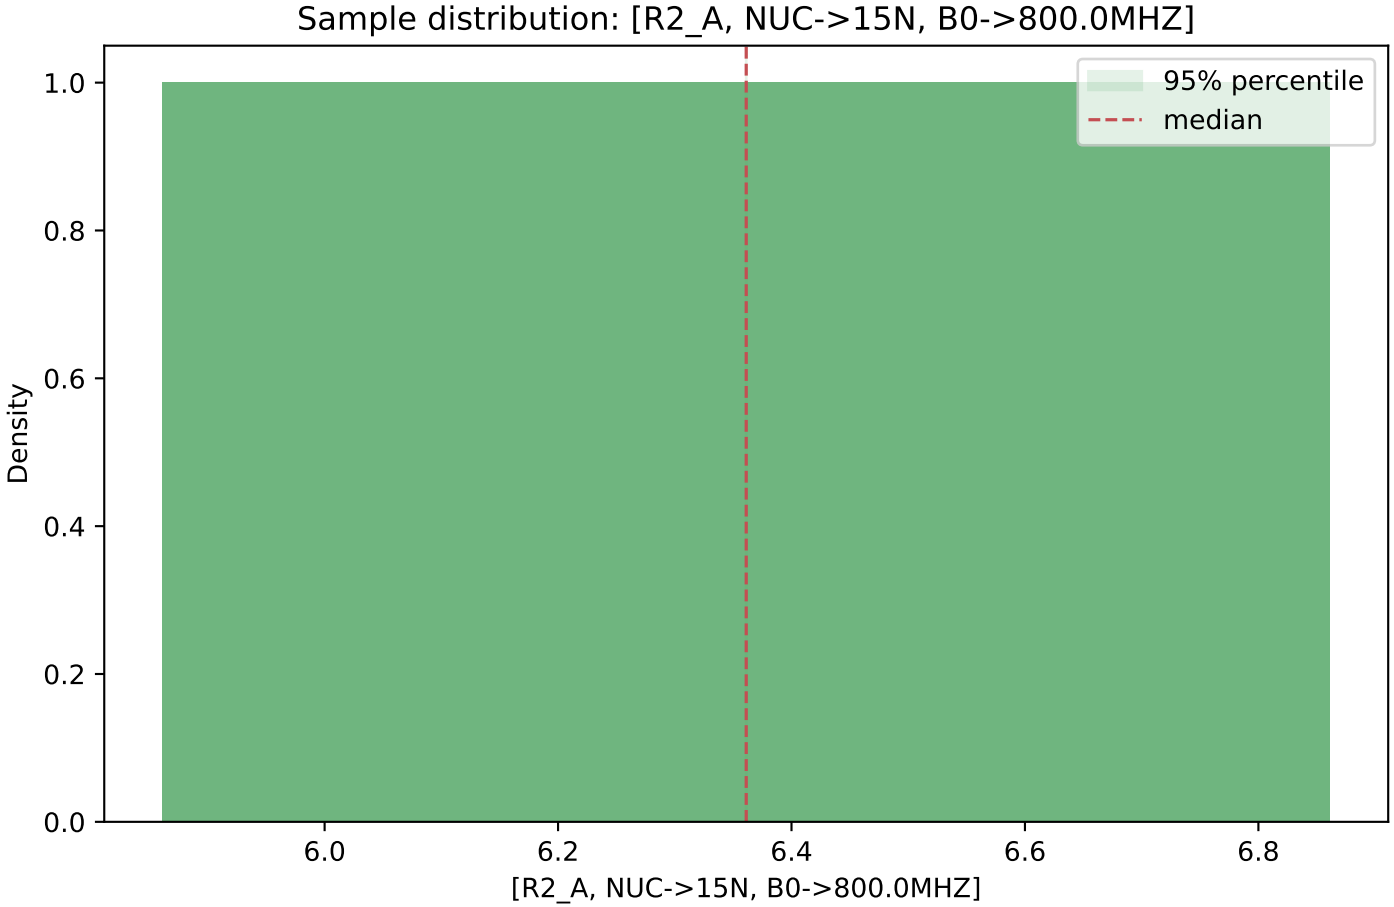
Sample distribution: [R2_A, NUC->15N, B0->800.0MHZ]
95% percentile
median
Density
1.0
0.8
0.6
0.4
0.2
0.0
6.0
6.2
6.4
6.6
6.8
[R2_A, NUC->15N, B0->800.0MHZ]

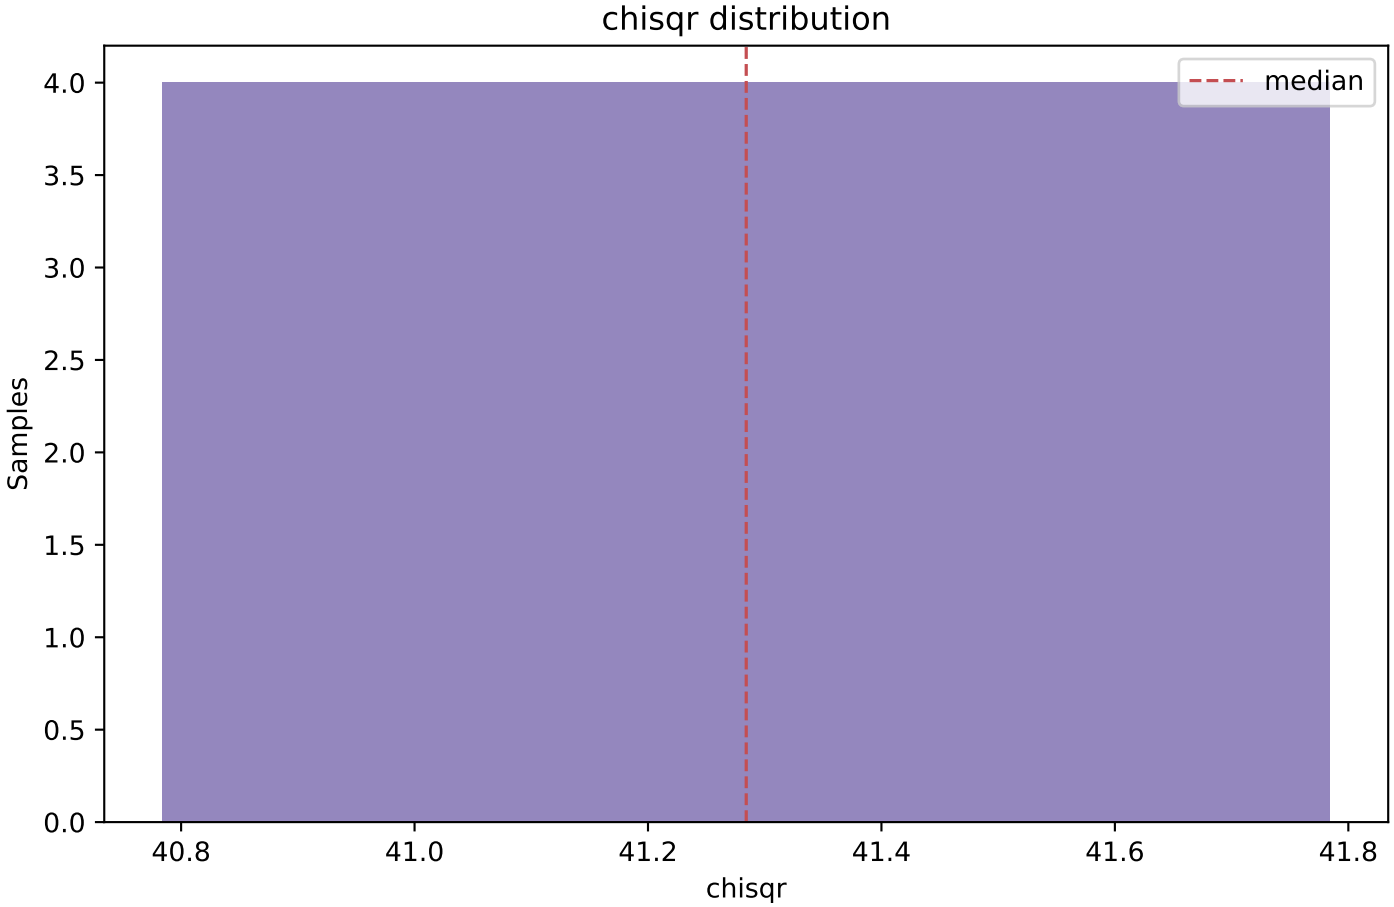
chisqr distribution
median
Samples
4.0
3.5
3.0
2.5
2.0
1.5
1.0
0.5
0.0
40.8
41.0
41.2
41.4
41.6
41.8
chisqr