

MÄLARDALEN UNIVERSITY

MASTER'S THESIS

Innovation Diffusion in Scale-Free Networks : Signal Analysis in Complex Networks

Author:

Debajyoti NAG

Supervisor:

Baran CÜRÜKLÜ

*A thesis submitted in fulfilment of the requirements
for the degree of Master of Science*

in the

Division of Intelligent Future Technologies
School of Innovation, Design and Engineering

May 2014

Declaration of Authorship

I, Debajyoti NAG, declare that this thesis titled, 'Innovation Diffusion in Scale-Free Networks : Signal Analysis in Complex Networks' and the work presented in it are my own. I confirm that:

- This work was done wholly or mainly while in candidature for a research degree at this University.
- Where any part of this thesis has previously been submitted for a degree or any other qualification at this University or any other institution, this has been clearly stated.
- Where I have consulted the published work of others, this is always clearly attributed.
- Where I have quoted from the work of others, the source is always given. With the exception of such quotations, this thesis is entirely my own work.
- I have acknowledged all main sources of help.
- Where the thesis is based on work done by myself jointly with others, I have made clear exactly what was done by others and what I have contributed myself.

Signed:

Date:

“Knowledge is the food of the soul.”

Plato.

MÄLARDALEN UNIVERSITY

Abstract

Intelligent Embedded Systems
School of Innovation, Design and Engineering

Master of Science

Innovation Diffusion in Scale-Free Networks : Signal Analysis in Complex Networks

by Debajyoti NAG

There is a dire need of understanding the inner workings in of a social structure to fully utilize the potential of the connections. This thesis aims at analyzing different policies for spread of an idea in the society, to gain insight into methods to strike a balance in utility and cost incurred for the same.

Acknowledgements

Thanks to Baran for the valuable guidance and patience.

Contents

Declaration of Authorship	i
Abstract	iii
Acknowledgements	iv
Contents	v
List of Figures	vii
List of Tables	viii
Abbreviations	ix
1 Introduction	1
1.1 Networks	1
1.1.1 Computer Networks	1
1.1.2 Social Networks	1
1.1.3 Scale-Free Networks	1
1.2 State of the Art	2
1.2.1 State of the art in networked devices	2
1.2.2 Examples of State of the Art networked devices	2
1.3 Motivation	3
1.3.1 Why Scale-Free Networks	3
1.3.2 Human to Human	4
1.3.3 Future Sight	4
1.4 Aim	4
2 Approach and Tools	5
2.1 Approach	5
2.1.1 Network Model	5
2.1.2 Orientation and View of the simulation environment	6
2.1.3 The Model	6
2.1.4 Presentation Approach	6
2.1.5 Company Policies	8

2.1.6	Simulation Approach	9
2.2	Tools	9
3	Methodology	11
3.1	The Companies	11
3.2	The Agents	11
3.3	Connections	12
3.3.1	The World	12
3.3.2	The Simulation	14
3.4	Definitions	15
3.5	Algorithms	17
4	Experimental Results	19
4.1	The Model	19
4.1.1	Small-World Networks	20
4.1.2	Scale-free Networks	20
4.2	The Simulation	22
4.2.1	Color Histograms	23
4.2.2	Spatial Cluster	23
4.2.3	Cost-Gain Function	24
5	Significance of Results	32
5.1	The Model	32
5.2	The Simulation	32
5.2.1	Base Group	32
5.2.2	Difference Group	33
6	Extending the Analysis	34
6.1	Extending the analysis to more companies	34
6.2	Extending the analysis to more attributes	34
6.3	Extending the analysis to collaborative diffusion over single attribute or multiple attributes	34
6.4	Extending to Other Systems	35
A	Appendix Title Here	36
	Bibliography	37

List of Figures

2.1	Color Clusters	7
2.2	3-D Spatial Cluster	7
3.1	Sample of Initial network with 10 nodes	13
3.2	Sample of Final network with 50 nodes	13
4.1	Small World Network with Original Algorithm	19
4.2	Small World Network with Modified Algorithm	20
4.3	Comparison of Scale Free Networks	21
4.4	Power Law Fit for Original Algorithm	21
4.5	Power Law Fit for Modified Algorithm	22
4.6	Color Clusters 1	24
4.7	Color Clusters 2	24
4.8	Spatial Clusters 1	25
4.9	Spatial Clusters 2	25
4.10	Diffusion 1	25
4.11	Diffusion 2	26
4.12	Base 1	27
4.13	Base 2	27
4.14	Base 3	28
4.15	Base 4	28
4.16	Difference 1	29
4.17	Difference 2	29
4.18	Difference 3	30
4.19	Difference 4	30
4.20	Difference 5	31
4.21	Difference 6	31

List of Tables

4.1 Cost	23
--------------------	----

Abbreviations

BA	B arabási A lbert model
CG	C ontinuous G rowth
PA	P referential A ttachment
CPS	C yber P hysical S ystems
M2M	M achine to M achine
IoT	I nternet of T hingss

For/Dedicated to/To my...

Chapter 1

Introduction

1.1 Networks

1.1.1 Computer Networks

Computer Networks are networks of interconnected devices that can exchange and share information and resources. These connections may be categorized depending on the form of connections being formed, and rules governing communications within the network.

1.1.2 Social Networks

Social Networks refer to arrangement to individual agents, most commonly humans, such that these arrangement are dependent on the actions of the agents and also influence their future actions. This is also referred to as a ‘social structure’.

With personalization of technology, computer networks are shaping themselves to get further closer to the social networks in terms of structure, shape, size, degree distribution etc. A comprehensive review of the same was done by Newman [\[1\]](#) .

This is particularly important and interesting with the emergence of personalized wearable devices, which could lead to a 1:1 man to machine ratio, which would mean, when allowed, the personal devices would network exactly as their users.

1.1.3 Scale-Free Networks

A scale-free network is a network with the property that the fraction $P(k)$ of nodes with ‘ k ’ connections is determined as:

$$P(k) \sim k^\gamma \quad (1.1)$$

In general, the degree distribution of the network follows a power law.

1.2 State of the Art

Everything networks. Studies have shown networks to evolve over time to optimize functionalities, and increase longevity. The most coveted type of network, perhaps, is the kind formed naturally among varied entities, i.e., free scaling networks [2, 3].

The first model for free scaling networks was proposed by Barabási–Albert [2], hereinafter referred to as B-A model, and the works of Erdős & Rényi [4], Watts and Strogatz [5], Watts, Strogatz and Newman [6], Saramäki and Kaski [7], Yang and Jure [8], and Rycroft [9] also helped greatly in laying the groundwork.

It is prominent that existing social networks tend to scale freely and it is safe to assume that personalized devices, if and when allowed to network, will follow a similar trace.

1.2.1 State of the art in networked devices

IoT [10] - As the almighty Internet steps out of traditional computers to directly link everyday physical objects, overcoming the spatio-temporal boundations, it upgrades a part of our lives to the so called cloud. This makes our lives easier, but also raises confusion as the complexity of processes increase manifold.

CPS and M2M [11] - IoT is but a small part of a larger picture, CPS (Cyber-Physical Systems), where computational devices of all size and shape interact with each other and with everyday objects to perform complex tasks, ranging from temperature control in a modern house, to automatic detection of spread of a potentially fatal epidemic. M2M makes it possible for sensors spread over a large area to share the load of detecting varied signals, while some entirely different processing entity looks into that raw data and extracts meaningful information from it, and then a strong/special link actuates some physical entity to act based on the information just gathered. However, large scale CPS faces a major challenge due to Heterogeneous nature of network elements

1.2.2 Examples of State of the Art networked devices

1. GremlinMusic [12]

Gremlin showed a concept of interconnecting embedded devices in a whole new light. It not only allowed users to carry their music along (like every music player), but it allowed friends to connect their Gremlins and legally share music with each other. An optimization of storage, bandwidth (in p2p form), and monetary resources for the users. Analogy : take an iPod and put facebook and a free Spotify premium on it.

2. p-Cell technology [13]

The new technology by Artemis seems promising, and could have crucial impact on the state of networked devices over time.

3. Swarm robots

Swarm robots are a good example of how even heterogeneous entities can work together. Like the coordination between the Eye-Feet-Hand bots [14] to achieve their goal.

1.3 Motivation

Since networks are everywhere, it's important we understand their nature and working so as to exploit and utilize them to our benefit. Going back as far as the 18th century, the "Seven Bridges of Königsberg" [15] might be the most famous networking problem. Ranging from the Travelling-Salesman [16] to Graph-Coloring algorithms [17], insight into the working of networks have helped greatly in optimizing several issues.

1.3.1 Why Scale-Free Networks

Scale-Free networks are the most prevalent in nature. Hence, it is paramount to model networking of personal devices used by humans on the same topology. This model aims at gaining insight into the workings of such networks, so as to optimize the network elements and make use of their full potential. For eg., by finding the optimal positioning for self-assembling network of satellites, military installations can provide improved security at a lesser cost. Or multiple groups of Swarm networks, like groups of eye-hand-feet bots [14], can work together as a collective with an increased proficiency. Most importantly, due to autonomous nature of most network elements, these networks can be formed anywhere, water, air, or land, and can accomplish a multitude of tasks.

1.3.2 Human to Human

Human beings are innately complex yet strive for simplicity [18]. The challenge today as humans is to find, understand and explain the complex in its most simplistic form. This is important not only for businesses, but for overall development of human society to a point where communications may have the desired effect to a greater extent.

1.3.3 Future Sight

Imagine if smart phones were a bit smarter, and it synchronized the user's calendar to include events from his/her best friend's public calendar automatically, or if it alerted the user that the person they are supposed to meet has now entered the building.

Or imagine a world where every child has a personal monitoring device, in form of a wearable device, and as the children go to the playground in the evening, these devices are with them, now, not only they serve the purpose of monitoring the child, these devices communicate with each other and form a bond, in a most likely manner that the children form bonds, so while your son is busy playing, his device could find out about the studies he missed at school.

Networked devices could make life easier and yet more manageable.

1.4 Aim

This thesis aims to analyse diffusion of innovation in the society. The author simulates a real-world scenario where companies try to influence its customers by spreading an idea or publicizing their products, and as an effect the customer agents, hereinafter referred to as 'agents' only, tend to lean towards the company if they are successfully, and enough, influenced. However, this campaigning propaganda incurs some costs to the company. The author tries to find a balance between the gain and cost for the company, in order to formulate a strategy which can be effectively used by the company to optimally attract customers.

Different companies have different policies towards customer involvement and making an effort towards further attracting the customer. This thesis aims to analyze and evaluate two of such policies, and to determine which policy is optimal for given circumstances.

Chapter 2

Approach and Tools

2.1 Approach

2.1.1 Network Model

It was an obvious choice to select scale-free topologies for modeling the network structure. But B-A model also proposes variants of the scale free structure depending on it's characteristics. These characteristics are :

1. Continuous Growth (CG)

This states that the network grows continuously. i.e., at all times, new nodes are being attached to the the network.

2. Preferential Attachment (PA) This states the rule any node should follow while making connections. It states that the most connected nodes are most likely candidates to form a connection with. The connections are formed according to the probaility which is calculated as :

$$p_i = \frac{k_i}{\sum_{j=1}^N k_j} \quad (2.1)$$

where,

- (a) p : probability
- (b) k : number of connections
- (c) i : agent id

(d) N : total number of agents

Now, a scale free network may exhibit either or both of above characteristics. However, the author decided to include both attributes in his model to make it as close to real life as possible.

2.1.2 Orientation and View of the simulation environment

Initially, an object oriented view was used to give better control over the network agents. But this led to higher time complexity, and the author decided to switch to a connection-view model, where more focus was given to the connections being formed and everything was managed from that view. This resulted in significant decrease in time complexity. Also, focusing on the connections was easier as the whole network could be minimally represented by using the edge list.

2.1.3 The Model

The author decided to focus on a competitive diffusion where the companies compete over a single attribute of the agent. The attribute *color* was chosen for the simulation as it is easy to understand and visualise, and let's us present the effect in a 2-dimensional model where clustering is not directly dependent on the axial values. As a limiting case, the author decided to simulate only two companies. This limits the scope as it does not give much insight into cases where two companies might collaborate for mutual benefit, like to win against a third rival company.

The model makes use of random functions wherever applicable, and uses this to simulate the effect of 'chance'. This inherent randomness makes the system non-deterministic and more reliable.

2.1.4 Presentation Approach

Like for any project with a large number of agents, a clear and easy to understand presentation of the simulation was imperative. Initially the author went with 2-D histograms depicting the membership values of each color group, which presented nicely how the members moved around as the height of the bars representing the number of members in a group could be easily seen to rise or fall, and the speed of this descent or ascent would tell about the rate of success or failure for a particular color. An example could be seen in figure [2.1](#).

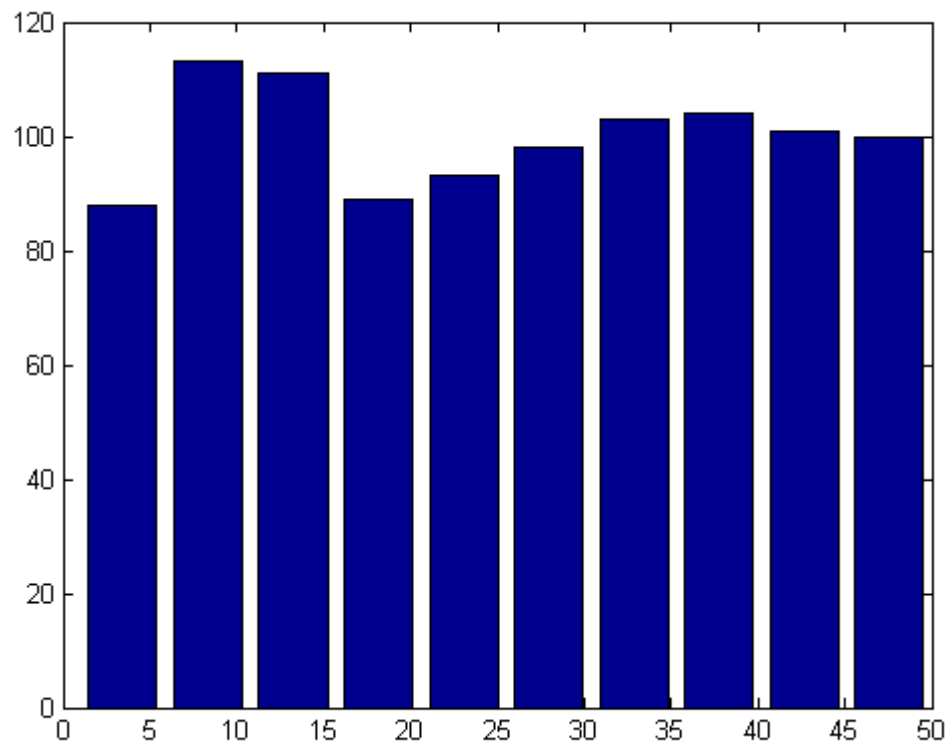


FIGURE 2.1: Color Clusters

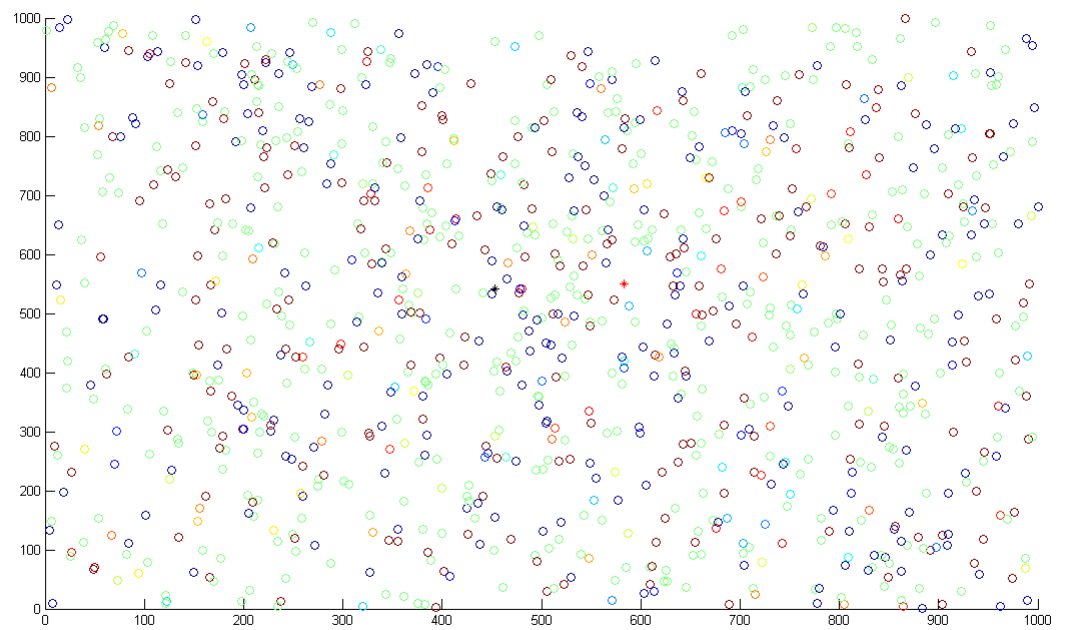


FIGURE 2.2: 3-D Spatial Cluster

However, with the progress of the model this model became obsolete as it was unable to represent the aspect of “Cost” to a company. To address this necessity, the author decided to switch to a 3-Dimensional presentation, with X- and Y- axes representing generic movement for agents, and the movement or effort as well as incurred cost for the companies, and the color, being the 3-rd dimension of the presentation, depicting the value of the attribute. The speed of movement here serves the purpose as the speed of rise/fall in the previous model. An example of this is figure 2.2.

While the X-Y movement in this model, for the agents, is a correlation, the changing colors as they move represent the agents leaning towards or away from a particular company.

2.1.5 Company Policies

Different companies may have different policies towards customer involvement.

The customer involvement continuum followed by the author is influenced by the works of Bodil Sanden [19] and follow the categorization by Ives & Olson [20]. These categories are :

- 1 No involvement. Users are unwilling or not invited to participate.
- 2 Symbolic involvement. User input is requested but ignored.
- 3 Involvement by advice. User advice is solicited through interviews or questionnaires.
- 4 Involvement by weak control. Users have sign-off responsibility at each stage of the system development process.
- 5 Involvement by doing. A user as design team member or as the official liaison with the information system’s development group.
- 6 Involvement by strong control. Users may pay directly for new development output from their own budget or the users’ overall organizational performance evaluation is dependent on the outcome of the development effort.

Out of these, this thesis focuses on categories 2 and 5. These two specific categories were chosen because they represent most dissimilar choices while still avoiding the extreme conditions, which allowed the model to simulate the more probable scenarios.

2.1.6 Simulation Approach

The simulation in this thesis focuses on companies attracting agents towards their cause, and the cost incurred in terms of efforts on the part of the company. The model witnesses three types of potential interactions :

1 Company to Agent interaction

These interactions are predefined, in a sense that a certain number of agents already seeded to believe in a company at the beginning of the simulation. This is explained further in Chapter 3.

2 Agent to Agent interactions

These interactions are the means by which one agent may influences another to lean towards a company. In this model, the agents belonging to either of the companies in question are referred to as *influencing agents*, and the others are referred to as *influenced agents*. This also mimics real life as the connections between agents are directional.

3 Agent to Company interactions

Whenever an agent is influenced, during the simulation, this also causes the company to make some effort, the amount of which depends on its policies. These interactions are what cause the cost to the company.

The outcome of these interactions are measured by the following two values

a Gain

This refers to a success for a company in influencing an agent to lean towards itself.

b Cost

This refers to the cost incurred to the company and is a function of the effort taken by the company. It depends on the policy being followed by the company.

2.2 Tools

As a requirement from the University, Matlab was chosen as the programming language, and no special toolboxes were used. The curve fitting app was used occasionally to check the output of the simulation.

The formulas, and variants thereof, used by the author were sometimes first tested as a prototype in Python with NetworkX and Mathematica for mathematical validation. However, any of those implementations do not directly contribute to the result.

Chapter 3

Methodology

On an abstract level, the model consists of an environment comprising of numerous agents, and a few companies. This thesis specifically focuses on the various strategies used by the companies to attract the agents, and try to measure its efficiency in terms of the related costs and benefits. Based on these measurements, a company could determine the optimal strategy to maximize its efficiency for the targeted section or sub-subsection of agents.

3.1 The Companies

The companies only exist in a superficial form in the model. In this model, each company plays the role by providing a central point for the agents to cluster about, and the movement of this point itself denotes effort made by the company, which in turn incurs a cost to the company.

The author decided to keep this model limited to two companies competing for the same spot, i.e., any agent cannot totally belong to both companies at the same time. The primary reasons for this were limitations of time and computation power, in that order.

3.2 The Agents

The agents in this model are simpler constructs, each having a “color” attribute, and this attribute changes as the agents tend to believe in either of the companies.

Structurally, each agent has following attributes :

1. Id
2. x-position coordinate
3. y-position coordinate
4. Color value
5. Influence value

During its lifetime, an agent has constant value for its Id, but the rest of its attributes may change. The influence value of the agent is determined as a function of the number of connections it makes, and remains constant once the whole network is created. All other attributes, however, may change throughout the simulation.

3.3 Connections

The connections between the agents form in such a manner that the model satisfies the requirements of free-scaling. Following in the footsteps of the giants, the implementation is based on algorithm ??, which is a modified form of the B-A algorithm.

3.3.1 The World

The model is first built based on two fixed parameters, and then the simulation runs on it. The author starts building the model for a fixed number of total agents N , and predefined average connectivity d in the environment. The initialization of the model begins with the creation of a small, fully connected network, and then, with time, new agents are added to this network, and these agents form the connections following the rules of PA. The exact method for forming this connection was modified by the author, so as to further trick the environment and simulate scenarios of chances of connection being formed, but only a fraction of those connections actually being formed. This was achieved by employing a ‘weight’ modifier on the probability of an agent to form a connection. This weight, in turn, is defined for every possible pair of agents, and is based on the difference in the value of a special attribute “likemindedness”, defined for each agent in an uniform, pseudo-random manner. This attribute is not considered an essential attribute because it may or may not be used, in various simulations. However, as an effect of using this modifier, the number of connections for an agent comes down considerably, while the nature of the connections still remain same, and the network remains scale free.

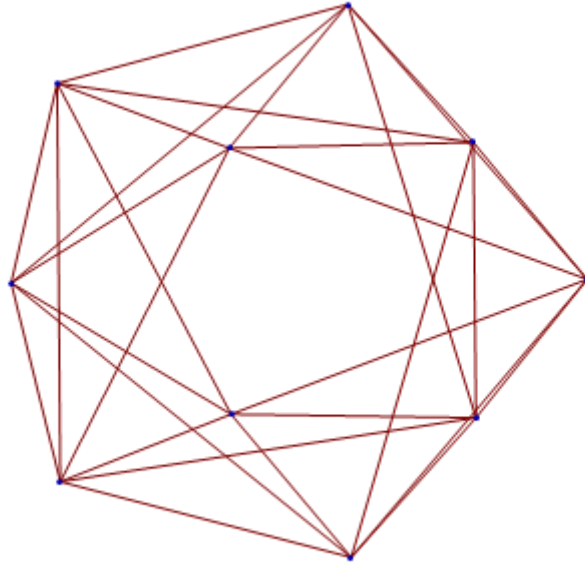


FIGURE 3.1: Sample of Initial network with 10 nodes

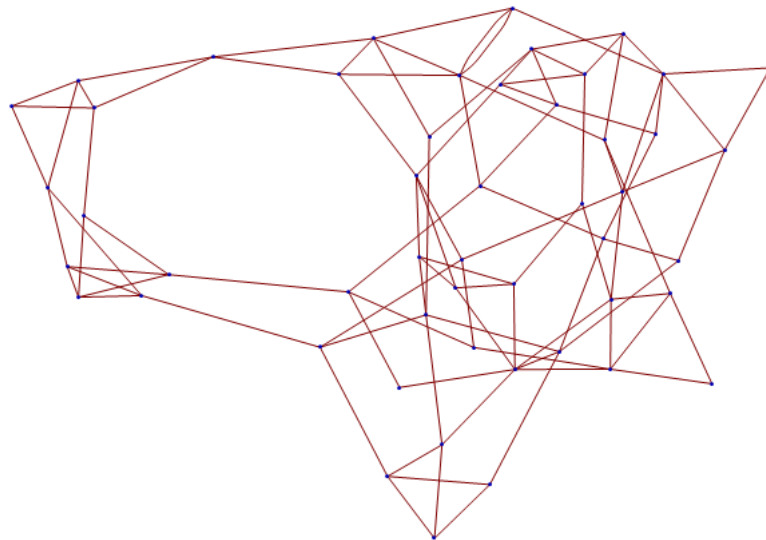


FIGURE 3.2: Sample of Final network with 50 nodes

The concept of starting with a smaller network and growing it is explained in details in Chapter 2 in section 2.1.1 and examples are shown in figures 3.1 and 3.2.

3.3.2 The Simulation

The simulation begins with allocating “influence” value to each agent, as a function of the number of connection it makes. This makes sure that the most-connected agents get a chance to be more influential. After this, values are uniformly assigned to all agents for the “color” attribute, and then they are seeded to belong to different companies. 20 % was the value chosen by the author for initial amount of seeding, for the following combination of reasons:

1. It allows for equal amount of seeding in both companies.
2. It allows for double amount of seeding in a neutral company.
3. After above mentioned allocations, it leaves equal amount of distribution randomly, to simulate chance.

The above rules give us the formula

$$\begin{aligned}
 company_1 + company_2 + company_{neutral} + company_{random} &= 100 \\
 \Rightarrow x + x + 2x + x &= 100\% \\
 \Rightarrow x &= 20\% \quad (3.1)
 \end{aligned}$$

Then, the simulation is run, where in each time step, an edge is selected randomly, and an exchange could happen if the FromNode of this edge belongs to one of the two companies. Here, “belonging to company” refers to the value of the “color” attribute for the agent. After this, the influence value of the FromNode is subjected to a randomly selected threshold, and upon satisfaction, the actual communication occurs. The threshold is lowered depending on a company’s efforts towards attracting the customer.

The selection of the edge depicts existence of a connection, while satisfaction of the threshold depicts the actual communication. This constraint was included to make the simulation model even closer to real-life. Hence, a higher effort would result in more cost, but would give a company more chances of a successful communication.

For every successful communication, the agents shift their “color” attribute a fraction towards the influencing company. This shift also translates to their x-y coordinate,

which is shown in the presentation. The important aspect here is that these changes in color and x-y coordinates, while not always causally related, are always correlated.

For the companies, however, it has different significance. Whenever an agent has moved closer, the companies also make an effort and move some fraction towards the agents. The amount of distance moved by the company represents the effort it makes, and is determined by the company policies. These movements also incurs the cost to the company, and a combined function of the gain and this cost determines the effectiveness of the policy.

Towards the end of the campaigning, a company may increase their effort to maximise chances of gain. This is achieved in the model by doubling the shift amount whenever a certain amount has been spent on the campaigning.

In the end, the gain and cost are calculated for the companies using the equation 3.3. Since cost is already lesser than the gain, this function was kept linear.

$$function = gain - cost \tag{3.2}$$

$$\tag{3.3}$$

3.4 Definitions

1. *Fully Connected*

It follows the standard definition that each node is connected to every other node. The initial network is formed in a manner such that it is fully connected and satisfies the average number of total connections.

2. *Likemindedness*

It is a special attribute of the agents, that is used in this model to modify the probability of formation of a new connection between two agents. It simulates the real life phenomenon that people with similar interests may be more likely to form a connection.

This subject is very vast in itself, and covers a wide ground [21, 22]. This is also helpful in showing the aspect that some people may be introverts or extroverts. However, that aspect is not simulated in detail in this model.

3. *Weight*

The weight is the difference in likemindedness of two agents. It is calculated as

$$weight_{j,k} = abs(likemindedness_j - likemindedness_k) \quad (3.4)$$

4. *Company Centre*

The company is not implemented as a structural entity, rather, the company centre is used to keep track of the attitude of the agents towards the company, and also to track the effort and cost on the part of the company.

5. *Influence*

This attribute determines the chances of an agent to influence another agent. As in real life, we allow more connected agents a chance to be more influential, but ultimately, there is no deterministic end to the model, and whether or not an actual communication takes place and an agent gets influenced is always determined by a randomly determined threshold. This is calculated as a function, described by equation 3.5, of the number of connections the agent makes.

$$influence_i = \frac{connections_i}{connections_{max}} \quad (3.5)$$

6. *Shift*

This shift represents a change in the state of the overall system. For an agent, a shift in it's color attribute represents the agent leaning towards a company. This shift is correlated with the same ratio of change in the agent's x-y coordinate, used for visualization purposes. For a company, the shift only occurs in it's x-y coordinate, which is caused by the x-y shift of the agent, and this change represents two things :

[a] The speed and frequency of movement represent the effort taken by the company

[b] The distance moved represent the cost incurred to the company

3.5 Algorithms

Algorithm 1 Create Scale-Free Network

N : Input, total number of agents
 D : Input, average number of connections
if $D < N + 1$ **then**
 Form a *fully connected* network with $D+1$ agents
end if
 implement *CG*
 $i \leftarrow D + 1$
while $i < N$ **do**
 $Agent_i \leftarrow newAgent$
 assign *likemindedness*
 implement *PA*
 $k \leftarrow 0$
 while $k \leq \frac{D}{2}$ **do**
 calculate $probability_{basic}$ based on equation 2.1
 compute *weight* based on equation 3.4
 $probability_{attachment} \leftarrow probability_{basic} + weight$
 $Agent_i$ forms $connection_k$, based on $probability_{attachment}$
 end while
end while

Algorithm 2 Simulation

```

assign  $centres_{company}$ 
assign  $effort_{company}$ 
calculate  $influence$  based on equation 3.5
assign  $color$  to all agents
seed 20% agents to  $color1$ 
seed 20% agents to  $color50$ 
seed 40% agents to  $color25$ 
seed 2most influential agents to different companies
 $J$  : number of iterations
 $i \leftarrow 0$ 
while  $i \leq J$  do
  select  $edge_i$ 
  if  $FromNode_{color} = color1$  OR  $color50$  then
    select  $threshold$ 
     $threshold = threshold - effort_{company}$ 
    if  $FromNode_{influence} \geq threshold$  then
       $ToNode_{color} \leftarrow ToNode_{color} + shift$ 
       $ToNode_{x-coordinate} \leftarrow ToNode_{x-coordinate} + shift$ 
       $ToNode_{y-coordinate} \leftarrow ToNode_{y-coordinate} + shift$ 
       $Company_{x-coordinate} \leftarrow Company_{x-coordinate} + shift$ 
       $Company_{y-coordinate} \leftarrow Company_{y-coordinate} + shift$ 
    end if
  end if
end while

```

Chapter 4

Experimental Results

4.1 The Model

The most common form of representing a scale-free network is by using its degree of connections, where the horizontal axis represents number of connections, and the vertical axis represents the number of agents having that many connections.

Figures 4.1 and 4.2 show the different degrees in the connection in the case of using original BA algorithm and using our modified approach to the algorithm respectively.

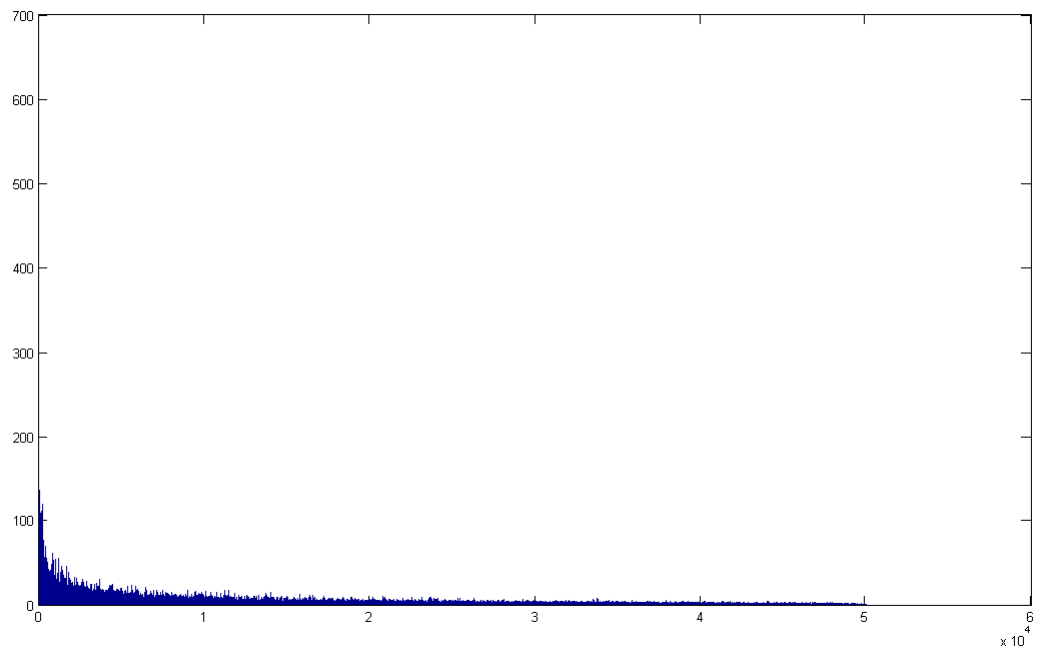


FIGURE 4.1: Small world Network, Original BA algorithm

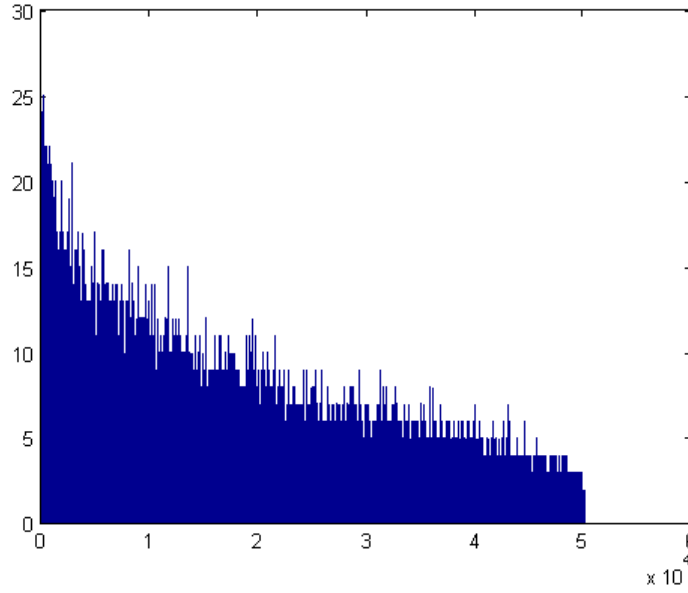


FIGURE 4.2: Small world Network, Modified BA algorithm

It can be observed that using the constraint of ‘likemindedness’ results in a drop in the horizontal axis values, which shows that lesser number of connections are formed.

The basic model was modified a lot with time, from the initial design, as the author learnt more. The development of the model can be explained in two parts.

4.1.1 Small-World Networks

Figures 4.1 and 4.2 both show discontinuation in the tail.

On further inspection, it was found that the networks were displaying characteristics of Small-World networks [23]. The difference in what was required and what was achieved is made clear by Cohen & Havlin [24].

This led to modifications in the design and the design explained in Chapter 3 was achieved.

4.1.2 Scale-free Networks

An example in comparison of both models, i.e., following original BA algorithm and the modified approach, can be seen in Figure 4.3, where green color represents the original algorithm and blue represents the modified approach.

These outputs were further tested for fit, using MATLAB’s curve fitting toolbox, against a power-law curve, and the results are shown in figure 4.4 and 4.5.

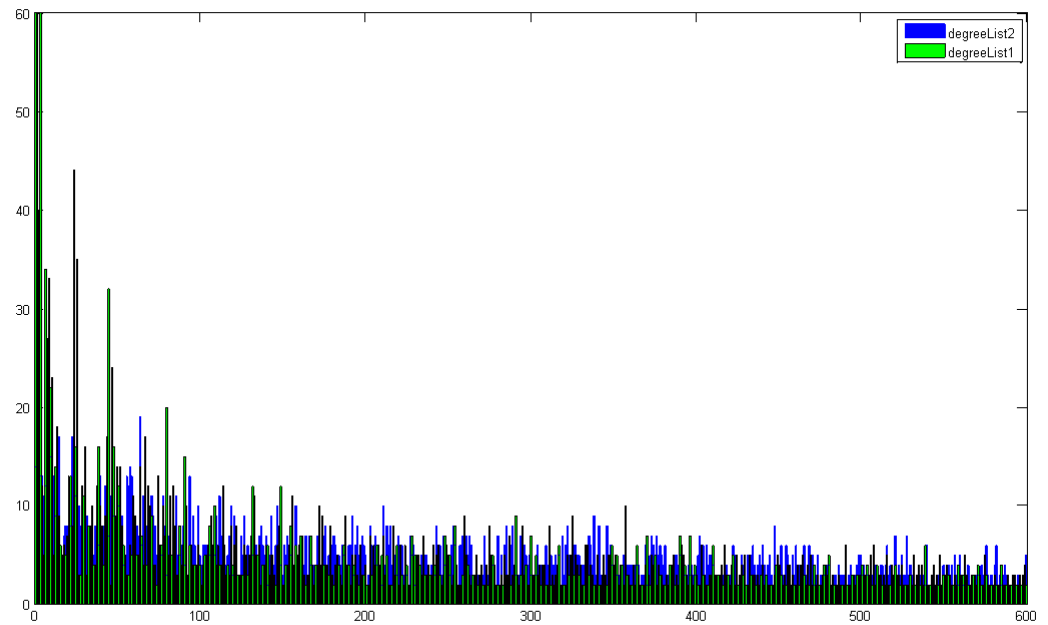


FIGURE 4.3: Comparison of Scale Free Networks generated by the different algorithms for 1000 agents

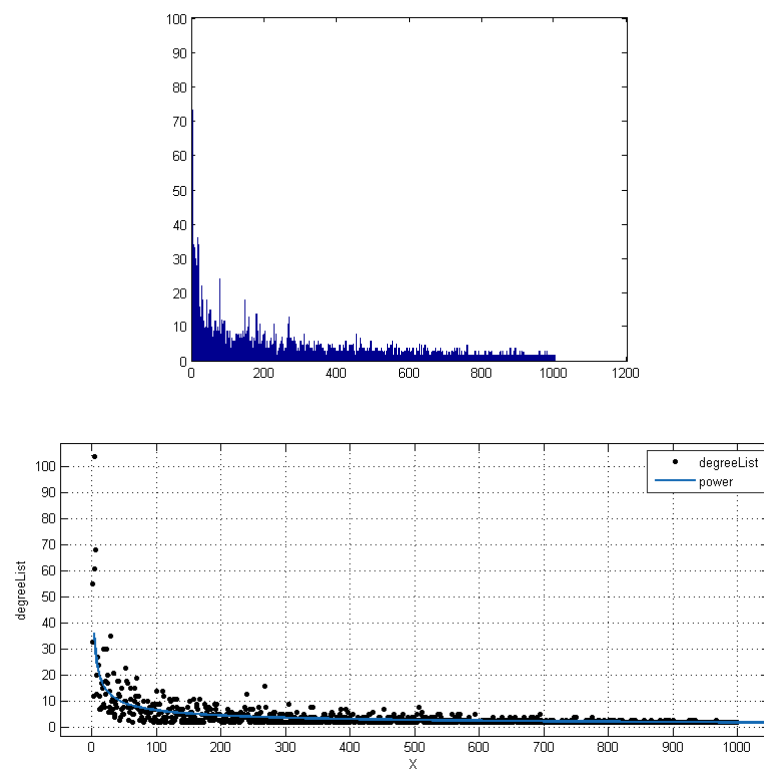


FIGURE 4.4: Scale-Free network using BA algorithm and corresponding power law fit

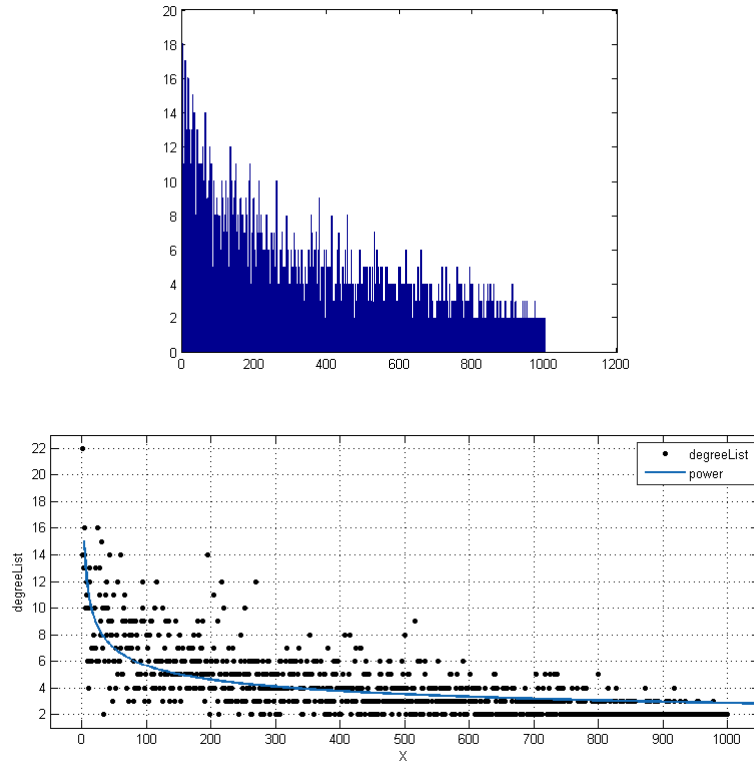


FIGURE 4.5: Scale-Free network using modified BA algorithm and corresponding power law fit

4.2 The Simulation

The simulations resulted in three different types of outputs. They were all run for cases where on an average, every agent makes 3 connections. The different types of outputs are as follows:

- 1 Color Histograms
- 2 Spatial Clusters
- 3 Cost-Gain Functions

For the specific purposes of this thesis, specifically for analysis part, a particular set of ‘Gain’ and ‘Cost’ values, in accordance with the policies followed by the companies, were used. Keeping the gain for each influence fixed at ‘One’ unit, and allowing the agents to move 0.2 percent of the distance at a single step, the costs are varied as per table 4.1.

The costs are also equal to the effort, i.e., the amount of fraction of distance travelled by the company towards the agent.

caseId	cost1	cost2
Base1	0.001	0.001
Base2	0.002	0.002
Base3	0.01	0.01
Base4	0.02	0.02
Diff1	0.001	0.002
Diff2	0.001	0.01
Diff3	0.001	0.02
Diff4	0.002	0.01
Diff5	0.002	0.02
Diff6	0.01	0.02

TABLE 4.1: Costs for various cases for both the companies

4.2.1 Color Histograms

These histograms give the observer a good view of how the agents tend to lean from one company towards another.

Since the network has a large concentration of agents initially seeded to a neutral color which is equidistant from both company1 and company2, it could be observed that a huge initial spike is in the center, while the two companies in question are at the extreme corners.

The change in the heights of different columns can be seen in fig. 4.6. The horizontal axis represents the color value, and the vertical axis represents the number of agents having that value for the color attribute, or, in other terms, the membership of that company.

Fig. 4.7 shows a similar output for 10000 agents. This case shows that although the agents move away from the central, equidistant clusters, they may not always reach all the way to either of the company clusters. This is evident by the change in the height of the intermediate columns.

4.2.2 Spatial Cluster

As mentioned in chapter 2, section 2.1.4, these outputs were necessary to visualise the cost incurred to the companies.

The three dimensions of any element of these plots are its x-y coordinates and its color. The agents are visible as ‘o’ markers while the companies are shown with ‘*’ markers.

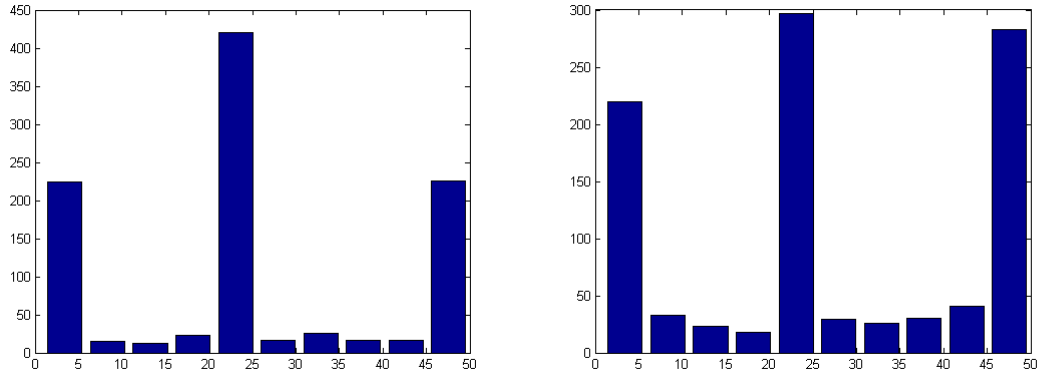


FIGURE 4.6: Color Clusters for 1000 agents. Initial Cluster on left, and final clusters on right.

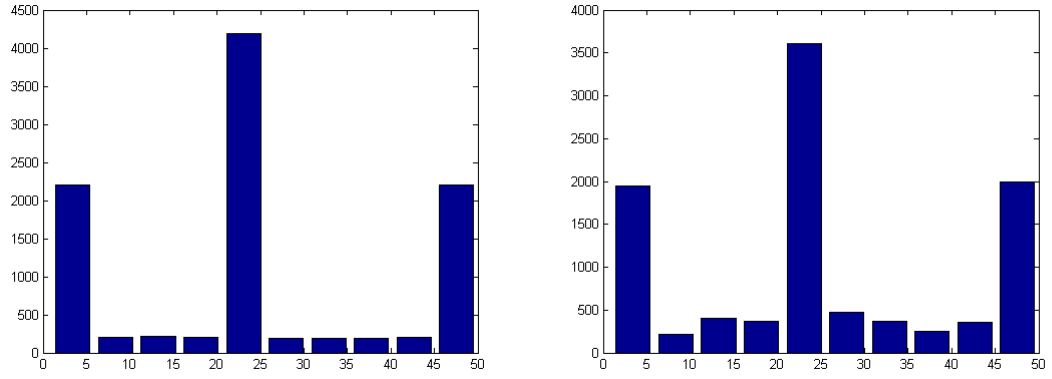


FIGURE 4.7: Color Clusters for 10000 agents. Initial Cluster on left, and final clusters on right.

The simulation allows the observer to see the agents change their color as they move towards a specific company. Some screenshots of the simulations can be seen in fig. 4.8 and 4.9.

While fig. 4.8 is easier on the human-eye, fig. 4.9 is a result of a lot more iterations and is richer in terms of analytics.

4.2.3 Cost-Gain Function

The simulation keeps track of the cost and gain for each company according to table 4.1. Company1 follows cost1 while company2 follows cost2, and the caseId tells us about the relation in the policies.

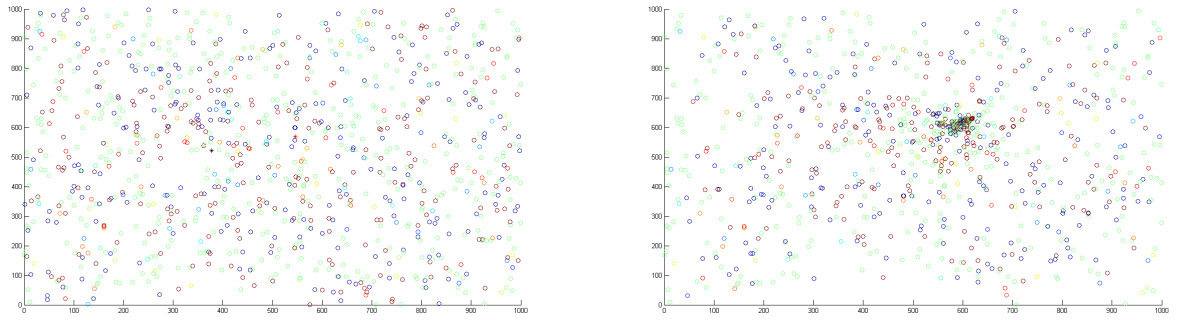


FIGURE 4.8: Spatial Clusters for 1000 agents. Initial Cluster on left, and final clusters on right.

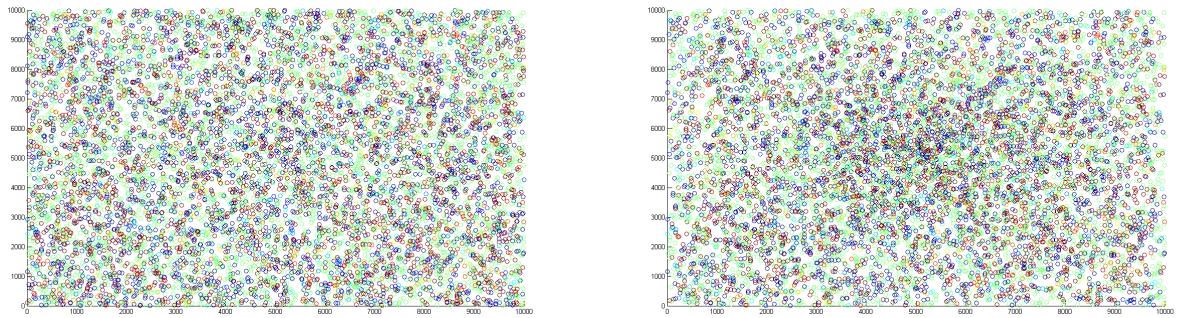


FIGURE 4.9: Spatial Clusters for 10000 agents. Initial Cluster on left, and final clusters on right.

The generic spread and the population count of the companies was monitored, and they tend to show exponential nature of change.

Fig. 4.10 and 4.11 show the increase and decrease of the membership of the companies against exponential fit.

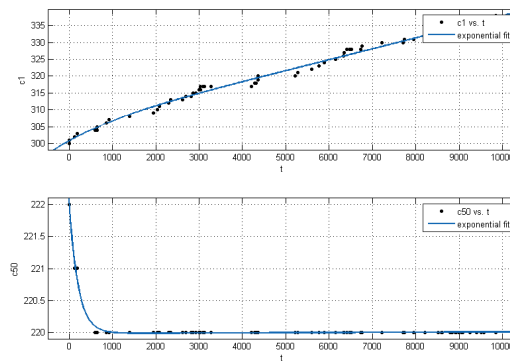


FIGURE 4.10: Changes in membership of company for 1000 agents

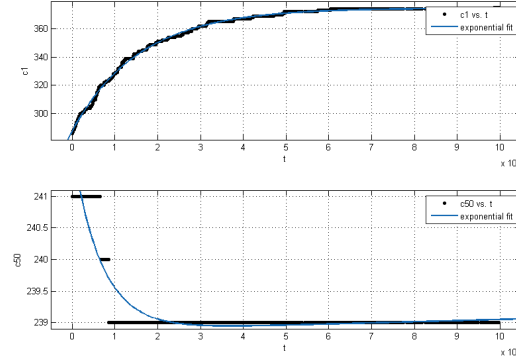


FIGURE 4.11: Changes in membership of company for 10000 agents

The cases from table 4.1 show the functions in the form of equation 3.3. These results can be divided into two categories. They are :

1 *Base* cases

These cases see both companies taking equal cost, and are meant to give the observer an idea about behaviour of both companies under similar policies. The outputs of these cases can be seen in fig. 4.12, 4.13, 4.14, and 4.15.

2 *Diff* cases

These cases witness the companies following different policies, and allows the observer to analyse the policies. In this approach, cost for Company1 is kept at a constant while the cost for Company2 is increased, and the observed results are recorded. The outputs of these cases can be seen in fig. 4.16, 4.17, 4.18, 4.19, 4.20, and 4.21.

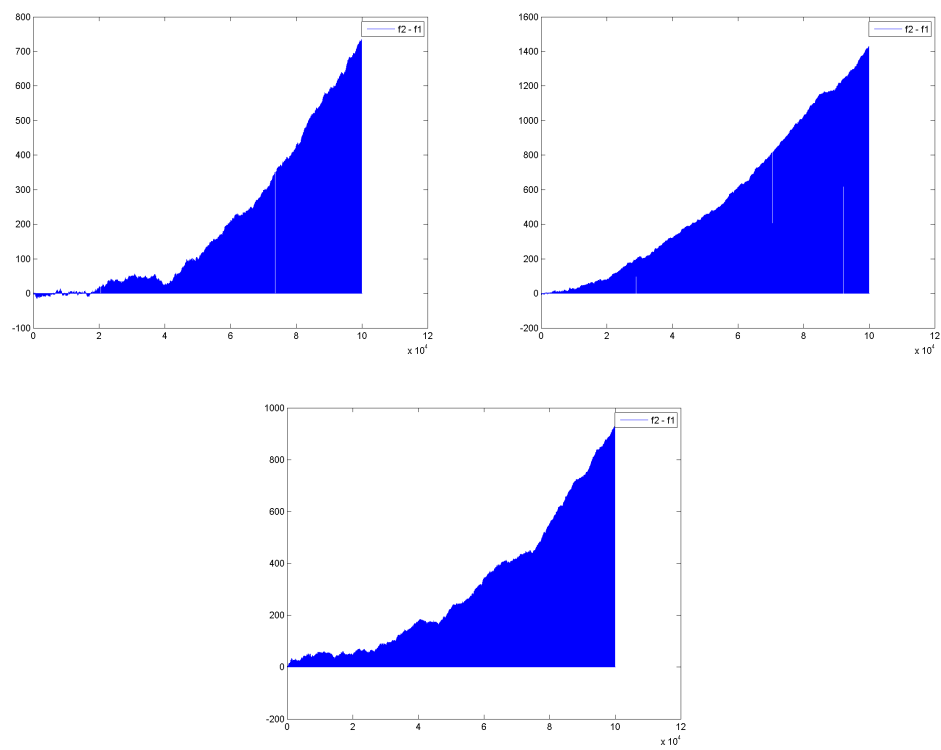


FIGURE 4.12: Base 1

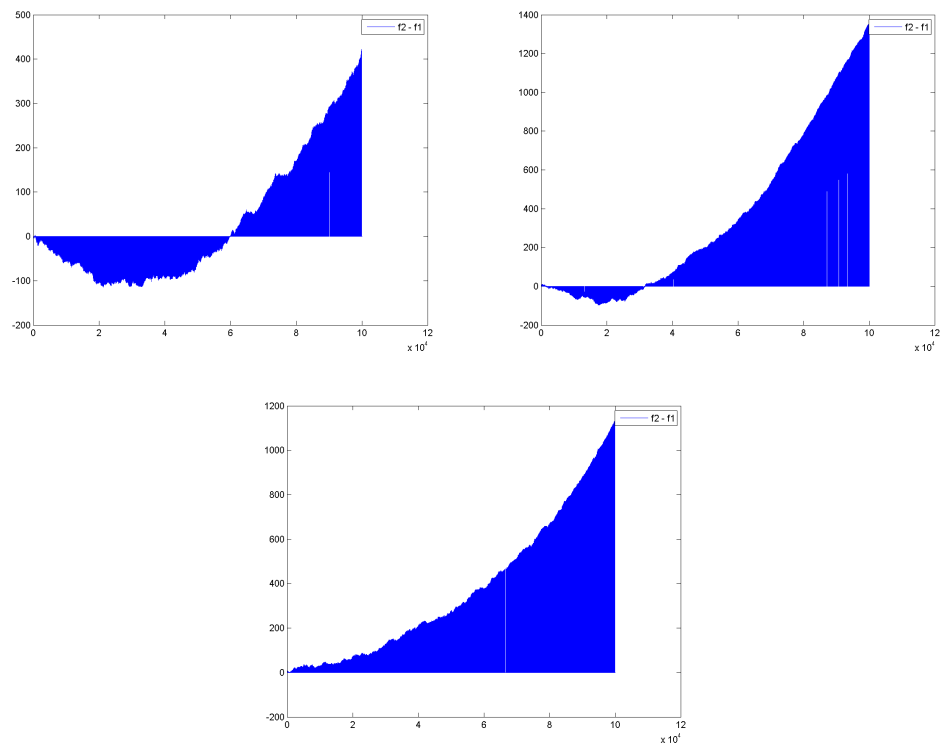


FIGURE 4.13: Base 2

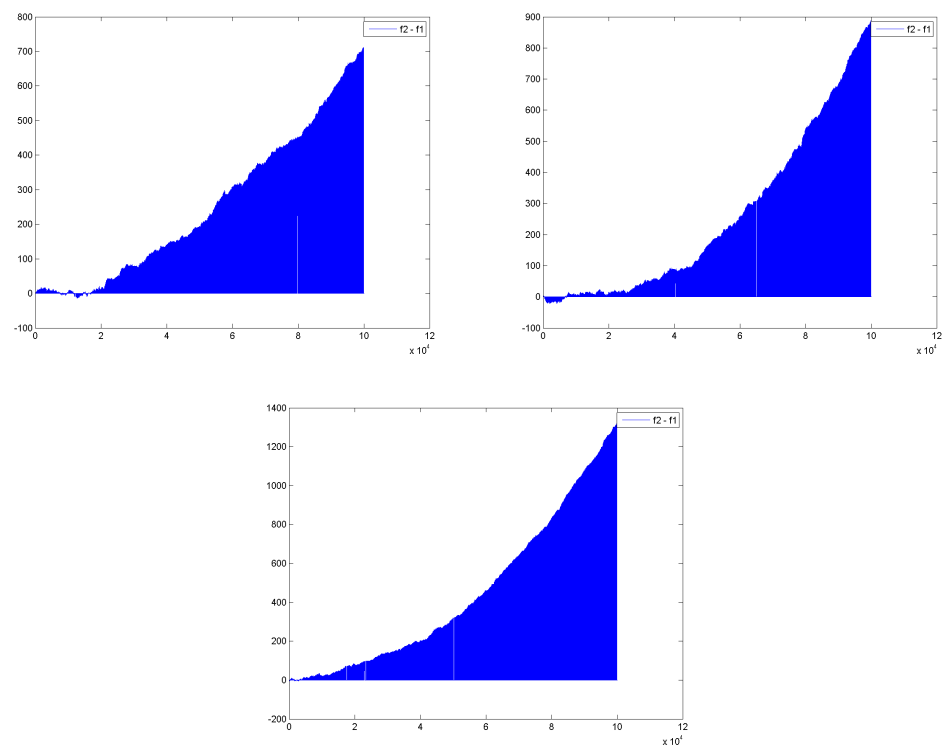


FIGURE 4.14: Base 3

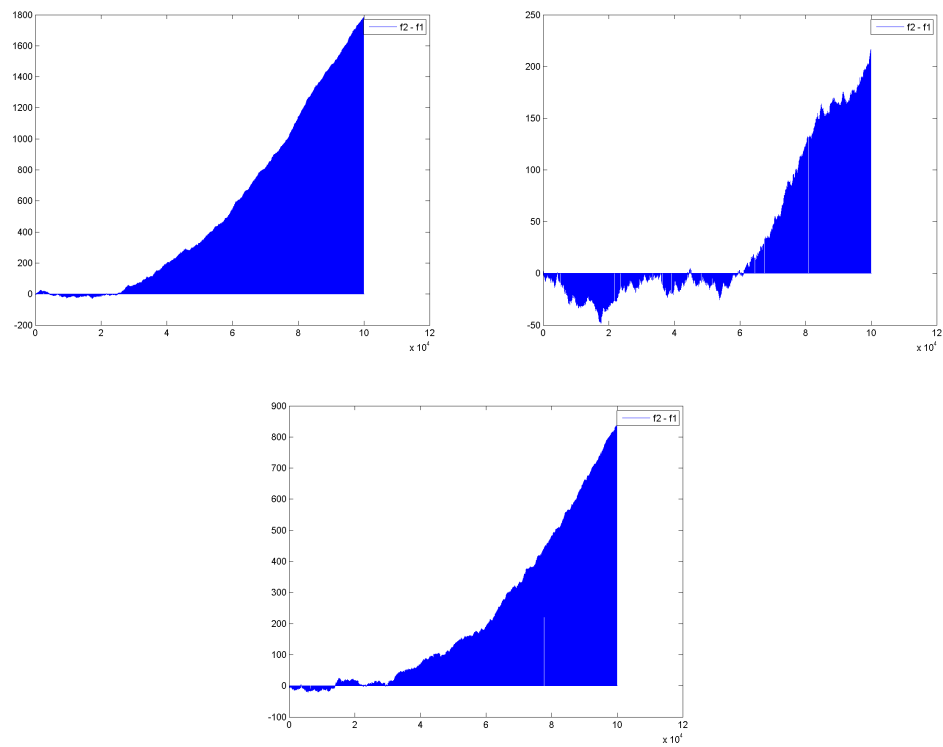


FIGURE 4.15: Base 4

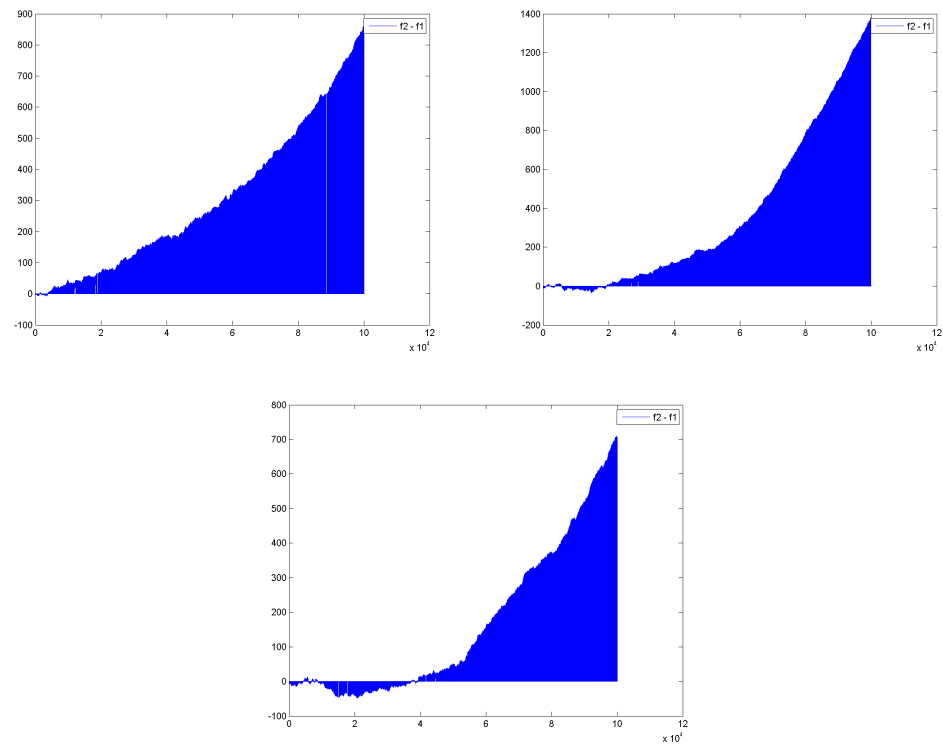


FIGURE 4.16: Difference 1

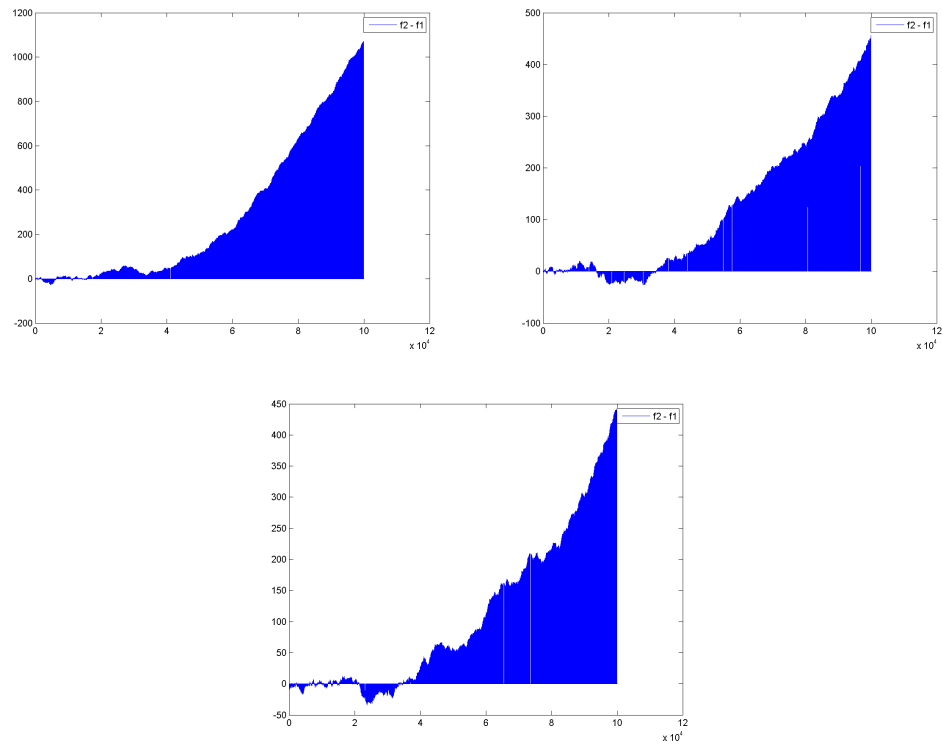


FIGURE 4.17: Difference 2

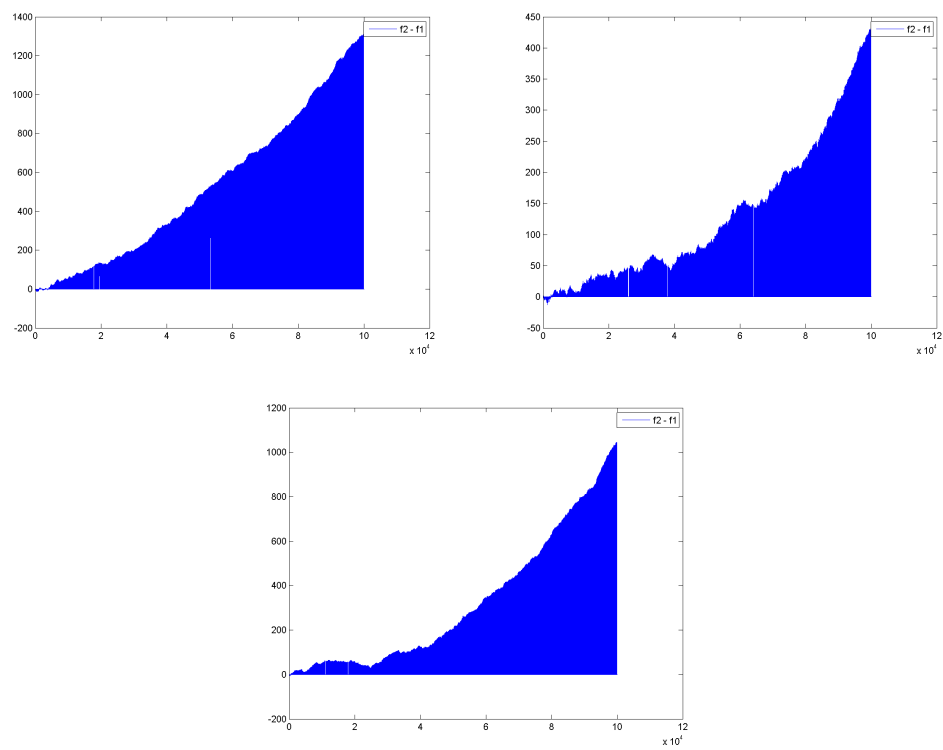


FIGURE 4.18: Difference 3

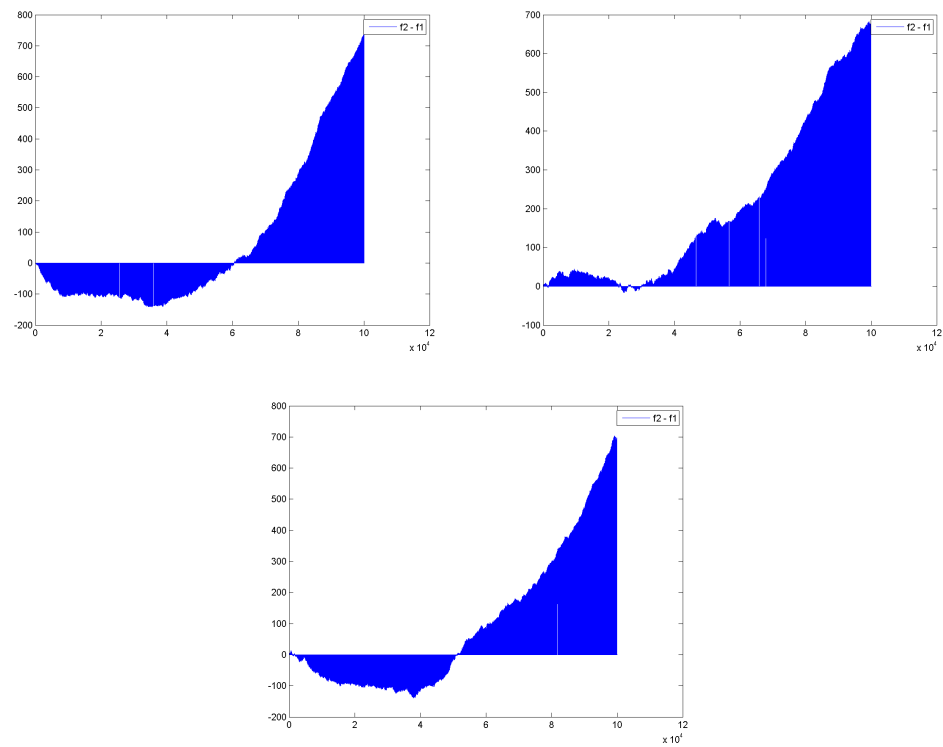


FIGURE 4.19: Difference 4

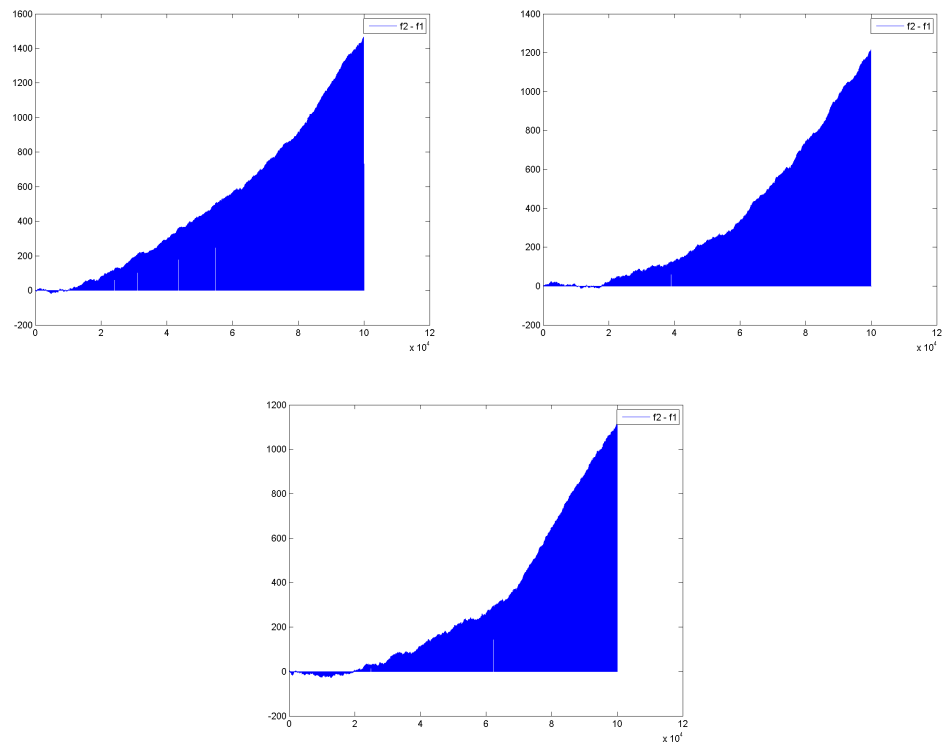


FIGURE 4.20: Difference 5

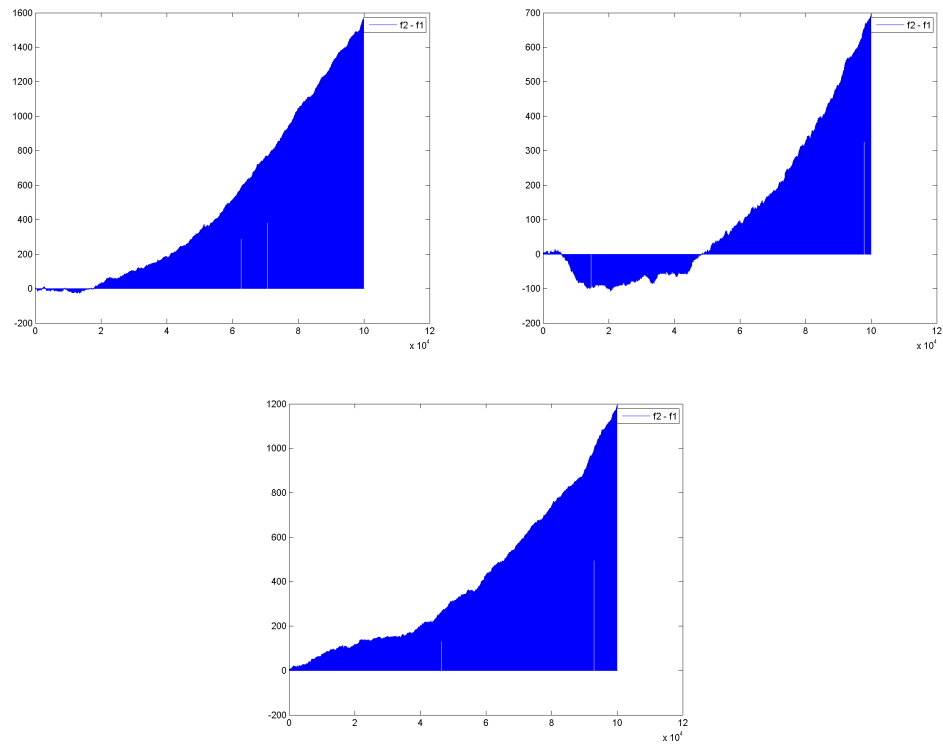


FIGURE 4.21: Difference 6

Chapter 5

Significance of Results

5.1 The Model

The model shows us a fast and easy way to generate a scale-free network, and the effects of using the constraint of ‘likemindedness’, defined in chapter 3 section 3.4, between the agents, which reduces the number of connections formed significantly, but the network still follows power law.

Although this thesis is focused on companies, the modularity of the project allows the algorithm 1 to be used for generic simulation of social structures.

5.2 The Simulation

The initial results for diffusion in a scale-free network present a picture where it is clear that the spread, whether it is increase or decrease, tends to be exponential.

The simulation results presented in chapter 4 section 4.2.3 give a varied picture. They are divided in two groups.

5.2.1 Base Group

This group focuses on analysis while cost is same for both companies, and helps the observer to understand the basic nature of the companies.

The base group analyses shows that company2 seems to emerge victor for overall simulation, however, the nature is unstable for shorter runs, i.e., during the initial time steps of the simulations.

5.2.2 Difference Group

This group focuses on analysis while cost is different for both companies, and allows for analysis of the different policies.

The author focused on two types of policies described in chapter 2 section 2.1.5. Specifically, the chosen policies were :

Company1 : Symbolic involvement. User input is requested but ignored.

Company2 : Involvement by doing. A user as design team member or as the official liaison with the information system's development group.

Company1 maintained a minimal involvement of customers in decision making, and made very little effort. This made sure that the company did not take a very high cost.

Company2 had a more open policy where customers were highly involved, and the company made a lot of efforts to reach out. This resulted in formation of long-lasting relations which led to profit in the long run.

The analyses show that company1, with its minimal inclusion policy, is more effective for short-term projects, when it makes less efforts towards the customers. The policy followed by Company2 is less profitable during this phase, but it starts to pay-off afterwards and becomes more profitable than Company1.

The exact shift point for this change is case dependant, and it varies with the value of gain, and costs. But this model could be further developed to prepare prediction system that helps companies to switch between policies in order to maximize their cost-benefit ratio.

Chapter 6

Extending the Analysis

The present system is focused on only two companies, competing over a single attribute of the agent. It is limited to a specific part of a very wide spectra of possibilities.

In future, there are possibilities to extend this sytem and anlyse a diversity of scenarios.

6.1 Extending the analysis to more companies

The environment could always include more companies competing for the same slot. This might provide valuable insight, specially for cases where two companies might collaborate for mutual benefit against a common competing company.

6.2 Extending the analysis to more attributes

The companies in the present model only compete for a single attribute, but this may be extended to make them compete for multiple attributes of the agents. However, this will significantly increase the complexity if the model.

6.3 Extending the analysis to collaborative diffusion over single attribute or multiple attributes

While the presented system only lets the companies compete against each other, it might be interesting to see how they behave when they are collaborating towards a common goal. This could be done for a single attribute as well as multiple attributes.

6.4 Extending to Other Systems

The present system is targeted towards company policies, but the generic nature and social structure of the model imparts flexibility to the system which makes it easy to extend it to other systems as well.

Chapter 7

Summary and Conclusion

In this thesis, the author presents methods to create a scale-free network fir for his purpose by following a slightly modified form [1](#) of the B-A Algorithm, and then he goes on to simulate an environment where two companies are competing to win over the agents in the network. He uses the data gathered to analyse the policies followed by the companies while attracting the customers, and presents his findings which suggest a basic model for maximizing cost to gain ration for the companies.

He also suggests that similar approach could be used in wearable tech to let devices connect and map the social structure of their users, and this model would provide analytical ability over such a network.

Appendix A

Appendix Title Here

Appendix goes here.

Bibliography

- [1] M. E. J. Newman. The structure and function of complex networks. *SIAM REVIEW*, 45:167–256, 2003.
- [2] A.-L. Barabási and R. Albert. Emergence of Scaling in Random Networks. *Science*, 286:509–512, October 1999. doi: 10.1126/science.286.5439.509.
- [3] R. Albert and A.-L. Barabási. Statistical mechanics of complex networks. *Reviews of Modern Physics*, 74:47–97, January 2002. doi: 10.1103/RevModPhys.74.47.
- [4] P. Erdős and A Rényi. On the evolution of random graphs. In *PUBLICATION OF THE MATHEMATICAL INSTITUTE OF THE HUNGARIAN ACADEMY OF SCIENCES*, pages 17–61, 1960.
- [5] Duncan J. Watts and Steven H. Strogatz. Collective dynamics of 'small-world' networks. *Nature*, 1998.
- [6] M. E. J. Newman, S. H. Strogatz, and D. J. Watts. Random graphs with arbitrary degree distributions and their applications. *Phys. Rev. E*, 64:026118, Jul 2001. doi: 10.1103/PhysRevE.64.026118. URL <http://link.aps.org/doi/10.1103/PhysRevE.64.026118>.
- [7] Jari Saramäki and Kimmo Kaski. Scale-free networks generated by random walkers. *Physica A: Statistical Mechanics and its Applications*, 341(0):80 – 86, 2004. ISSN 0378-4371. doi: <http://dx.doi.org/10.1016/j.physa.2004.04.110>. URL <http://www.sciencedirect.com/science/article/pii/S0378437104005503>.
- [8] Jaewon Yang and Jure Leskovec. Modeling information diffusion in implicit networks, 2010.
- [9] Robert W. Rycroft. Does cooperation absorb complexity? innovation networks and the speed and spread of complex technological innovation. *Technological Forecasting and Social Change*, 74(5):565 – 578, 2007. ISSN 0040-1625. doi: <http://dx.doi.org/10.1016/j.techfore.2006.10.005>. URL <http://www.sciencedirect.com/science/article/pii/S0040162506001879>.

- [10] Friedemann Mattern and Christian Floerkemeier. *From the Internet of Computers to the Internet of Things*, volume 6462 of *LNCIS*, pages 242–259. Springer, 2010.
- [11] I. Stojmenovic. Large scale cyber-physical systems: Distributed actuation, in-network processing and machine-to-machine communications. In *Embedded Computing (MECO), 2013 2nd Mediterranean Conference on*, pages 21–24, June 2013. doi: 10.1109/MECO.2013.6601317.
- [12] Peter. Rojas. Musicgremlin: feeding your mp3 player wireless downloads after midnight, 2004. URL <http://www.engadget.com/2004/07/13/musicgremlin-feeding-your-mp3-player-wireless-downloads-after/>.
- [13] Artemis. Steve perlman’s pcell, 2014. URL <http://www.artemis.com/press>.
- [14] Swarmanoid. Swarmanoid: Towards humanoid robotic swarms, 2011. URL <http://www.swarmanoid.org/>.
- [15] Eric W. Weisstein. “königsberg bridge problem.” from mathworld—a wolfram web resource., . URL <http://mathworld.wolfram.com/KoenigsbergBridgeProblem.html>.
- [16] Eric W. Weisstein. “traveling salesman problem.” from mathworld—a wolfram web resource., . URL <http://mathworld.wolfram.com/TravelingSalesmanProblem.html>.
- [17] Eric W. Weisstein. “vertex coloring.” from mathworld—a wolfram web resource., . URL <http://mathworld.wolfram.com/VertexColoring.html>.
- [18] Bryan Kramer. There is no more b2b or b2c: There is only human to human (h2h). socialmediatoday, 2014. URL <http://socialmediatoday.com/bryan-kramer/2115561/there-no-more-b2b-or-b2c-it-s-human-human-h2h>. [online] Accessed: 2014-05-10.
- [19] Bodil Sandén. The customer’s role in new service development. 2007. URL <http://urn.kb.se/resolve?urn=urn:nbn:se:kau:diva-785>.
- [20] Blake Ives and Margrethe H. Olson. User involvement and mis success: A review of research. *Management Science*, 30(5):pp. 586–603. ISSN 00251909. URL <http://www.jstor.org/stable/2631374>.
- [21] C.G. Jung. *The question of the therapeutic value of “abreaction”*. 1921. URL <http://books.google.ca/books?id=BJo1cgAACAAJ>.
- [22] Joshua Wilt and William Revelle. Extraversion, 2008.

-
- [23] Ed Jr. Pegg. “small world network.” from mathworld—a wolfram web resource. URL <http://mathworld.wolfram.com/SmallWorldNetwork.html>.
- [24] Reuven Cohen and Shlomo Havlin. Scale-free networks are ultrasmall. *Phys. Rev. Lett.*, 90:058701, Feb 2003. doi: 10.1103/PhysRevLett.90.058701. URL <http://link.aps.org/doi/10.1103/PhysRevLett.90.058701>.