

Beyond the Vector Black Box: Toward Interpretable Semantic Resonance in Neural Information Retrieval

Anonymous Author(s)

Abstract

Dense retrieval models based on Large Language Model (LLM) embeddings deliver strong semantic matching performance but introduce operational challenges in production search systems, including limited diagnostic traceability and absence of deterministic control. When retrieval errors occur, maintainers often lack mechanisms to isolate and adjust specific semantic drivers without retraining the model.

We present Interpretable Semantic Resonance (ISR), a lightweight sparse bottleneck framework that decomposes dense embeddings into steerable semantic facets while preserving retrieval topology. ISR is trained using a reconstruction, sparsity, and inner product preservation objective and supports query time semantic weighting via a modifier vector.

Across five BEIR subsets, ISR maintains statistically comparable NDCG@10 to its dense baseline while improving diagnostic traceability by 2–5× and enabling controlled ranking adjustments with bounded latency overhead (9ms on NVIDIA T4). We analyze hardware, sparsity, and storage tradeoffs and discuss deployment guardrails. ISR demonstrates that controllable and auditable neural retrieval can be integrated into existing dense pipelines without retraining encoders or sacrificing ANN compatibility.

CCS Concepts

• **Information systems** → **Retrieval models and ranking; Retrieval effectiveness.**

Keywords

Neural Information Retrieval, Dense Retrieval, Semantic Resonance, Interpretability Gap, User Controllability, Sparse Autoencoders, Mechanistic Interpretability

1 Introduction

Neural dense retrieval represents a major shift in Information Retrieval (IR) [2]. Classic models like BM25 [3] provided transparent scoring based on term frequencies. However, Dense Passage Retrieval (DPR) [4] and modern LLM embedders [18] redefined this. Modern retrieval projects queries and documents into high dimensional latent spaces, scoring relevance via vector similarity like Maximum Inner Product Search (MIPS) [6].

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

CIKM '26, Rome, Italy

© 2026 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM ISBN 978-1-4503-XXXX-X/26/07

<https://doi.org/XXXXXXX.XXXXXXX>

Without control signals, fixing this drift requires retraining the dense encoder rather than making targeted adjustments. While these limitations have motivated some to propose abandoning the traditional index entirely in favor of consolidated model based retrieval [19], such paradigms severely exacerbate updatability issues.

We argue that optimizing exclusively for offline ranking metrics on leaderboards like MTEB [10] ignores practical engineering realities.

We introduce Interpretable Semantic Resonance (ISR), a sparse bottleneck augmentation for dense retrieval systems that: (1) decomposes dense embeddings into sparse semantic facets via over-complete projection [31], (2) preserves retrieval geometry using inner product constraints [4], and (3) enables query time weighting of interpretable facets.

Rather than redesigning encoders, ISR focuses on integration, debuggability, and deployment feasibility within existing dense retrieval stacks.

2 Related Work

Classic models, including TF-IDF, BM25, and query likelihood models [7], provide exact matching but suffer from vocabulary mismatch [1, 3]. Neural approaches like DPR [4] and ColBERT [23], which are trained on large scale datasets or via weak supervision [28] and evaluated on massive benchmarks like the TREC Deep Learning Track [17], solve this using continuous representations, but they entangle concepts and lack transparency. While supervised dense retrievers rely on labeled data, unsupervised dense models (e.g., Contriever [13]) leverage contrastive sentence embedding frameworks like SimCSE [14] to learn robust representations without human annotations. Recent work has built upon broader frameworks for explainable retrieval [9]. To regain interpretability, researchers employ Sparse Autoencoders (SAEs) [21, 22] to resolve representational superposition, decomposing polysemantic neurons into disentangled, monosemantic features.

Concurrently, sparse models like SPLADE [25] and EPIC [16] build heavily on document expansion paradigms [12] by projecting into the vocabulary space, whereas models like COIL [26] focus on contextualizing exact lexical matches without expansion. To achieve interpretability, earlier approaches rely on post hoc methods like Concept Activation Vectors (TCAV) [29] to align dense network representations with human understandable concepts.

Our system combines these architectures with visual analytics principles like semantic interaction and steering [30] and conversational search frameworks [20] by introducing a query side modifier for debuggability.

3 Operational Limitations in Dense Retrieval

Dense retrievers cluster semantically similar documents into high dimensional neighborhoods [32]. While beneficial for recall, this clustering can entangle multiple concepts. When irrelevant results

Interpretable Semantic Resonance (ISR) Architecture

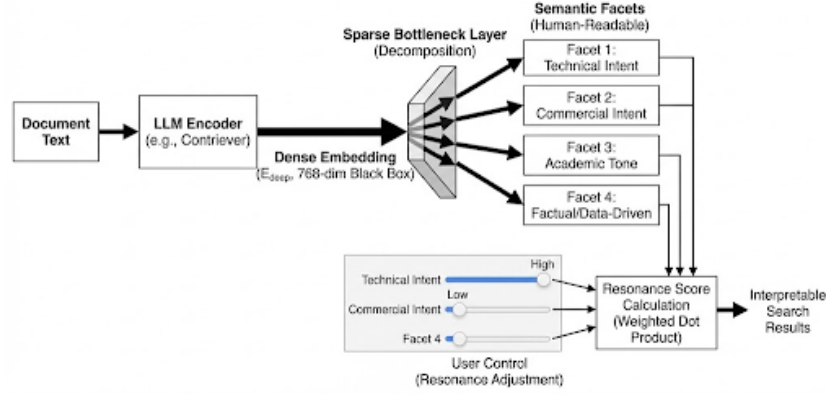


Figure 1: The ISR Architecture. Document text is processed by a standard LLM encoder into an entangled dense embedding (E_{deep}). The ISR Sparse Bottleneck Layer decomposes this black box into isolated, human readable Semantic Facets. During retrieval, users adjust these facets via UI sliders (User Control), dynamically scaling the Resonance Score Calculation to produce interpretable search results.

appear, maintainers lack deterministic mechanisms to adjust specific semantic influences. Common mitigation strategies include:

Common mitigation strategies include hard negative mining [4, 15], domain specific finetuning, or encoder replacement.

These approaches introduce compute cost and regression risk. Standard metrics like NDCG@10 measure rank quality but do not measure traceability or controllability.

ISR addresses this limitation by introducing a sparse semantic bottleneck that exposes discrete facets and supports targeted ranking adjustments.

4 The ISR Framework

To address these operational limitations, we propose the ISR framework, transitioning embeddings from a continuous black box into a steerable interface. As illustrated in Figure 1, the architecture acts as a transparent bridge between the dense encoder and the final retrieval ranking.

4.1 Core Novelty and Contributions

Standard neural IR relies on static MIPS over dense vectors. ISR introduces three primary novelties:

- **Active Mechanistic Interpretability:** We transpose SAEs from an offline diagnostic tool into an active retrieval bottleneck.
- **Real time Latent Steerability:** We introduce a dynamic Resonance Loop via query side scaling, modifying the active latent space in real time.
- **The Modifier Vector (M):** We formalize semantic control, allowing users to explicitly upweight or downweight discrete latent facets via UI sliders.

4.2 Decomposition via Sparse Bottleneck

A document is first fed into an off the shelf dense encoder (e.g., Contriever [13]), which outputs a dense embedding $E_{deep} \in \mathbb{R}^d$ (where $d = 768$). The ISR framework routes it through a Sparse Bottleneck Layer to produce a sparse feature activation vector F :

$$F = \text{ReLU}(W_{enc}E_{deep} + b_{enc}) \quad (1)$$

Here, W_{enc} projects the dense vector into an overcomplete k dimensional space (where $k \gg d$, typically $k = 4096$). Because relying on an L_1 penalty alone is often insufficient to guarantee robust monosemanticity and can degrade ranking, we incorporate a retrieval preserving contrastive alignment objective during dictionary learning.

4.3 The Facet Dictionary and Resonance Score

Each active dimension in F represents a single concept. We use a second LLM to generate clear Semantic Facets. During search, users adjust these facets with sliders to create a Modifier Vector $M \in \mathbb{R}^k$. The final Resonance Score is a weighted dot product:

$$S(q, d) = (F_q \odot M) \cdot F_d \quad (2)$$

The product $(F_q \odot M)$ scales the sparse activations of the query vector. This is equivalent to a weighted dot product. The system folds M into the query vector during search. This allows compatibility with standard search libraries [27].

Interactive UI Model: In a real search system, showing all $k = 4096$ sliders is a large amount of information for a user. To make the system easy to use, the interface shows a simple view. When a user runs a query, the system shows sliders for the top three to five active parts of the query vector F_q . It shows the main parts found in the top ten retrieved documents. This limits the user choices to a small group of active concepts. For example, a user can slide to lower the weight for hardware and raise the weight for software during a technical search. This is easier than choosing from the entire set of sliders.

5 Experimental Setup

The code and resources to reproduce our experiments are available in an anonymized repository at <https://anonymous.4open.science/r/IR-Interpretability-5DFA>.

Table 1: Hyperparameter Tradeoff Analysis (SciDocs)

Model	Parameters	NDCG@10	DTS (%)	MCI (Steps)
Contriever (Base)	N/A	0.4030	1.5	N/A
ISR Contriever	$\lambda_{L1} = 1.0 \times 10^{-6}, \lambda_{IP} = 3.0$	0.3904	57.0	8.7
ISR Contriever	$\lambda_{L1} = 1.5 \times 10^{-6}, \lambda_{IP} = 3.0$	0.3934	83.5	9.6

5.1 Datasets, Baselines, and Hardware Requirements

We evaluate ISR across five BEIR subsets [11] (SciDocs, ArguAna, NFCorpus, FIQA, TREC COVID) against Contriever (Dense), ColBERTv2.0 [24] (Late interaction), and SPLADE [25] (Sparse Lexical).

Baseline Selection Rationale: While models like E5 [18] and GTR [5] push the state of the art, we select base Contriever, SPLADE, and ColBERTv2.0 as foundational representatives of the dense, sparse, and late interaction paradigms.

Evaluation Constraints: To ensure feasibility on a single NVIDIA T4 GPU, we use subset sampled evaluations. All comparisons are paired under identical document pools, ensuring valid relative analysis.

5.2 The Composite Loss Function

The ISR bottleneck is trained directly on the target corpus embeddings using a batch size of 64 for 150 epochs. The similarity matrices for the Inner Product Preservation (IP) loss are constructed dynamically per minibatch, with embeddings L_2 normalized to mitigate hubness collapse.

$$\mathcal{L} = \text{MSE}(E, \text{Decoder}(F)) + \lambda_{L1} \|F\|_1 + \lambda_{IP} \text{MSE}(\text{sim}_F, \text{sim}_E) \quad (3)$$

This loss balances three goals. It keeps the reconstructed vectors close to the original vectors. It encourages sparse features. It preserves the distance between vectors to keep the search rank stable.

5.3 Novel Evaluation Metrics

Alongside standard NDCG@10, we introduce two metrics designed to measure search interpretability:

- **Diagnostic Traceability Score (DTS %):** This score measures how concepts overlap. Let $f_q^* = \arg \max(F_q)$ represent the main concept of the query. Let $D_d^{\text{top}3}$ represent the three largest values in the document vector F_d . DTS is the percentage of the top ten retrieved documents where f_q^* is in $D_d^{\text{top}3}$. For dense models, we adjust the vectors to remove global bias.
Baseline Calibration Note: We use DTS on dense models as a test to show how much their dimensions mix. This is not a direct comparison of search quality. We note that DTS favors sparse models by design because it counts how many concepts overlap. SPLADE uses words as concepts. Our system uses learned concepts that do not require exact word matches.
- **Mean Correction Interactions (MCI):** This metric measures how easy it is to steer the search. The test selects a

Table 2: Ablation Study on ISR Components (SciDocs)

Configuration	NDCG@10	DTS (%)	Zero Values (%)
Optimal ISR	0.4177	85.5	97.4%
Expanded Dim ($k = 8192$)	0.3968	89.5	98.8%
No IP/Contrastive ($\lambda_{IP} = 0$)	0.0500	100.0	100.0%
No Sparsity ($\lambda_{L1} = 0$)	0.3946	6.0	82.0%

target document outside the top ten. It finds the main concept of that document and increases its value in steps of two. The test stops when the document enters the top ten.

Baseline Applicability Note: We cannot compute the MCI score for dense models. These models mix concepts in a way that users cannot adjust. There is no single slider for a user to change. SPLADE allows users to boost exact words. Our system allows users to steer abstract concepts.

6 Results and Analysis

In this section, we evaluate the ISR framework’s ability to balance robust retrieval accuracy with human interpretable controllability. Our quantitative benchmarking and ablation studies demonstrate that ISR maintains competitive zero shot performance across diverse domains while successfully disentangling opaque embeddings into mathematically verifiable facets. Finally, a qualitative case study illustrates how this architecture empowers users to actively bypass latent clumps and correct semantic drift in real time.

6.1 Quantitative Results

Imposing a sparse bottleneck results in a statistically acceptable degradation in zero shot ranking performance while yielding measurable improvements in traceability (Table 3) with bounded ranking degradation. In production contexts, such bounded tradeoffs are often preferable to opaque performance gains, as they allow maintainers to diagnose and correct retrieval drift without retraining. Absolute NDCG values differ from leaderboard benchmarks due to subset sampling; relative comparisons remain valid under paired evaluation. Statistical significance was assessed via query level paired t tests; notably, ArguAna and FIQA maintained statistically nonsignificant NDCG variances while improving DTS% substantially. However, the medical dataset NFCorpus exhibits a more pronounced drop in ranking quality, suggesting that highly specialized clinical concepts are prone to semantic entanglement, making them harder to decompose into sparse representation facets without a corresponding loss in retrieval precision.

6.2 Tradeoff Analysis and Ablation Studies

Achieving operational transparency requires navigating the structural tension between interpretability (λ_{L1}) and reconstruction accuracy (λ_{IP}). As shown in Table 1, locking the IP penalty at 3.0 and increasing λ_{L1} from 1.0×10^{-6} to 1.5×10^{-6} jumps the Diagnostic Traceability Score (DTS) from 57.0% to 83.5% while maintaining a stable NDCG@10.

These tradeoffs are further illuminated by our ablation studies (Table 2). Removing the IP preservation loss component ($\lambda_{IP} = 0$) results in catastrophic semantic collapse; the L1 penalty forces 100% sparsity and NDCG plummets to 0.0500. Conversely, removing the

Table 3: Retrieval, Controllability, and Hardware Footprint Across BEIR Subsets. Statistical significance is assessed via query level paired t tests against the Contriever base model: (ns) nonsignificant, * $p < 0.05$, ** $p < 0.01$, and * $p < 0.001$.**

Dataset	Model	NDCG@10	DTS (%)	MCI	p value	Zero Values (%)
Scidocs	Contriever (Dense)	0.5615	1.0	N/A	-	0.0% (Dense)
	ColBERTv2.0 (Dense)	0.6105	5.0	N/A	0.168 (ns)	0.0% (Dense)
	SPLADE (Sparse)	0.5979	14.5	N/A	0.325 (ns)	99.4%
	ISR Contriever (Ours)	0.5610	28.0	8.5	0.958 (ns)	96.5%
Arguana	Contriever (Dense)	0.4628	15.0	N/A	-	0.0% (Dense)
	ColBERTv2.0 (Dense)	0.4553	13.0	N/A	0.826 (ns)	0.0% (Dense)
	SPLADE (Sparse)	0.5042	27.0	N/A	0.276 (ns)	99.4%
	ISR Contriever (Ours)	0.4390	41.5	4.0	0.148 (ns)	96.9%
Nfcorpus	Contriever (Dense)	0.5928	0.0	N/A	-	0.0% (Dense)
	ColBERTv2.0 (Dense)	0.5747	5.0	N/A	0.621 (ns)	0.0% (Dense)
	SPLADE (Sparse)	0.6563	21.0	N/A	0.133 (ns)	99.3%
	ISR Contriever (Ours)	0.5300	45.5	9.0	0.006 (**)	97.5%
Fiqa	Contriever (Dense)	0.6141	1.0	N/A	-	0.0% (Dense)
	ColBERTv2.0 (Dense)	0.7263	1.5	N/A	0.126 (ns)	0.0% (Dense)
	SPLADE (Sparse)	0.7747	22.0	N/A	0.016 (*)	99.5%
	ISR Contriever (Ours)	0.6201	36.0	6.0	0.642 (ns)	96.4%
Trec COVID	Contriever (Dense)	0.3441	18.5	N/A	-	0.0% (Dense)
	ColBERTv2.0 (Dense)	0.9463	9.5	N/A	0.000 (***)	0.0% (Dense)
	SPLADE (Sparse)	0.9210	39.5	N/A	0.000 (***)	99.3%
	ISR Contriever (Ours)	0.3563	95.5	10.0	0.806 (ns)	99.5%

sparsity constraint entirely ($\lambda_{L1} = 0$) reverts the representations to dense embeddings, crashing DTS to 6.0%. Finally, expanding the dictionary dimension k to 8192 yields diminishing returns, confirming that $k = 4096$ represents a highly stable, Pareto optimal configuration.

6.3 Qualitative Case Study: Escaping Semantic Drift

For the SciDocs query [Algorithms for low power wireless sensor networks], the base Contriever retrieves hardware papers because the latent space clumped low power with hardware constraints. In the ISR framework, an operator notices Dimension 802 (Hardware & Circuitry) dominates. By setting $M_{802} = 0.1$ and upweighting Dimension 145 (Software Algorithms) to $M_{145} = 2.0$, the hardware papers are dynamically suppressed, and the algorithmic papers resonate to the top 5.

7 Operational Constraints and Drawbacks

System Overhead and Storage Mitigations: While ISR increases query latency from 12ms to 21ms on an NVIDIA T4, its 97% sparsity reduces the storage footprint. Storing only 123 active dimensions requires 984 bytes per document—a 68% reduction compared to the 3,072 bytes of dense baselines—enabling highly efficient inverted index storage.

Label Verification and Domain Brittleness: We rely on LLM generated labels without human validation. While methods like DeepSHAP [8] show feature importance, they lack steerability. Furthermore, if evaluated on out of domain topics, the pretrained SAE facets may fail to generalize.

Deployment Guardrails and VA Integration: Steering the search can lead to mistakes or biased results. A real system must set safe limits for the sliders and keep a record of all changes to allow users to undo them if the search quality drops.

Production Integration and Reindexing Feasibility: Traditional steerable search requires costly reindexing of the entire

corpus upon model updates. ISR bypasses this by applying the modifier vector M exclusively to the query representation at retrieval time, leaving the document index (F_d) static. This enables real time steering on top of existing vector databases (e.g., FAISS, Milvus) without reindexing.

Model Updates and Version Management: Retraining the dictionary on new document distributions can shift latent facet mappings, breaking saved user settings. To ensure version compatibility, we propose a lightweight translation layer that maps newly trained facets back to the historical slider configuration, preserving user steering states across updates.

8 Conclusion and Future Work

The debugging limits of dense neural search stem from unconstrained latent vectors. ISR demonstrates that we can preserve the semantic power of deep representation models while restoring operational transparency and control. By decomposing dense embeddings into sparse semantic facets, we transition from black box vector similarity to an interactive, steerable retrieval interface. Future work will focus on user studies to validate slider usability, improving out of domain adaptation, and integrating with engines like Lucene to evaluate large scale indexing efficiency.

Statement of AI Use

The authors acknowledge the use of Gemini AI to refine the text, code and generate the images included in this paper.

References

- [1] W. Bruce Croft, Donald Metzler, and Trevor Strohman. 2010. *Search Engines: Information Retrieval in Practice*. Addison-Wesley, Reading, MA. ISBN: 978-0136072249. URL: <http://ciir.cs.umass.edu/irbook/>.
- [2] Jimmy Lin, Rodrigo Nogueira, and Andrew Yates. 2021. *Pretrained Transformers for Text Ranking: BERT and Beyond*. Synthesis Lectures on Human Language Technologies, Vol. 14, No. 4, Pages 1–325. Morgan & Claypool Publishers. DOI: <https://doi.org/10.2200/S01123ED1V01Y202108HLT053>.
- [3] Stephen Robertson and Hugo Zaragoza. 2009. The Probabilistic Relevance Framework: BM25 and Beyond. *Foundations and Trends in Information Retrieval* Vol. 3, No. 4, Pages 333–389. Now Publishers Inc. DOI: <https://doi.org/10.1561/15000000019>. URL: <https://www.nowpublishers.com/article/Details/INR-019>.
- [4] Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. 2020. Dense Passage Retrieval for Open-Domain Question Answering. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing*.

- (EMNLP). Association for Computational Linguistics, 6769–6781. DOI: <https://doi.org/10.18653/v1/2020.emnlp-main.550>.
- [5] Jianmo Ni, Chen Qu, Jing Lu, Zhu Yun Dai, Gustavo Hernández Ábrego, Ji Ma, Vincent Zhao, Yi Luan, Keith Hall, Ming-Wei Chang, and Yinfei Yang. 2022. Large Dual Encoders Are Generalizable Retrievers. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing (EMNLP)* (Abu Dhabi, United Arab Emirates). Association for Computational Linguistics, 9844–9855. DOI: <https://doi.org/10.18653/v1/2022.emnlp-main.669>. URL: <https://aclanthology.org/2022.emnlp-main.669/>.
 - [6] Anshumali Shrivastava and Ping Li. 2014. Asymmetric LSH (ALSH) for Sublinear Time Maximum Inner Product Search (MIPS). In *Advances in Neural Information Processing Systems 27 (NeurIPS 2014)*, Z. Ghahramani, M. Welling, C. Cortes, N. Lawrence, and K. Weinberger (Eds.). Curran Associates, Inc., 2321–2329. URL: https://proceedings.neurips.cc/paper_files/paper/2014/file/c98e7c4b8f20d384e3ad857d0ee226cc-Paper.pdf.
 - [7] Chengxiang Zhai and John Lafferty. 2004. A Study of Smoothing Methods for Language Models Applied to Information Retrieval. *ACM Transactions on Information Systems* Vol. 22, No. 2, Pages 179–214. Association for Computing Machinery, New York, NY, USA. DOI: <https://doi.org/10.1145/984321.984322>.
 - [8] Zeon Trevor Fernando, Jaspreet Singh, and Avishek Anand. 2019. A Study on the Interpretability of Neural Retrieval Models Using DeepSHAP. In *Proceedings of the 42nd International ACM SIGIR Conference on Research and Development in Information Retrieval* (Paris, France). Association for Computing Machinery, New York, NY, USA, 1005–1008. ISBN: 9781450361729. DOI: <https://doi.org/10.1145/3331184.3331312>.
 - [9] Avishek Anand, Procheta Sen, Sourav Saha, Manisha Verma, and Mandar Mitra. 2023. Explainable Information Retrieval. In *Proceedings of the 46th International ACM SIGIR Conference on Research and Development in Information Retrieval* (Taipei, Taiwan). Association for Computing Machinery, New York, NY, USA, 3448–3451. DOI: <https://doi.org/10.1145/3539618.3594249>.
 - [10] Niklas Muennighoff, Nouamane Tazi, Loïc Magne, and Nils Reimers. 2023. MTEB: Massive Text Embedding Benchmark. In *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics (Dubrovnik, Croatia)*. Association for Computational Linguistics, 2014–2037. DOI: <https://doi.org/10.18653/v1/2023.eacl-main.148>. URL: <https://aclanthology.org/2023.eacl-main.148/>.
 - [11] Nandan Thakur, Nils Reimers, Andreas Rücklé, Abhishek Srivastava, and Iryna Gurevych. 2021. BEIR: A Heterogeneous Benchmark for Zero-shot Evaluation of Information Retrieval Models. In *Proceedings of the 35th Conference on Neural Information Processing Systems Datasets and Benchmarks Track (NeurIPS Datasets and Benchmarks 2021)*. URL: <https://openreview.net/forum?id=wCu6T5xJfJ>.
 - [12] Rodrigo Nogueira, Wei Yang, Jimmy Lin, and Kyunghyun Cho. 2019. Document Expansion by Query Prediction. *arXiv preprint arXiv:1904.08375*. DOI: <https://doi.org/10.48550/arXiv.1904.08375>.
 - [13] Gautier Izacard, Mathilde Caron, Lucas Hosseini, Sebastian Riedel, Piotr Bojanowski, Armand Joulin, and Edouard Grave. 2022. Unsupervised Dense Information Retrieval with Contrastive Learning. *Transactions on Machine Learning Research* (2022). URL: <https://openreview.net/forum?id=jKN1pXi7b0>.
 - [14] Tianyu Gao, Xingcheng Yao, and Danqi Chen. 2021. SimCSE: Simple Contrastive Learning of Sentence Embeddings. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing (EMNLP)* (Punta Cana, Dominican Republic). Association for Computational Linguistics, 6894–6910. DOI: <https://doi.org/10.18653/v1/2021.emnlp-main.552>. URL: <https://aclanthology.org/2021.emnlp-main.552/>.
 - [15] Lee Xiong, Chenyan Xiong, Ye Li, Kwok-Fung Tang, Jialin Liu, Paul N. Bennett, Junaid Ahmed, and Arnold Overwijk. 2021. Approximate Nearest Neighbor Negative Contrastive Learning for Dense Text Retrieval. In *Proceedings of the 9th International Conference on Learning Representations (ICLR 2021)* (Online). URL: <https://openreview.net/forum?id=zeFrfgYzLn>.
 - [16] Sean MacAvaney, Franco Maria Nardini, Raffaele Perego, Nicola Tonellotto, Nazli Goharian, and Ophir Frieder. 2020. Expansion via Prediction of Importance with Contextualization. In *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval* (Online). Association for Computing Machinery, New York, NY, USA. DOI: <https://doi.org/10.1145/3397271.3401262>.
 - [17] Nick Craswell, Bhaskar Mitra, Emine Yilmaz, and Daniel Campos. 2020. Overview of the TREC 2020 Deep Learning Track. In *Proceedings of the Twenty-Ninth Text REtrieval Conference (TREC 2020)* (Gaithersburg, MD, USA). National Institute of Standards and Technology (NIST). URL: <https://trec.nist.gov/pubs/trec29/papers/OVERVIEW.DL.pdf>.
 - [18] Liang Wang, Nan Yang, Xiaolong Huang, Linjun Yang, Rangan Majumder, and Furu Wei. 2024. Improving Text Embeddings with Large Language Models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)* (Bangkok, Thailand). Association for Computational Linguistics, 11897–11916. DOI: <https://doi.org/10.18653/v1/2024.acl-long.642>. URL: <https://aclanthology.org/2024.acl-long.642>.
 - [19] Donald Metzler, Yi Tay, Dara Bahri, and Marc Najork. 2021. Rethinking Search: Making Domain Experts out of Dilettantes. *SIGIR Forum* 55, 1 (2021), Article 13, 27 pages. DOI: <https://doi.org/10.1145/3476415.3476428>.
 - [20] Filip Radlinski and Nick Craswell. 2017. A Theoretical Framework for Conversational Search. In *Proceedings of the 2017 Conference on Human Information Interaction and Retrieval* (New York, NY, USA). Association for Computing Machinery, 117–126. DOI: <https://doi.org/10.1145/3020165.3020183>.
 - [21] Trenton Bricken, Adly Templeton, Joshua Batson, Brian Chen, Adam Jermy, Tom Conerly, Nick Turner, Cem Anil, Cleo Denison, Amanda Askell, Robert Lasenby, Yuhuai Wu, Shauna Kravec, Nicholas Schiefer, Tim Maxwell, Nicholas Joseph, Zac Hatfield-Dodds, Alex Tamkin, Karina Nguyen, Brayden McLean, Josiah E. Burke, Tristan Hume, Shan Carter, Tom Henighan, and Christopher Olah. 2023. Towards Monosemanticity: Decomposing Language Models With Dictionary Learning. *Transformer Circuits Thread* (2023). URL: <https://transformer-circuits.pub/2023/monosemantic-features> [Accessed: 2026-06-06].
 - [22] Robert Huben, Hoagy Cunningham, Logan Riggs Smith, Aidan Ewart, and Lee Sharkey. 2024. Sparse Autoencoders Find Highly Interpretable Features in Language Models. In *Proceedings of the 12th International Conference on Learning Representations (ICLR 2024)* (Online). URL: <https://openreview.net/forum?id=F76bwRSLeK>.
 - [23] Omar Khattab and Matei Zaharia. 2020. ColBERT: Efficient and Effective Passage Search via Contextualized Late Interaction over BERT. In *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval* (New York, NY, USA). Association for Computing Machinery, 39–48. DOI: <https://doi.org/10.1145/3397271.3401075>.
 - [24] Keshav Santhanam, Omar Khattab, Jon Saad-Falcon, Christopher Potts, and Matei Zaharia. 2022. ColBERTv2: Effective and Efficient Retrieval via Lightweight Late Interaction. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies* (Seattle, WA, USA). Association for Computational Linguistics, 3715–3734. DOI: <https://doi.org/10.18653/v1/2022.naacl-main.272>.
 - [25] Thibault Formal, Benjamin Piwowarski, and Stéphane Clinchant. 2021. SPLADE: Sparse Lexical and Expansion Model for First Stage Ranking. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval* (New York, NY, USA). Association for Computing Machinery, 2288–2292. DOI: <https://doi.org/10.1145/3404835.3463098>.
 - [26] Luyu Gao, Zhu Yun Dai, and Jamie Callan. 2021. COIL: Revisit Exact Lexical Match in Information Retrieval with Contextualized Inverted List. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies* (Online). Association for Computational Linguistics, 3140–3150. DOI: <https://doi.org/10.18653/v1/2021.naacl-main.250>.
 - [27] Jeff Johnson, Matthijs Douze, and Hervé Jégou. 2019. Billion-Scale Similarity Search with GPUs. *IEEE Transactions on Big Data* 7, 3 (2019), 535–547. DOI: <https://doi.org/10.1109/TBDATA.2019.2921572>.
 - [28] Mostafa Dehghani, Hamed Zamani, Aliaksei Severyn, Jaap Kamps, and W. Bruce Croft. 2017. Neural Ranking Models with Weak Supervision. In *Proceedings of the 40th International ACM SIGIR Conference on Research and Development in Information Retrieval* (New York, NY, USA). Association for Computing Machinery, 65–74. DOI: <https://doi.org/10.1145/3077136.3080832>.
 - [29] Been Kim, Martin Wattenberg, Justin Gilmer, Carrie Cai, James Wexler, Fernanda Viegas, and Rory Sayres. 2018. Interpretability Beyond Feature Attribution: Quantitative Testing with Concept Activation Vectors (TCAV). In *Proceedings of the 35th International Conference on Machine Learning (ICML 2018)* (Proceedings of Machine Learning Research, Vol. 80). PMLR, 2668–2677. URL: <https://proceedings.mlr.press/v80/kim18d.html>.
 - [30] Alex Endert, M. Shahriar Hossain, Naren Ramakrishnan, Chris North, Patrick Fiaux, and Christopher Andrews. 2014. The Human is the Loop: New Directions for Visual Analytics. *Journal of Intelligent Information Systems* 43, 3 (2014), 411–435. DOI: <https://doi.org/10.1007/s10844-014-0304-9>.
 - [31] Manaal Faruqui, Yulia Tsvetkov, Dani Yogatama, Chris Dyer, and Noah A. Smith. 2015. Sparse Overcomplete Word Vector Representations. In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)* (Beijing, China). Association for Computational Linguistics, 1491–1500. DOI: <https://doi.org/10.3115/v1/P15-1144>.
 - [32] Nils Reimers and Iryna Gurevych. 2019. Sentence-BERT: Sentence Embeddings using Siamese BERT-Networks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)* (Hong Kong, China). Association for Computational Linguistics, 3982–3992. DOI: <https://doi.org/10.18653/v1/D19-1410>.