

Exercise5 Seaborn

April 15, 2018

1 Seaborn

Seaborn is a library for making attractive and informative statistical graphics in Python. It is built on top of matplotlib and tightly integrated with the PyData stack, including support for numpy and pandas data structures and statistical routines from scipy and statsmodels.

Library documentation: <http://stanford.edu/~mwaskom/software/seaborn/>

```
In [2]: import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sb
%matplotlib inline
```

1.0.1 Themes

```
In [3]: # global config settings to control things like style, font size, color palette etc.
sb.set(context="notebook", style="darkgrid", palette="dark")
```

```
In [4]: # seaborn has some nice built-in color palette features
sb.palplot(sb.color_palette())
sb.palplot(sb.color_palette("husl", 8))
sb.palplot(sb.color_palette("hls", 8))
```





```
In [5]: # matplotlib colormap of evenly spaced colors
sb.palplot(sb.color_palette("coolwarm", 7))
```




```
In [6]: # sequential palette with linear increase in brightness
sb.palplot(sb.cubehelix_palette(8))
```



```
In [7]: # palettes are used in a plot via the color paramter
gammas = sb.load_dataset("gammas")
sb.tsplot(gammas, "timepoint", "subject", "ROI", "BOLD signal", color="muted")
```

```
/home/debaraj/anaconda3/lib/python3.6/site-packages/seaborn/timeseries.py:183: UserWarning: The
warnings.warn(msg, UserWarning)
```

```
Out[7]: <matplotlib.axes._subplots.AxesSubplot at 0x7f2c99163c88>
```

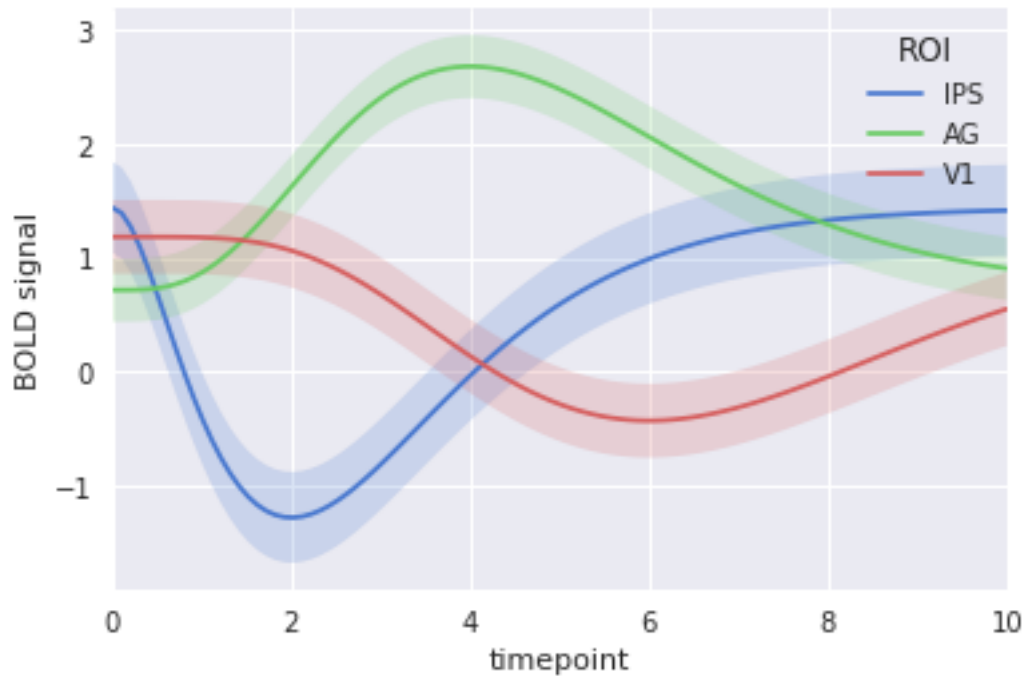


1.0.2 Advanced Plots

In [8]: *# facetting histograms by subsets of data*
`sb.set(style="darkgrid")`

```
tips = sb.load_dataset("tips")
g = sb.FacetGrid(tips, row="sex", col="time", margin_titles=True)
bins = np.linspace(0, 60, 13)
g.map(plt.hist, "total_bill", color="steelblue", bins=bins, lw=0)
```

Out [8]: <seaborn.axisgrid.FacetGrid at 0x7f2ccc1e38d0>

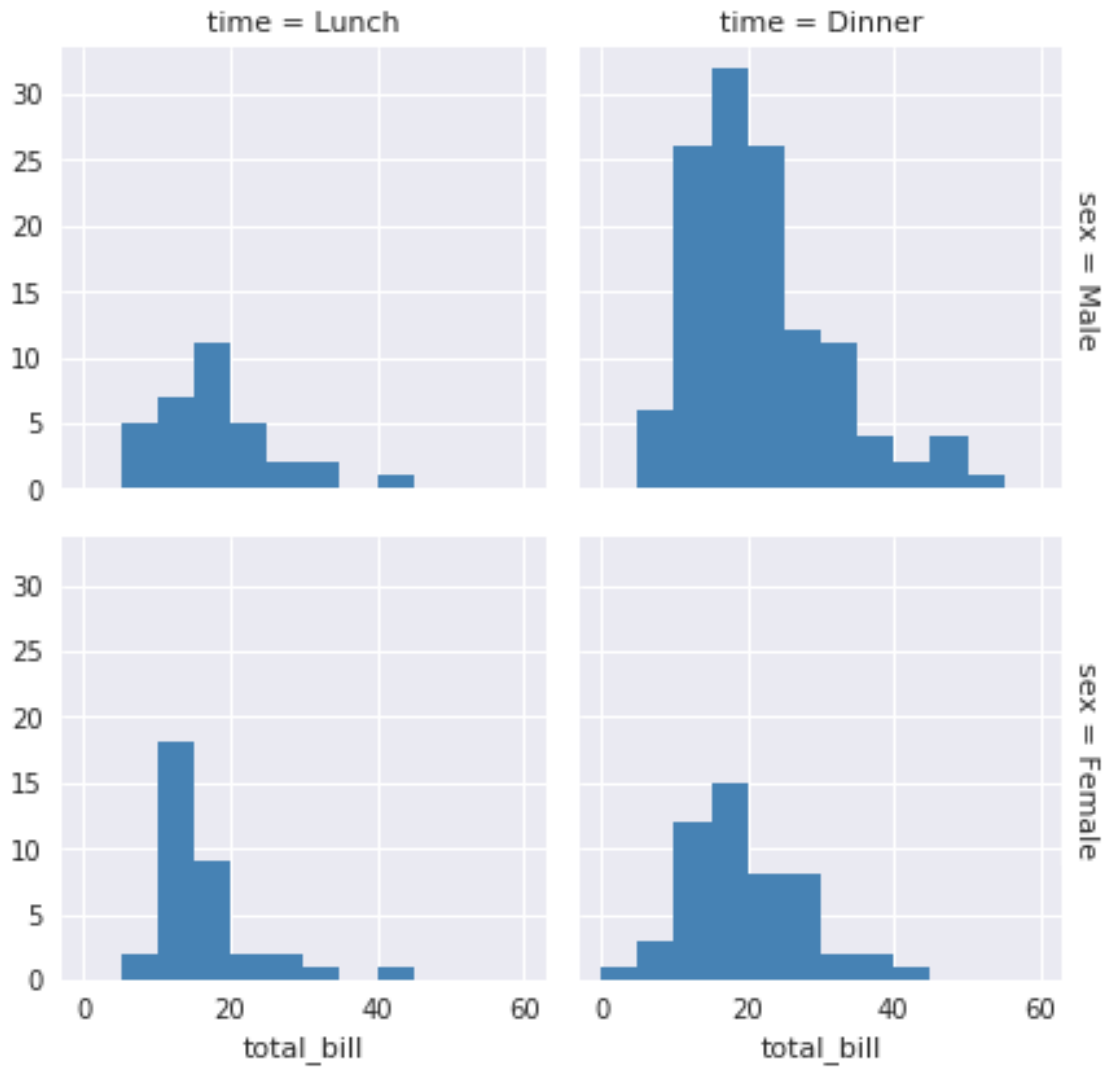

```
In [9]: # several distribution plot examples
sb.set(style="white", palette="muted")
f, axes = plt.subplots(2, 2, figsize=(7, 7), sharex=True)
sb.despine(left=True)

rs = np.random.RandomState(10)

b, g, r, p = sb.color_palette("muted", 4)


d = rs.normal(size=100)

sb.distplot(d, kde=False, color=b, ax=axes[0, 0])
sb.distplot(d, hist=False, rug=True, color=r, ax=axes[0, 1])
sb.distplot(d, hist=False, color=g, kde_kws={"shade": True}, ax=axes[1, 0])
```

```
sb.distplot(d, color=p, ax=axes[1, 1])
```

```
plt.setp(axes, yticks=[])
```

```
plt.tight_layout()
```

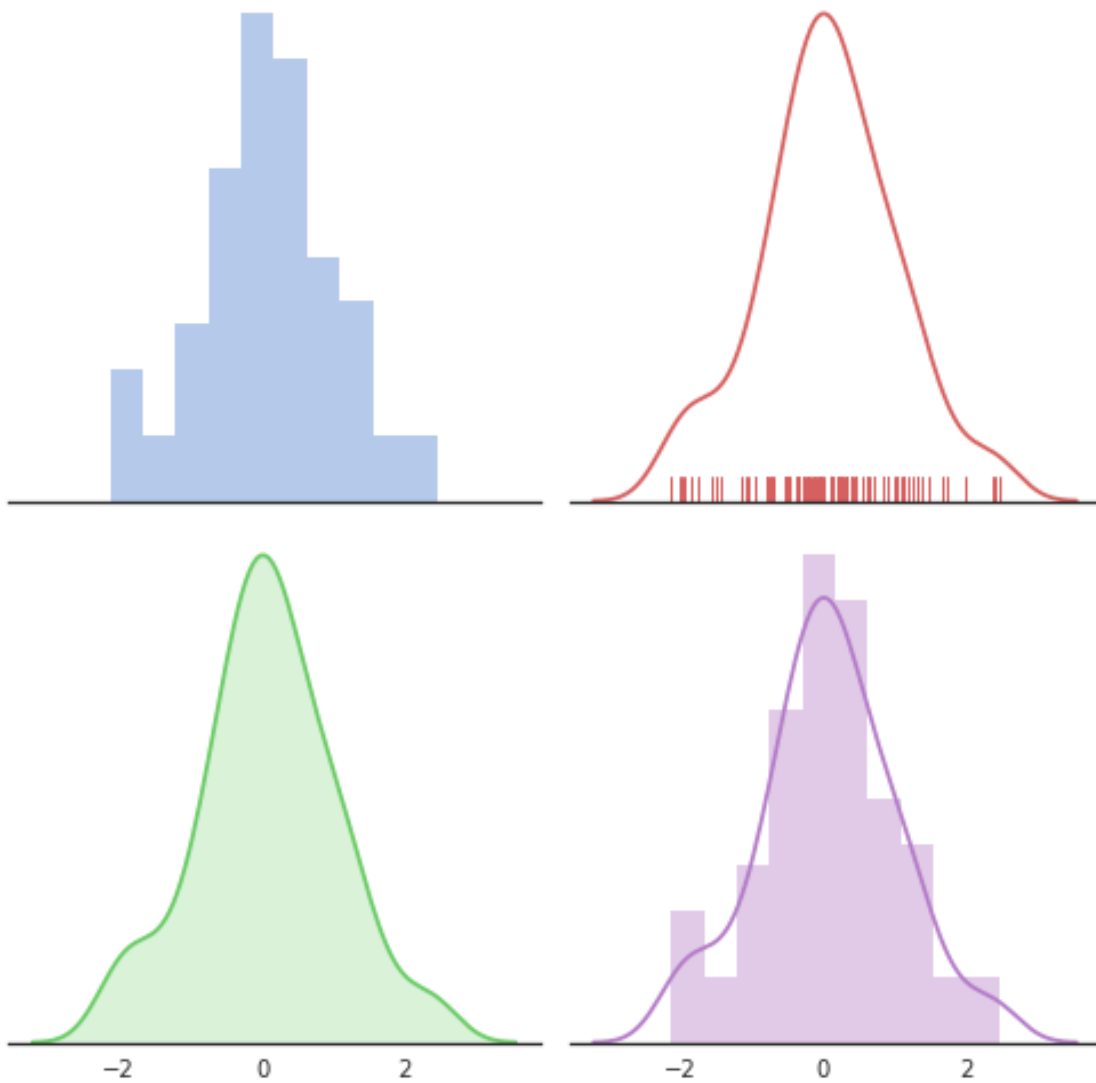

```
In [10]: # hexbin plot with marginal distributions
```

```
from scipy.stats import kendalltau
```

```
sb.set(style="ticks")
```


```
rs = np.random.RandomState(11)
```

```
x = rs.gamma(2, size=1000)
```

```
y = -.5 * x + rs.normal(size=1000)
```

```
sb.jointplot(x, y, kind="hex", stat_func=kendalltau, color="#4CB391")
```


Out[10]: <seaborn.axisgrid.JointGrid at 0x7f2c9876c400>

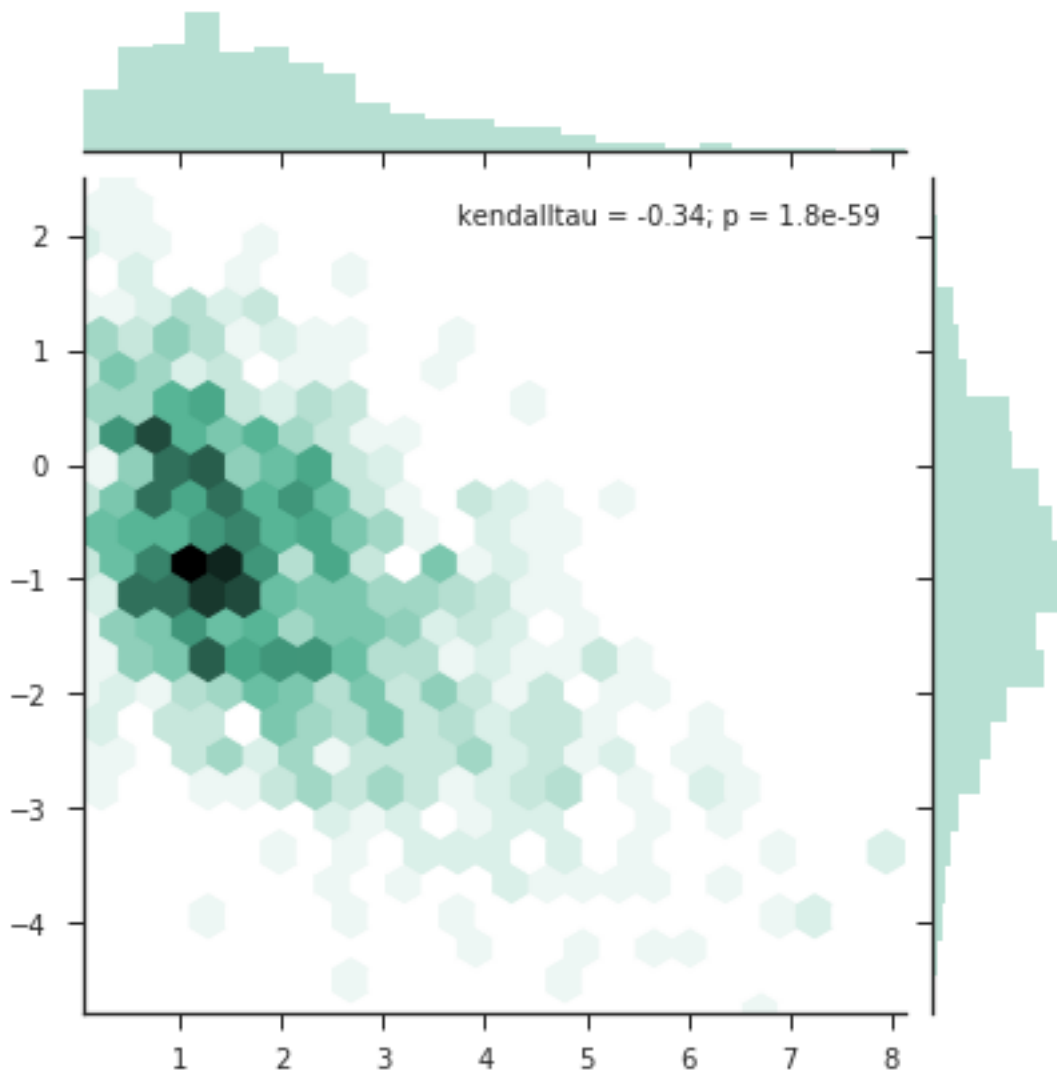


```
In [11]: # faceted logistic regression
sb.set(style="darkgrid")
df = sb.load_dataset("titanic")

pal = dict(male="#6495ED", female="#F08080")
g = sb.lmplot("age", "survived", col="sex", hue="sex", data=df,
              palette=pal, y_jitter=.02, logistic=True)
g.set(xlim=(0, 80), ylim=(-.05, 1.05))
```

Out[11]: <seaborn.axisgrid.FacetGrid at 0x7f2c984b8320>

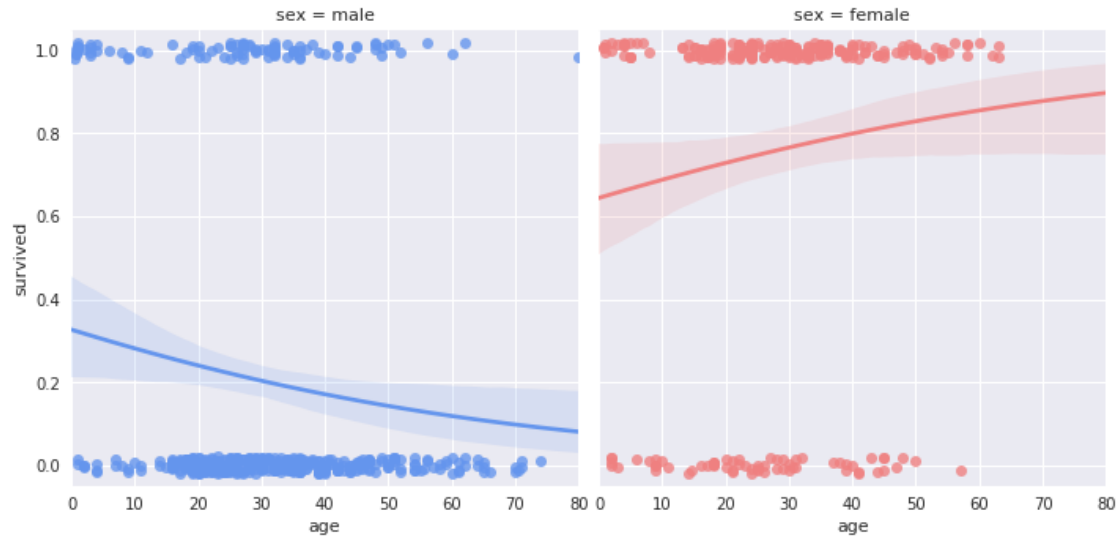


```
In [12]: # linear regression with marginal distributions
sb.set(style="darkgrid")
tips = sb.load_dataset("tips")
color = sb.color_palette()[2]
g = sb.jointplot("total_bill", "tip", data=tips, kind="reg",
                 xlim=(0, 60), ylim=(0, 12), color=color, size=7)
```

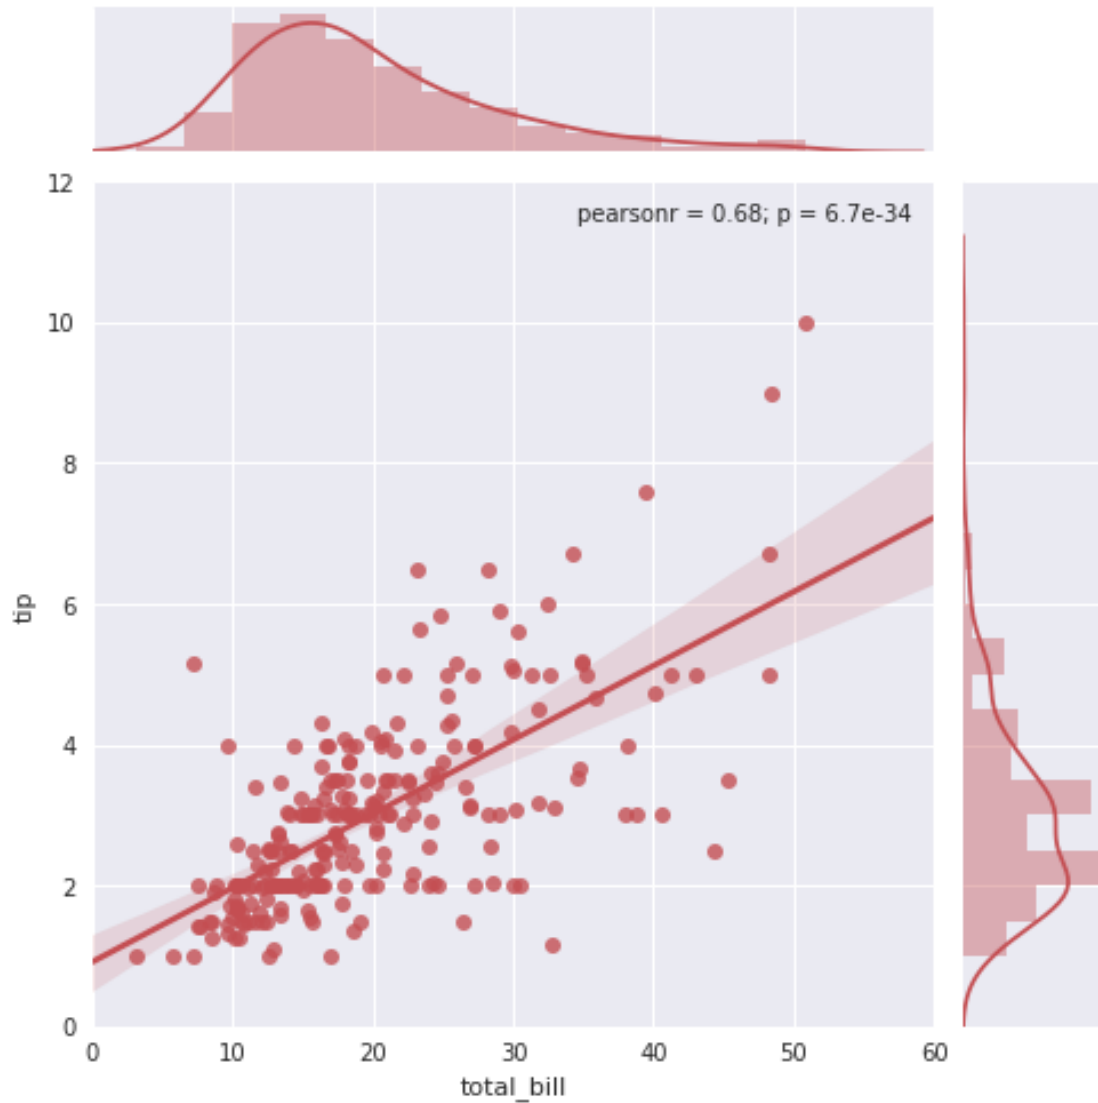

```
In [13]: # time series factor plot
sb.set(style="white")
planets = sb.load_dataset("planets")
years = np.arange(2000, 2015)
g = sb.factorplot("year", data=planets, palette="BuPu",
                  aspect=1.5, x_order=years)
g.set_xticklabels(step=2)
```

```
Out[13]: <seaborn.axisgrid.FacetGrid at 0x7f2c9570b320>
```
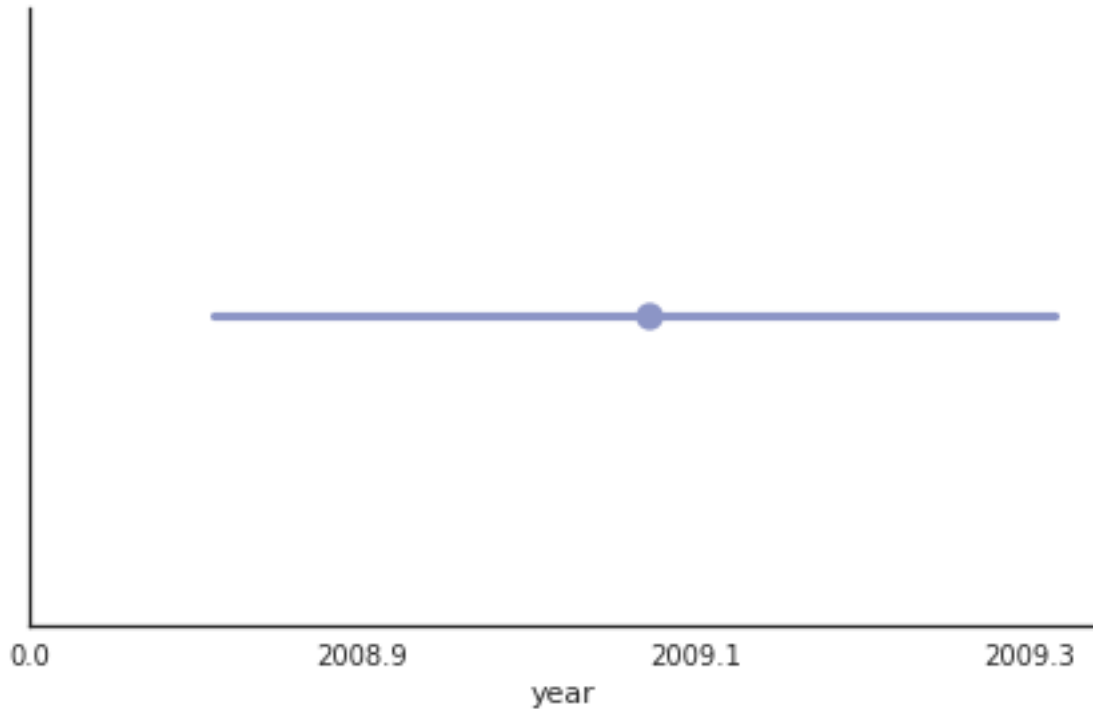
```
In [14]: # correlation matrix
sb.set(style="darkgrid")

rs = np.random.RandomState(33)
d = rs.normal(size=(100, 30))


f, ax = plt.subplots(figsize=(9, 9))
cmap = sb.blend_palette(["#00008B", "#6A5ACD", "#F0F8FF",
                        "#FFE6F8", "#C71585", "#8B0000"], as_cmap=True)
sb.corrplot(d, annot=False, sig_stars=False,
            diag_names=False, cmap=cmap, ax=ax)
f.tight_layout()
```

AttributeError

Traceback (most recent call last)

```
<ipython-input-14-1036dd447ea2> in <module>()
      8 cmap = sb.blend_palette(["#00008B", "#6A5ACD", "#F0F8FF",
      9                             "#FFE6F8", "#C71585", "#8B0000"], as_cmap=True)
--> 10 sb.corrplot(d, annot=False, sig_stars=False,
      11             diag_names=False, cmap=cmap, ax=ax)
      12 f.tight_layout()
```

```
AttributeError: module 'seaborn' has no attribute 'corrplot'
```

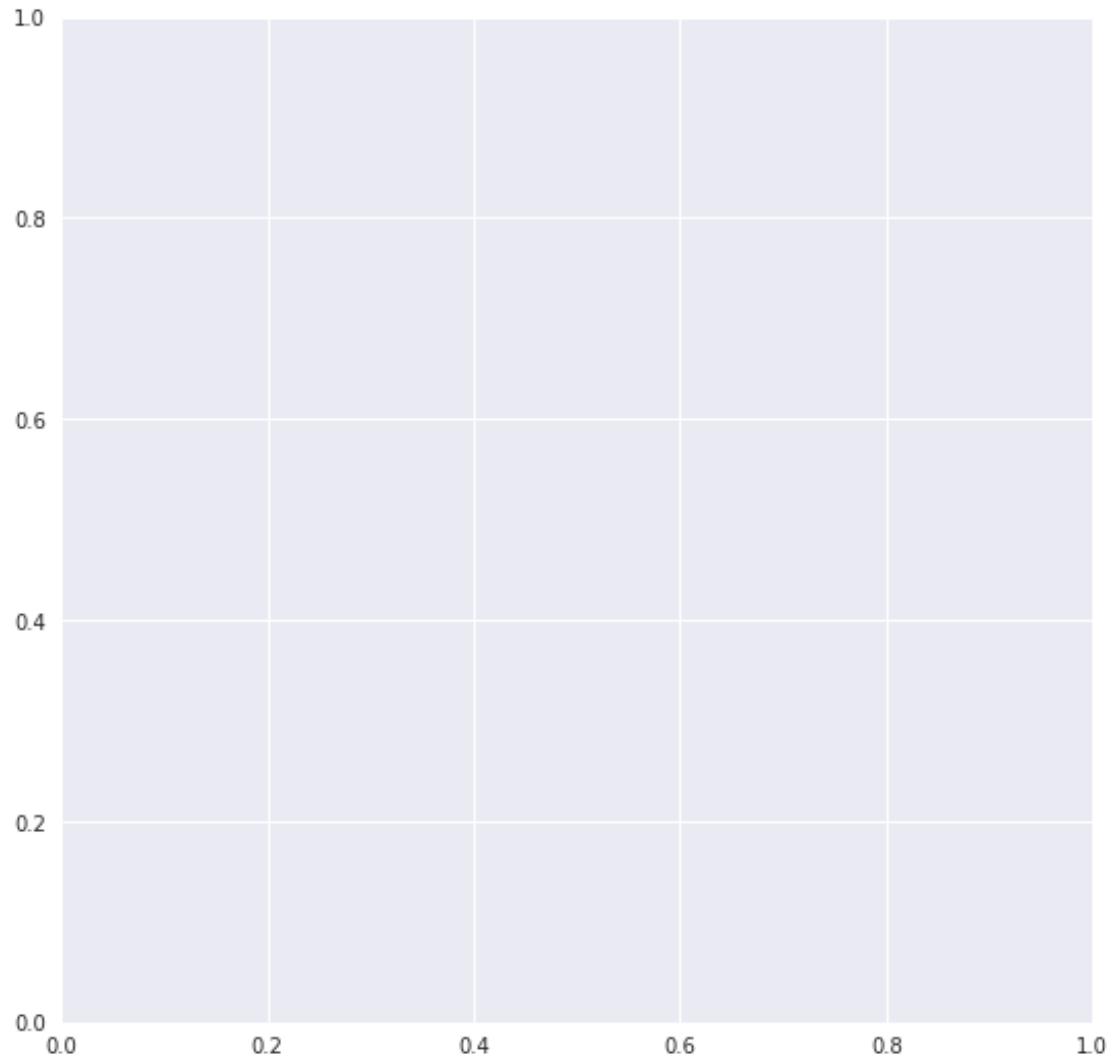

```
In [ ]: # pair plot example
        sb.set(style="darkgrid")
        df = sb.load_dataset("iris")
        sb.pairplot(df, hue="species", size=2.5)
```