Frozen, from EventGPT

Trained by cross-entropy

Intercept b, solved by Fisher scoring

Next-event tokens and q

Token decoder

Residual head

$z = W_0\, y + A\,\mathrm{std}(y) + b$

Final LayerNorm

Causal self-attention block

within the next event

× 2

Token embeddings + h

h

gradients stop at h

h is computed once and cached

Final LayerNorm

History decoder

Causal multi-head attention

over events, temporal RoPE

Feed forward

residual blocks, GELU

× 6

e_1 to e_i, one vector per event

Event encoder

Self-attention block, mean pool

bidirectional, within each event


× 2

Token embedding layer

Tokenized events

A client's events

EventGPT-D

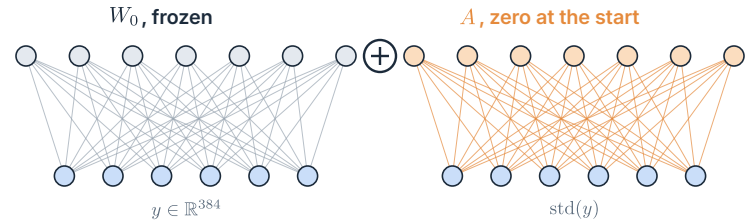

$$z = W_0\, y + A\,\mathrm{std}(y) + b, \quad z \in \mathbb{R}^{755}$$

EventGPT's output layer stays frozen. A residual on the standardized state starts at zero, so training starts at EventGPT zero-shot (Geuter, Cheng and Alvarez-Melis 2026).

`[EVT]` `name=cb_pay` `dt=101` `n=3` `late=1` `pdpd=b2`

$$q = P(\mathrm{kind}) \sum_n P(n)\, P(\mathrm{late} \mid n)\, P(\mathrm{pdpd} \mid n, \mathrm{late})$$

= 0.30 for case 244050

The confidence is the model's own probability of the event it writes, summed over n, which is not judged. There is no separate confidence head.

Case 244050: 60 events before the cut

`name=cb_pay` `dt=101` `n=3` `late=1` `pdpd=b2` `pov=b1`

`name=tax` `dt=0` `src=b` `tamt=b15`

`name=cb_pay` `dt=101` `n=3` `late=1` `pdpd=b1` `pov=b2`

the last three, oldest first

EventGPT reads the whole history once. Its state h at the last event before the cut is cached, so fine-tuning runs only the token decoder: one cached h per case.