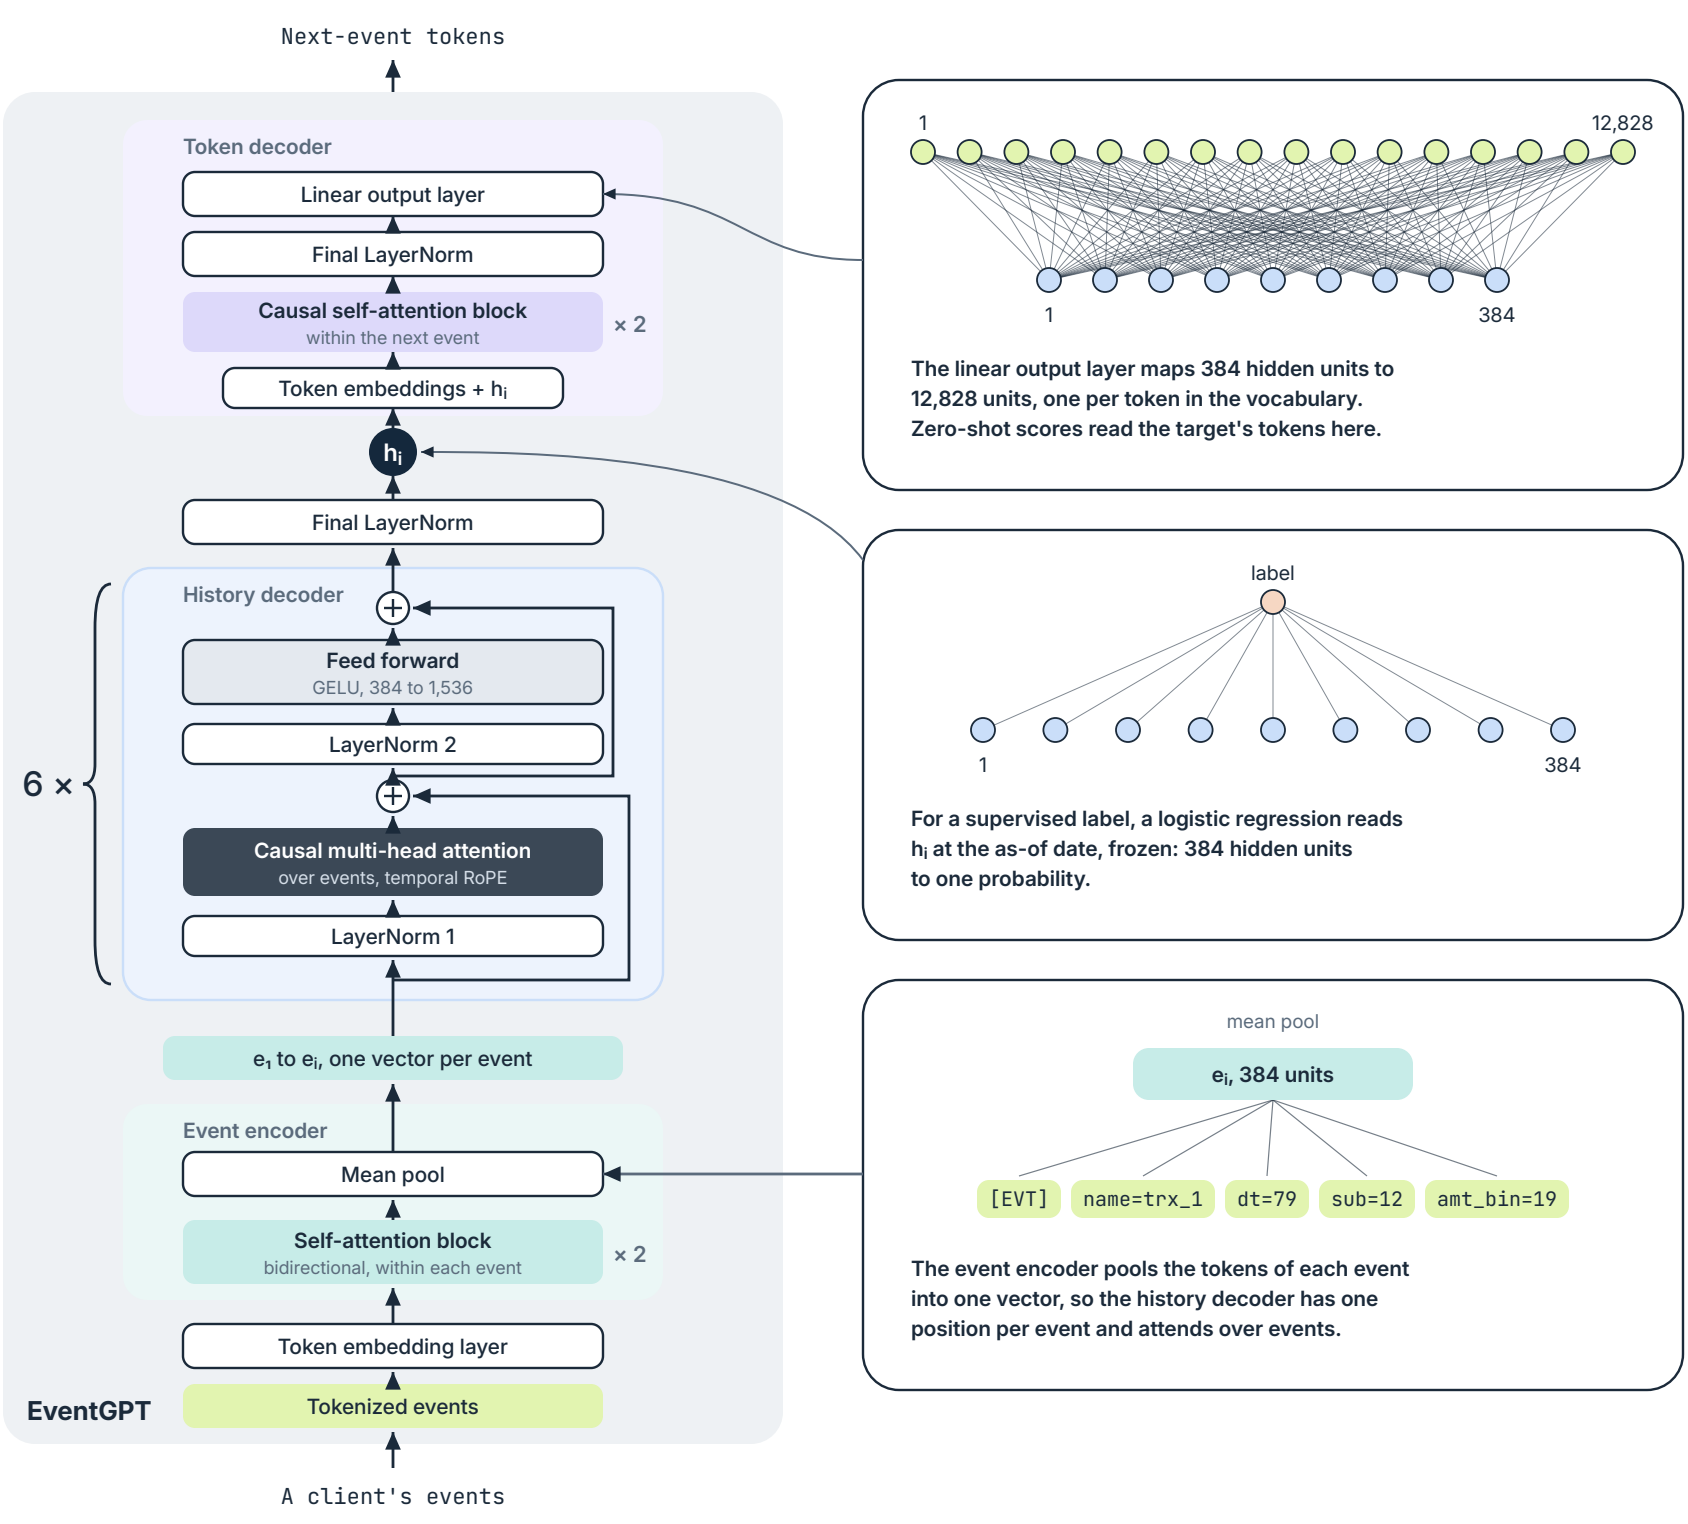

Next-event tokens
Token decoder
Linear output layer
Final LayerNorm
Causal self-attention block
within the next event
× 2
Token embeddings + h_i
h_i
Final LayerNorm
History decoder
6 ×
Feed forward
GELU, 384 to 1,536
LayerNorm 2
Causal multi-head attention
over events, temporal RoPE
LayerNorm 1
e_1 to e_i, one vector per event
Event encoder
Mean pool
Self-attention block
bidirectional, within each event
× 2
Token embedding layer
Tokenized events
EventGPT
A client's events
1
12,828
1
384
The linear output layer maps 384 hidden units to 12,828 units, one per token in the vocabulary. Zero-shot scores read the target's tokens here.
label
1
384
For a supervised label, a logistic regression reads h_i at the as-of date, frozen: 384 hidden units to one probability.
mean pool
e_i, 384 units
[EVT]
name=trx_1
dt=79
sub=12
amt_bin=19
The event encoder pools the tokens of each event into one vector, so the history decoder has one position per event and attends over events.