



April 18-24
89¢

TV GUIDE



**MORE
POWER!**

Home
Improvement:

The Year's
Only
Breakaway
Hit Show

SWEEPS!


Our Guide
to TV's
Hot-Ratings
Month

**CAMPUS
HITS!**

What
College
Kids
Watch




Visual editor

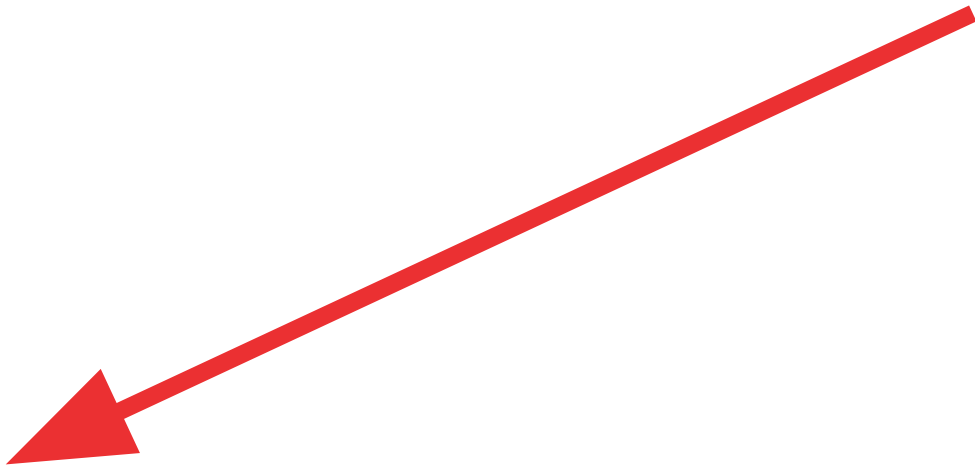

Declarative marks (Like Chart.js)



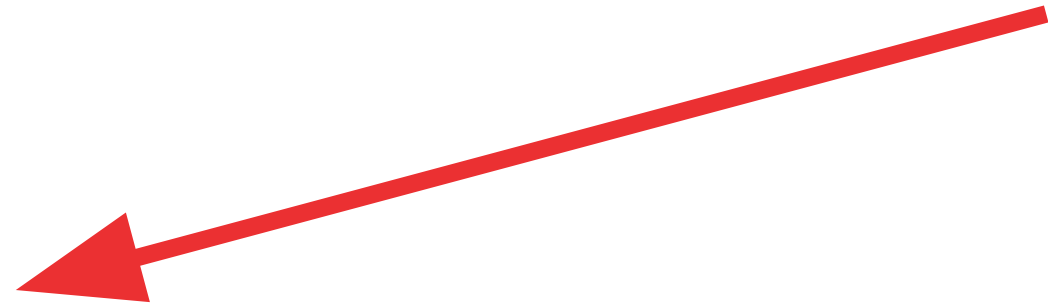

Data-binding primitives (Like D3)



JS / Canvas / SVG



WebGL shaders



R













































```
    domain(labels).range([m,w-m]);
```

const y=d3.sealLinear()

```
export function mountD3(host: HTMLDivElement) {
```

```
const line = d3.line<number>().x(_ => x(labels[i])!).y(d) => y(d);
```

```
const w = 600, h = 300, m = 32;
```

```
domain([0, Math.max(...data)].range([h-m, m]);
```

const svg = d3.select(host)

```
const x = d3.selectAll().
```

datastr('stroke', '#2563elb')

attr('stroke-width', 2)

svd

• append("path")

```
.append("svg").attr("viewBox", 0 0 ${w} ${h});
```

```
.attr('id', 'nine(data)');
```





• `attn("final", "none")`

• `attr('transform', translate($n, 0))`

attr('transform', translate(0, \${h-m}))

·call(d3·axist(y));

```
.call(d3.axisBottom(x));
```

D3

















































