KEMENTERIAN PENDIDIKAN, KEBUDAYAAN, RISET, DAN TEKNOLOGI
POLITEKNIK NEGERI MALANG
JURUSAN TEKNOLOGI INFORMASI
Jl. Soekarno Hatta No. 9, Jatimulyo, Lowokwaru, Malang 65141
Telp. (0341) 404424 – 404425, Fax (0341) 404420
https://jti.polinema.ac.id

Mata Kuliah	:	Pemograman Framework
Program Studi	:	D4 – Teknik Informatika
Semester	:	6

Kelas	:	TI – 3B
NIM	:	2341720169
Nama	:	Dimas Adi Bayu S
Jobsheet ke-	:	5

Laporan Jobsheet

Praktikum 1

Langkah	Jawaban/Deskripsi
1	Modifikasi file global.css

my-app > src > styles > # globals.css > ...
You, 3 minutes ago | 1 author (You)

```
* {
  box-sizing: border-box;
  padding: 0;
  margin: 0;
}

html,
body {
  max-width: 100vw;
  overflow-x: hidden;
}

a {
  color: inherit;
  text-decoration: none;
}

.navbar {
  width: 100%;
  height: 60px;
  background-color: #333;
  color: white;
  display: flex;
  align-items: center;
  padding: 0 20px;
}
```

2	my-app > src > pages > _app.tsx > App
	You, last week | 1 author (You)
	`import '@/styles/globals.css'`
	`import type { AppProps } from 'next/app'`
	`import Navbar from '@/components/layouts/navbar'`
	`import Appshell from '@/components/layouts/Appshell'`
	
	Windsurf: Refactor | Explain | Generate JSDoc | ×
	`export default function App({ Component, pageProps }: AppProps) {`
	`  return (`
	`  <Appshell>`
	`  <Component {...pageProps} />`
	`  </Appshell>` You, last week • Tugas 2
	`  )`
	`}`

Praktikum Ke-2

Langkah	Jawaban/Deskripsi
1	Membuat file baru di dalam folder navbar components\layouts Appshell index.tsx footer index.tsx navbar index.tsx # navbar.module.css U

2	Modifikasi isi dari file baru
	my-app > src > components > layouts > navbar > # navbar.module.css > ...
	`.navbar {`
	`  width: 100%;`
	`  height: 60px;`
	`  background-color: #333;`
	`  color: white;`
	`  display: flex;`
	`  align-items: center;`
	`  padding: 0 20px;`
	`}`

3	Modifikasi kode pada index.tsx pada folder navbar 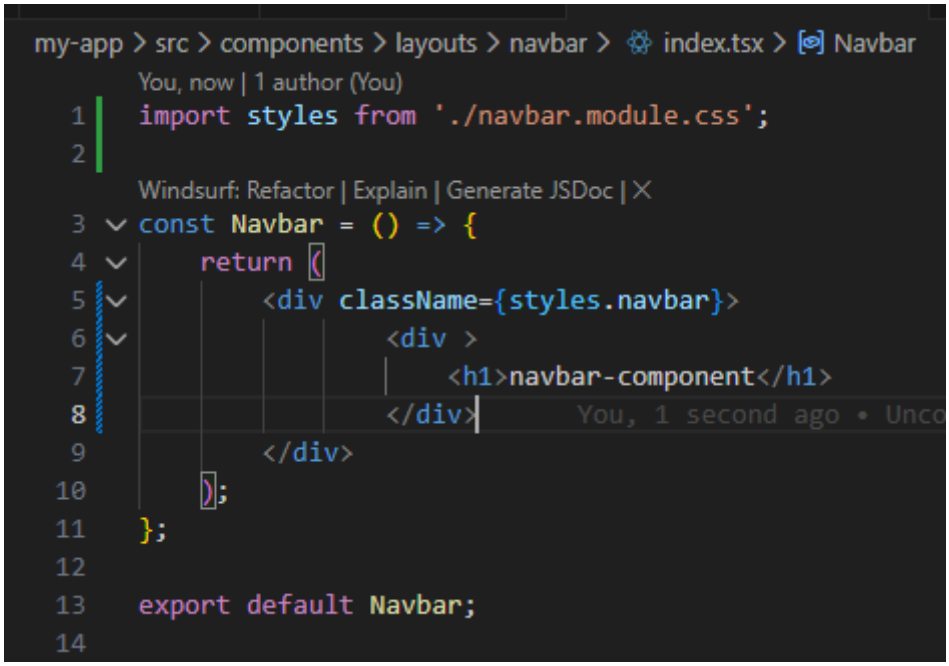
4	Jalankan browser

Praktikum Ke-3

Langkah	Jawaban/Deskripsi
1	Membuat file baru di dalam folder auth 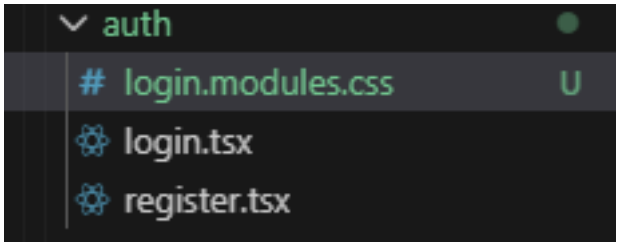

2	Modifikasi login.module.css
	
	my-app > src > pages > auth > # login.modules.css > .login
	`.login{`
	`  display: flex;`
	`  flex-direction: column;`
	`  align-items: center;`
	`  justify-content: center;`
	`  height: 100vh;`
	`}`

3	Modifikasi login.tsx my-app > src > pages > auth > login.tsx > halamanLogin You, 20 seconds ago | 1 author (You) `import Link from "next/link";` `import { useRouter } from "next/router";` `import styles from './login.module.css';` Windsurf: Refactor | Explain | Generate JSDoc | × `const halamanLogin = () => {` `  const { push } = useRouter();` Windsurf: Refactor | Explain | Generate JSDoc | × `  const handlerLogin = () => {` `  // Simulasi login berhasil` `  // localStorage.setItem('isLoggedIn', 'true');` `  push('/produk');` `  }` `  return (` `  <div className={styles.login}>` `  <h1>Halaman Login</h1>` `  <button onClick={handlerLogin}>Login</button> ` `  <p>Belum punya akun? <Link href="/auth/register">Daftar sekarang</Link></p>` `  </div>` `  );` You, 21 hours ago • Tugas 4 `};` `export default halamanLogin;`
4	**navbar-component** **Halaman Login** Login Belum punya akun? Daftar sekarang

Praktikum Ke-4

Langkah	Jawaban/Deskripsi
1	Modifikasi index.tsx pada folder Appsheel

my-app > src > components > layouts > Appshell > index.tsx > ...

```
You, 23 seconds ago | 1 author (You)
import Navbar from "../navbar";
import { useRouter } from "next/router";

const disableNavbar = ['/auth/login', '/auth/register'];

Windsurf: Refactor | Explain
type AppshellProps = {
    children: React.ReactNode
}

Windsurf: Refactor | Explain | Generate JSDoc | X
const AppShell = (props: AppshellProps) => {
    const { children } = props;
    const { pathname } = useRouter();
    return (
        <main>
            {!disableNavbar.includes(pathname) && <Navbar/>}
            {children}
        </main>
    );
};

export default AppShell;
```

2	Tampilan web

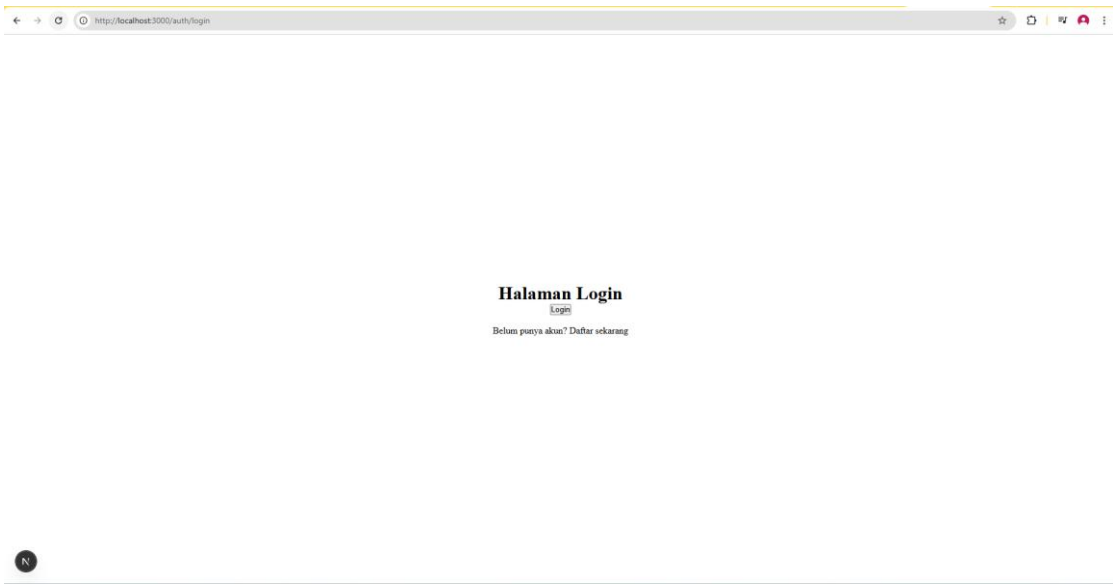

Praktikum Ke-5

Langkah	Jawaban/Deskripsi
1	Refactoring Struktur Project 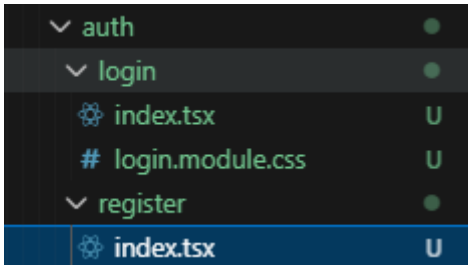
2	Modifikasi login.module.css pada folder view/auth/login/ 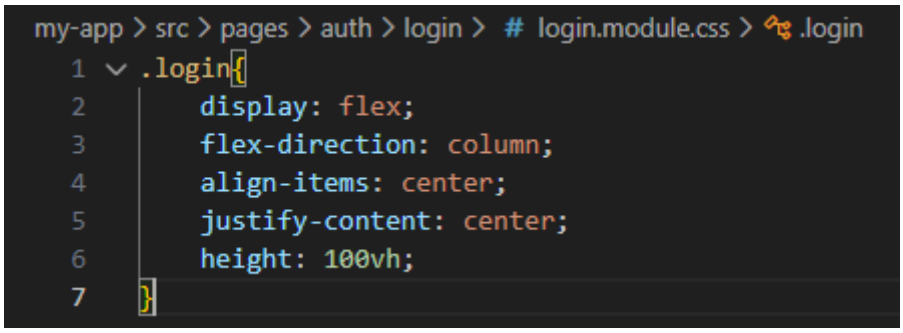
3	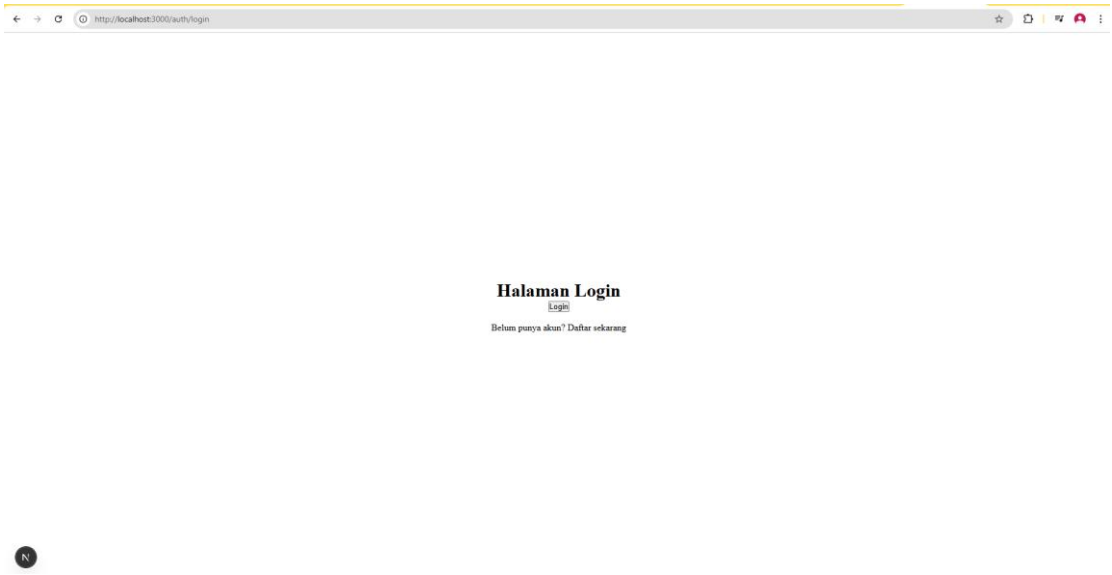

Praktikum Ke-6

Langkah	Jawaban/Deskripsi
1	Modifikasi index.tsx pada folder views/auth/login my-app > src > pages > auth > login > index.tsx > default `import Link from "next/link";` `import { useRouter } from "next/router";` `import styles from './login.module.css';` Windsurf: Refactor | Explain | Generate JSDoc | X `const tampilanLogin = () => {` `  const { push } = useRouter();` Windsurf: Refactor | Explain | Generate JSDoc | X `  const handlerLogin = () => {` `  // Simulasi login berhasil` `  // localStorage.setItem('isLoggedIn', 'true');` `  push('/produk');` `  }` `  return (` `  <div className={styles.login}>` `  <h1>Halaman Login</h1>` `  <button onClick={()=> handlerLogin()}>Login</button> ` `  <h1 style={{color: 'red', border: '1px solid red', borderRadius: '5px', padding: '5px'}}>Belum punya akun</h1` `  <Link href="/auth/register">Daftar sekarang</Link>` `  </div>` `  );` `};` `export default tampilanLogin;`
2	Jalankan browser **Halaman Login** Login **Belum punya akun** Daftar sekarang

Praktikum Ke-7

Langkah	Jawaban/Deskripsi

1	Modifikasi global.css
	my-app > src > styles > # globals.css > .big
	You, now | 1 author (You)
	`* { box-sizing: border-box; padding: 0; margin: 0; }`
	`html, body { max-width: 100vw; overflow-x: hidden; }`
	`a { color: inherit; text-decoration: none; }`
	`.big{ font-size: 1.5rem; }`

2	Modifikasi index.tsx pada folder components/layouts/navbar
	my-app > src > components > layouts > navbar > index.tsx > Navbar
	`import styles from './navbar.module.css';`
	Windsurf: Refactor | Explain | Generate JSDoc | X
	`const Navbar = () => { return ( <div className={styles.navbar}> <div className='big'> Navbar </div> </div> ); };`
	`export default Navbar;`

Praktikum Ke-8

Langkah	Jawaban/Deskripsi
1	Install SASS 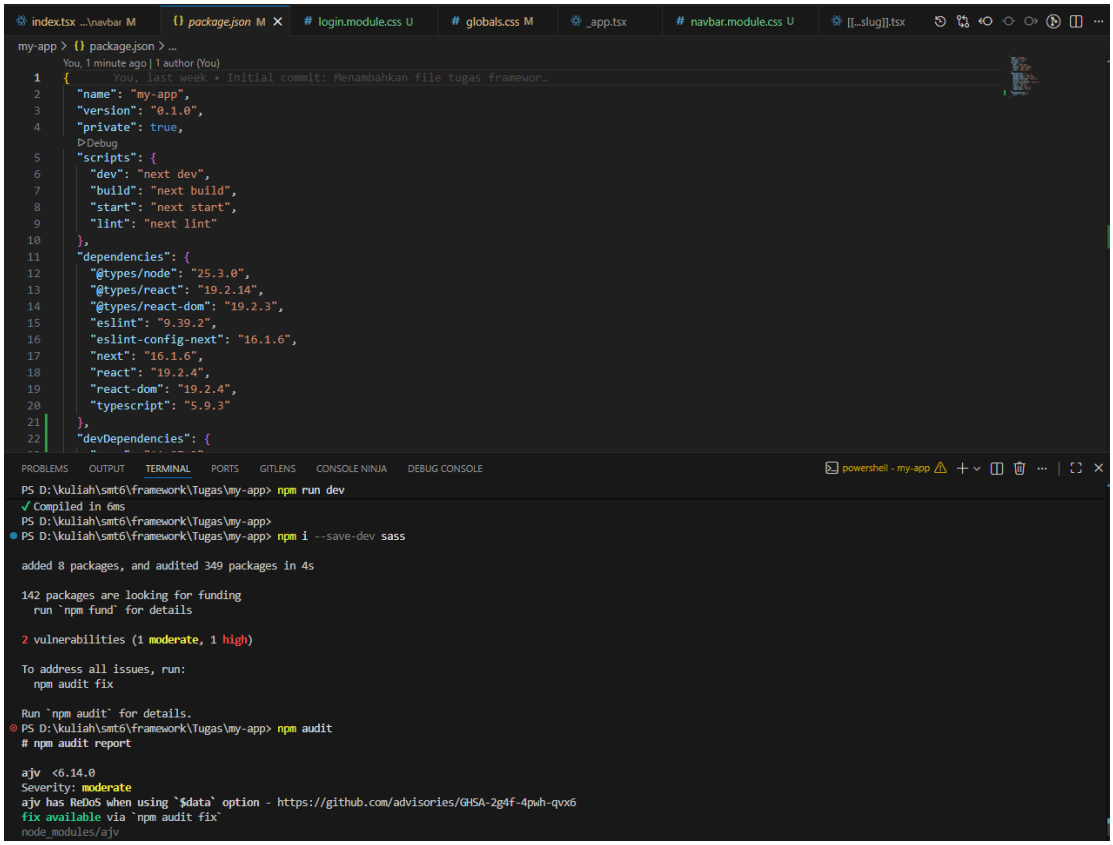
2	Tambahkan colors.scss pada folder styles 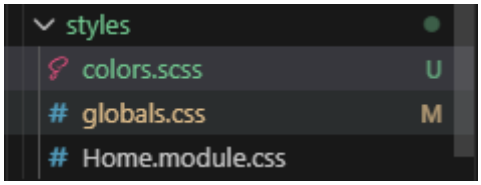
3	Modifikasi colors.scss 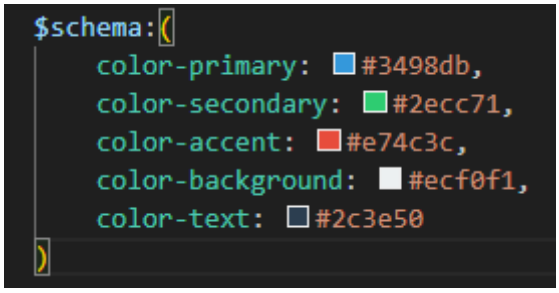

4	Tambahkan file login.module.scss pada folder views/auth/login/ 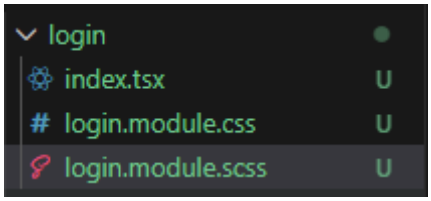
5	Modifikasi index.tsx 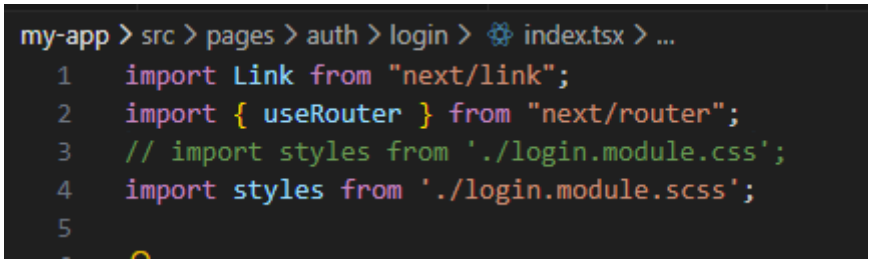
6	Modifikasi login.module.scss 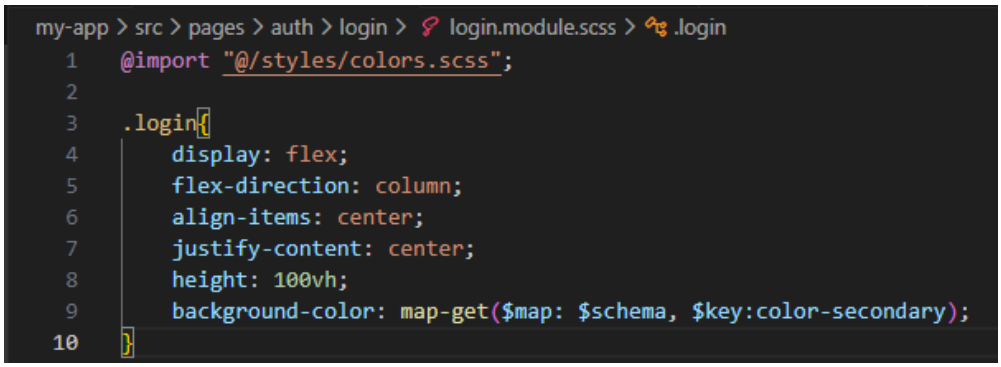
7	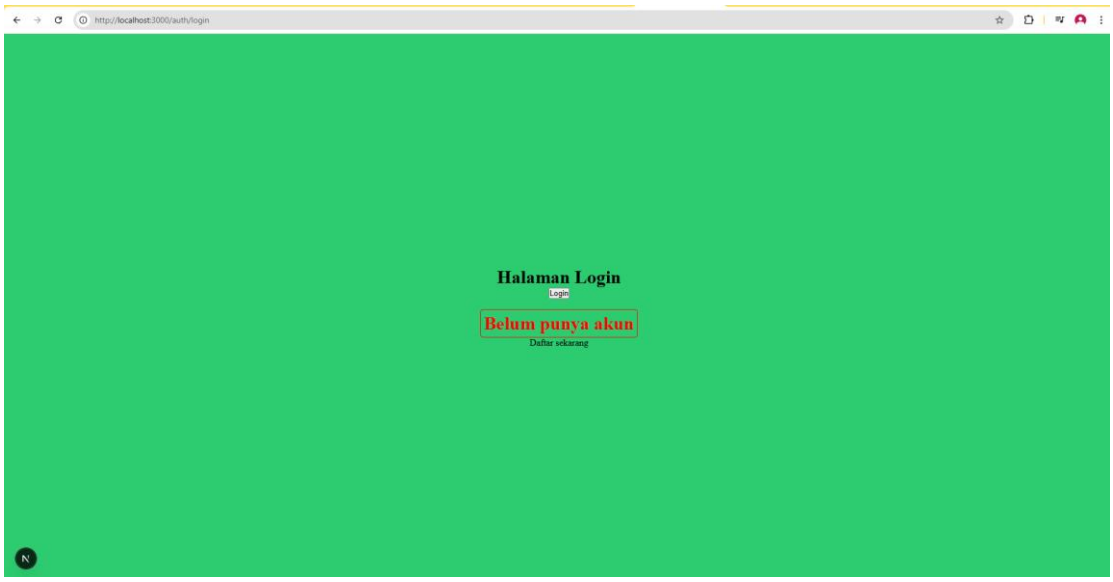

Praktikum Ke-9

Langkah	Jawaban/Deskripsi

1	Install tailwind
	`PS D:\kuliah\smt6\framework\Tugas\my-app> npm install tailwindcss@3 postcss autoprefixer`
	`added 35 packages, changed 1 package, and audited 389 packages in 3s`
	`152 packages are looking for funding`
	`run `npm fund` for details`
	`found 0 vulnerabilities`
	`PS D:\kuliah\smt6\framework\Tugas\my-app> npx tailwindcss init -p`
	`Created Tailwind CSS config file: tailwind.config.js`
	`Created PostCSS config file: postcss.config.js`

2	Konfigurasi tailwind.config.js
	`my-app > tailwind.config.js > <unknown> > content`
	`/** @type {import('tailwindcss').Config} */`
	`module.exports = {`
	`content: [`
	`"./app/**/*.{js,ts,jsx,tsx}",`
	`"./pages/**/*.{js,ts,jsx,tsx}",`
	`"./components/**/*.{js,ts,jsx,tsx}",`
	`"./src/**/*.{js,ts,jsx,tsx}",`
	`],`
	`theme: {`
	`extend: {},`
	`},`
	`plugins: [],`
	`}`

3	Import di Global CSS
	`my-app > src > styles > # globals.css > ...`
	`You, now | 1 author (You)`
	`@tailwind base;`
	`@tailwind components;`
	`@tailwind utilities;  You, now • Uncommit`
	`* {`
	`box-sizing: border-box;`
	`padding: 0;`
	`margin: 0;`
	`}`

4	Modifikasi index.tsx pada folder auth/login/

```
return (
    <div className={styles.login}>
        <h1 className="text-3xl font-bold text-blue-600">Halaman Login</h1>
        <button onClick={()=> handlerLogin()}>Login</button><br />
        <h1 style={{color: 'red', border: '1px solid red', borderRadius: '5px', padding: '5px'}}>Belum punya akun</h1>
        <Link href="/auth/register">Daftar sekarang</Link>
    </div>
```

Tugas 1

Langkah	Jawaban/Deskripsi
1	

```
my-app > src > pages > auth > register > index.tsx
import Link from "next/link";
import styles from "./register.module.css";

Windsurf: Refactor | Explain | Generate JSDoc | X
const halamanRegister = () => {
    return (
        <div className={styles.container}>
            <h1 className={styles.title}>Halaman Register</h1>
            <form className={styles.form}>
                <input type="email" placeholder="Email" className={styles.input} required />
                <input type="password" placeholder="Password" className={styles.input} required />
                <button type="submit" className={styles.button}>Register</button>
            </form>
            <br />
            <p>Sudah punya akun? <Link href="/auth/login" className={styles.link}>Kembali ke login</Link></p>
        </div>
    );
};

export default halamanRegister;
```

my-app > src > pages > auth > register > # register.module.css > .container

```
.container {
  max-width: 400px;
  margin: 0 auto;
  padding: 20px;
  border: 1px solid #ccc;
  border-radius: 8px;
  background-color: #f9f9f9;
}

.title {
  text-align: center;
  margin-bottom: 20px;
  color: #333;
}

.form {
  display: flex;
  flex-direction: column;
}

.input {
  margin-bottom: 15px;
  padding: 10px;
  border: 1px solid #ddd;
  border-radius: 4px;
  font-size: 16px;
}

.button {
  padding: 10px;
  background-color: #007bff;
```

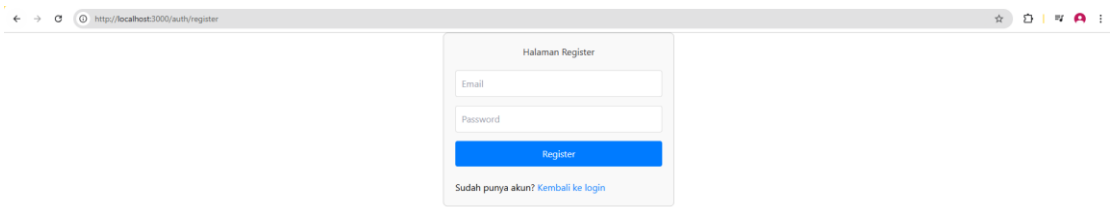

Tugas 2

Langkah	Jawaban/Deskripsi

1	
	 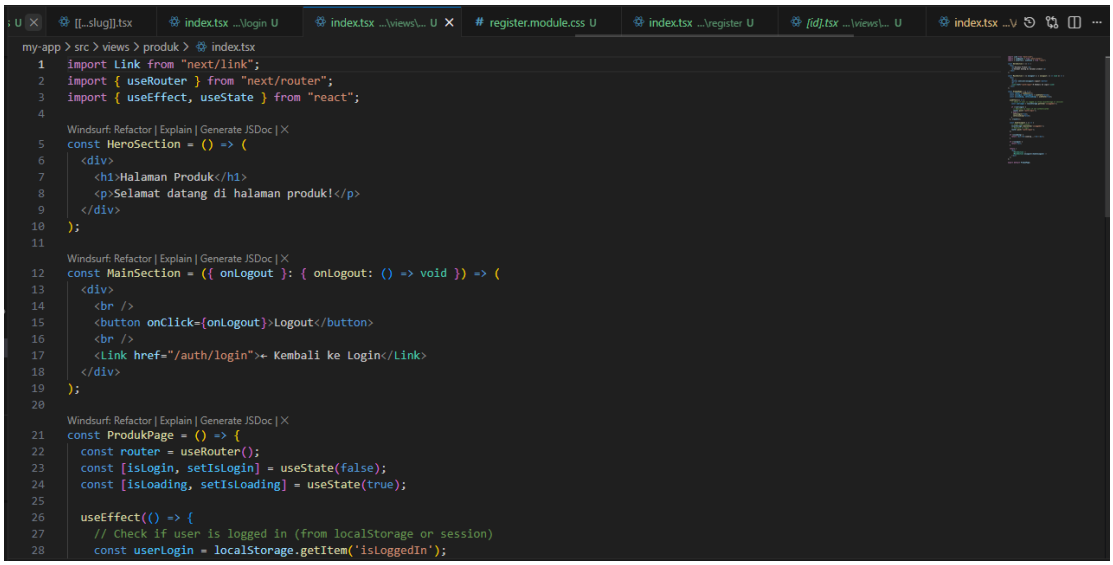
	my-app > src > views > produk > index.tsx
	import Link from "next/link";
	import { useRouter } from "next/router";
	import { useEffect, useState } from "react";
	Windsurf: Refactor | Explain | Generate JSDoc | X
	const HeroSection = () => (
	
	<h1>Halaman Produk</h1>
	 Selamat datang di halaman produk!
	
	);
	Windsurf: Refactor | Explain | Generate JSDoc | X
	const MainSection = ({ onLogout }: { onLogout: () => void }) => (
	
	<button onClick={onLogout}>Logout</button>
	
	<Link href="/auth/login">← Kembali ke Login</Link>
	
	);
	Windsurf: Refactor | Explain | Generate JSDoc | X
	const ProdukPage = () => {
	const router = useRouter();
	const [isLogin, setIsLogin] = useState(false);
	const [isLoading, setIsLoading] = useState(true);
	useEffect(() => {
	// Check if user is logged in (from localStorage or session)
	const userLogin = localStorage.getItem('isLoggedIn');

Tugas 3

Langkah	Jawaban/Deskripsi

1	my-app > src > pages > auth > login > index.tsx
	`import Link from "next/link";`
	`import { useRouter } from "next/router";`
	`// import styles from './login.module.css';`
	`import styles from './login.module.scss';`
	
	Windsurf: Refactor | Explain | Generate JSDoc | X
	`const tampilanLogin = () => {`
	`  const { push } = useRouter();`
	
	Windsurf: Refactor | Explain | Generate JSDoc | X
	`  const handlerLogin = () => {`
	`  // Simulasi login berhasil`
	`  // localStorage.setItem('isLoggedIn', 'true');`
	`  push('/produk');`
	`  }`
	
	`  return (`
	`  <div className={`${styles.login} flex flex-col items-center justify-center min-h-screen bg-gray-100`}>`
	`  <h1 className="text-3xl font-bold text-blue-600 mb-4">Halaman Login</h1>`
	`  <button onClick={()=> handlerLogin()} className="bg-blue-500 text-white px-4 py-2 rounded hover:bg-blue-700 mb-4">Login</button>`
	`  <h1 className="text-red-500 border border-red-500 rounded px-2 py-1 mb-2">Belum punya akun</h1>`
	`  <Link href="/auth/register" className="text-blue-500 hover:underline">Daftar sekarang</Link>`
	`  </div>`
	`  );`
	`};`
	
	`export default tampilanLogin;`
	
	 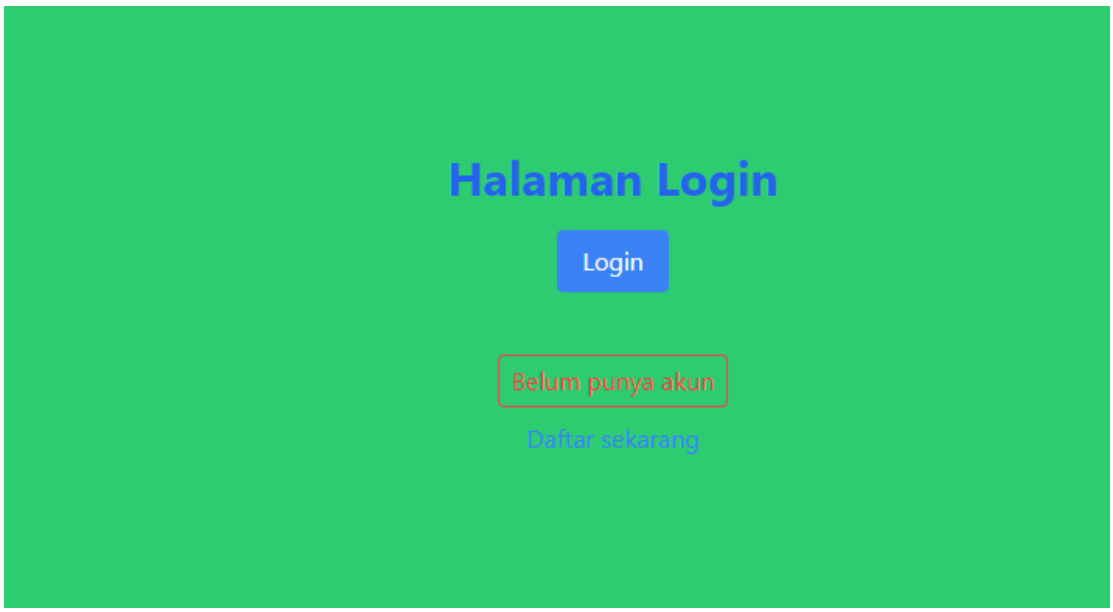

Pertanyaan

Langkah	Jawaban/Deskripsi
1	Kapan sebaiknya menggunakan CSS Module dibanding Global CSS? Ketika membuat aplikasi berbasis komponen seperti react
2	Apa kelemahan inline styling? Redundansi: Jika ada 10 tombol yang sama, maka harus menulis kode yang sama 10 kali.
3	Mengapa SCSS cocok untuk project skala besar? SCSS (Sass) membuat kode CSS lebih terstruktur dan efisien melalui fitur-fitur "pintar"
4	Apa keunggulan Tailwind dibanding CSS tradisional? idak perlu bolak-balik antara file HTML dan CSS. Cukup tulis class "kecil" langsung di HTML (seperti flex, pt-4, bg-blue-500)