

Compositional Decompilation

Robin Eklind

Problem

Recover high-level control flow primitives (e.g. if-statements, for-loop, ...) from low-level LLVM IR (platform-independent assembly).

Method

Identify control flow primitives using subgraph isomorphism search algorithms [1].

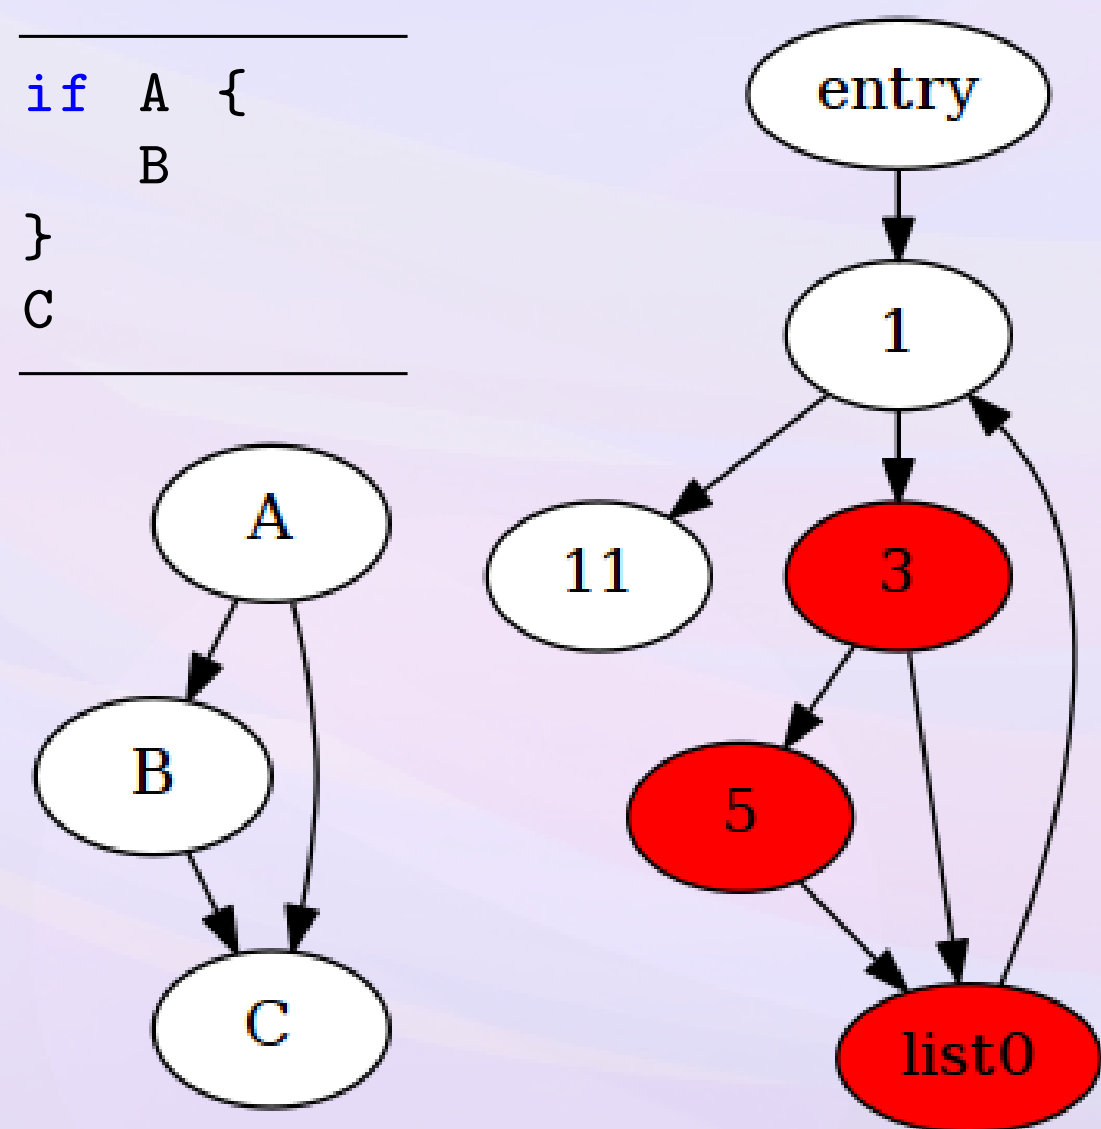


Figure 1: Pseudo-code and graph representation of an if-statement (left) and the control flow graph of `main` (right).

Results

```
define i32 @main(i32 %argc, i8** %argv) {  
    br label %1  
; <label>:1  
    %i.0 = phi i32 [ 0, %0 ], [ %10, %9 ]  
    %x.0 = phi i32 [ 0, %0 ], [ %x.1, %9 ]  
    %2 = icmp slt i32 %i.0, 10  
    br i1 %2, label %3, label %11  
; <label>:3  
    %4 = icmp slt i32 %x.0, 100  
    br i1 %4, label %5, label %8  
; <label>:5  
    %6 = mul nsw i32 3, %i.0  
    %7 = add nsw i32 %x.0, %6  
    br label %8  
; <label>:8  
    %x.1 = phi i32 [ %7, %5 ], [ %x.0, %3 ]  
    br label %9  
; <label>:9  
    %10 = add nsw i32 %i.0, 1  
    br label %1  
; <label>:11  
    ret i32 %x.0  
}
```

```
package main
```

```
import "os"
```

```
func main() {
```

```
    x := 0
```

```
    for i := 0; i < 10; i++ {
```

```
        if x < 100 {
```

```
            x += 3 * i
```

```
        }
```

```
    }
```

```
    os.Exit(x)
```

```
}
```

Figure 2: LLVM IR input (left) and Go output (right).

Source Code

<https://github.com/mewrev/graphs>
<https://github.com/mewrev/ll2dot>
<https://github.com/mewrev/ll2go>

References

- [1] S. Moll, *Decompilation of LLVM IR*. BSc thesis, Saarland University, 2011.