


Functional variation across V1 locations and higher visual areas


Session-mean version · one value per session/location · uncertainty resampled by session

● Observed + 95% session bootstrap interval □ Location-block shuffle: median + central 95%


C Within V1

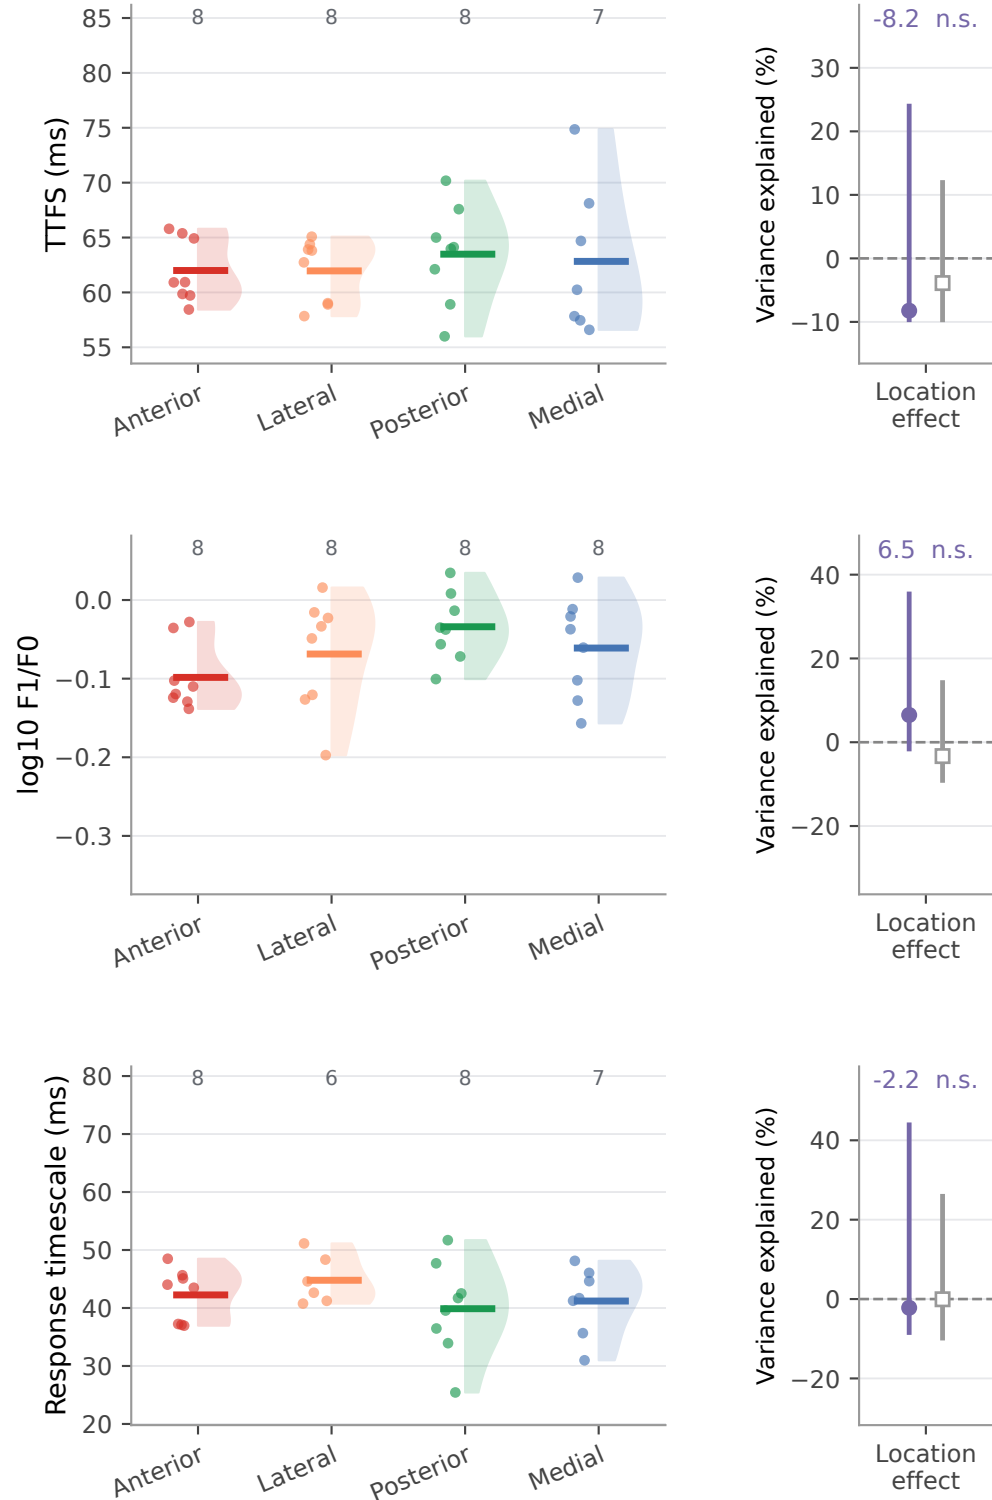

D Across HVAs

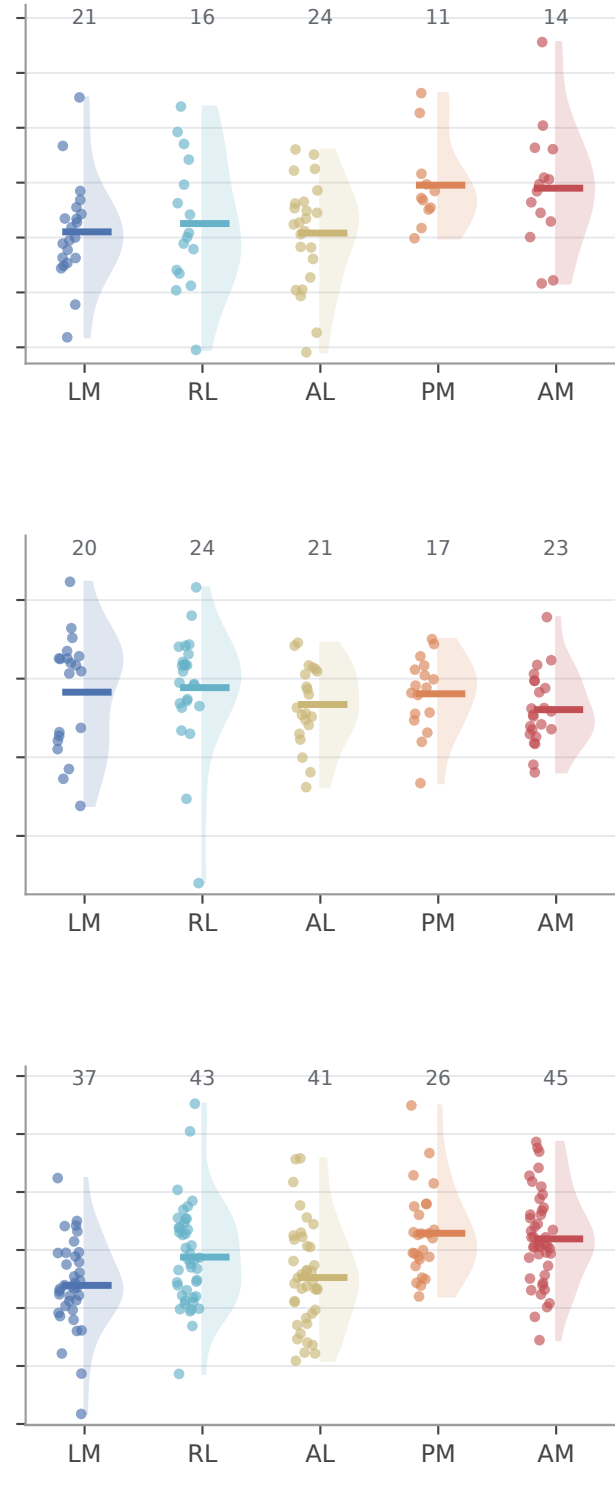

E Control and main comparison

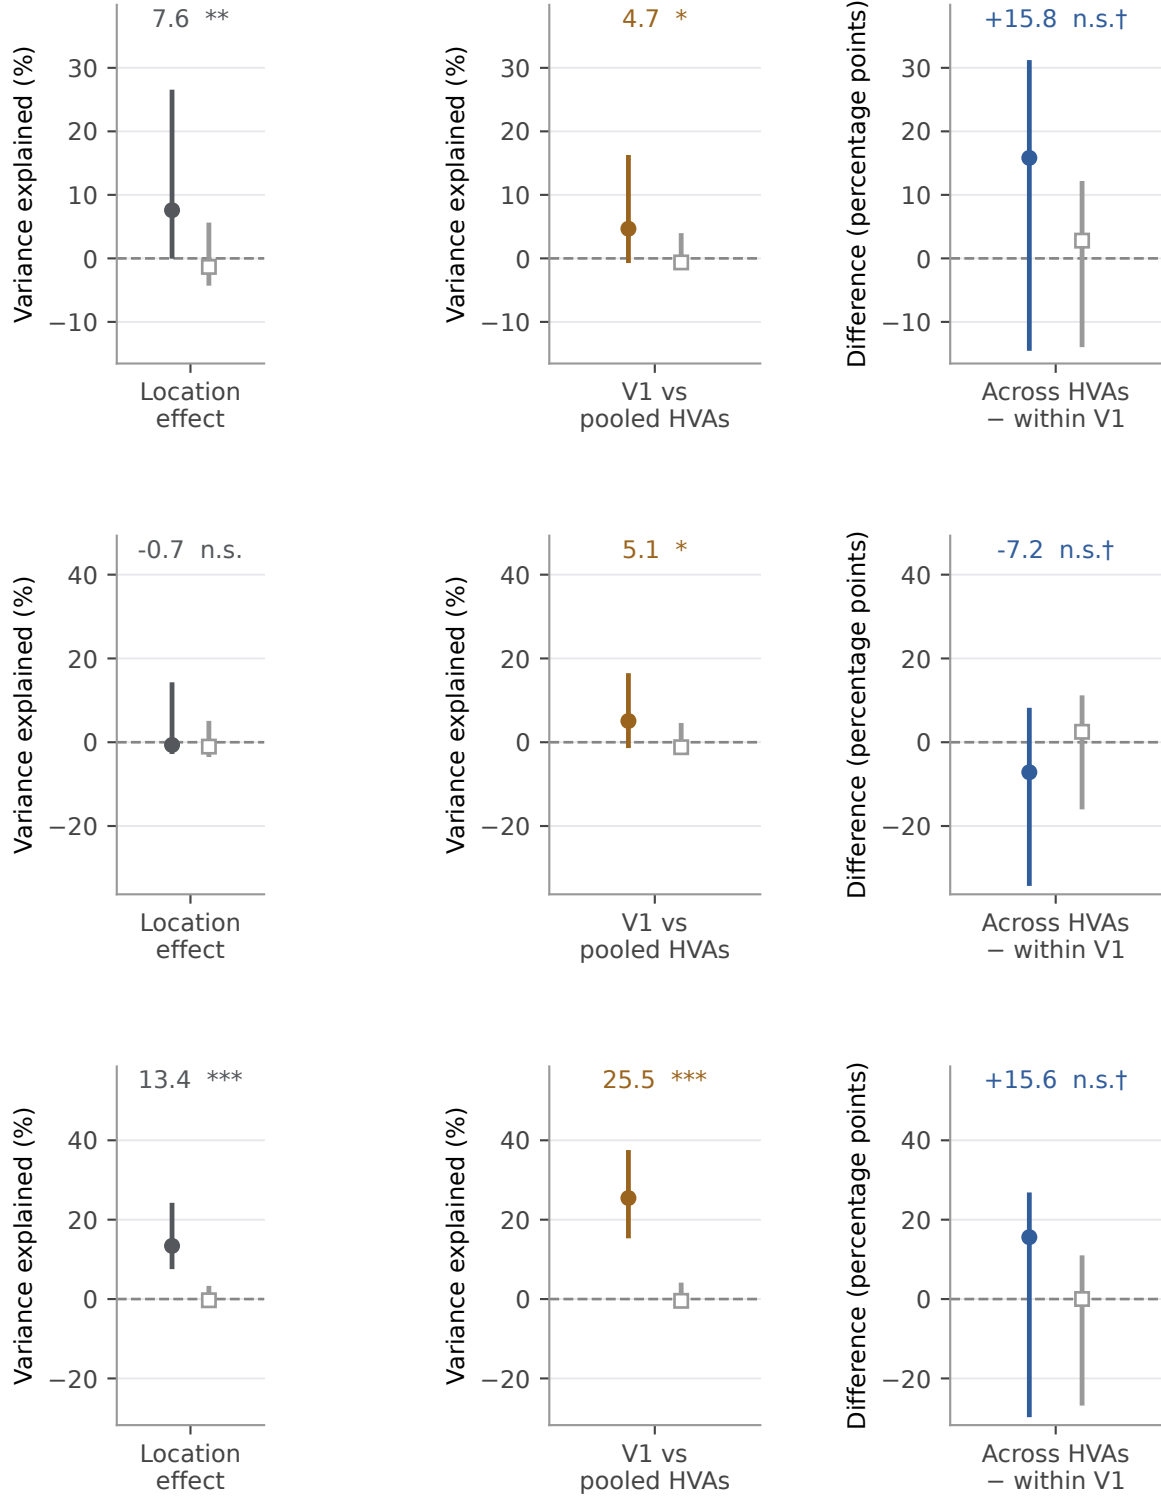

C/D: points = session/location means; bars = means across sessions; counts = sessions. Location effects use session-mean ω^2 .
E control: matched Allen V1 and equal-area HVA session means. Effects use bias-corrected ω^2 ; negative estimates reflect the correction.
Original control retained: legacy V1 processing differs from the HVA processing (see notes).
Uncorrected one-sided shuffle tests: * $p < .05$; ** $p < .01$; *** $p < .001$; n.s. $p \geq .05$.
† Difference: * = 95% bootstrap interval excludes zero; n.s. = includes zero (not an equivalence test or shuffle p-value).