


Functional variation across V1 locations and higher visual areas


Single-cell version · one value per neuron · equal cell weights · uncertainty resampled by session

● Observed + 95% session bootstrap interval □ Location-block shuffle: median + central 95%


C Within V1

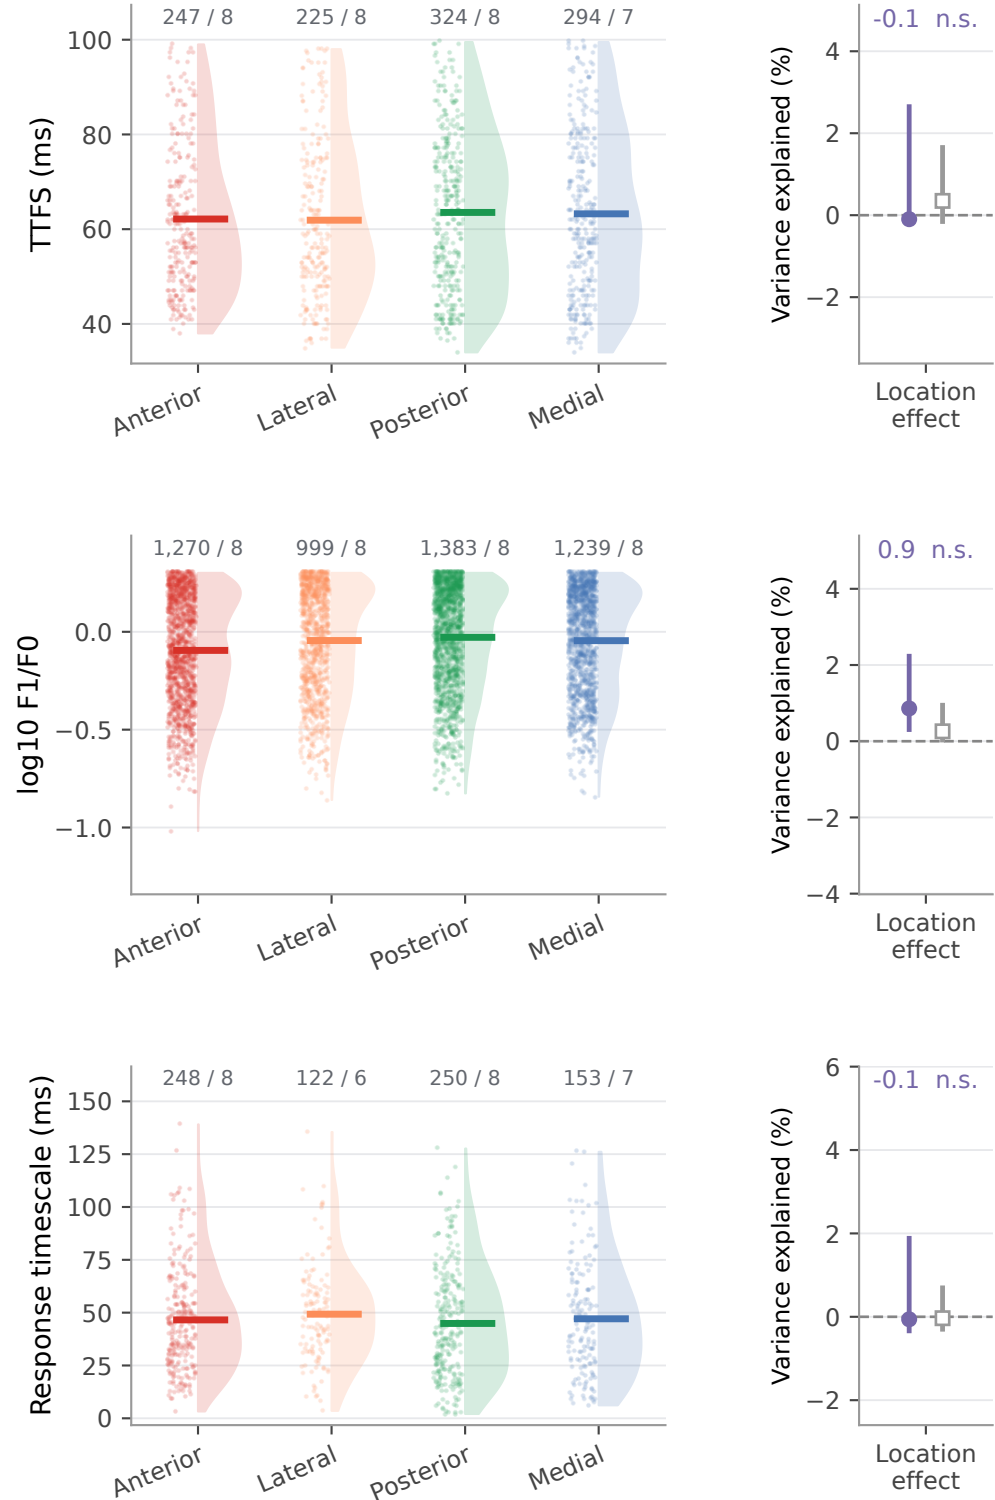

D Across HVAs

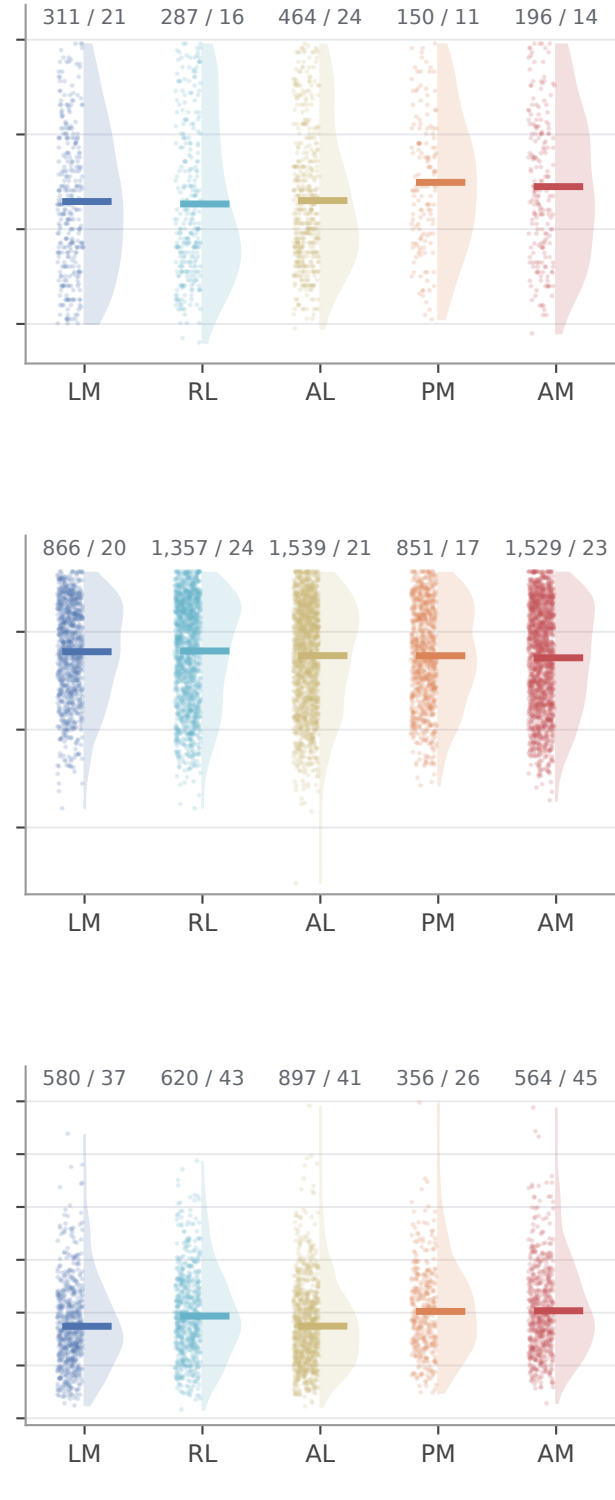

E Control and main comparison

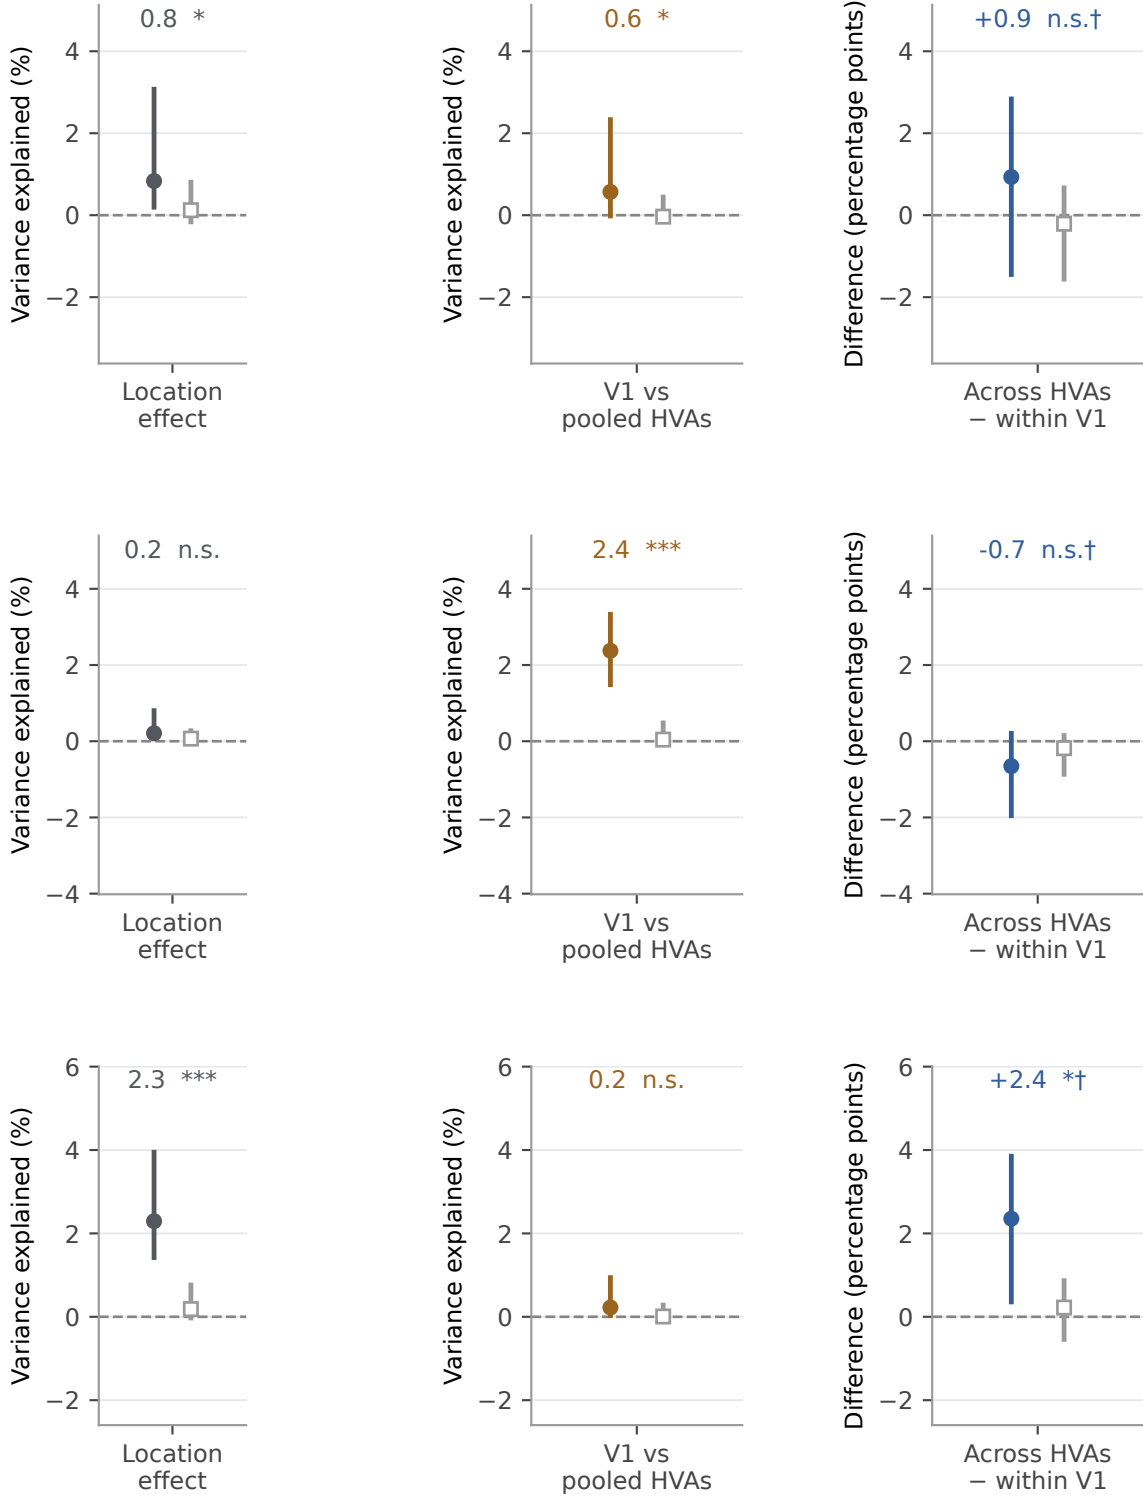

C/D: points = neurons; bars = cell-weighted means; counts = cells / sessions. Repeated timescale fits are averaged within neuron.
E control: matched Allen sessions; HVAs pooled with equal cell weights. Effects use bias-corrected ω^2 ; negative estimates reflect the correction.
Cell control uses HVA-matched processing; the original session control uses legacy V1 inputs (see notes).
Uncorrected one-sided shuffle tests: * $p < .05$; ** $p < .01$; *** $p < .001$; n.s. $p \geq .05$.
† Difference: * = 95% bootstrap interval excludes zero; n.s. = includes zero (not an equivalence test or shuffle p-value).