


Response variation and hierarchy-score trends

Dots are session-level means; bars are group means $\pm$ 95% CI. Dashed fits use area means; shaded bands are session-bootstrap 95% intervals.


V1: within-area locations + Visual Coding VISp

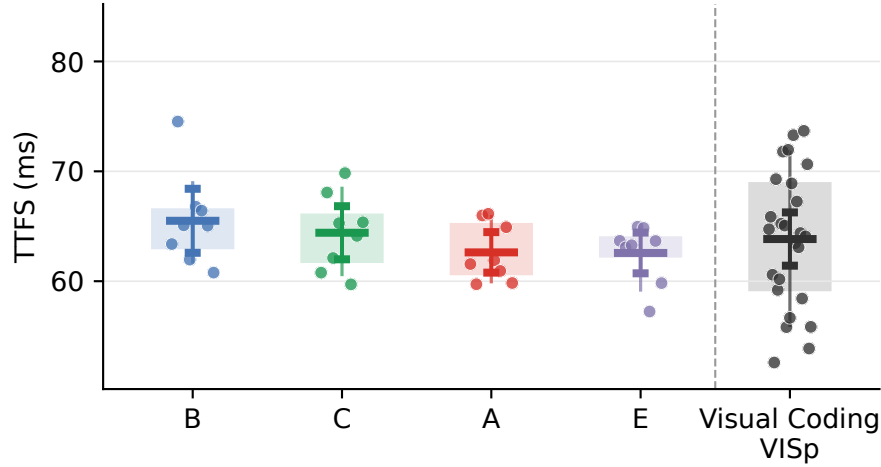






Distribution



Visual Coding areas by hierarchy score

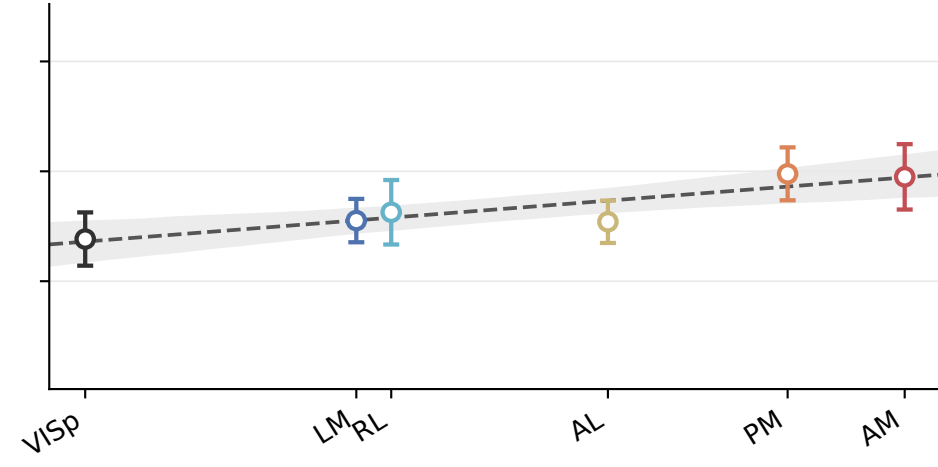

Distribution

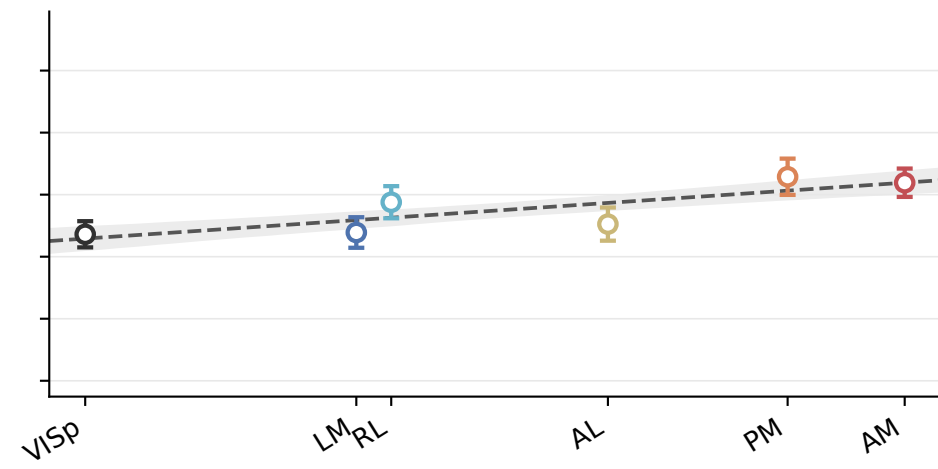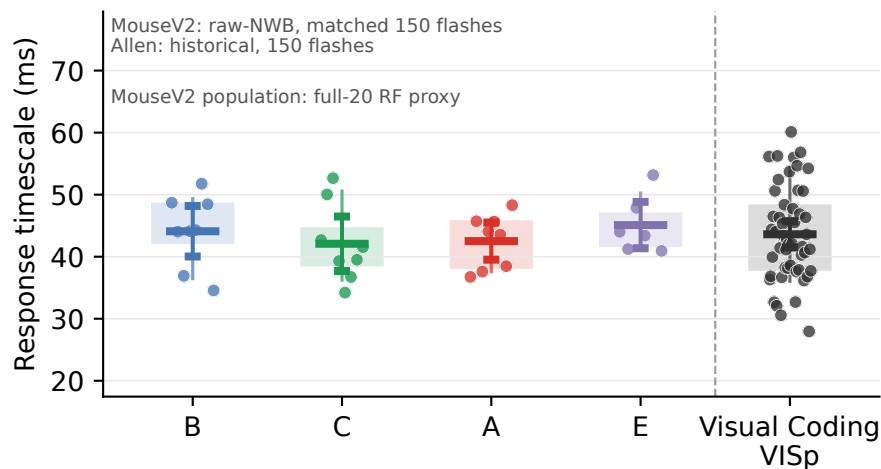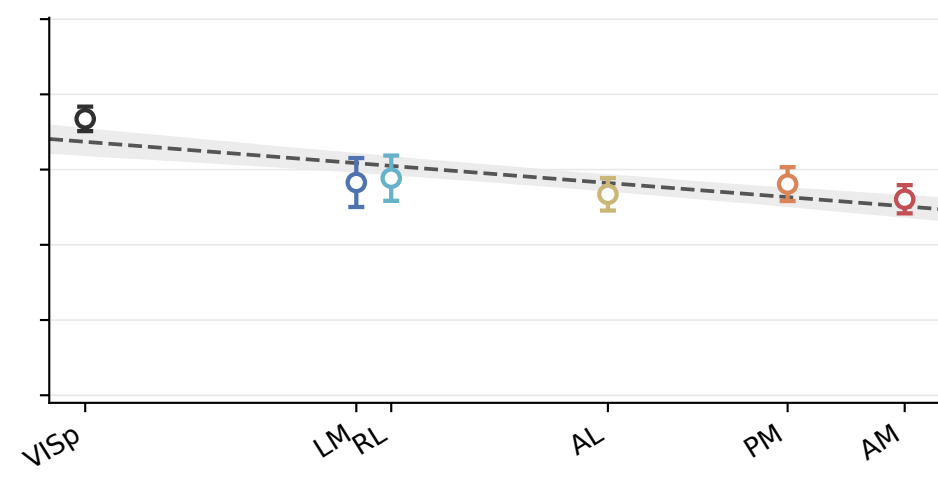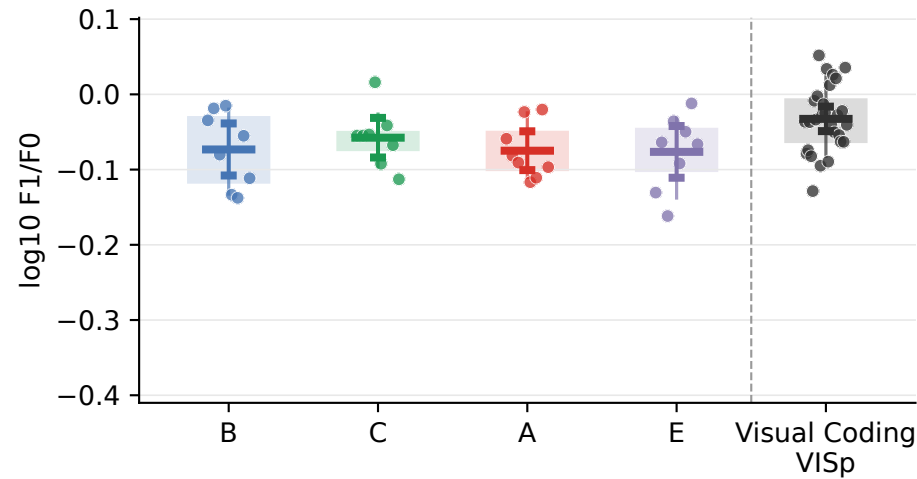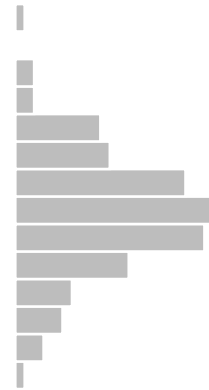

Marginal histograms contain session $\times$ location/area means, not pooled neurons. TTFS uses preferred flash polarity, odd-trial positive-response selection (FDR $\alpha < 0.01$, $\text{Arate} \geq 2$ Hz), and ≥ 10 selected units per estimate. MouseV2 timescale view: allen_matched_150; population: historical_proxy_full20; Allen uses 150 flashes. The full-20 RF population is a parametric LRT/ellipse proxy, not Allen's categorical RF test. F1/F0 uses common QC and matched 1-s, 15-trial, SF 0.04, contrast 0.8 support; Allen F1/F0 uses 28 complete Brain Observatory sessions. The F1/F0 all-area fit includes the VISp-to-post-V1 step; the post-V1-only slope interval crosses zero.