```
    ▪ Using image gcr.io/k8s-minikube/storage-provisioner:v5
🌟  Enabled addons: storage-provisioner, default-storageclass
🏄  Done! kubectl is now configured to use "minikube" cluster and "default" namespace by default
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes> kubectl get nodes
NAME       STATUS     ROLES           AGE   VERSION
minikube   NotReady   control-plane   26s   v1.37.0
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes>
```

```
🔎  Verifying Kubernetes components...
    ▪ Using image gcr.io/k8s-minikube/storage-provisioner:v5
🌟  Enabled addons: storage-provisioner, default-storageclass
🏄  Done! kubectl is now configured to use "minikube" cluster and "default" namespace by default
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes> kubectl get nodes
NAME       STATUS     ROLES           AGE   VERSION
minikube   NotReady   control-plane   26s   v1.37.0
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes> kubectl wait --for
=condition=Ready node/minikube --timeout=180s
node/minikube condition met
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes> kubectl get nodes
NAME       STATUS   ROLES           AGE   VERSION
minikube   Ready    control-plane   74s   v1.37.0
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes>
```

```
    > preloaded-images-k8s-v18-v1...:  347.58 MiB / 347.58 MiB  100.00% 8.58 Mi
🔥  Creating docker container (CPUs=2, Memory=4000MB) ...
📦  Preparing Kubernetes v1.37.0 on containerd 2.3.4 ...
🔗  Configuring CNI (Container Networking Interface) ...
🔎  Verifying Kubernetes components...
    ▪ Using image gcr.io/k8s-minikube/storage-provisioner:v5
🌟  Enabled addons: storage-provisioner, default-storageclass
🏄  Done! kubectl is now configured to use "minikube" cluster and "default" namespace by default
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes> kubectl get nodes
NAME       STATUS     ROLES           AGE   VERSION
minikube   NotReady   control-plane   26s   v1.37.0
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes> kubectl wait --for
=condition=Ready node/minikube --timeout=180s
node/minikube condition met
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes> kubectl get nodes
NAME       STATUS   ROLES           AGE   VERSION
minikube   Ready    control-plane   74s   v1.37.0
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes> kubectl apply -f p
od.yml
pod/meu-site-pod created
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes> kubectl apply -f s
ervice.yml
service/meu-site-service created
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes> kubectl wait --for
=condition=Ready pod/meu-site-pod --timeout=120s
pod/meu-site-pod condition met
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes> kubectl get pods,s
ervices
NAME               READY   STATUS    RESTARTS   AGE
pod/meu-site-pod   1/1     Running   0          16s

NAME                       TYPE        CLUSTER-IP      EXTERNAL-IP   PORT(S)        AGE
service/kubernetes         ClusterIP   10.96.0.1       <none>        443/TCP        2m13s
service/meu-site-service   NodePort    10.101.63.129   <none>        80:30080/TCP   16s
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes>
```


```
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes> kubectl apply -f pod.yml
pod/meu-site-pod created
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes> kubectl apply -f service.yml
service/meu-site-service created
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes> kubectl wait --for=condition=R
eady pod/meu-site-pod --timeout=120s
pod/meu-site-pod condition met
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes> kubectl get pods,services
NAME               READY   STATUS    RESTARTS   AGE
pod/meu-site-pod   1/1     Running   0          16s


NAME                       TYPE        CLUSTER-IP      EXTERNAL-IP   PORT(S)        AGE
service/kubernetes         ClusterIP   10.96.0.1       <none>        443/TCP        2m13s
service/meu-site-service   NodePort    10.101.63.129   <none>        80:30080/TCP   16s
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes>
```

127.0.0.1:54021

Projeto Docker funcionando!

Aplicação web executando em um container Debian com Apache.

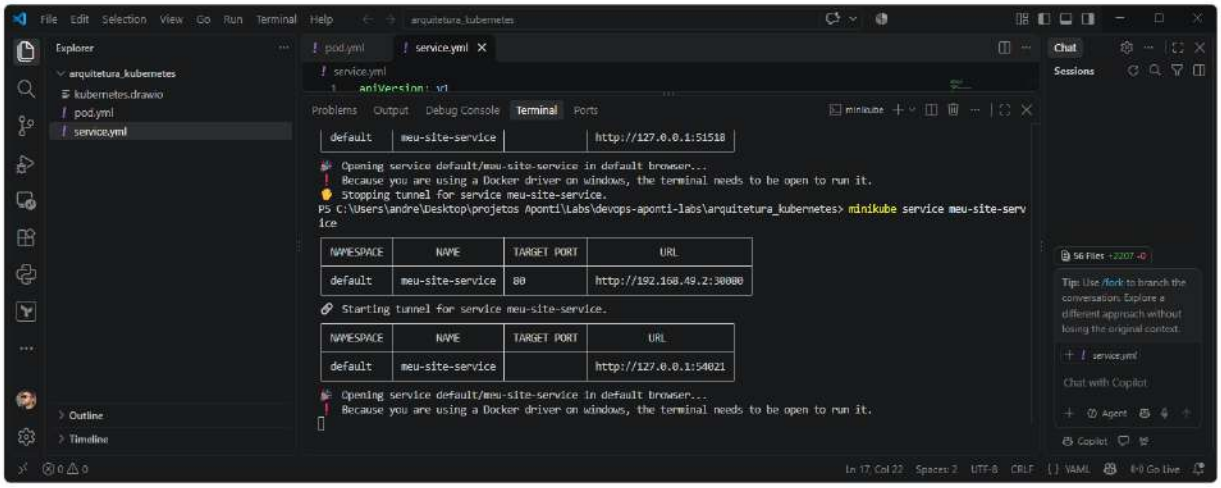

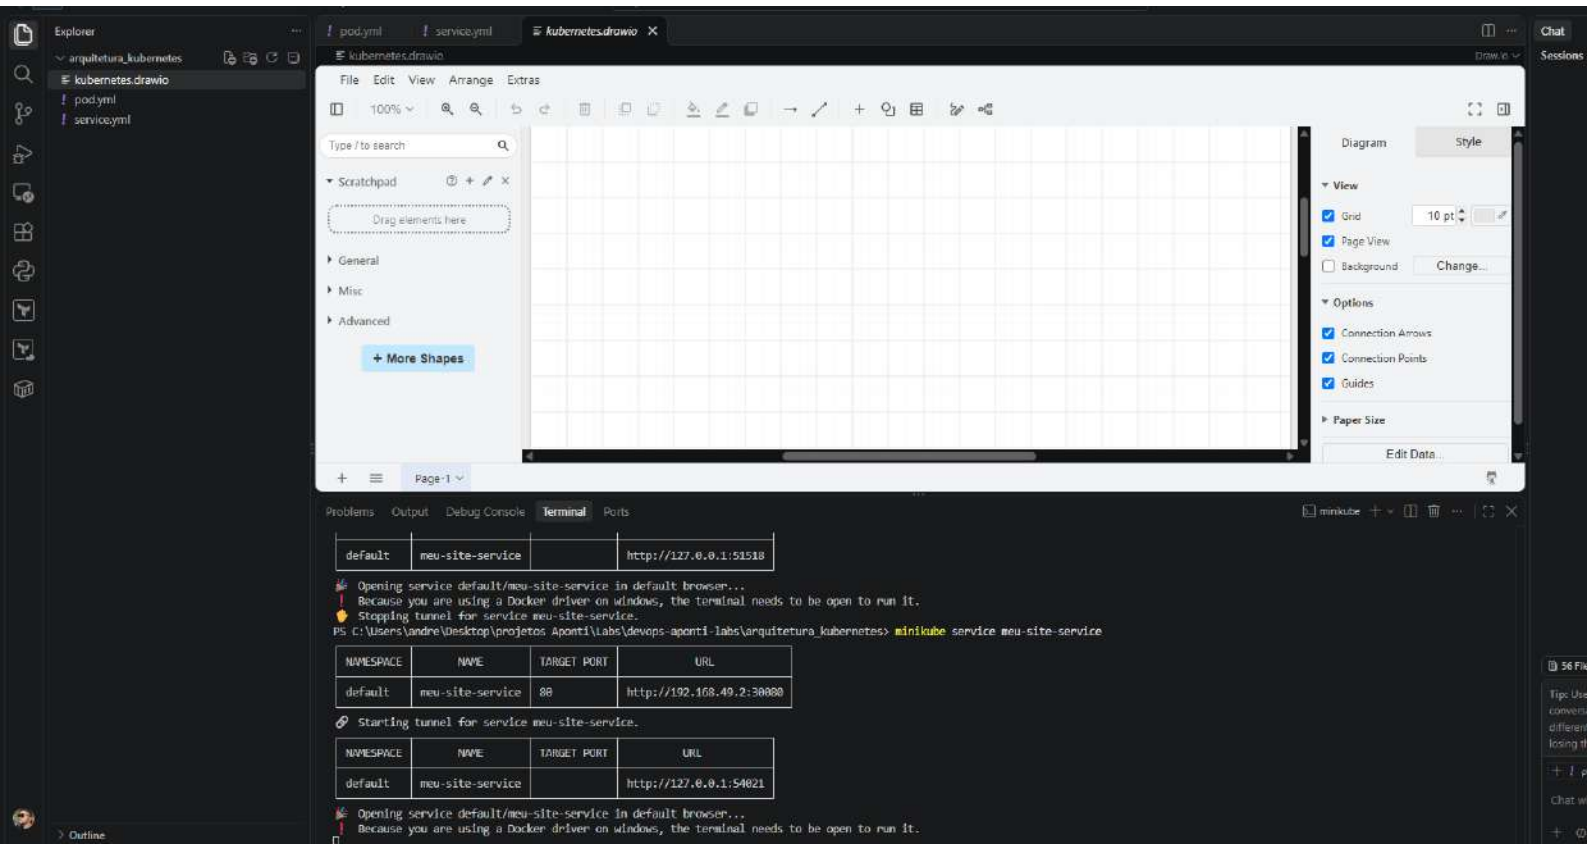
Explorer
arquitetura_kubernetes
kubernetes.drawio
pod.yml
service.yml
pod.yml
service.yml
kubernetes.drawio
File Edit View Arrange Extras
Type / to search
Scratchpad
Drag elements here
General
Misc
Advanced
+ More Shapes
Diagram
Style
View
Grid
10 pt
Page View
Background
Change...
Options
Connection Arrows
Connection Points
Guides
Paper Size
Edit Data...
Page-1
Problems Output Debug Console Terminal Ports
minikube
default meu-site-service http://127.0.0.1:51518
Opening service default/meu-site-service in default browser...
Because you are using a Docker driver on windows, the terminal needs to be open to run it.
Stopping tunnel for service meu-site-service.
PS C:\Users\andre\Desktop\projetos Aponti\Labs\devops-aponti-labs\arquitetura_kubernetes> minikube service meu-site-service
NAMESPACE NAME TARGET PORT URL
default meu-site-service 80 http://192.168.49.2:30080
Starting tunnel for service meu-site-service.
NAMESPACE NAME TARGET PORT URL
default meu-site-service http://127.0.0.1:54021
Opening service default/meu-site-service in default browser...
Because you are using a Docker driver on windows, the terminal needs to be open to run it.
Outline
Chat
Sessions