

INSAR_G2S

An automatic script to export interferograms
generated by GMTSAR into StaMPS/MTI
(suitable for Sentinel1A/B SLC dataset)

Noorlaila Isya
email: noorlaila@geodesy.its.ac.id
23.10.2019

Institute für Geodäsie und Photogrammetrie



INSAR_G2S is automatic GMTSAR bundled scripts acted as InSAR Processor before running the InSAR time series analysis using StaMPS.

Required Softwares

- GMT
 - GMTSAR
 - StaMPS/MTI
-
- When using this program please reference Isya et al., 2018:
Isya, N. H.; Riedel, A.; Riedel, B. & Niemeier, W. Comparison of Power Law Tropospheric Correction for Time Series InSAR Application Wissenschaftlich-Technische Jahrestagung der DGPF und PFGK18 Tagung in München, Deutschen Gesellschaft für Photogrammetrie, Fernerkundung und Geoinformation e.V., 2018, 483 - 50

How to use INSAR_G2S

- Set INSAR_G2S scripts to your shell environment

```
cd ~
```

```
pico .bashrc
```

- Add these commands on your bashrc and save it

```
export INSAR_G2S=/home/isya/STAMPS/INSAR_G2S
```

```
export PATH=$INSAR_G2S:$PATH
```

- Replace or add files from **gmtsar_matlab** to **StaMPS/matlab** directory

- stamps.m (replace the old file)
- ps_load_initial_gmtsar.m (add file)
- sb_load_initial_gmtsar.m (add file)

INSAR_G2S overview

```
isya@hermes:/media/isya/649d6fa0-f505-4c78-9eb5-78d4aec5c2f3/Celle$ INSAR_G2S.sh
```

```
Usage: INSAR_G2S [step] [parameter_with_path_directory]
```

```
Script to pre-process SAR data and export to STAMPS format
```

```
example : INSAR_G2S 1 /home/isya/3d_disp/param_INSAR_G2S.txt
```

```
Step: Data Preparation -->
```

- 1 Prepare the directory arrangement
- 2 Prepare the POE data
- 3 Prepare the EAP data
- 4 Preprocess SAR data: Compute Baseline and Alignment
- 5 Create a configuration of master-slave for SM or SB network

```
Interferogram Generation -->
```

- 6 Project DEM to radar coordinates
- 7 Generate Interferogram (Real and Imaginary format) [SM | SB]
- 8 Overview the sample of amplitude and phase file on Google Earth (optional)
- 9 Cut the interferograms based on ROI (optional) [SM | SB]

```
GMTSAR2STAMPS (PS Method) -->
```

- 10 Create Amplitude Dispersion Index
- 11 Convert GMTsar result to be able processed by STAMPS PS
- 12 Fix the result of PS Candidates (PS)

```
GMTSAR2STAMPS (Small Baseline [SB] Method) -->
```

- 13 Create Amplitude Difference Dispersion Index
- 14 Convert GMTsar result to be able processed by STAMPS SB
- 15 Fix the result of PS Candidates (SB)

```
isya@hermes:/media/isya/649d6fa0-f505-4c78-9eb5-78d4aec5c2f3/Celle$ █
```

Guidelines:

Step 0

- Create a main folder which all of the processing will be run.

`$ mkdir yourproject`

- Copy a template of param_INSAR_G2S.txt in the “yourproject” folder

Explanation of param_INSAR_G2S.txt

dataorbit = the orbit direction (could be ascending / descending)

raw_path = the full path directory of your SLC SAR data (ZIP files)

sen_POE = the full path directory of POE Sentinel-1 files, inside this directory S1A and S1B has to be splitted into two folders (S1A and S1B folder)

temp_bl = the maximum limit of temporal baseline

spatial_bl = the maximum limit of spatial baseline

region = the region of interest (radar coordinates)

reg_ll = the region of interest (geographic coordinates)

n_range = number of patches in range

n_azimuth = number of patches in azimuth

ov_range = overlapping pixels between patches in range

ov_azimuth = overlapping pixels patches in azimuth

threshold = threshold of amplitude (difference) dispersion (0.4-0.6 is reasonable)

heading = heading angle or azimuth direction for Sentinel-1, see metadata super master file (default=**auto** or e.g, Asc = -12.00707218611660e ; Dsc = -1.6799e+02)

master_date= date of super master

master_PRM = the name of master PRM

suffix = sub-swath number (e.g F1, F2, F3)

tiff_id = number of tiff (e.g 001, 002, ..)

type_data = type of polarization (could be single | dual | mix)


param_INSAR_G2S.txt
example -->

Note:

For Step 1-7, region and region_ll can be let empty “-”

region_ll will be used on step 8

region will be used on step 9

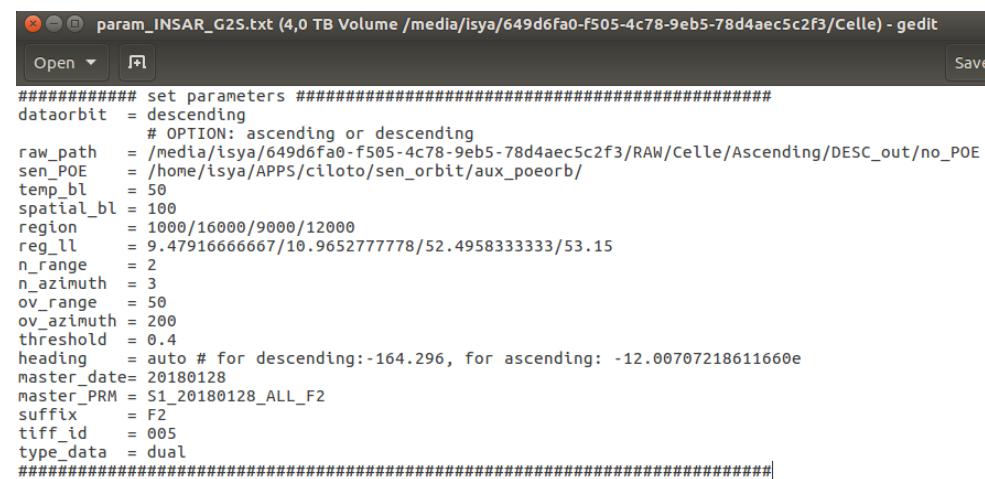

```
##### set parameters #####
dataorbit = descending
# OPTION: ascending or descending
raw_path = /media/isya/649d6fa0-f505-4c78-9eb5-78d4aec5c2f3/RAW/Celle/Ascending/DESC_out/no_POE
sen_POE = /home/isya/APPS/ciloto/sen_orbit/aux_poeorb/
temp_bl = 50
spatial_bl = 100
region = 1000/16000/9000/12000
reg_ll = 9.4791666667/10.9652777778/52.4958333333/53.15
n_range = 2
n_azimuth = 3
ov_range = 50
ov_azimuth = 200
threshold = 0.4
heading = auto # for descending:-164.296, for ascending: -12.00707218611660e
master_date= 20180128
master_PRM = S1_20180128_ALL_F2
suffix = F2
tiff_id = 005
type_data = dual
#####
```

Guidelines:

Step 1 – 5 → a process of “Data Preparation”

(For the data preparation steps, they are suitable for Sentinel-1 dataset. If you want to process other sensors (e.g., ALOS, ERS, etc), You need to manually modify the scripts.)

- Step 1 ; Prepare the directory arrangement

Run Step 1 on “yourproject” folder

```
$ INSAR_G2S 1 /home/isya/yourproject/param_INSAR_G2S.txt
```

It will create batch_asc or batch_dsc folder (depends on your orbit direction data)

- Step 2 ; Prepare the POE data

Run Step 2 on “yourproject” folder

```
$ INSAR_G2S 2 /home/isya/yourproject/param_INSAR_G2S.txt
```

If POE files are located on your local storage, type \$ yes

If you don't have POE files, the program will automatically download them, type \$ no

- Step 3 ; Prepare the EAP data

Save s1a-aux-cal.xml and s1b-aux-cal.xml in **raw_orig** directory.

The aux file is only needed for Elevation Antenna Pattern correction. Please check on the manifest.safe file from your downloaded data. If the processing version is after 2.36 (some early data after March 2015), there is no need to cat the aux file to the xmls. However, it's better to apply the aux file to all xmls.

Run Step 3 on “yourproject” folder

```
$ INSAR_G2S 3 /home/isya/yourproject/param_INSAR_G2S.txt
```

It will create “topo” directory inside batch_“orbit” directory. Please save **dem.grd** file in topo directroy.

dem.grd could be downloaded from <https://topex.ucsd.edu/gmtsar/demgen/>

Guidelines:

- Step 4 ; Preprocess SAR data: Compute Baseline and Alignment

Run Step 4 on “yourproject” folder

```
$ INSAR_G2S 4 /home/isya/yourproject/param_INSAR_G2S.txt
```

PRM, LED and SLC files will be generated in raw directory

- Step 5 ; Create a configuration of master-slave for SM or SB network

Run Step 5 on **batch_“orbit”** folder

```
$ INSAR_G2S 5 /home/isya/yourproject/param_INSAR_G2S.txt
```


There are two network options : Single Master (SM) or Small Baseline (SB)

If you want to work with PS method, type **\$ SM**

If you want to work with SB method, type **\$ SB**


Example for the generated files from Step 5

Sentinel-1 SM Network

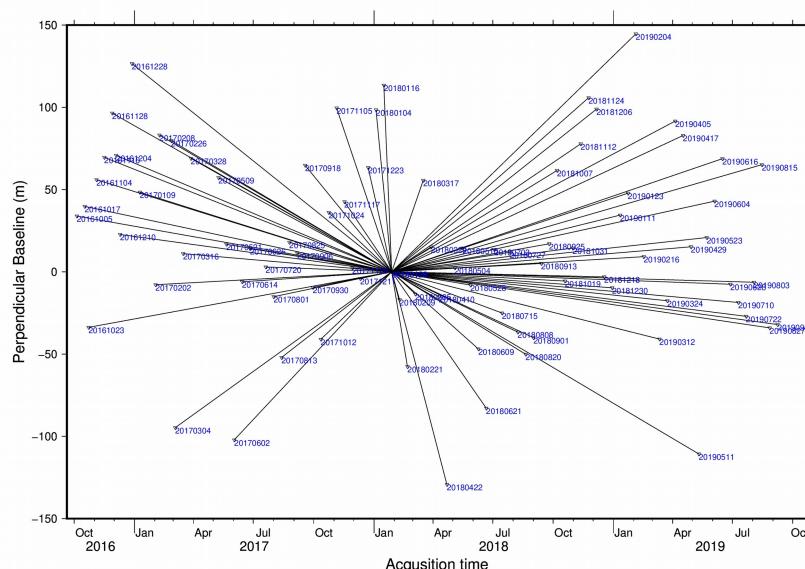

baseline_pair_SM.ps

Sentinel-1 SB Network

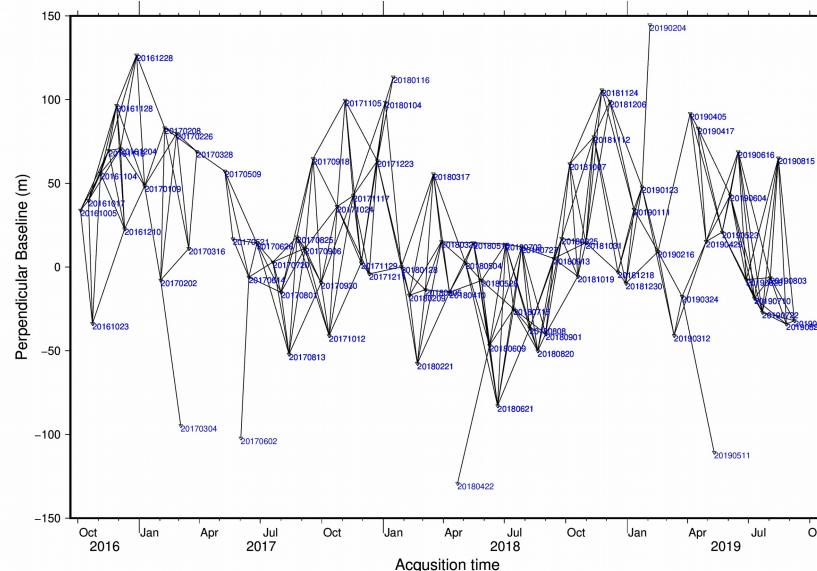

baseline_pair_50_100.ps

```
S1_20180128_ALL_F2:S1_20161005_ALL_F2  
S1_20180128_ALL_F2:S1_20161017_ALL_F2  
S1_20180128_ALL_F2:S1_20161023_ALL_F2  
S1_20180128_ALL_F2:S1_20161104_ALL_F2  
S1_20180128_ALL_F2:S1_20161116_ALL_F2  
S1_20180128_ALL_F2:S1_20161128_ALL_F2  
S1_20180128_ALL_F2:S1_20161204_ALL_F2  
S1_20180128_ALL_F2:S1_20161210_ALL_F2  
S1_20180128_ALL_F2:S1_20161228_ALL_F2  
S1_20180128_ALL_F2:S1_20170109_ALL_F2  
S1_20180128_ALL_F2:S1_20170202_ALL_F2  
S1_20180128_ALL_F2:S1_20170208_ALL_F2  
S1_20180128_ALL_F2:S1_20170226_ALL_F2  
S1_20180128_ALL_F2:S1_20170304_ALL_F2  
S1_20180128_ALL_F2:S1_20170316_ALL_F2  
S1_20180128_ALL_F2:S1_20170409_ALL_F2  
S1_20180128_ALL_F2:S1_20170426_ALL_F2  
S1_20180128_ALL_F2:S1_20170509_ALL_F2  
S1_20180128_ALL_F2:S1_20170526_ALL_F2  
S1_20180128_ALL_F2:S1_20170612_ALL_F2  
S1_20180128_ALL_F2:S1_20170701_ALL_F2  
S1_20180128_ALL_F2:S1_20170707_ALL_F2  
S1_20180128_ALL_F2:S1_20170713_ALL_F2  
S1_20180128_ALL_F2:S1_20170720_ALL_F2  
S1_20180128_ALL_F2:S1_20170726_ALL_F2  
S1_20180128_ALL_F2:S1_20170803_ALL_F2  
S1_20180128_ALL_F2:S1_20170810_ALL_F2  
S1_20180128_ALL_F2:S1_20170827_ALL_F2  
S1_20180128_ALL_F2:S1_20170903_ALL_F2  
S1_20180128_ALL_F2:S1_20170910_ALL_F2  
S1_20180128_ALL_F2:S1_20170917_ALL_F2  
S1_20180128_ALL_F2:S1_20170924_ALL_F2  
S1_20180128_ALL_F2:S1_20171001_ALL_F2  
S1_20180128_ALL_F2:S1_20171008_ALL_F2  
S1_20180128_ALL_F2:S1_20171015_ALL_F2  
S1_20180128_ALL_F2:S1_20171022_ALL_F2  
S1_20180128_ALL_F2:S1_20171029_ALL_F2  
S1_20180128_ALL_F2:S1_20171105_ALL_F2  
S1_20180128_ALL_F2:S1_20171112_ALL_F2  
S1_20180128_ALL_F2:S1_20171119_ALL_F2  
S1_20180128_ALL_F2:S1_20171126_ALL_F2  
S1_20180128_ALL_F2:S1_20171203_ALL_F2  
S1_20180128_ALL_F2:S1_20171210_ALL_F2  
S1_20180128_ALL_F2:S1_20171217_ALL_F2  
S1_20180128_ALL_F2:S1_20171224_ALL_F2  
S1_20180128_ALL_F2:S1_20171231_ALL_F2  
S1_20180128_ALL_F2:S1_20180107_ALL_F2  
S1_20180128_ALL_F2:S1_20180114_ALL_F2  
S1_20180128_ALL_F2:S1_20180121_ALL_F2  
S1_20180128_ALL_F2:S1_20180128_ALL_F2  
S1_20180128_ALL_F2:S1_20180204_ALL_F2  
S1_20180128_ALL_F2:S1_20180211_ALL_F2  
S1_20180128_ALL_F2:S1_20180218_ALL_F2  
S1_20180128_ALL_F2:S1_20180225_ALL_F2  
S1_20180128_ALL_F2:S1_20180301_ALL_F2  
S1_20180128_ALL_F2:S1_20180308_ALL_F2  
S1_20180128_ALL_F2:S1_20180315_ALL_F2  
S1_20180128_ALL_F2:S1_20180322_ALL_F2  
S1_20180128_ALL_F2:S1_20180329_ALL_F2  
S1_20180128_ALL_F2:S1_20180405_ALL_F2  
S1_20180128_ALL_F2:S1_20180412_ALL_F2  
S1_20180128_ALL_F2:S1_20180419_ALL_F2  
S1_20180128_ALL_F2:S1_20180426_ALL_F2  
S1_20180128_ALL_F2:S1_20180503_ALL_F2  
S1_20180128_ALL_F2:S1_20180510_ALL_F2  
S1_20180128_ALL_F2:S1_20180517_ALL_F2  
S1_20180128_ALL_F2:S1_20180524_ALL_F2  
S1_20180128_ALL_F2:S1_20180601_ALL_F2  
S1_20180128_ALL_F2:S1_20180608_ALL_F2  
S1_20180128_ALL_F2:S1_20180615_ALL_F2  
S1_20180128_ALL_F2:S1_20180622_ALL_F2  
S1_20180128_ALL_F2:S1_20180709_ALL_F2  
S1_20180128_ALL_F2:S1_20180716_ALL_F2  
S1_20180128_ALL_F2:S1_20180723_ALL_F2  
S1_20180128_ALL_F2:S1_20180803_ALL_F2  
S1_20180128_ALL_F2:S1_20180810_ALL_F2  
S1_20180128_ALL_F2:S1_20180817_ALL_F2  
S1_20180128_ALL_F2:S1_20180824_ALL_F2  
S1_20180128_ALL_F2:S1_20180901_ALL_F2  
S1_20180128_ALL_F2:S1_20180908_ALL_F2  
S1_20180128_ALL_F2:S1_20180915_ALL_F2  
S1_20180128_ALL_F2:S1_20180922_ALL_F2  
S1_20180128_ALL_F2:S1_20180929_ALL_F2  
S1_20180128_ALL_F2:S1_20181006_ALL_F2  
S1_20180128_ALL_F2:S1_20181013_ALL_F2  
S1_20180128_ALL_F2:S1_20181020_ALL_F2  
S1_20180128_ALL_F2:S1_20181027_ALL_F2  
S1_20180128_ALL_F2:S1_20181103_ALL_F2  
S1_20180128_ALL_F2:S1_20181110_ALL_F2  
S1_20180128_ALL_F2:S1_20181117_ALL_F2  
S1_20180128_ALL_F2:S1_20181124_ALL_F2  
S1_20180128_ALL_F2:S1_20181201_ALL_F2  
S1_20180128_ALL_F2:S1_20181208_ALL_F2  
S1_20180128_ALL_F2:S1_20181215_ALL_F2  
S1_20180128_ALL_F2:S1_20181222_ALL_F2  
S1_20180128_ALL_F2:S1_20181229_ALL_F2  
S1_20180128_ALL_F2:S1_20181230_ALL_F2  
S1_20180128_ALL_F2:S1_20190101_ALL_F2  
S1_20180128_ALL_F2:S1_20190108_ALL_F2  
S1_20180128_ALL_F2:S1_20190115_ALL_F2  
S1_20180128_ALL_F2:S1_20190122_ALL_F2  
S1_20180128_ALL_F2:S1_20190129_ALL_F2  
S1_20180128_ALL_F2:S1_20190205_ALL_F2  
S1_20180128_ALL_F2:S1_20190212_ALL_F2  
S1_20180128_ALL_F2:S1_20190219_ALL_F2  
S1_20180128_ALL_F2:S1_20190226_ALL_F2  
S1_20180128_ALL_F2:S1_20190302_ALL_F2  
S1_20180128_ALL_F2:S1_20190309_ALL_F2  
S1_20180128_ALL_F2:S1_20190316_ALL_F2  
S1_20180128_ALL_F2:S1_20190323_ALL_F2  
S1_20180128_ALL_F2:S1_20190330_ALL_F2  
S1_20180128_ALL_F2:S1_20190406_ALL_F2  
S1_20180128_ALL_F2:S1_20190413_ALL_F2  
S1_20180128_ALL_F2:S1_20190420_ALL_F2  
S1_20180128_ALL_F2:S1_20190427_ALL_F2  
S1_20180128_ALL_F2:S1_20190504_ALL_F2  
S1_20180128_ALL_F2:S1_20190511_ALL_F2  
S1_20180128_ALL_F2:S1_20190518_ALL_F2  
S1_20180128_ALL_F2:S1_20190525_ALL_F2  
S1_20180128_ALL_F2:S1_20190601_ALL_F2  
S1_20180128_ALL_F2:S1_20190608_ALL_F2  
S1_20180128_ALL_F2:S1_20190615_ALL_F2  
S1_20180128_ALL_F2:S1_20190622_ALL_F2  
S1_20180128_ALL_F2:S1_20190629_ALL_F2  
S1_20180128_ALL_F2:S1_20190706_ALL_F2  
S1_20180128_ALL_F2:S1_20190713_ALL_F2  
S1_20180128_ALL_F2:S1_20190720_ALL_F2  
S1_20180128_ALL_F2:S1_20190727_ALL_F2  
S1_20180128_ALL_F2:S1_20190803_ALL_F2  
S1_20180128_ALL_F2:S1_20190810_ALL_F2  
S1_20180128_ALL_F2:S1_20190817_ALL_F2  
S1_20180128_ALL_F2:S1_20190824_ALL_F2  
S1_20180128_ALL_F2:S1_20190831_ALL_F2  
S1_20180128_ALL_F2:S1_20190907_ALL_F2  
S1_20180128_ALL_F2:S1_20190914_ALL_F2  
S1_20180128_ALL_F2:S1_20190921_ALL_F2  
S1_20180128_ALL_F2:S1_20190928_ALL_F2  
S1_20180128_ALL_F2:S1_20191005_ALL_F2  
S1_20180128_ALL_F2:S1_20191012_ALL_F2  
S1_20180128_ALL_F2:S1_20191019_ALL_F2  
S1_20180128_ALL_F2:S1_20191026_ALL_F2  
S1_20180128_ALL_F2:S1_20191102_ALL_F2  
S1_20180128_ALL_F2:S1_20191109_ALL_F2  
S1_20180128_ALL_F2:S1_20191116_ALL_F2  
S1_20180128_ALL_F2:S1_20191123_ALL_F2  
S1_20180128_ALL_F2:S1_20191130_ALL_F2  
S1_20180128_ALL_F2:S1_20191207_ALL_F2  
S1_20180128_ALL_F2:S1_20191214_ALL_F2  
S1_20180128_ALL_F2:S1_20191221_ALL_F2  
S1_20180128_ALL_F2:S1_20191228_ALL_F2  
S1_20180128_ALL_F2:S1_20200104_ALL_F2
```

intf_SM.in

```
S1_20190604_ALL_F2:S1_20190616_ALL_F2  
S1_20190604_ALL_F2:S1_20190628_ALL_F2  
S1_20190604_ALL_F2:S1_20190710_ALL_F2  
S1_20190604_ALL_F2:S1_20190722_ALL_F2  
S1_20190616_ALL_F2:S1_20190628_ALL_F2  
S1_20190616_ALL_F2:S1_20190710_ALL_F2  
S1_20190616_ALL_F2:S1_20190722_ALL_F2  
S1_20190616_ALL_F2:S1_20190803_ALL_F2  
S1_20190628_ALL_F2:S1_20190710_ALL_F2  
S1_20190628_ALL_F2:S1_20190722_ALL_F2  
S1_20190628_ALL_F2:S1_20190803_ALL_F2  
S1_20190710_ALL_F2:S1_20190710_ALL_F2  
S1_20190710_ALL_F2:S1_20190815_ALL_F2  
S1_20190710_ALL_F2:S1_20190827_ALL_F2  
S1_20190722_ALL_F2:S1_20190803_ALL_F2  
S1_20190722_ALL_F2:S1_20190815_ALL_F2  
S1_20190722_ALL_F2:S1_20190827_ALL_F2  
S1_20190803_ALL_F2:S1_20190803_ALL_F2  
S1_20190803_ALL_F2:S1_20190815_ALL_F2  
S1_20190803_ALL_F2:S1_20190827_ALL_F2  
S1_20190815_ALL_F2:S1_20190827_ALL_F2  
S1_20190815_ALL_F2:S1_20190908_ALL_F2  
S1_20190827_ALL_F2:S1_20190908_ALL_F2
```

intf_SB.in

Guidelines:

Step 6 – 9 → a process of “Interferogram Generation”

- Step 6 ; Project DEM to radar coordinates

Run Step 6 on **batch_"orbit"** folder

```
$ INSAR_G2S 6 /home/isya/yourproject/param_INSAR_G2S.txt
```

- Step 7 ; Generate Interferogram (Real and Imaginary format)

Run Step 7 on **batch_"orbit"** folder

```
$ INSAR_G2S 7 /home/isya/yourproject/param_INSAR_G2S.txt
```

There are two network options : Single Master (SM) or Small Baseline (SB), based on your option on Step 5

If you want to work with PS method, type **\$ SM**

If you want to work with SB method, type **\$ SB**

Guidelines:

- Step 8 ; Overview the sample of amplitude and phase file on Google Earth (optional)
Create one pair interferogram and save as **intf_tes.in** in stack directory (An example can be seen in intf_SB.in or intf_SM.in). Run Step 8 on **batch_"orbit"/stack** folder

\$ INSAR_G2S 8 /home/isya/yourproject/param_INSAR_G2S.txt

- Step 9 ; Cut the interferograms based on ROI (optional) [SM | SB]

Run Step 9 on **batch_"orbit"/stack** folder

\$ INSAR_G2S 9 /home/isya/yourproject/param_INSAR_G2S.txt

There are two network options : Single Master (SM) or Small Baseline (SB), based on your option on Step 5

If you want to work with PS method, type \$ **SM**

If you want to work with SB method, type \$ **SB**

- Step 8 and 9 are optional.

If you want to save your computer storage, run step 8 to define your ROI on radar coordinates and step 9 to cut real and image files based on a certain region. You could delete imag* and real* files in stack directory after Step 9.

You can set **region_II** before running step 8 or let it empty if you want to plot a whole scene.

After you could define radar coordinates based on the KML overview, set **region** before running step 9, 10,

Guidelines:

If on Step 5 you choose SM option, then run step 10 – 12

Step 10 – 12 → a process of “GMTSAR to STAMPS for PS method”

- Step 10 ; Create Amplitude Dispersion (AD) Index

Run Step 10 on **batch_”orbit”/stack** folder

```
$ INSAR_G2S 10 /home/isya/yourproject/param_INSAR_G2S.txt
```

In raw folder, scatter_SM.grd (Amplitude Dispersion) is generated.

Threshold of AD is taken from param_INSAR_G2S.txt (e.g 0.4).

- Step 11 ; Convert GMTSAR result to be able processed by STAMPS PS

Run Step 11 on **batch_”orbit”/stack** folder

```
$ INSAR_G2S 11 /home/isya/yourproject/param_INSAR_G2S.txt
```

It will create PS directory and generate interferograms result based on StaMPS format.

- Step 12 ; Fix the result of PS Candidates (PS)

Run Step 12 on **batch_”orbit”/stack/PS** folder

```
$ INSAR_G2S 12 /home/isya/yourproject/param_INSAR_G2S.txt
```

This step is to rewrite pscands1.ll and pscands.hgt to have the same size matrix.

GMTSAR to StaMPS result [PS Method]

The screenshot displays a file browser interface with two main windows. The top window shows a list of folders and files in a directory. The bottom window shows the detailed contents of a selected folder.

Top Window (Main Directory View):

Name	Size	Type	Modified
PATCH_1	32 items	Folder	Okt 10
PATCH_2	32 items	Folder	Okt 15
PATCH_3	32 items	Folder	Okt 15
PATCH_4	32 items	Folder	Okt 15
PATCH_5	32 items	Folder	Okt 16
PATCH_6	32 items	Folder	Okt 16
patch_reg	29 items	Folder	Okt 2
patch_SM	10 items	Folder	Okt 9
SMALL_BASELINES	194 items		
bp2.mat	62,5 kB		
bperp.1.in	706 bytes		
bperp_20161005.1.in	50,0 kB		
bperp_20161017.1.in	50,0 kB		

Bottom Window (PATCH_1 Content View):

Name	Size	Type	Modified
pscands.1.da	6,1 MB	Text	Okt 9
pscands.1.hgt	1,6 MB	Binary	Okt 10
pscands.1.ij	7,0 MB	Text	Okt 10
pscands.1.ll	3,3 MB	Binary	Okt 10
pscands.1.ph	279,7 MB	Binary	Okt 9
psver.mat	1,9 kB	Binary	Okt 14
psweed.1.node	2,2 MB	Text	Okt 14
psweed.2.edge	5,1 MB	Text	Okt 14
psweed.2.ele	4,0 MB	Text	Okt 14
psweed.2.node	3,6 MB	Text	Okt 14
rc2.mat	27,9 MB	Binary	Okt 18
select1.mat	270,3 MB	Binary	Okt 14
STAMPS.log	19,4 kB	Text	Okt 18

Guidelines:

If on Step 5 you choose SB option, then run step 13 – 15

Step 13 – 15 → a process of “GMTSAR to STAMPS/MTI for SB method”

- Step 13 ; Create Amplitude Difference Dispersion (ADD) Index

Run Step 13 on **batch_”orbit”/stack** folder

```
$ INSAR_G2S 13 /home/isya/yourproject/param_INSAR_G2S.txt
```

In raw folder, scatter_SB.grd (Amplitude Difference Dispersion) is generated.

Threshold of ADD is taken from param_INSAR_G2S.txt (e.g 0.6).

- Step 14 ; Convert GMTSAR result to be able processed by STAMPS SB

Run Step 14 on **batch_”orbit”/stack** folder

```
$ INSAR_G2S 14 /home/isya/yourproject/param_INSAR_G2S.txt
```

It will create PS/SMALL_BASELINES directory and generate interferograms result based on StaMPS format.

- Step 15 ; Fix the result of PS Candidates (SB)

Run Step 15 on **batch_”orbit”/stack/PS/SMALL_BASELINES** folder

```
$ INSAR_G2S 15 /home/isya/yourproject/param_INSAR_G2S.txt
```

This step is to rewrite pscands1.ll and pscands.hgt to have the same size matrix.

GMTSAR to StaMPS result [SB Method]

Name	Celle	batch_dsc	stack	PS	SMALL_BASELINES			
PATCH_1						29 items	Folder	Okt 7
PATCH_2						29 items	Folder	Okt 9
PATCH_3						29 items	Folder	Okt 11
PATCH_4						29 items	Folder	Okt 12
PATCH_5						29 items	Folder	Okt 12
PATCH_6						29 items	Folder	Okt 12
PATCH_7						29 items	Folder	Okt 12
PATCH_8						29 items	Folder	Okt 12
PATCH_9								
PATCH_10								
PATCH_11								
PATCH_12								
PATCH_13								

Name	Size	Type	Modified
pscands.1.ll	2,7 MB	Binary	Okt 7
pscands.1.ij	5,7 MB	Text	Okt 7
pscands.1.hgt	1,4 MB	Binary	Okt 7
ifgday.1.in	4,6 kB	Link to Text	Okt 3
pscands.1.ph	689,2 MB	Binary	Okt 2
swap_pixels.m	596 bytes	Text	Okt 2
pscands.1.pho	689,2 MB	Binary	Okt 2
pscands.1.da	5,1 MB	Text	Okt 2
patch_noover_old.in	13 bytes	Text	Okt 2
patch_noover.in	20 bytes	Text	Okt 2
patch.in	13 bytes	Text	Okt 2

StaMPS Processing

- After you sucessfully convert all of files from GMTSAR to StaMPS format, now you can run the PS/SB InSAR processing on Matlab.
- Run StaMPS step by step

```
>> stamps(1,1)
```

```
>> stamps(1,2)      etc
```


- Or all steps

```
>> stamps(1,5)
```


```
>> stamps(6,7)      etc
```

STAMPS result overview (SB method)


Location: Cerro Prieto, Mexico

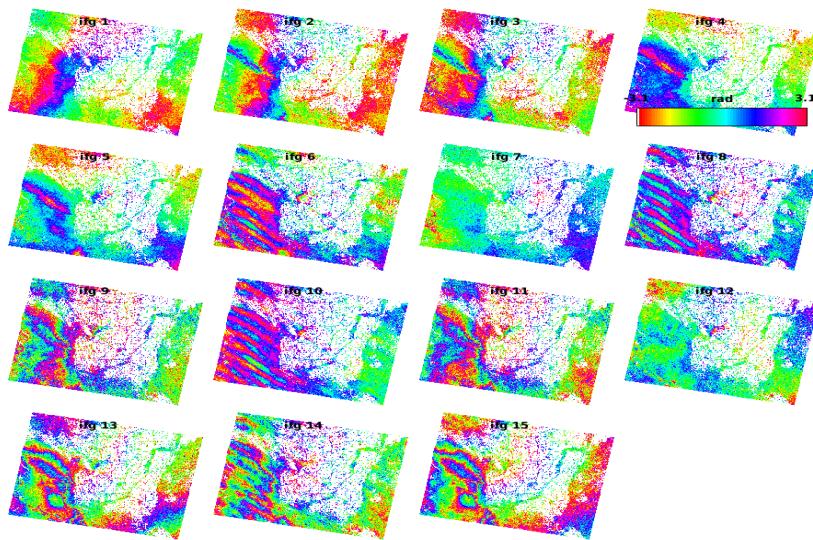


wrapped interferograms

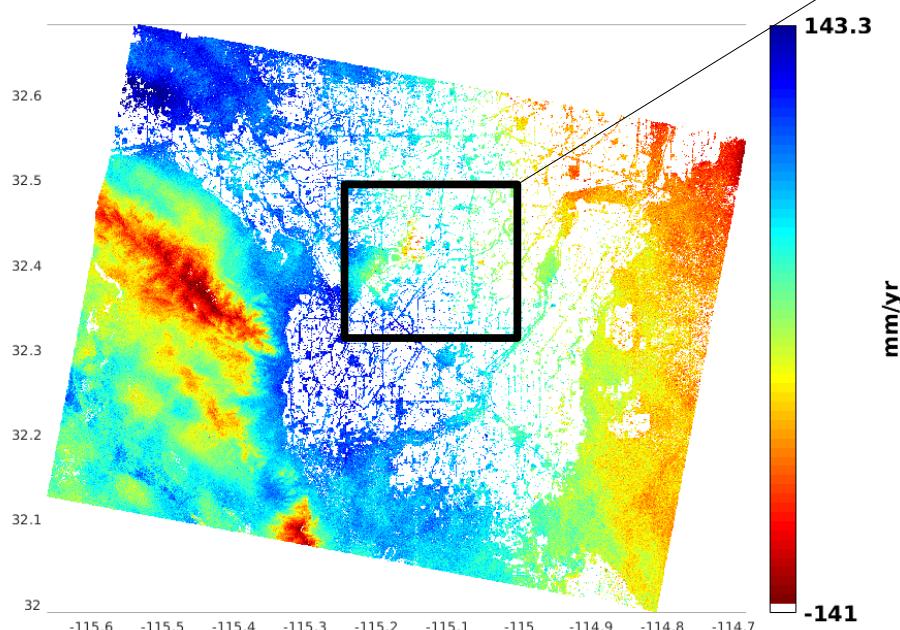


mean velocity (SM network inversion) for V-DO plot

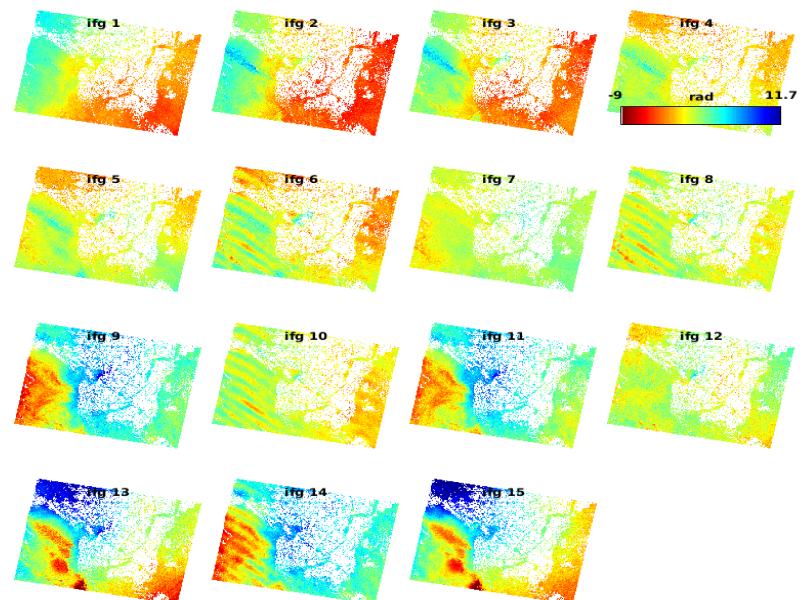


unwrapped interferograms

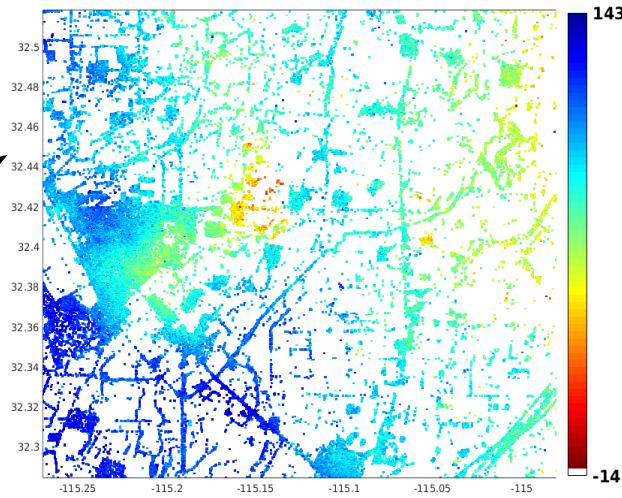

mm/yr


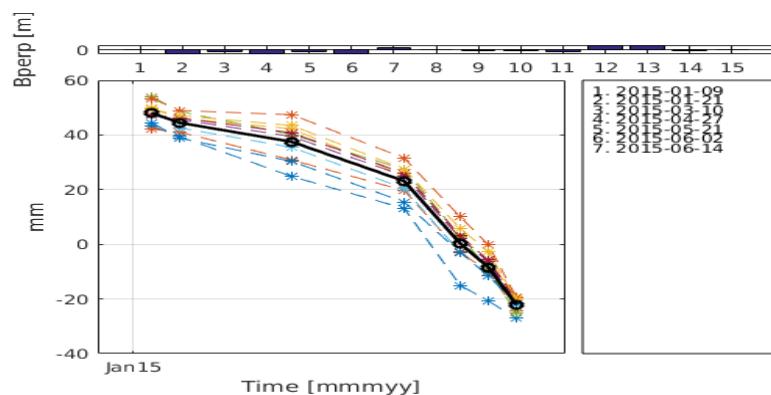


Time series PS scatters

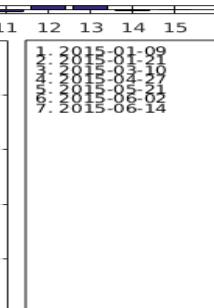

17

STAMPS result with (set merge_resample_size = 100)

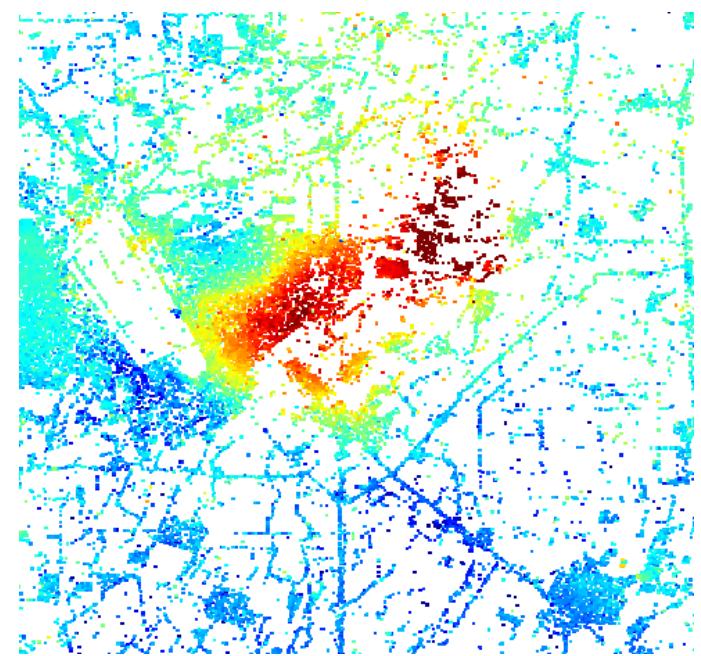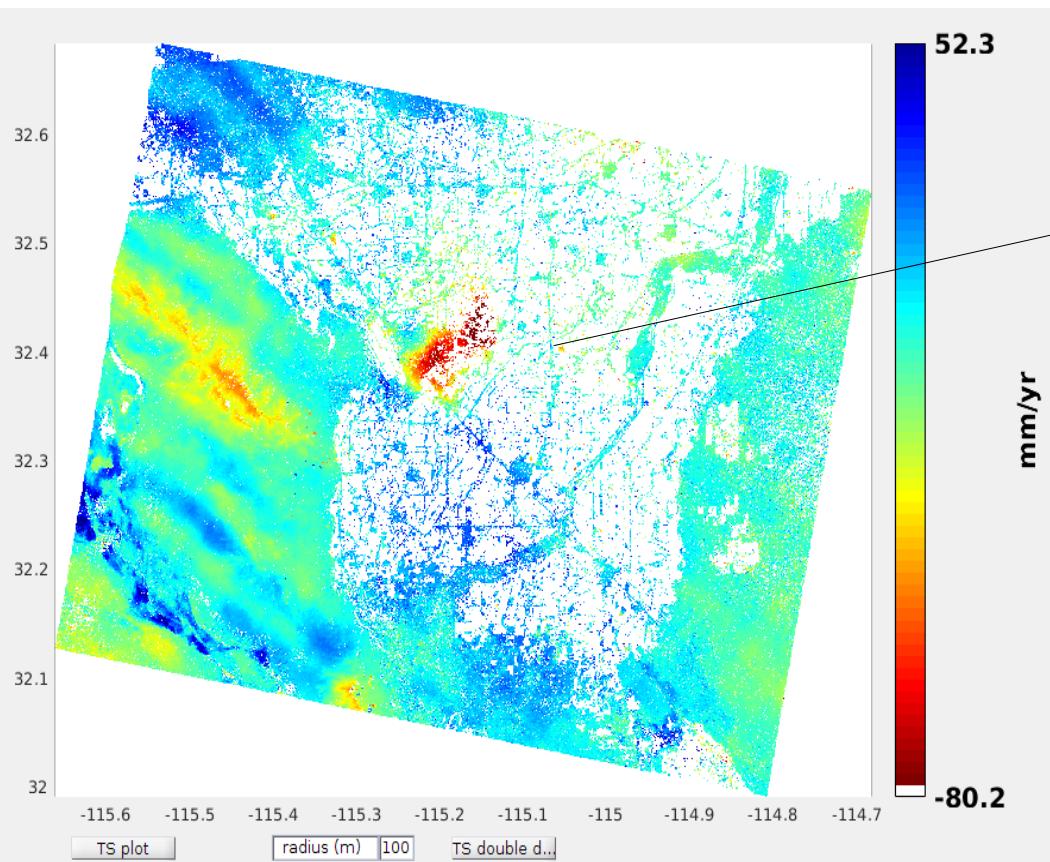

mean velocity (SB network inversion) for v-do plot
(small letters for v-do)

