Compositional Federated Learning: Applications in Distributionally Robust Averaging and Meta Learning

Feihu Huang^{*}, Junyi Li [†], Heng Huang [‡]

Abstract

In the paper, we propose an effective and efficient Compositional Federated Learning (ComFedL) algorithm for solving a new compositional Federated Learning (FL) framework, which frequently appears in many machine learning problems with a hierarchical structure such as distributionally robust federated learning and model-agnostic meta learning (MAML). Moreover, we study the convergence analysis of our ComFedL algorithm under some mild conditions, and prove that it achieves a fast convergence rate of $O(\frac{1}{\sqrt{T}})$, where T denotes the number of iteration. To the best of our knowledge, our algorithm is the first work to bridge federated learning with composition stochastic optimization. In particular, we first transform the distributionally robust FL (i.e., a minimax optimization problem) into a simple composition optimization problem by using KL divergence regularization. At the same time, we also first transform the distribution-agnostic MAML problem (i.e., a minimax optimization problem) into a simple composition optimization problem. Finally, we apply two popular machine learning tasks, i.e., distributionally robust FL and MAML to demonstrate the effectiveness of our algorithm.

1 Introduction

In the paper, we study a new compositional Federated Learning (FL) framework that is equivalent to solve the following composition optimization problem, defined as

$$\min_{w \in \mathbb{R}^d} F(w) := \frac{1}{n} \sum_{i=1}^n F^i(w) = \frac{1}{n} \sum_{i=1}^n \mathbb{E}_{\zeta \sim \tilde{\mathcal{D}}_i} g^i \left(\mathbb{E}_{\xi \sim \mathcal{D}_i} f^i(w; \xi); \zeta \right), \tag{1}$$

where $F^i(w) = g^i(f^i(w))$, $y^i = f^i(w) = \mathbb{E}_{\xi \sim \mathcal{D}_i} f^i(w; \xi) : \mathbb{R}^d \to \mathbb{R}^p$ denotes the inner function (or mapping) and $g^i(y^i) = \mathbb{E}_{\zeta \sim \tilde{\mathcal{D}}_i} g^i(y^i; \zeta) : \mathbb{R}^p \to \mathbb{R}$ denotes the outer function. Here $\{\mathcal{D}_i, \tilde{\mathcal{D}}_i\}$ denote two data distributions on *i*-th device, and $\{\mathcal{D}_i, \tilde{\mathcal{D}}_i\}_{i=1}^n$ are not identical. In our new FL framework, each device cooperates to learn a model and raw data in each device is never shared with the server or among distinct devices as in the existing FL framework [Kairouz et al., 2019] (Please see Figure 1). Thus, it is also helpful to protect data privacy as in the existing FL framework.

 $^{^*}$ Department of Electrical and Computer Engineering, University of Pittsburgh, Pittsburgh, USA. Email: huangfeihu2018@gmail.com

[†]Department of Electrical and Computer Engineering, University of Pittsburgh, Pittsburgh, USA. Email: juny-ili.ai@gmail.com

[‡]Department of Electrical and Computer Engineering, University of Pittsburgh, Pittsburgh, USA. Email: henghuanghh@gmail.com

A key difference between our new FL framework and the existing FL framework (Please see the problem (2)) is that each device includes two different data $\{\mathcal{D}_i, \tilde{\mathcal{D}}_i\}$ in our new FL framework, while each device only includes one data \mathcal{D}_i in existing FL framework. Another difference is that the loss function in our new FL framework is two-level composition function, while the loss function in the existing FL framework is only a single-level function. Thus, our new FL framework can effectively be applied to many machine learning problems with a hierarchical structure such as distributionally robust FL and model-agnostic meta learning.

To the best of our knowledge, there does not exist an effective federated learning algorithm to solve the above distributed composition problem (1). To fill this gap, thus we propose an effective and efficient compositional federated learning (ComFedL) algorithm for solving the problem (1).

1.1 Applications

1). Distributionally Robust Federated Learning. Federated learning (FL) [Kairouz et al., 2019] is a popular learning paradigm in machine learning for training a centralized model using data distributed over a network of devices. In general, FL solves the following distributed optimization problem:

$$\min_{w \in \mathbb{R}^d} \sum_{i=1}^n r_i f^i(w), \quad f^i(w) := \mathbb{E}_{\xi \sim \mathcal{D}_i} [\ell_i(w; \xi)]$$
 (2)

where $r_i \in (0,1)$ denotes the proportion of *i*-th device in the entire model. Here $\ell_i(w;\xi)$ is the loss function on *i*-th device, and \mathcal{D}_i denotes the data distribution on *i*-th device. In FL, the data distributions $\{\mathcal{D}_i\}_{i=1}^n$ generally are different. The goal of FL is to learn a global variable w based on these heterogeneous data from different data distributions.

To tackle the data heterogeneity concern in FL, some robust FL algorithms [Mohri et al., 2019, Reisizadeh et al., 2020, Deng et al., 2020b] have been proposed. Specifically, the robust FL mainly focuses on the following agnostic (distributionally robust) empirical loss problem

$$\min_{w \in \mathbb{R}^d} \max_{r \in \Lambda_n} \sum_{i=1}^n r_i f^i(w), \tag{3}$$

where $\Lambda_n = \{r \in \mathbb{R}^n_+ : \sum_{i=1}^n r_i = 1, \ r_i \geq 0\}$ is a *n*-dimensional simplex. In the paper, we introduce a regularized agnostic empirical loss problem as follows:

$$\min_{w \in \mathbb{R}^d} \max_{r \in \Lambda_n} \sum_{i=1}^n r_i f^i(w) - \gamma \phi(r, 1/n), \tag{4}$$

where $\gamma > 0$ is a regularization parameter, and $\phi(r, 1/n)$ is a divergence measure between r_i for all $i \in [n]$ and uniform probability 1/n. Here the penalty $\phi(r, 1/n)$ ensures that the proportion r_i is not far away from 1/n, i.e., we still equally treat each local dataset and model in training the whole model. When consider the KL divergence $\phi(r, 1/n) = \sum_{i=1}^{n} r_i \log(nr_i)$, by exactly maximizing over $r \in \Lambda_n$, the above minimax problem (4) is equivalent to a composition problem, defined as

$$\min_{w \in \mathbb{R}^d} \gamma \log \left(\frac{1}{n} \sum_{i=1}^n \exp\left(f^i(w) / \gamma \right) \right), \tag{5}$$

which can be obtained from the following Lemma 1. Since the function $\log(\cdot)$ is monotonically increasing, we can solve the following problem instead of the above problem (5), defined as

$$\min_{w \in \mathbb{R}^d} \frac{1}{n} \sum_{i=1}^n g(f^i(w)/\gamma),\tag{6}$$

where $g(\cdot) = \exp(\cdot)$. In fact, we can apply the other monotonically increasing functions instead of the function $g(\cdot) = \exp(\cdot)$ in the problem (6). Clearly, the problem (6) is a special case of the above problem (1).

2). Model-Agnostic Meta Learning. Meta Learning (ML) is a powerful learning paradigm for learning the optimal model properties to improve model performances with more experiences, i.e., learn how to learn [Andrychowicz et al., 2016]. Model-Agnostic Meta Learning (MAML) [Finn et al., 2017] is a popular meta-learning method, which is to learn a good initialization for a gradient-based update. The goal of MAML is to find a common initialization that can adapt to a desired model for a set of new tasks after taking several gradient descent steps. Specifically, we consider a set of tasks collected in $\mathcal{M} := \{1, 2, \dots, n\}$ drawn from a certain task distribution. Then we find such initialization by solving the following one-step MAML problem

$$\min_{w \in \mathbb{R}^d} \frac{1}{n} \sum_{i=1}^n f_i(w - \eta \nabla f_i(w)), \quad f_i(w) = \mathbb{E}_{\xi \sim \mathcal{D}_i}[f(w; \xi)]$$
 (7)

where $\eta > 0$ is stepsize. Let $g^i(y^i) = f_i(y^i)$ and $y^i = f^i(w) = w - \eta \nabla f_i(w)$, the above problem (7) is a special case of the above problem (1).

However, more recently [Collins et al., 2020] pointed some drawbacks such as poor worst-case performance and unfairness on the above MAML problem (7). To overcome these drawbacks, [Collins et al., 2020] proposed a distribution-agnostic MAML (DAMAML) model, defined as

$$\min_{w \in \mathbb{R}^d} \max_{p \in \Delta_n} \sum_{i=1}^n p_i f_i (w - \eta \nabla f_i(w)), \tag{8}$$

where p_i denotes the probability associated with *i*-th task, and $p = (p_1, \dots, p_n)$, and $\Delta_n = \{p \in \mathbb{R}^n_+ | \sum_{i=1}^n p_i = 0, p_i \ge 0\}$ is the standard simplex in \mathbb{R}^n_+ . Following the above distributionally robust FL, we can also add a KL divergence $\phi(p, 1/n) = \sum_{i=1}^n p_i \log(np_i)$ to the above problem (8). Then we obtain a regularized DAMAML model, defined as

$$\min_{w \in \mathbb{R}^d} \max_{p \in \Delta_n} \sum_{i=1}^n p_i f_i \left(w - \eta \nabla f_i(w) \right) - \gamma \phi(p, 1/n)$$
(9)

where tuning parameter $\gamma > 0$. Since the above formation (7) can be regarded as a personalized federated learning problem [Fallah et al., 2020b], the formation (9) can be also regarded as a distributionally robust personalized federated learning problem.

Similarly, following the above problem (6), by exactly maximizing over $p \in \Delta_n$, we can also solve the following problem instead of the above problem problem (9), defined as

$$\min_{w \in \mathbb{R}^d} \frac{1}{n} \sum_{i=1}^n \exp\left(f_i \left(w - \eta \nabla f_i(w)\right) / \gamma\right). \tag{10}$$

Let $g^i(y^i) = \exp(f_i(y^i)/\gamma)$ and $y^i = f^i(w) = w - \eta \nabla f_i(w)$, the above problem (10) also is a special case of the above problem (1).

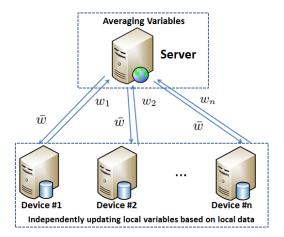


Figure 1: A star-network of FL system includes a server and multiple devices. The server averages the local model variables $\bar{w} = \frac{1}{n} \sum_{i=1}^{n} w_i$, and sends \bar{w} to each device; Each device update the local variable w_i for $i \in [n]$, and then sent it to the server.

1.2 Contributions

Our main **contributions** can be summarized as follows:

- 1) We study a novel compositional federated learning framework that can be applied in many popular machine learning problems such as distributionally robust FL and MAML. Moreover, we propose an effective and efficient Compositional Federated Learning (ComFedL) algorithm for solving this new compositional FL framework.
- 2) We provide a convergence analysis framework for our algorithm. Specifically, we prove that our ComFedL algorithm reaches a fast convergence rate of $O(\frac{1}{\sqrt{T}})$, where T denotes the number of iteration.
- 3) To the best of our knowledge, our ComFedL algorithm is the first work to bridge federated learning with composition stochastic optimization. In particular, we first transform the distributionally robust FL (i.e., a minimax problem) into a simple composition problem by using KL divergence regularization (please see the above problem (6)).
- 4) Since the above problem (9) can be regarded as a distributionally robust personalized FL problem, we are the first study the distributionally robust personalized FL based on composition optimization. At the same time, we also first transform the distribution-agnostic MAML problem into a simple composition problem (please see the above problem (10)).
- 5) Extensive experimental results on distributionally robust FL and MAML demonstrate the efficiency of our algorithm.

Notations: $\|\cdot\|$ denotes the ℓ_2 norm for vectors and spectral norm for matrices. $\langle x,y\rangle$ denotes the inner product of two vectors x and y. M^T denotes transpose of matrix M. For two sequences $\{a_n\}$ and $\{b_n\}$, we denote $a_n = O(b_n)$ if $a_n \leq Cb_n$ for some constant C > 0.

2 Related Works

In this section, we review federated learning, composition optimization and model-agnostic meta learning.

2.1 Federated Learning

Federated learning (FL) [Kairouz et al., 2019] has become a useful paradigm in large-scale machine learning, where the data remains distributed over a large number of clients such as network sensors or mobile phones. The key point of FL is that multiple clients such as edge devices cooperate to learn a model and raw client data is never shared with the server or among distinct clients, in Figure 1. Thus, it is very helpful to protect data privacy. FedAvg [McMahan et al., 2017] is the first FL algorithm, which builds on the local stochastic gradient descent (SGD) [Haddadpour et al., 2019a,b, Woodworth et al., 2020, Khaled et al., 2020, Liang et al., 2019, Yu et al., 2019. Specifically, it performs multiple SGDs in the available clients before communicating to the server, which can reduce the total amount of communication required, but can lead to client drift [Karimireddy et al., 2019, Li et al., 2019, Sahu et al., 2018, Zhao et al., 2018. To deal with these issues of client drift and stability, some variants of FedAvg have been proposed. For example, Li et al. [2018] applied a regularization term in the client objectives towards the broadcast model to reduce the client drift. Hsu et al. [2019], Karimireddy et al. [2019], Wang et al. [2019] used the momentum technique on the server to control variates. More recently, Reddi et al. [2020] proposed an adaptive federated learning algorithm by using momentum technique and adaptive learning rate to improve the performance in FL. Karimireddy et al. [2020] applied the momentum techniques on both the clients and server to control variates. At the same time, some robust FL algorithms [Mohri et al., 2019, Reisizadeh et al., 2020, Deng et al., 2020b] have been proposed to deal with the data heterogeneity concern in FL. To incorporate personalization in FL, more recently some personalized federated learning models [Jiang et al., 2019, Fallah et al., 2020b, Deng et al., 2020a, Dinh et al., 2020, Chen et al., 2018] have been developed and studied.

2.2 Composition Stochastic Optimization

Composition stochastic optimization has been widely applied to many applications such as reinforcement learning [Wang et al., 2017b], model-agnostic meta Learning [Tutunov et al., 2020] and risk management [Wang et al., 2017b]. Some compositional gradient methods have recently been proposed to solve these composition optimization problems. For example, stochastic compositional gradient methods [Wang et al., 2017a,b] have been proposed to solve these problems. Subsequently, some variance-reduced compositional algorithms [Huo et al., 2018, Lin et al., 2018, Zhang and Xiao, 2019] have been proposed for composition optimization. More recently, Tutunov et al. [2020], Chen et al. [2020] presented a class of adaptive compositional gradient methods.

2.3 Model-Agnostic Meta Learning

Model-Agnostic Meta Learning (MAML) is an effective learning framework that learns a good initialization from prior experiences to fast adaptation in new tasks [Finn et al., 2017, 2019]. MAML has been widely used to various applications such as deep learning [Finn et al., 2017], reinforcement learning [Liu et al., 2019, Fallah et al., 2020c,a] and personalized federated learning [Fallah et al., 2020b]. For example, Fallah et al. [2020c] has proposed stochastic gradient meta-reinforcement

Algorithm 1 Compositional Federated Learning (ComFedL) Algorithm

```
1: Input: Synchronization gap \tau, total number of iterations T = S\tau, learning rate \eta, and initial
      parameter \bar{w}_0 \in \mathbb{R}^d;
  2: for s = 0, 1, \dots, S - 1 do
           Server samples a mini-batch devices C_s \subset [n] with |C_s| = m;
           Server broadcasts \bar{w}_s to all devices i \in \mathcal{C}_s;
           for Devices i \in \mathcal{C}_s parallel do
 5:
               Device sets w_{s,0}^i = \bar{w}_s;
 6:
 7:
               for t = 0, 1, \dots, \tau - 1 do
                   Device draws a mini-batch samples \mathcal{B}_t^i \subset \mathcal{D}_i with |\mathcal{B}_t^i| = b;
 8:
                                                        f_{\mathcal{B}_t^i}^i(w_{s,t}^i) = \frac{1}{b} \sum_{j \in \mathcal{B}_t^i} f^i(w_{s,t}^i; \xi_j) \quad \text{and} \quad \nabla f_{\mathcal{B}_t^i}^i(w_{s,t}^i)
                   Device computes
 9:
                   \frac{1}{b} \sum_{j \in \mathcal{B}_{+}^{i}} \nabla f^{i}(w_{s,t}^{i}; \xi_{j});
                   // To solve a specific version of the problem (1)
                   Device computes u_{s,t}^i = \nabla g(f_{\mathcal{B}_t^i}^i(w_{s,t}^i))^T \nabla f_{\mathcal{B}_t^i}^i(w_{s,t}^i);
10:
                   // To solve the problem (1)
                   Device draws a mini-batch samples \tilde{\mathcal{B}}_t^i \subset \tilde{\mathcal{D}}_i with |\tilde{\mathcal{B}}_t^i| = b_1;
11:
                  Device computes \nabla g^i_{\tilde{\mathcal{B}}^i_t}(f^i_{\mathcal{B}^i_t}(w^i_{s,t})) = \frac{1}{b_1} \sum_{j \in \tilde{\mathcal{B}}^i_t} \nabla g^i(f^i_{\mathcal{B}^i_t}(w^i_{s,t}); \zeta_j);
12:
                  u_{s,t}^i = \nabla g_{\tilde{\mathcal{B}}_t^i}^i(f_{\mathcal{B}_t^i}^i(w_{s,t}^i))^T \nabla f_{\mathcal{B}_t^i}^i(w_{s,t}^i);
13:
               \begin{aligned} w_{s,t+1}^i &= w_{s,t}^i - \eta u_{s,t}^i; \\ \text{end for} \end{aligned}
14:
15:
               Device sends w_{s,\tau}^i back to server;
16:
17:
           end for
           Server computes \bar{w}_{s+1} = \frac{1}{m} \sum_{i \in \mathcal{C}_s} w_{s,\tau}^i;
18:
20: Output: Final solution w_T.
```

learning, which can be regarded as a variant of the MAML method. Fallah et al. [2020b] has studied a personalized variant of federated learning from the MAML view.

Due to solving MAML requires information on the stochastic Hessian matrix, some Hessian-free methods [Balcan et al., 2019, Song et al., 2019] have been recently proposed to reduce the cost of computing Hessian matrix. At the same time, Ji et al. [2020] studied the general multi-step MAML instead of one-step one to improve performance. More recently, Tutunov et al. [2020], Chen et al. [2020] have applied the composition optimization to the MAML by using the compositional structure of MAML.

3 Compositional Federated Learning

In this section, we propose an effective and efficient compositional federated learning (ComFedL) algorithm to solve the problem (1) based on compositional gradient descent iteration. The pseudo code of ComFedL algorithm is given in Algorithm 1.

For solving the problem (1), we should compute the gradient of composition function $F^{i}(w) =$

 $g^{i}(f^{i}(w))$, defined as

$$\nabla F^{i}(w) = \left(\nabla g^{i}(f^{i}(w))\right)^{T} \nabla f^{i}(w). \tag{11}$$

Since the inner function (or mapping) $y^i = f^i(w) = \mathbb{E}_{\xi \sim \mathcal{D}_i} f^i(w; \xi)$ and the outer function $g^i(y^i) = \mathbb{E}_{\zeta \sim \tilde{\mathcal{D}}_i} f^i(y^i; \zeta)$ are expected functions, we can not compute the full gradient $\nabla F^i(w)$. Thus, we compute the stochastic gradient $\nabla F^i(w)$ based on some mini-batch samples. Specifically, we draw a mini-batch samples $\mathcal{B}^i_t \subset \mathcal{D}_i$ with $|\mathcal{B}^i_t| = b$, and then compute stochastic value of inner function $f^i_{\mathcal{B}^i_t}(w^i_{s,t}) = \frac{1}{b} \sum_{j \in \mathcal{B}^i_t} \nabla f^i(w^i_{s,t}; \xi_j)$ and its stochastic gradient $\nabla f^i_{\mathcal{B}^i_t}(w^i_{s,t}) = \frac{1}{b} \sum_{j \in \mathcal{B}^i_t} \nabla f^i(w^i_{s,t}; \xi_j)$. At the same time, we draw a mini-batch samples $\tilde{\mathcal{B}}^i_t \subset \tilde{\mathcal{D}}_i$ with $|\tilde{\mathcal{B}}^i_t| = b_1$, and compute stochastic gradient of outer function $\nabla g^i_{\tilde{\mathcal{B}}^i_t}(f^i_{\mathcal{B}^i_t}(w^i_{s,t})) = \frac{1}{b_1} \sum_{j \in \tilde{\mathcal{B}}^i_t} g^i(f^i_{\mathcal{B}^i_t}(w^i_{s,t}); \zeta_j)$. Finally, we obtain the stochastic gradient estimator $u^i_{s,t} = \nabla g^i_{\tilde{\mathcal{B}}^i_t}(f^i_{\mathcal{B}^i_t}(w^i_{s,t}))^T \nabla f^i_{\mathcal{B}^i_t}(w^i_{s,t})$. Clearly, the gradient estimator $u^i_{s,t}$ is a biased estimator of $\nabla F^i(w)$, i.e., $\mathbb{E}[u^i_{s,t}] \neq \nabla F^i(w)$.

When the outer functions $\{g^i\}_{i=1}^n$ in the problem (1) are determinate and $g^1 = g^2 = \cdots = g^n$, i.e., $F^i(w) = g(\mathbb{E}[f^i(w;\xi)])$, we only compute stochastic gradient $u^i_{s,t} = \nabla g(f^i_{\mathcal{B}^i_t}(w^i_{s,t}))^T \nabla f^i_{\mathcal{B}^i_t}(w^i_{s,t})$. For example, by the following Lemma 1, we can obtain the simple composition problem (6) is similarly equivalent to the minimax problem (4) with $\phi(r,1/n) = \sum_{i=1}^n r_i \log(nr_i)$. To solve the problem (6), we can obtain $u^i_t = \exp\left(f^i_{\mathcal{B}^i_t}(w^i_t)/\gamma\right) \nabla f^i_{\mathcal{B}^i_t}(w^i_t)/\gamma$.

When obtain the stochastic gradient $u_{s,t}^i$, we will use the SGD to update the parameter w given at the step 14 in Algorithm 1, where we can choose an appropriate learning rate $\eta > 0$ to guarantee the convergence of our algorithm. In Algorithm 1, we apply the local-SGD framework to reduce communication. Specifically, our ComFedL algorithm performs multiple stochastic gradient descent (SGD) in the available devices before communicating to the server, which can reduce the total amount of communication. In Algorithm 1, we use the synchronization gap $\tau > 0$ to control the communication cost and performances of our algorithm.

4 Convergence Analysis

In the section, we study the convergence properties of our ComFedL algorithm. From Algorithm 1, we only obtain a **biased** stochastic gradient in each device, due to the compositional loss function in our new FL framework. While the **unbiased** stochastic gradient is easily obtained in each device in the existing FL framework. Thus, our convergence analysis can not easily follow convergence analysis in the existing FL framework. All detailed proofs are in the Appendix. We begin with giving some mild conditions.

Assumption 1. (Lipschitz Gradients) There exist constants L_g , L_g and L for $\nabla f^i(w;\xi)$, $\nabla g^i(y;\zeta)$ and $\nabla F(w)$ satisfying that for $i \in [n]$

$$\|\nabla f^{i}(w_{1};\xi) - \nabla f^{i}(w_{2};\xi)\| \leq L_{f}\|w_{1} - w_{2}\|, \ \forall w_{1}, w_{2} \in \mathbb{R}^{d},$$

$$\|\nabla g^{i}(y_{1},\zeta) - \nabla g^{i}(y_{2},\zeta)\| \leq L_{g}\|y_{1} - y_{2}\|, \ \forall y_{1}, y_{2} \in \mathbb{R}^{p},$$

$$\|\nabla F(w_{1}) - \nabla F(w_{2})\| \leq L\|w_{1} - w_{2}\|,$$

and the last inequality follows

$$F(w_2) \le F(w_1) + \nabla F(w_1)^T (w_2 - w_1) + \frac{L}{2} ||w_1 - w_2||^2.$$

Assumption 2. (Bounded Gradients) Gradient $\nabla g^i(x)$ and Jacobian matrix $\nabla f^i(w)$ have the upper bounds G_q and G_f , respectively, i.e., for $i \in [n]$

$$\|\nabla f^i(w;\xi)\| \le G_f, \ \forall x \in \mathbb{R}^d, \ \|\nabla g^i(y;\zeta)\| \le G_g, \ \forall y \in \mathbb{R}^p.$$

Assumption 3. (Bounded Variances) The variances of stochastic gradient or value of functions $f^i(w;\xi)$ and $g^i(y;\zeta)$, i.e., we have for all $i \in [n]$

$$\mathbb{E}\|\nabla f^i(w;\xi) - \nabla f^i(w)\|^2 \le \sigma_1^2, \ \mathbb{E}\|f^i(w;\xi) - f^i(w)\|^2 \le \sigma_2^2, \ \forall w \in \mathbb{R}^d$$

$$\mathbb{E}\|\nabla g^i(y;\zeta) - \nabla g^i(y)\|^2 \le \sigma_3^2, \ \forall y \in \mathbb{R}^p$$

where $\sigma_1, \sigma_2, \sigma_3 > 0$. Let $\sigma = \max(\sigma_1, \sigma_2, \sigma_3)$.

Assumption 4. F(w) is lower bounded, i.e., $F^* = \inf_{w \in \mathbb{R}^d} F(w)$.

Assumptions 1-4 have been commonly used in the convergence analysis of the composition stochastic algorithms [Wang et al., 2017a,b]. Specifically, Assumption 1 ensures the smoothness of functions $f^i(w;\xi)$, $g^i(y;\zeta)$ and F(w). Assumption 2 ensures the bounded gradients (or Jacobian matrix) of functions $f^i(w;\xi)$ and $g^i(y;\zeta)$. Assumption 3 ensures the bounded variances of stochastic gradient or value of functions $f^i(w;\xi)$ and $g^i(y;\zeta)$. Assumption 4 guarantees the feasibility of the problem (1). For the special problem (1), where the outer functions $\{g^i\}_{i=1}^n$ are determinate and $g^1 = g^2 = \cdots = g^n$, we only assume $\|\nabla g(y_1) - \nabla g(y_2)\| \le L_g \|y_1 - y_2\|$, $\forall y_1, y_2 \in \mathbb{R}^p$ and $\|\nabla g(y)\| \le G_g$, $\forall y \in \mathbb{R}^p$. For example, in the above problem (6), g(y), $y \in \mathcal{Y}$ is a monotonically increasing function, where \mathcal{Y} is the range of functions $\{f^i(w)\}$. Thus, g(y) is generally smooth and $\|\nabla g(y)\|$ is bounded.

4.1 Convergence Analysis for General Problem (1)

In this subsection, we analyze the convergence properties of ComFedL algorithm for solving the general problem (1). The detail proofs are given in the Appendix A.1.

Theorem 1. Under the above Assumptions, in the Algorithm 1, given $\eta > 0$ and $b = b_1 > 0$, we have

$$\frac{1}{S} \sum_{s=0}^{S-1} \mathbb{E} \|\nabla F(\bar{w}_s)\|^2 \le \frac{F(\bar{w}_0) - F^*}{T\eta} + G_f G_g \left(\sqrt{5}H\tau G_g G_f \eta \frac{\sqrt{5}G_f \sigma}{\sqrt{b_1}} + \frac{\sqrt{5}G_g \sigma}{\sqrt{b}} + \frac{\sqrt{5}L_g G_f \sigma}{\sqrt{b}}\right) + L\tau \eta G_g^2 G_f^2 + \frac{L\eta}{2} G_f^2 G_g^2, \tag{12}$$

where
$$H = \sqrt{G_g^2 L_f^2 + G_f^4 L_g^2}$$
.

Remark 1. Let $\eta = \frac{1}{T^{\alpha_1}}$, $0 < \alpha_1 \le 1$, $b = \frac{1}{T^{\alpha_2}}$, $\alpha_2 > 0$ and $b_1 = \frac{1}{T^{\alpha_3}}$, $\alpha_3 > 0$, we have $\frac{1}{S} \sum_{s=0}^{S-1} \mathbb{E} \|\nabla F(\bar{w}_s)\|^2 \le O(\frac{1}{T^{1-\alpha_1}} + \frac{\tau}{T^{\alpha_1}} + \frac{1}{T^{0.5\alpha_2}} + \frac{1}{T^{0.5\alpha_3}})$. Thus, our ComFedL algorithm has a convergence rate of $O(\frac{1}{T^{1-\alpha_1}} + \frac{\tau}{T^{\alpha_1}} + \frac{1}{T^{0.5\alpha_2}} + \frac{1}{T^{0.5\alpha_3}})$. When $\alpha_1 = \frac{1}{2}$, $\alpha_2 = \alpha_3 = 1$ and $\tau = O(1)$, our ComFedL algorithm reaches an optimal convergence rate of $O(\frac{1}{\sqrt{T}})$.

4.2 Convergence Analysis for Special Problem (1)

In this subsection, we analyze the convergence properties of ComFedL algorithm for solving the special problem (1), where the outer functions $\{g^i\}_{i=1}^n$ are determinate and $g^1 = g^2 = \cdots = g^n$. The detail proofs are given in the Appendix A.2.

Theorem 2. Under the above Assumptions, in the Algorithm 1, given $\eta > 0$ and b > 0, we have

$$\frac{1}{S} \sum_{s=0}^{S-1} \mathbb{E} \|\nabla F(\bar{w}_s)\|^2 \le \frac{F(\bar{w}_0) - F^*}{T\eta} + G_f G_g \left(2H\tau \eta G_g G_f + \frac{2G_g \sigma}{\sqrt{b}} + \frac{2L_g G_f \sigma}{\sqrt{b}} \right) + L\tau \eta G_g^2 G_f^2 + \frac{L\eta}{2} G_f^2 G_g^2, \tag{13}$$

where $H = \sqrt{G_g^2 L_f^2 + G_f^4 L_g^2}$.

Remark 2. Let $\eta = \frac{1}{T^{\alpha_1}}$, $0 < \alpha_1 \le 1$ and $b = \frac{1}{T^{\alpha_2}}$, $\alpha_2 > 0$, we have $\frac{1}{S} \sum_{s=0}^{S-1} \mathbb{E} \|\nabla F(\bar{w}_s)\|^2 \le O(\frac{1}{T^{1-\alpha_1}} + \frac{\tau}{T^{\alpha_1}} + \frac{1}{T^{0.5\alpha_2}})$. Thus, our ComFedL algorithm has a convergence rate of $O(\frac{1}{T^{1-\alpha_1}} + \frac{\tau}{T^{\alpha_1}} + \frac{1}{T^{0.5\alpha_2}})$. When $\alpha_1 = \frac{1}{2}$, $\alpha_2 = 1$ and $\tau = O(1)$, our ComFedL algorithm reaches an optimal convergence rate of $O(\frac{1}{\sqrt{T}})$.

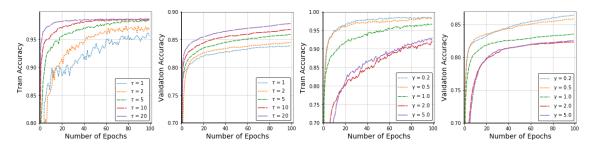


Figure 2: Comparing the effects of synchronization gap τ and regularization parameter γ over our algorithm, respectively.

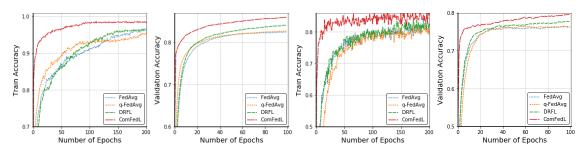


Figure 3: Comparing our algorithm (ComFedL) with DRFL Deng et al. [2020b], q-FedAvg Liu et al. [2019] and FedAvg McMahan et al. [2017]. The top figures show average accuracy, and the bottom figures show the worst accuracy.

5 Experiments

In this section, we empirically validate the efficacy of our ComFedL algorithm. Specifically, we apply our algorithm to two tasks i.e. Distributionally Robust Federated Learning and (Distribution Agnostic) MAML-based Personalized Federated Learning. In the experiments, all algorithms are implemented based on the *Distributed* Library of Pytorch [Paszke et al., 2019], and are conducted over 4 NVIDIA P40 GPUs.

5.1 Distributionally Robust Federated Learning

In this subsection, we conduct the distributionally robust FL task to verify the effectiveness of our algorithm. In this set of experiments, we consider the multi-class classification problem over the MNIST [LeCun et al., 2010] dataset with logistic regression model. The experiments are run over 10 workers and 1 server. In particular, we randomly select one worker to have 5000 images, while the remained workers are distributed much less data, which is 20 images. This way of data construction is aimed to create imbalance among different worker's datasets. To get a good performance over this type of imbalanced datasets, the algorithm needs to attach more importance over the hardest task, *i.e.* the worker that has dominant number of images. So it is a good way to test the ability of our algorithm to adapt to such imbalance.

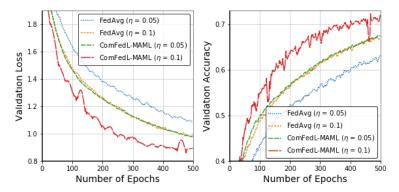


Figure 4: Comparing ComFedL-MAML with FedAvg McMahan et al. [2017]. ρ is fixed as 0.28.

In Figure 2, we show the results of our algorithm by varying the number of synchronization gap τ . As shown by the figure, our algorithm can get good train and validation accuracy with different τ , moreover, the algorithm converges much faster when we increase τ , which shows the effectiveness of the local epochs. Next, we also show the effects of γ , recall that γ is a regularization parameter that penalizes the divergence $\phi(r,1/n)$. The larger γ is, the more the algorithm emphasizes on getting r_i to be close to the the average weight $\frac{1}{n}$. Since in our data-set, the optimal weights is far from $\frac{1}{n}$, we should pick γ relatively small. This is verified by the results in Figure 2. The algorithm converges much faster when we choose $\gamma = 0.1/0.2$ compared to that of 2/5 in terms of both train and validation accuracy.

Finally, we also compare our algorithm with several state-of-the-art distributionally robust federated learning algorithms. In particular, we compare with DRFL [Deng et al., 2020b], q-FedAvg Liu et al. [2019] and FedAvg [McMahan et al., 2017]. We set the learning rate as 0.01 and the synchronization gap as 5 for all the experiments. As for other hyper-parameters, we set γ as 0.5 in

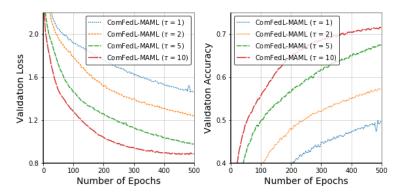


Figure 5: Comparing the effects of synchronization gap τ over ComFedL-MAML. Learning rate η is fixed as 0.05, and ρ is set as 0.28.

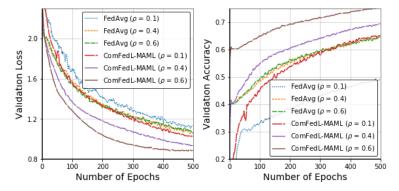


Figure 6: Comparing the effects of data heterogeneity ρ over ComFedL-MAML. Learning rate η is fixed as 0.05.

our algorithm, and set γ as 8×10^{-2} in DRFL, set q as 0.2 in q-FedAvg. We show the result in Figure 3, where we report both average accuracy and the worst accuracy (among all the workers). As shown by the figure, both q-FedAvg and DRFL outperform the FedAvg algorithm, while our algorithm significantly outperforms all baselines in both metrics. In particular, note that DRFL solves a minimax problem, in other words, it needs to optimize the weight r_i explicitly, while our algorithm exponentially increases the weight of the workers which have high training losses, and this explains the reason why our algorithm converges much faster than other baselines.

5.2 (Distribution Agnostic) MAML-based Personalized Federated Learning

In this subsection, we conduct (distribution agnostic) MAML-based personalized federated learning task to verify the effectiveness of our algorithm. Here we let ComFedL-MAML denote our algorithm for solving the above problem (7), i.e., a personalized FL problem, and let ComFedL-DAMAML denote our algorithm for solving the above problem (10), i.e., a distributionally robust personalized FL problem. In this set of experiments, we consider the multi-class classification problem over

the CIFAR10 [Krizhevsky et al., 2009] dataset with a 4-layer convolutional neural network. We run experiments over 10 workers and 1 server. We first validate the efficacy of ComFedL-MAML method as denoted in (7). We construct the training(validation) dataset as follows: each worker has a different dominant class and a small percentage of other classes of images. More precisely, for worker-i, it owns ρ percentage images of class-i, and $(1 - \rho)/9$ for all the other classes. When we set $\rho > 0.1$ the images of each worker will be dominated by a different class. By constructing the dataset in this way, the distribution of the data over each worker is heterogeneous, and it will bring extra benefit by tuning a personalized model over each worker.

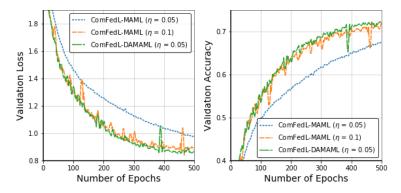


Figure 7: Comparing ComFedL-MAML with ComFedL-DAMAML. γ for ComFedL-DAMAML is set as 0.5.

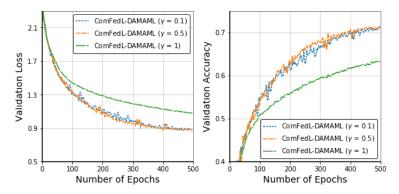


Figure 8: Comparing the effects of regularization parameter γ over ComFedL-DAMAML. Learning rate η is fixed as 0.01, and ρ is set as 0.28.

In Figure 4, we compare ComFedL-MAML with the FedAvg method. For fair comparison, FedAvg is trained with one step at test time, and we tune the learning rate η to report the best results. As shown by the figures, ComFedL-MAML outperforms the FedAvg significantly. What's more, we also test the effect of synchronization gap τ as shown in Figure 5. As shown in the figure, ComFedL-MAML converges much faster when we increase τ . Moreover, we also show the effect of ρ in Figure 6. When ρ is larger, there is greater data heterogeneity among the workers. As shown by the figure, ComFedL-MAML consistently outperforms the FedAvg method over different

 ρ , especially when ρ is large.

In Figure 7, we compare the ComFedL-MAML algorithm with ComFedL-DAMAML algorithm. As shown in the figure, for the ComFedL-DAMAML algorithm, we pick learning rate η as 0.05, which is sub-optimal for the task, however, it still achieves lower validation loss and better accuracy. Note that the ComFedL-DAMAML algorithm assigns weight based on the task's performance, in other words, it will adaptively adjusts the learning rate of each task based on it current loss. Finally, in Figure 8, we also compare the effects of different regularization parameter γ . As shown by the experiments, our algorithm is pretty robust with different value of γ .

6 Conclusion

In the paper, we proposed an effective and efficient compositional federated learning (ComFedL) algorithm for solving a new compositional FL framework. To the best of our knowledge, our algorithm is the first work to bridge federated learning with composition stochastic optimization. In particular, we first transform the distributionally robust federated learning (i.e., a minimax problem) into a simple composition problem by using KL divergence regularization.

References

- M. Andrychowicz, M. Denil, S. G. Colmenarejo, M. W. Hoffman, D. Pfau, T. Schaul, B. Shillingford, and N. de Freitas. Learning to learn by gradient descent by gradient descent. In *Proceedings of the 30th International Conference on Neural Information Processing Systems*, pages 3988–3996, 2016.
- M.-F. Balcan, M. Khodak, and A. Talwalkar. Provable guarantees for gradient-based meta-learning. In *International Conference on Machine Learning*, pages 424–433. PMLR, 2019.
- F. Chen, M. Luo, Z. Dong, Z. Li, and X. He. Federated meta-learning with fast convergence and efficient communication. arXiv preprint arXiv:1802.07876, 2018.
- T. Chen, Y. Sun, and W. Yin. Solving stochastic compositional optimization is nearly as easy as solving stochastic optimization. arXiv preprint arXiv:2008.10847, 2020.
- L. Collins, A. Mokhtari, and S. Shakkottai. Distribution-agnostic model-agnostic meta-learning. arXiv preprint arXiv:2002.04766, 2020.
- Y. Deng, M. M. Kamani, and M. Mahdavi. Adaptive personalized federated learning. arXiv preprint arXiv:2003.13461, 2020a.
- Y. Deng, M. M. Kamani, and M. Mahdavi. Distributionally robust federated averaging. Advances in Neural Information Processing Systems, 33, 2020b.
- C. T. Dinh, N. H. Tran, and T. D. Nguyen. Personalized federated learning with moreau envelopes. arXiv preprint arXiv:2006.08848, 2020.
- A. Fallah, A. Mokhtari, and A. Ozdaglar. On the convergence theory of gradient-based model-agnostic meta-learning algorithms. In *International Conference on Artificial Intelligence and Statistics*, pages 1082–1092. PMLR, 2020a.
- A. Fallah, A. Mokhtari, and A. Ozdaglar. Personalized federated learning: A meta-learning approach. arXiv preprint arXiv:2002.07948, 2020b.

- A. Fallah, A. Mokhtari, and A. Ozdaglar. Provably convergent policy gradient methods for model-agnostic meta-reinforcement learning. arXiv preprint arXiv:2002.05135, 2020c.
- C. Finn, P. Abbeel, and S. Levine. Model-agnostic meta-learning for fast adaptation of deep networks. In International Conference on Machine Learning, pages 1126–1135. PMLR, 2017.
- C. Finn, A. Rajeswaran, S. Kakade, and S. Levine. Online meta-learning. In *International Conference on Machine Learning*, pages 1920–1930, 2019.
- F. Haddadpour, M. M. Kamani, M. Mahdavi, and V. Cadambe. Trading redundancy for communication: Speeding up distributed sgd for non-convex optimization. In *International Conference on Machine Learning*, pages 2545–2554. PMLR, 2019a.
- F. Haddadpour, M. M. Kamani, M. Mahdavi, and V. R. Cadambe. Local sgd with periodic averaging: Tighter analysis and adaptive synchronization. arXiv preprint arXiv:1910.13598, 2019b.
- T.-M. H. Hsu, H. Qi, and M. Brown. Measuring the effects of non-identical data distribution for federated visual classification. arXiv preprint arXiv:1909.06335, 2019.
- Z. Huo, B. Gu, J. Liu, and H. Huang. Accelerated method for stochastic composition optimization with nonsmooth regularization. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 32, 2018.
- K. Ji, J. Yang, and Y. Liang. Multi-step model-agnostic meta-learning: Convergence and improved algorithms. arXiv preprint arXiv:2002.07836, 2020.
- Y. Jiang, J. Konečný, K. Rush, and S. Kannan. Improving federated learning personalization via model agnostic meta learning. arXiv preprint arXiv:1909.12488, 2019.
- P. Kairouz, H. B. McMahan, B. Avent, A. Bellet, M. Bennis, A. N. Bhagoji, K. Bonawitz, Z. Charles, G. Cormode, R. Cummings, et al. Advances and open problems in federated learning. arXiv preprint arXiv:1912.04977, 2019.
- S. P. Karimireddy, S. Kale, M. Mohri, S. J. Reddi, S. U. Stich, and A. T. Suresh. Scaffold: Stochastic controlled averaging for on-device federated learning. arXiv preprint arXiv:1910.06378, 2019.
- S. P. Karimireddy, M. Jaggi, S. Kale, M. Mohri, S. J. Reddi, S. U. Stich, and A. T. Suresh. Mime: Mimicking centralized stochastic algorithms in federated learning. arXiv preprint arXiv:2008.03606, 2020.
- A. Khaled, K. Mishchenko, and P. Richtárik. Tighter theory for local sgd on identical and heterogeneous data. In *International Conference on Artificial Intelligence and Statistics*, pages 4519–4529. PMLR, 2020.
- A. Krizhevsky, G. Hinton, et al. Learning multiple layers of features from tiny images. 2009.
- Y. LeCun, C. Cortes, and C. Burges. Mnist handwritten digit database. ATT Labs [Online]. Available: http://yann.lecun.com/exdb/mnist, 2, 2010.
- T. Li, A. K. Sahu, M. Zaheer, M. Sanjabi, A. Talwalkar, and V. Smith. Federated optimization in heterogeneous networks. arXiv preprint arXiv:1812.06127, 2018.
- X. Li, K. Huang, W. Yang, S. Wang, and Z. Zhang. On the convergence of fedavg on non-iid data. arXiv preprint arXiv:1907.02189, 2019.
- X. Liang, S. Shen, J. Liu, Z. Pan, E. Chen, and Y. Cheng. Variance reduced local sgd with lower communication complexity. arXiv preprint arXiv:1912.12844, 2019.

- T. Lin, C. Fan, M. Wang, and M. I. Jordan. Improved sample complexity for stochastic compositional variance reduced gradient. arXiv preprint arXiv:1806.00458, 2018.
- H. Liu, R. Socher, and C. Xiong. Taming maml: Efficient unbiased meta-reinforcement learning. In *International Conference on Machine Learning*, pages 4061–4071, 2019.
- B. McMahan, E. Moore, D. Ramage, S. Hampson, and B. A. y Arcas. Communication-efficient learning of deep networks from decentralized data. In *Artificial Intelligence and Statistics*, pages 1273–1282. PMLR, 2017.
- M. Mohri, G. Sivek, and A. T. Suresh. Agnostic federated learning. In *International Conference on Machine Learning*, pages 4615–4625. PMLR, 2019.
- A. Paszke, S. Gross, F. Massa, A. Lerer, J. Bradbury, G. Chanan, T. Killeen, Z. Lin, N. Gimelshein, L. Antiga, et al. Pytorch: An imperative style, high-performance deep learning library. arXiv preprint arXiv:1912.01703, 2019.
- S. Reddi, Z. Charles, M. Zaheer, Z. Garrett, K. Rush, J. Konečný, S. Kumar, and H. B. McMahan. Adaptive federated optimization. arXiv preprint arXiv:2003.00295, 2020.
- A. Reisizadeh, F. Farnia, R. Pedarsani, and A. Jadbabaie. Robust federated learning: The case of affine distribution shifts. arXiv preprint arXiv:2006.08907, 2020.
- A. K. Sahu, T. Li, M. Sanjabi, M. Zaheer, A. Talwalkar, and V. Smith. On the convergence of federated optimization in heterogeneous networks. arXiv preprint arXiv:1812.06127, 3, 2018.
- X. Song, W. Gao, Y. Yang, K. Choromanski, A. Pacchiano, and Y. Tang. Es-maml: Simple hessian-free meta learning. arXiv preprint arXiv:1910.01215, 2019.
- R. Tutunov, M. Li, J. Wang, and H. Bou-Ammar. Compositional adam: An adaptive compositional solver. arXiv preprint arXiv:2002.03755, 2020.
- J. Wang, V. Tantia, N. Ballas, and M. Rabbat. Slowmo: Improving communication-efficient distributed sgd with slow momentum. arXiv preprint arXiv:1910.00643, 2019.
- M. Wang, E. X. Fang, and H. Liu. Stochastic compositional gradient descent: algorithms for minimizing compositions of expected-value functions. *Mathematical Programming*, 161(1-2):419–449, 2017a.
- M. Wang, J. Liu, and E. X. Fang. Accelerating stochastic composition optimization. The Journal of Machine Learning Research, 18(1):3721–3743, 2017b.
- B. Woodworth, K. K. Patel, S. Stich, Z. Dai, B. Bullins, B. Mcmahan, O. Shamir, and N. Srebro. Is local sgd better than minibatch sgd? In *International Conference on Machine Learning*, pages 10334–10343. PMLR, 2020.
- H. Yu, S. Yang, and S. Zhu. Parallel restarted sgd with faster convergence and less communication: Demystifying why model averaging works for deep learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, pages 5693–5700, 2019.
- J. Zhang and L. Xiao. Multi-level composite stochastic optimization via nested variance reduction. arXiv preprint arXiv:1908.11468, 2019.
- Y. Zhao, M. Li, L. Lai, N. Suda, D. Civin, and V. Chandra. Federated learning with non-iid data. arXiv preprint arXiv:1806.00582, 2018.

A Appendix

In this section, we provide the detailed convergence analysis of our ComFedL algorithm. We first give a useful lemma as follows:

Lemma 1. The above minimax problem (4) with $\phi(r, 1/n) = \sum_{i=1}^{n} r_i \log(nr_i)$, i.e.,

$$\min_{w \in \mathbb{R}^d} \max_{r \in \Lambda_n} \sum_{i=1}^n r_i f^i(w) - \gamma \sum_{i=1}^n r_i \log(nr_i), \quad s.t. \ \Lambda_n = \left\{ r \in \mathbb{R}^n_+ \mid \sum_{i=1}^n r_i = 1 \right\}$$
 (14)

is equivalent to the above composition problem (5), i.e.,

$$\min_{w \in \mathbb{R}^d} \gamma \log \left(\frac{1}{n} \sum_{i=1}^n \exp\left(f^i(w) / \gamma \right) \right). \tag{15}$$

Proof. We maximize the above problem (14) over $r \in \Lambda_n = \{r \in \mathbb{R}^n_+ | \sum_{i=1}^n r_i = 1\}$, i.e.,

$$\max_{r \in \Lambda_n} F(w, r) := \sum_{i=1}^n r_i f^i(w) - \gamma \sum_{i=1}^n r_i \log(r_i n).$$
 (16)

For function F(w,r), we first introduce its Lagrange function

$$L(w, r, \lambda) = \sum_{i=1}^{n} r_i f^i(w) - \gamma \sum_{i=1}^{n} r_i \log(r_i n) + \lambda \left(\sum_{i=1}^{n} r_i - 1\right), \tag{17}$$

where λ is a Lagrange multiplier. Then we have

$$\frac{\partial L(w, r, \lambda)}{\partial r_i} = f^i(w) - \gamma \log(r_i n) - \frac{\gamma}{n} + \lambda = 0.$$
 (18)

According to the equality (18), we have

$$f^{i}(w) - \gamma \log(nr_{i}) = \frac{\gamma}{n} - \lambda. \tag{19}$$

Then by using the equality (19), we can obtain

$$r_i = \frac{1}{n} \exp(\frac{\lambda}{\gamma} - \frac{1}{n}) \exp(f^i(w)/\gamma)$$
 (20)

According to $\sum_{i=1}^{n} r_i = 1$, we have

$$\sum_{i=1}^{n} r_i = \frac{1}{n} \exp(\frac{\lambda}{\gamma} - \frac{1}{n}) \sum_{i=1}^{n} \exp(f^i(w)/\gamma) = 1,$$
(21)

Clearly, we can obtain

$$\exp(\frac{1}{n} - \frac{\lambda}{\gamma}) = \frac{1}{n} \sum_{i=1}^{n} \exp(f^{i}(w)/\gamma). \tag{22}$$

Taking the logarithm of its both sides, we have

$$\frac{1}{n} - \frac{\lambda}{\gamma} = \log\left(\frac{1}{n}\sum_{i=1}^{n} \exp(f^{i}(w)/\gamma)\right). \tag{23}$$

According to $\sum_{i=1}^{n} r_i = 1$ and the above equalities (19) and (23), we have

$$F(w,r) = \sum_{i=1}^{n} r_i \left(f^i(w) - \gamma \log(nr_i) \right) = \frac{\gamma}{n} - \lambda = \gamma \log \left(\frac{1}{n} \sum_{i=1}^{n} \exp(f^i(w)/\gamma) \right), \tag{24}$$

where the last equality is due to the above equality (23).

Thus, the above minimax problem (14) is equivalent to the above composition problem (15). In the other word, by exactly maximizing the above problem (4) over $r \in \Lambda_n$, the above minimax problem (4) with $\phi(r, 1/n) = \sum_{i=1}^{n} r_i \log(nr_i)$ is equivalent to the composition problem (5).

A.1 Convergence Analysis for General Problem (1)

In this subsection, we analyze the convergence properties of ComFedL algorithm for solving the general problem (1). For notational simplicity, let

$$\bar{w}_{s,t} = \frac{1}{m} \sum_{i \in \mathcal{C}_s} w_{s,t}^i, \quad \bar{u}_{s,t} = \frac{1}{m} \sum_{i \in \mathcal{C}_s} u_{s,t}^i = \frac{1}{m} \sum_{i \in \mathcal{C}_s} \nabla g_{\tilde{\mathcal{B}}_t^i}^i(f_{\mathcal{B}_t^i}^i(w_{s,t}^i))^T \nabla f_{\mathcal{B}_t^i}^i(w_{s,t}^i), \tag{25}$$

then we have

$$\bar{w}_{s,t+1} = \bar{w}_{s,t} - \eta \bar{u}_{s,t}. \tag{26}$$

Let

$$U_{s,0} = \frac{1}{m} \sum_{i \in \mathcal{C}_s} \nabla F^i(\bar{w}_s) = \frac{1}{m} \sum_{i \in \mathcal{C}_s} \nabla g^i (f^i(\bar{w}_s))^T \nabla f^i(\bar{w}_s), \tag{27}$$

we have $\mathbb{E}[U_{s,0}] = \nabla F(\bar{w}_s)$.

Lemma 2. Under the about Assumptions, we have

$$\mathbb{E}\|\bar{w}_{s,t} - \bar{w}_s\|^2 \le \tau^2 \eta^2 G_g^2 G_f^2.$$

Proof. Since $\bar{w}_s = w_{s,0}^i$, we have

$$\mathbb{E}\|\bar{w}_{s,t} - \bar{w}_{s}\|^{2} = \mathbb{E}\|\frac{1}{m}\sum_{i \in \mathcal{C}_{s}} w_{s,t}^{i} - \bar{w}_{s}\|^{2}
\leq \frac{1}{m}\sum_{i \in \mathcal{C}_{s}} \mathbb{E}\|w_{s,t}^{i} - \bar{w}_{s}\|^{2} = \frac{1}{m}\sum_{i \in \mathcal{C}_{s}} \mathbb{E}\|w_{s,t}^{i} - w_{s,0}^{i}\|^{2} = \frac{1}{m}\sum_{i \in \mathcal{C}_{s}} \mathbb{E}\|\sum_{j=0}^{t-1} \eta u_{s,j}^{i}\|^{2}
\leq \frac{1}{m}\sum_{i \in \mathcal{C}_{s}} \left(t\eta^{2}\sum_{s=0}^{t-1} \mathbb{E}\|\nabla g_{\tilde{\mathcal{B}}_{t}^{i}}(f_{\mathcal{B}_{t}^{i}}^{i}(w_{s,t}^{i}))^{T}\nabla f_{\mathcal{B}_{t}^{i}}^{i}(w_{s,t}^{i})\|^{2}\right) \leq t^{2}\eta^{2}G_{g}^{2}G_{f}^{2} \leq \tau^{2}\eta^{2}G_{g}^{2}G_{f}^{2}, \quad (28)$$

where the second inequality holds by Assumption 2.

Lemma 3. Under the above Assumptions, we have

$$\mathbb{E}\|\bar{u}_{s,t} - U_{s,0}\|^2 \le 5(G_g^2 L_f^2 + G_f^4 L_g^2)\tau^2 \eta^2 G_g^2 G_f^2 + \frac{5G_f^2 \sigma^2}{b_1} + \frac{5G_g^2 \sigma^2}{b} + \frac{5L_g^2 G_f^2 \sigma^2}{b}.$$
 (29)

Proof. By the above equality (27), we have

$$\mathbb{E}\|\bar{u}_{s,t} - U_{s,0}\|^{2} \\
= \mathbb{E}\|\frac{1}{m}\sum_{i \in C_{s}} \nabla g_{\tilde{B}_{t}^{i}}^{i}(f_{\tilde{B}_{t}^{i}}^{i}(w_{s,t}^{i}))^{T} \nabla f_{\tilde{B}_{t}^{i}}^{i}(w_{s,t}^{i}) - \nabla g^{i}(f^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s})\|^{2} \\
\leq \frac{1}{m}\sum_{i \in C_{s}} \mathbb{E}\|\nabla g_{\tilde{B}_{t}^{i}}^{i}(f_{\tilde{B}_{t}^{i}}^{i}(w_{s,t}^{i}))^{T} \nabla f_{\tilde{B}_{t}^{i}}^{i}(w_{s,t}^{i}) - \nabla g^{i}(f^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s})\|^{2} \\
= \frac{1}{m}\sum_{i \in C_{s}} \mathbb{E}\|\nabla g_{\tilde{B}_{t}^{i}}^{i}(f_{\tilde{B}_{t}^{i}}^{i}(w_{s,t}^{i}))^{T} \nabla f_{\tilde{B}_{t}^{i}}^{i}(w_{s,t}^{i}) - \nabla g_{\tilde{B}_{t}^{i}}^{i}(f_{\tilde{B}_{t}^{i}}^{i}(w_{s,t}^{i}))^{T} \nabla f_{\tilde{B}_{t}^{i}}^{i}(w_{s,t}^{i}) \\
+ \nabla g_{\tilde{B}_{t}^{i}}^{i}(f_{\tilde{B}_{t}^{i}}^{i}(w_{s,t}^{i}))^{T} \nabla f_{\tilde{B}_{t}^{i}}^{i}(\bar{w}_{s}) - \nabla g^{i}(f_{\tilde{B}_{t}^{i}}^{i}(w_{s,t}^{i}))^{T} \nabla f_{\tilde{B}_{t}^{i}}^{i}(\bar{w}_{s}) \\
+ \nabla g^{i}(f_{\tilde{B}_{t}^{i}}^{i}(w_{s,t}^{i}))^{T} \nabla f_{\tilde{B}_{t}^{i}}^{i}(\bar{w}_{s}) - \nabla g^{i}(f_{\tilde{B}_{t}^{i}}^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) \\
+ \nabla g^{i}(f_{\tilde{B}_{t}^{i}}^{i}(w_{s,t}^{i}))^{T} \nabla f^{i}(\bar{w}_{s}) - \nabla g^{i}(f_{\tilde{B}_{t}^{i}}^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) \\
+ \nabla g^{i}(f_{\tilde{B}_{t}^{i}}^{i}(w_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) - \nabla g^{i}(f^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) \\
+ \nabla g^{i}(f_{\tilde{B}_{t}^{i}}^{i}(w_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) - \nabla g^{i}(f^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) \\
+ \nabla g^{i}(f_{\tilde{B}_{t}^{i}}^{i}(w_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) - \nabla g^{i}(f^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) \\
+ \nabla g^{i}(f_{\tilde{B}_{t}^{i}}^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) - \nabla g^{i}(f^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) \\
+ \nabla g^{i}(f_{\tilde{B}_{t}^{i}}^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) - \nabla g^{i}(f^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) \\
+ \nabla g^{i}(f_{\tilde{B}_{t}^{i}}^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) - \nabla g^{i}(f^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) \\
+ \nabla g^{i}(f_{\tilde{B}_{t}^{i}}^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) - \nabla g^{i}(f^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) \\
+ \nabla g^{i}(f_{\tilde{B}_{t}^{i}}^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) - \nabla g^{i}(f^{i}(\bar{w}_{s}))^{T} \nabla f^{i}(\bar{w}_{s}) \\
+ \nabla g^{i}(f_{\tilde{B}_{t}^{i}}^{i}(\bar{w}_{s}))^{T}$$

where the second inequality is due to Assumptions 1-3, and the last inequality holds by Lemma 2. \Box

Theorem 3. Under the above assumptions, in Algorithm 1, given $\eta > 0$ and $b = b_1 > 0$, we have

$$\frac{1}{S} \sum_{s=0}^{S-1} \mathbb{E} \|\nabla F(\bar{w}_s)\|^2 \le \frac{F(\bar{w}_0) - F^*}{T\eta} + G_f G_g \left(\sqrt{5} H \tau G_g G_f \eta \frac{\sqrt{5} G_f \sigma}{\sqrt{b_1}} + \frac{\sqrt{5} G_g \sigma}{\sqrt{b}} + \frac{\sqrt{5} L_g G_f \sigma}{\sqrt{b}} \right) \\
+ L \tau \eta G_g^2 G_f^2 + \frac{L \eta}{2} G_f^2 G_g^2, \tag{31}$$

where $H = \sqrt{G_g^2 L_f^2 + G_f^4 L_g^2}$

Proof. By the smoothness of the function F(x), we have

$$\begin{split} \mathbb{E}[F(\bar{w}_{s,t+1})] &\leq \mathbb{E}[F(\bar{w}_{s,t})] + \mathbb{E}\langle \nabla F(\bar{w}_{s,t}), \bar{w}_{s,t+1} - \bar{w}_{s,t} \rangle + \frac{L}{2} \mathbb{E} \|\bar{w}_{s,t+1} - \bar{w}_{s,t}\|^2 \\ &= \mathbb{E}[F(\bar{w}_{s,t})] + \mathbb{E}\langle \nabla F(\bar{w}_{s,t}), -\eta \bar{u}_{s,t} \rangle + \frac{L}{2} \mathbb{E} \|\eta \bar{u}_{s,t}\|^2 \\ &= \mathbb{E}[F(\bar{w}_{s,t})] - \eta \mathbb{E}\langle \nabla F(\bar{w}_{s,t}), \bar{u}_{s,t} - U_{s,0} \rangle \\ &- \eta \mathbb{E}\langle \nabla F(\bar{w}_{s,t}) - \nabla F(\bar{w}_{s}), U_{s,0} \rangle - \eta \mathbb{E}\langle \nabla F(\bar{w}_{s}), U_{s,0} \rangle + \frac{L}{2} \mathbb{E} \|\eta \bar{u}_{s,t}\|^2 \\ &\leq \mathbb{E}[F(\bar{w}_{s,t})] + \eta \mathbb{E} (\|\nabla F(\bar{w}_{s,t})\| \|\bar{u}_{s,t} - U_{s,0}\|) \\ &+ \eta \mathbb{E} (\|\nabla F(\bar{w}_{s,t}) - \nabla F(\bar{w}_{s})\| \|U_{s,0}\|) - \eta \mathbb{E} \|\nabla F(\bar{w}_{s})\|^2 + \frac{L\eta^2}{2} \mathbb{E} \|\bar{u}_{s,t}\|^2 \\ &\leq \mathbb{E}[F(\bar{w}_{s,t})] + \eta G_f G_g \mathbb{E} \|\bar{u}_{s,t} - U_{s,0}\| + \eta L G_f G_g \mathbb{E} \|\bar{w}_{s,t} - \bar{w}_{s}\| \\ &- \eta \mathbb{E} \|\nabla F(\bar{w}_{s})\|^2 + \frac{L\eta^2}{2} G_f^2 G_g^2 \\ &\leq \mathbb{E}[F(\bar{w}_{s,t})] + \eta G_f G_g \sqrt{\mathbb{E} \|\bar{u}_{s,t} - U_{s,0}\|^2} + \eta L G_f G_g \sqrt{\mathbb{E} \|\bar{w}_{s,t} - \bar{w}_{s}\|^2} \\ &- \eta \mathbb{E} \|\nabla F(\bar{w}_{s})\|^2 + \frac{L\eta^2}{2} G_f^2 G_g^2 \\ &\leq \mathbb{E}[F(\bar{w}_{s,t})] + \eta G_f G_g \left(\sqrt{5(G_g^2 L_f^2 + G_f^4 L_g^2)} \tau \eta G_g G_f + \frac{\sqrt{5} G_f \sigma}{\sqrt{b_1}} + \frac{\sqrt{5} G_g \sigma}{\sqrt{b}} + \frac{\sqrt{5} L_g G_f \sigma}{\sqrt{b}} \right) \\ &+ L\tau \eta^2 G_g^2 G_f^2 - \eta \mathbb{E} \|\nabla F(\bar{w}_{s})\|^2 + \frac{L\eta^2}{2} G_f^2 G_g^2, \end{split}$$

where the second inequality is due to Cauchy-Schwarz inequality and $\mathbb{E}[U_{s,0}] = \nabla F(\bar{w}_s)$; the second last inequality holds by the concavity of \sqrt{x} , and the last inequality is due to Lemmas 2 and 3. Thus, we have

$$\eta \mathbb{E} \|\nabla F(\bar{w}_s)\|^2 \leq \mathbb{E} [F(\bar{w}_{s,t})] - \mathbb{E} [F(\bar{w}_{s,t+1})] + \eta G_f G_g \left(\sqrt{5(G_g^2 L_f^2 + G_f^4 L_g^2)} \tau \eta G_g G_f + \frac{\sqrt{5}G_f \sigma}{\sqrt{b_1}} \right) \\
+ \frac{\sqrt{5}G_g \sigma}{\sqrt{b}} + \frac{\sqrt{5}L_g G_f \sigma}{\sqrt{b}} + L\tau \eta^2 G_g^2 G_f^2 + \frac{L\eta^2}{2} G_f^2 G_g^2. \tag{33}$$

Since $w_{s,0} = \bar{w}_s$, telescoping the above inequality over $s = 0, 1, \dots, S-1$ and $t = 0, 1, \dots, \tau-1$, we have

$$\frac{1}{S} \sum_{s=0}^{S-1} \mathbb{E} \|\nabla F(\bar{w}_s)\|^2 \leq \frac{F(\bar{w}_0) - F(\bar{w}_T)}{T\eta} + G_f G_g \left(\sqrt{5(G_g^2 L_f^2 + G_f^4 L_g^2)} \tau \eta G_g G_f + \frac{\sqrt{5}G_f \sigma}{\sqrt{b_1}} \right) \\
+ \frac{\sqrt{5}G_g \sigma}{\sqrt{b}} + \frac{\sqrt{5}L_g G_f \sigma}{\sqrt{b}} + L\eta G_g^2 G_f^2 \tau + \frac{L\eta}{2} G_f^2 G_g^2 \\
\leq \frac{F(\bar{w}_0) - F^*}{T\eta} + G_f G_g \left(\sqrt{5(G_g^2 L_f^2 + G_f^4 L_g^2)} \tau \eta G_g G_f + \frac{\sqrt{5}G_f \sigma}{\sqrt{b_1}} + \frac{\sqrt{5}G_g \sigma}{\sqrt{b}} \right) \\
+ \frac{\sqrt{5}L_g G_f \sigma}{\sqrt{b}} + L\tau \eta G_g^2 G_f^2 + \frac{L\eta}{2} G_f^2 G_g^2, \tag{34}$$

where the last inequality is due to Assumption 4.

A.2 Convergence Analysis for Special Problem (1)

In this subsection, we analyze the convergence properties of ComFedL algorithm for solving the special problem (1) where the outer functions $\{g^i\}_{i=1}^n$ are determinate and $g^1 = g^2 = \cdots = g^n$. For notational

simplicity, we let

$$\bar{w}_{s,t} = \frac{1}{m} \sum_{i \in \mathcal{C}_s} w_{s,t}^i, \quad \bar{u}_{s,t} = \frac{1}{m} \sum_{i \in \mathcal{C}_s} u_{s,t}^i = \frac{1}{m} \sum_{i \in \mathcal{C}_s} \nabla g(f_{\mathcal{B}_t^i}^i(w_{s,t}^i))^T \nabla f_{\mathcal{B}_t^i}^i(w_{s,t}^i), \tag{35}$$

then we have

$$\bar{w}_{s,t+1} = \bar{w}_{s,t} - \eta \bar{u}_{s,t}. \tag{36}$$

Lemma 4. Under the above Assumptions, we have

$$\mathbb{E}\|\bar{u}_{s,t} - U_{s,0}\|^2 \le 4(G_g^2 L_f^2 + G_f^4 L_g^2)\tau^2 \eta^2 G_g^2 G_f^2 + \frac{4G_g^2 \sigma^2}{h} + \frac{4L_g^2 G_f^2 \sigma^2}{h}.$$
 (37)

Proof. This proof is similar the above proof of Lemma 3. By the above equality (27), we have

$$\begin{split} \mathbb{E}\|\bar{u}_{s,t} - U_{s,0}\|^2 &= \mathbb{E}\|\frac{1}{m}\sum_{i \in \mathcal{C}_s} \nabla g(f_{\mathcal{B}_t^i}^i(w_{s,t}^i))^T \nabla f_{\mathcal{B}_t^i}^i(w_{s,t}^i) - \nabla g(f^i(\bar{w}_s))^T \nabla f^i(\bar{w}_s)\|^2 \\ &\leq \frac{1}{m}\sum_{i \in \mathcal{C}_s} \mathbb{E}\|\nabla g(f_{\mathcal{B}_t^i}^i(w_{s,t}^i))^T \nabla f_{\mathcal{B}_t^i}^i(w_{s,t}^i) - \nabla g(f_{\mathcal{B}_t^i}^i(w_{s,t}^i))^T \nabla f_{\mathcal{B}_t^i}^i(\bar{w}_s) \\ &+ \nabla g(f_{\mathcal{B}_t^i}^i(w_{s,t}^i))^T \nabla f_{\mathcal{B}_t^i}^i(\bar{w}_s) - \nabla g(f_{\mathcal{B}_t^i}^i(w_{s,t}^i))^T \nabla f^i(\bar{w}_s) \\ &+ \nabla g(f_{\mathcal{B}_t^i}^i(w_{s,t}^i))^T \nabla f^i(\bar{w}_s) - \nabla g(f_{\mathcal{B}_t^i}^i(\bar{w}_s))^T \nabla f^i(\bar{w}_s) \\ &+ \nabla g(f_{\mathcal{B}_t^i}^i(\bar{w}_s))^T \nabla f^i(\bar{w}_s) - \nabla g(f^i(\bar{w}_s))^T \nabla f^i(\bar{w}_s) \\ &+ \nabla g(f_{\mathcal{B}_t^i}^i(\bar{w}_s))^T \nabla f^i(\bar{w}_s) - \nabla g(f^i(\bar{w}_s))^T \nabla f^i(\bar{w}_s) \|^2 \\ &\leq \frac{4G_g^2 L_f^2}{m} \sum_{i \in \mathcal{C}_s} \mathbb{E}\|w_{s,t}^i - \bar{w}_s\|^2 + \frac{4G_g^2 \sigma^2}{b} + \frac{4G_f^4 L_g^2}{m} \sum_{i \in \mathcal{C}_s} \mathbb{E}\|w_{s,t}^i - \bar{w}_s\|^2 + \frac{4L_g^2 G_f^2 \sigma^2}{b} \\ &\leq 4(G_g^2 L_f^2 + G_f^4 L_g^2) \tau^2 \eta^2 G_g^2 G_f^2 + \frac{4G_g^2 \sigma^2}{b} + \frac{4L_g^2 G_f^2 \sigma^2}{b}, \end{split}$$

where the second inequality is due to Assumptions 1-3, and the last inequality holds by Lemma 2. \Box

Theorem 4. Under the above Assumptions, in Algorithm 1, given $\eta > 0$ and b > 0, we have

$$\frac{1}{S} \sum_{s=0}^{S-1} \mathbb{E} \|\nabla F(\bar{w}_s)\|^2 \le \frac{F(\bar{w}_0) - F^*}{T\eta} + G_f G_g \left(2H\tau \eta G_g G_f + \frac{2G_g \sigma}{\sqrt{b}} + \frac{2L_g G_f \sigma}{\sqrt{b}} \right) \\
+ L\tau \eta G_g^2 G_f^2 + \frac{L\eta}{2} G_f^2 G_g^2, \tag{38}$$

where $H = \sqrt{G_g^2 L_f^2 + G_f^4 L_g^2}$

Proof. This proof is similar to the above proof of Theorem 3. By using the above inequality (32), we have

$$\mathbb{E}[F(\bar{w}_{s,t+1})] \leq \mathbb{E}[F(\bar{w}_{s,t})] + \eta G_f G_g \sqrt{\mathbb{E}\|\bar{u}_{s,t} - U_{s,0}\|^2} + \eta L G_f G_g \sqrt{\mathbb{E}\|\bar{w}_{s,t} - \bar{w}_s\|^2} \\
- \eta \mathbb{E}\|\nabla F(\bar{w}_s)\|^2 + \frac{L\eta^2}{2} G_f^2 G_g^2 \\
\leq \mathbb{E}[F(\bar{w}_{s,t})] + \eta G_f G_g \left(2\sqrt{G_g^2 L_f^2 + G_f^4 L_g^2} \tau \eta G_g G_f + \frac{2G_g \sigma}{\sqrt{b}} + \frac{2L_g G_f \sigma}{\sqrt{b}}\right) + L\tau \eta^2 G_g^2 G_f^2 \\
- \eta \mathbb{E}\|\nabla F(\bar{w}_s)\|^2 + \frac{L\eta^2}{2} G_f^2 G_g^2, \tag{39}$$

where the last inequality is due to the above Lemma 4. Thus, we have

$$\|\eta \mathbb{E} \|\nabla F(\bar{w}_s)\|^2 \leq \mathbb{E} [F(\bar{w}_{s,t})] - \mathbb{E} [F(\bar{w}_{s,t+1})] + \eta G_f G_g \left(2\sqrt{G_g^2 L_f^2 + G_f^4 L_g^2} \tau \eta G_g G_f + \frac{2G_g \sigma}{\sqrt{b}} + \frac{2L_g G_f \sigma}{\sqrt{b}}\right) + L\tau \eta^2 G_g^2 G_f^2 + \frac{L\eta^2}{2} G_f^2 G_g^2.$$

$$(40)$$

Since $w_{s,0} = \bar{w}_s$, telescoping the above inequality over $s = 0, 1, \dots, S-1$ and $t = 0, 1, \dots, \tau-1$, we have

$$\frac{1}{S} \sum_{s=0}^{S-1} \mathbb{E} \|\nabla F(\bar{w}_s)\|^2 \leq \frac{F(\bar{w}_0) - F(\bar{w}_T)}{T\eta} + G_f G_g \left(2\sqrt{G_g^2 L_f^2 + G_f^4 L_g^2} \tau \eta G_g G_f + \frac{2G_g \sigma}{\sqrt{b}} + \frac{2L_g G_f \sigma}{\sqrt{b}}\right) \\
+ L\eta G_g^2 G_f^2 \tau + \frac{L\eta}{2} G_f^2 G_g^2 \\
\leq \frac{F(\bar{w}_0) - F^*}{T\eta} + G_f G_g \left(2\sqrt{G_g^2 L_f^2 + G_f^4 L_g^2} \tau \eta G_g G_f + \frac{2G_g \sigma}{\sqrt{b}} + \frac{2L_g G_f \sigma}{\sqrt{b}}\right) \\
+ L\tau \eta G_g^2 G_f^2 + \frac{L\eta}{2} G_f^2 G_g^2,$$

where the last inequality is due to Assumption 4.