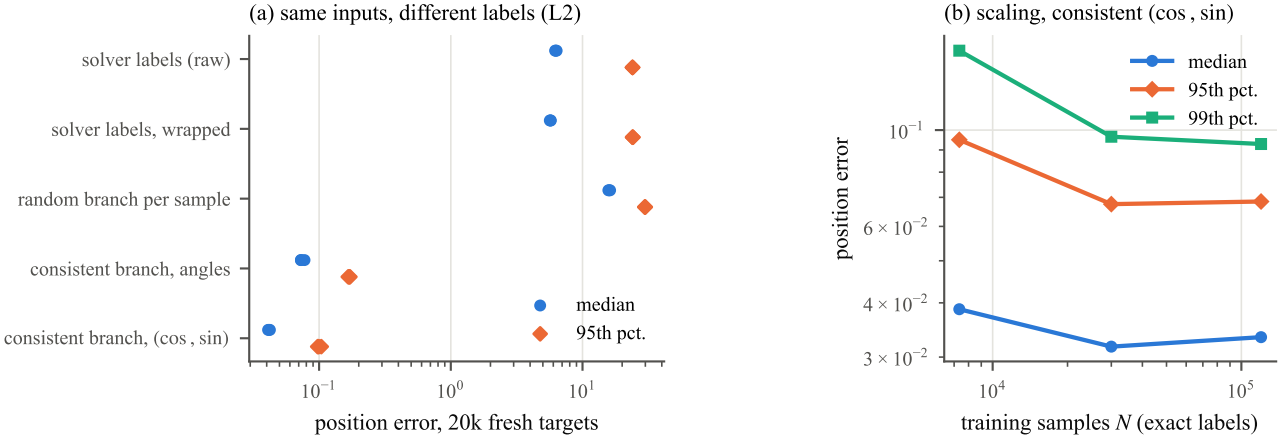
(a) same inputs, different labels (L2)
solver labels (raw)
solver labels, wrapped
random branch per sample
consistent branch, angles
consistent branch, (cos , sin)
median
95th pct.
10^{-1}
10^{0}
10^{1}
position error, 20k fresh targets
(b) scaling, consistent (cos , sin)
median
95th pct.
99th pct.
position error
10^{-1}
6×10^{-2}
4×10^{-2}
3×10^{-2}
10^{4}
10^{5}
training samples N (exact labels)