




SHODWE
Pizza Resto


SQL PROJECT - PIZZA SALES ANALYSIS

- EXPLORING BUSINESS INSIGHTS
USING MYSQL QUERIES – FROM
BASIC TO ADVANCED LEVELS

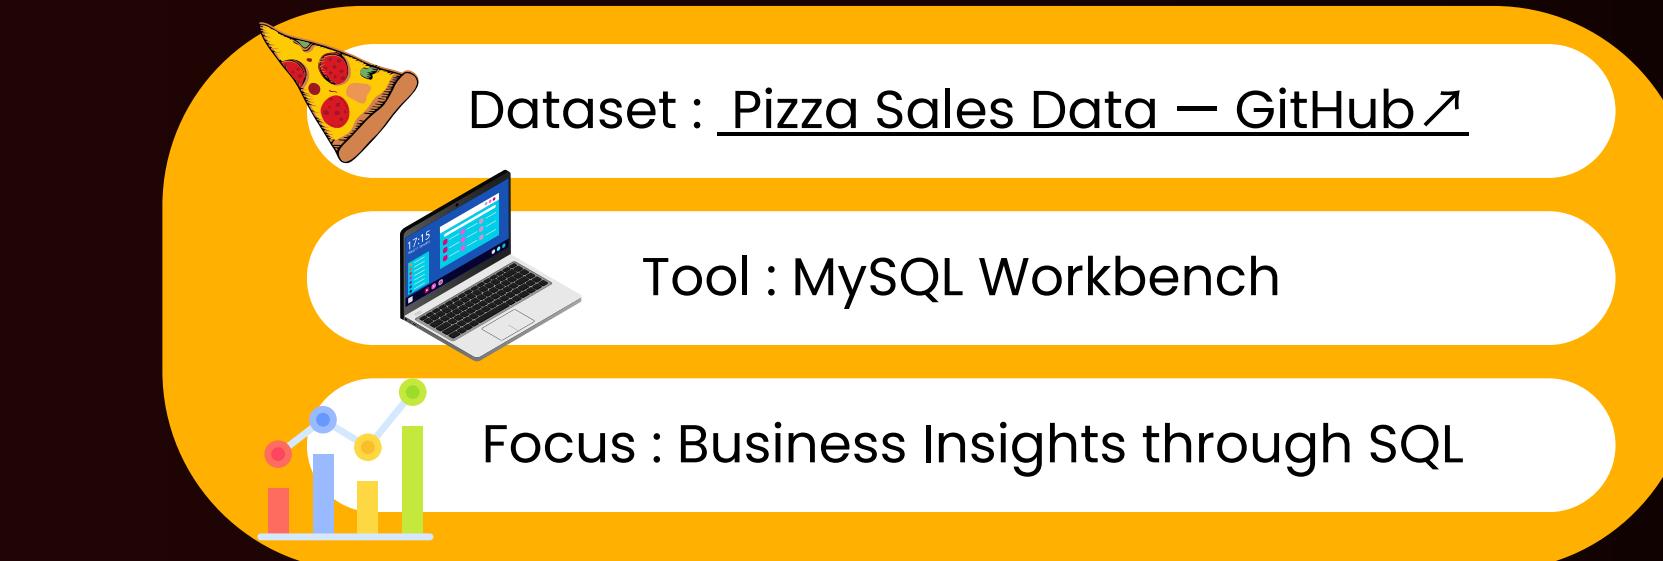



SHODWE
Pizza Resto

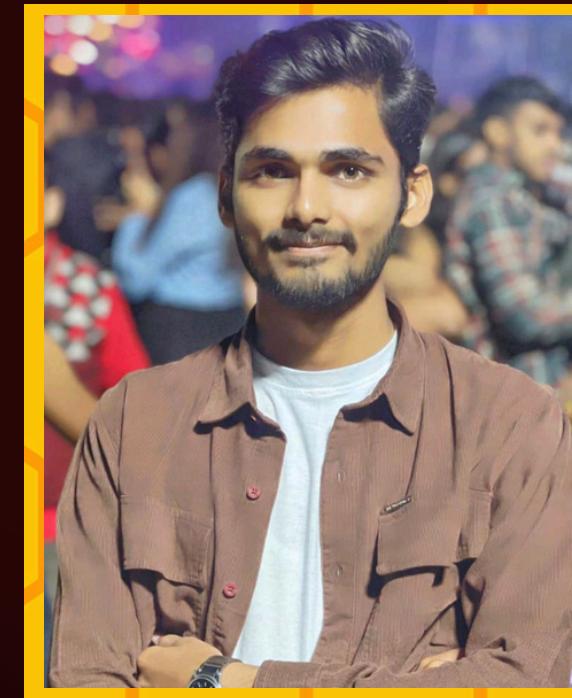

Project GitHub Repository : [Pizza Sales SQL](#)




HI – I'M DEEPAK JAISWAL

I am pursuing B.Tech in Computer Science (Data Science) at GL Bajaj Institute of Technology and Management.

For this SQL project, I focused on applying a range of queries on pizza sales data to analyze revenue trends, top-selling pizzas, customer behavior, and other business metrics.

It reflects my ability to design a database schema, import data, write clean and reusable SQL, and extract actionable insights.

Skills : SQL | MySQL Workbench | Data Analysis | Problem Solving

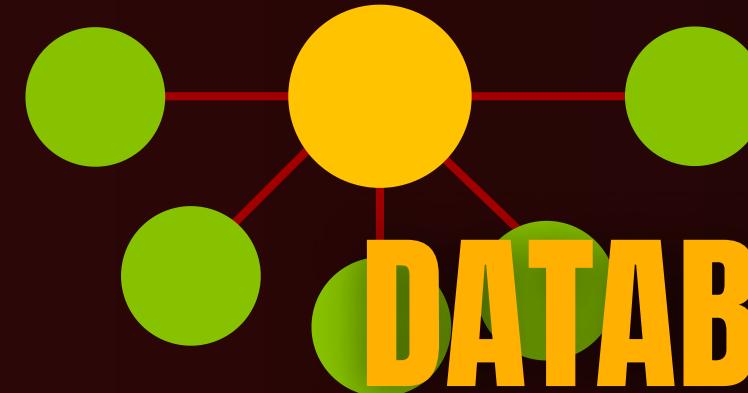

DATABASE & SCHEMA – HOW I SET IT UP

01

orders
order_id INT
order_date DATE
order_time TIME
Indexes
PRIMARY

02

pizzas
pizza_id TEXT
pizza_type_id TEXT
size TEXT
price DOUBLE
Indexes

03

order_details
order_details_id INT
order_id INT
pizza_id TEXT
quantity INT
Indexes
PRIMARY

04

pizza_types
pizza_type_id TEXT
name TEXT
category TEXT
ingredients TEXT

Visual : EER diagram exported from MySQL Workbench

The dataset was organized into four linked tables in MySQL Workbench with proper keys, forming a relational schema ready for SQL analysis.

RETRIEVE THE TOTAL NUMBER OF ORDERS PLACED.

SELECT

COUNT(order_id) AS total_orders

FROM

orders;

Result Grid	
	total_orders
▶	21350



CALCULATE THE TOTAL REVENUE GENERATED FROM PIZZA SALES.

SELECT

ROUND(SUM(order_details.quantity * pizzas.price),
2) AS total_sales

FROM

order_details

JOIN

pizzas ON pizzas.pizza_id = order_details.pizza_id

Result Grid	
	total_sales
→	817860.05



IDENTIFY THE HIGHEST-PRICED PIZZA.

```
SELECT pizza_types.name, pizzas.price  
FROM pizza_types  
JOIN pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id  
ORDER BY pizzas.price DESC  
LIMIT 1;
```

Result Grid |  Filter Rows:

	name	price
▶	The Greek Pizza	35.95



IDENTIFY THE MOST COMMON PIZZA SIZE ORDERED.

```
SELECT
    pizzas.size,
    COUNT(order_details.order_details_id) AS order_count
FROM
    pizzas
    JOIN
    order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC;
```

	size	order_count
▶	L	18526
	M	15385
	S	14137
	XL	544
	XXL	28



LIST THE TOP 5 MOST ORDERED PIZZA TYPES ALONG WITH THEIR QUANTITIES.

```
SELECT  
    pizza_types.name, SUM(order_details.quantity) AS quantity  
FROM  
    pizza_types  
    JOIN  
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id  
    JOIN  
    order_details ON order_details.pizza_id = pizzas.pizza_id  
GROUP BY pizza_types.name  
ORDER BY quantity DESC  
LIMIT 5;
```

	name	quantity
▶	The Classic Deluxe Pizza	2453
	The Barbecue Chicken Pizza	2432
	The Hawaiian Pizza	2422
	The Pepperoni Pizza	2418
	The Thai Chicken Pizza	2371



JOIN THE NECESSARY TABLES TO FIND THE TOTAL QUANTITY OF EACH PIZZA CATEGORY ORDERED.

SELECT

pizza_types.category, SUM(order_details.quantity) AS quantity

FROM

pizza_types

JOIN

pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id

JOIN

order_details ON order_details.pizza_id = pizzas.pizza_id

GROUP BY pizza_types.category

ORDER BY quantity DESC;

	category	quantity
▶	Classic	14888
	Supreme	11987
	Veggie	11649
	Chicken	11050



DETERMINE THE DISTRIBUTION OF ORDERS BY HOUR OF THE DAY.

SELECT

HOUR(order_time) AS hour, COUNT(order_id) AS order_count

FROM

orders

GROUP BY HOUR(order_time)

	hour	order_count
▶	11	1231
	12	2520
	13	2455
	14	1472
	15	1468
	16	1920
	17	2336
	18	2399
	19	2009
	20	1642
	21	1198
	22	663
	23	28
	10	8
	9	1



JOIN RELEVANT TABLES TO FIND THE CATEGORY-WISE DISTRIBUTION OF PIZZAS.



```
SELECT  
    category, COUNT(name)  
FROM  
    pizza_types  
GROUP BY category;
```

	category	COUNT(name)
▶	Chicken	6
	Classic	8
	Supreme	9
	Veggie	9



GROUP THE ORDERS BY DATE AND CALCULATE THE AVERAGE NUMBER OF PIZZAS ORDERED PER DAY.

```
SELECT  
    ROUND(AVG(quantity), 0) as avg_pizza_ordered_per_day  
FROM  
    (SELECT  
        orders.order_date, SUM(order_details.quantity) AS quantity  
    FROM  
        orders  
    JOIN order_details ON orders.order_id = order_details.order_id  
    GROUP BY orders.order_date) AS order_quantity;
```

Result Grid	
	avg_pizza_ordered_per_day
▶	138



DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE.

```
SELECT  
    pizza_types.name,  
    SUM(order_details.quantity * pizzas.price) AS revenue  
FROM  
    pizza_types  
        JOIN  
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id  
        JOIN  
    order_details ON order_details.pizza_id = pizzas.pizza_id  
GROUP BY pizza_types.name  
ORDER BY revenue DESC  
LIMIT 3;
```

	name	revenue
▶	The Thai Chicken Pizza	43434.25
	The Barbecue Chicken Pizza	42768
	The California Chicken Pizza	41409.5



CALCULATE THE PERCENTAGE CONTRIBUTION OF EACH PIZZA TYPE TO TOTAL REVENUE.

```
SELECT
    pizza_types.category,
    ROUND(SUM(order_details.quantity * pizzas.price) / (SELECT
        ROUND(SUM(order_details.quantity * pizzas.price),
        2) AS total_sales
    )
    FROM
        order_details
        JOIN
            pizzas ON pizzas.pizza_id = order_details.pizza_id) * 100,
    2) AS revenue
FROM
    pizza_types
    JOIN
        pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
        order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY revenue DESC;
```

	category	revenue
▶	Classic	26.91
	Supreme	25.46
	Chicken	23.96
	Veggie	23.68



ANALYZE THE CUMULATIVE REVENUE GENERATED OVER TIME.

```
select order_date,  
       sum(revenue) over(order by order_date) as cum_revenue  
  from  
    (select orders.order_date,  
           sum(order_details.quantity * pizzas.price) as revenue  
      from order_details join pizzas  
        on order_details.pizza_id = pizzas.pizza_id  
     join orders  
        on orders.order_id = order_details.order_id  
   group by orders.order_date) as sales;
```

	order_date	cum_revenue
▶	2015-01-01	2713.8500000000004
	2015-01-02	5445.75
	2015-01-03	8108.15
	2015-01-04	9863.6
	2015-01-05	11929.55
	2015-01-06	14358.5
	2015-01-07	16560.7
	2015-01-08	18772.5



DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE FOR EACH PIZZA CATEGORY.



```
select name, revenue from
(select category, name, revenue,
rank() over(partition by category order by revenue desc) as rn
from
(select pizza_types.category, pizza_types.name,
sum((order_details.quantity) * pizzas.price) as revenue
from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
join order_details
on order_details.pizza_id = pizzas.pizza_id
group by pizza_types.category, pizza_types.name) as a) as b
where rn <= 3;
```

	name	revenue
▶	The Thai Chicken Pizza	43434.25
	The Barbecue Chicken Pizza	42768
	The California Chicken Pizza	41409.5
	The Classic Deluxe Pizza	38180.5
	The Hawaiian Pizza	32273.25
	The Pepperoni Pizza	30161.75
	The Spicy Italian Pizza	34831.25
	The Veggie Pizza	22476.75





SHODWE
Pizza Resto

Contact

**THANK YOU
FOR ATTENTION
• ANY QUESTIONS?**



Email : deejai6281@gmail.com