

Application of Generative Models: Image-to-Image Translation

Hao Dong

Peking University

Application of Generative Models: Image-to-Image Translation

Why we learn im2im?

- The most classical generative model application ..
- The state-of-the-art methods are all based on GAN ...
- Understand GAN and the history better ...

Application of Generative Models: Image-to-Image Translation

- Problem Definition
- Image Inpainting / Reconstruction / Super Resolution
- Pix2Pix: paired data
- Discussion: ideal im2im
- UNIT and CycleGAN: unpaired data
- BiCycleGAN: multi-modality
- MUNIT and Augmented CycleGAN: unpaired data + multi-modality
- DRIT: disentangle domain-specific features
- Attention CycleGAN: maintain background
- StarGAN: label condition
- Breaking the Cycle
- GAN-CLS and SisGAN: text condition

- **Problem Definition**

- Image Inpainting / Reconstruction / Super Resolution
- Pix2Pix: paired data
- Discussion: ideal im2im
- UNIT and CycleGAN: unpaired data
- BiCycleGAN: multi-modality
- MUNIT and Augmented CycleGAN: unpaired data + multi-modality
- DRIT: disentangle domain-specific features
- Attention CycleGAN: maintain background
- StarGAN: label condition
- Breaking the Cycle
- GAN-CLS and SisGAN: text condition


Problem Definition

- Supervised/Paired image-to-image translation
- Unsupervised/Unpaired image-to-image translation


- Problem Definition
- **Image Inpainting / Reconstruction / Super Resolution**
- Pix2Pix: paired data
- Discussion: ideal im2im
- UNIT and CycleGAN: unpaired data
- BiCycleGAN: multi-modality
- MUNIT and Augmented CycleGAN: unpaired data + multi-modality
- DRIT: disentangle domain-specific features
- Attention CycleGAN: maintain background
- StarGAN: label condition
- Breaking the Cycle
- GAN-CLS and SisGAN: text condition

Image Inpainting / Reconstruction / Super Resolution

- Utilising Feature Information for Medical Image Reconstruction

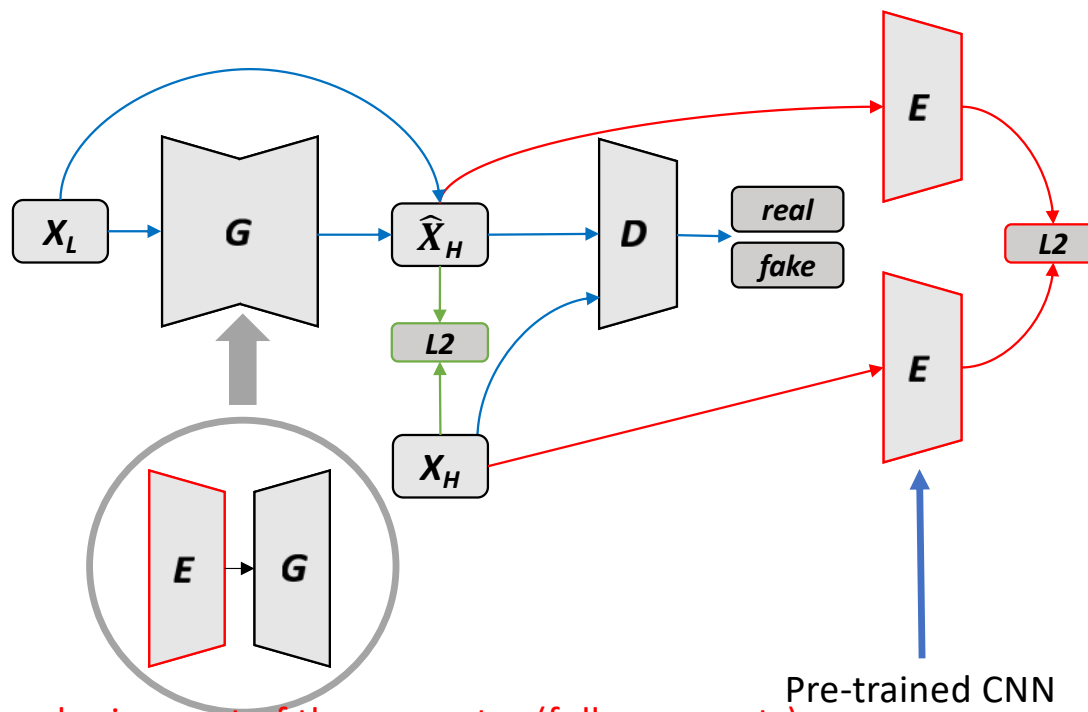

Encoder is a part of the generator (fully conv nets)

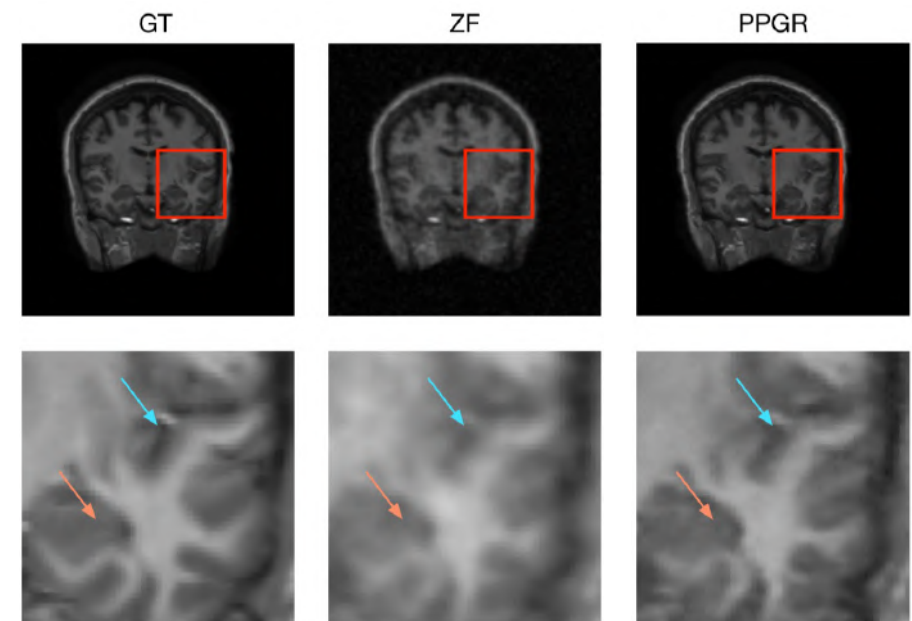

Deep De-Aliasing for Fast Compressive Sensing MRI. S. Yu, H. Dong, G. Yang et al. arXiv:1705.07137 2017.

DAGAN: Deep De-Aliasing Generative Adversarial Networks for Fast Compressed Sensing MRI Reconstruction.

G. Yang, S. Yu, H. Dong et al. TMI 2017.



Image Inpainting / Reconstruction / Super Resolution

- Supervised image super resolution

Better feature reconstruction

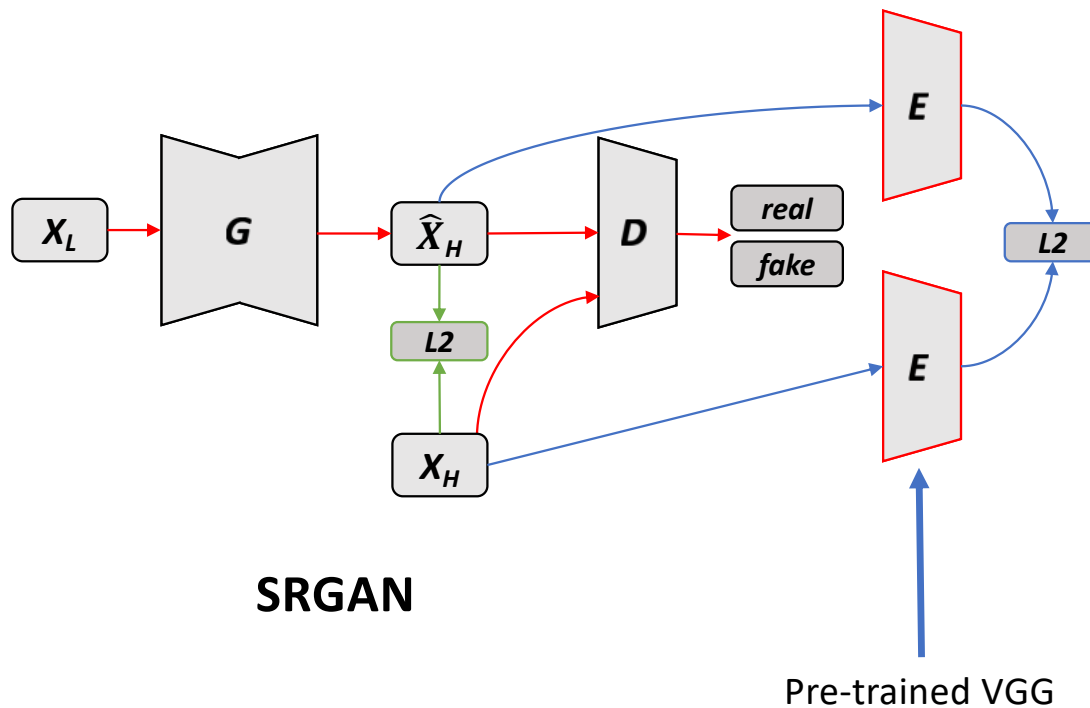


Image Inpainting / Reconstruction / Super Resolution

- Supervised image super resolution


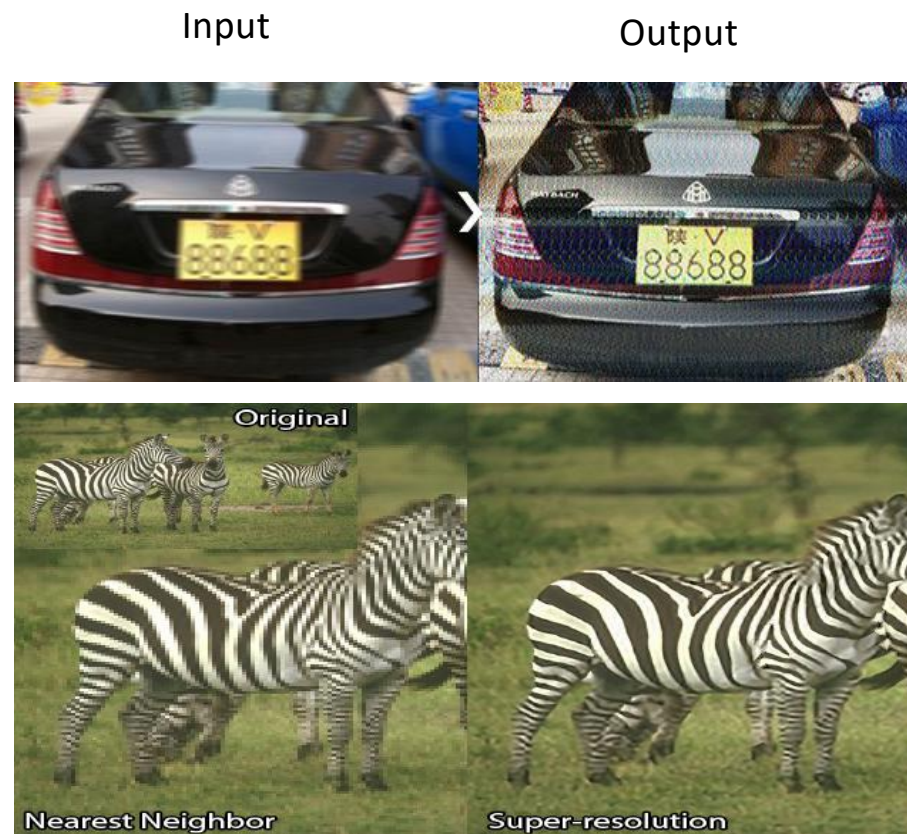


Photo-Realistic Single Image Super-Resolution Using a Generative Adversarial Network. *C. Ledig, L. Theis et al. CVPR⁹ 2017.*

Image Inpainting / Reconstruction / Super Resolution

- UV-GAN

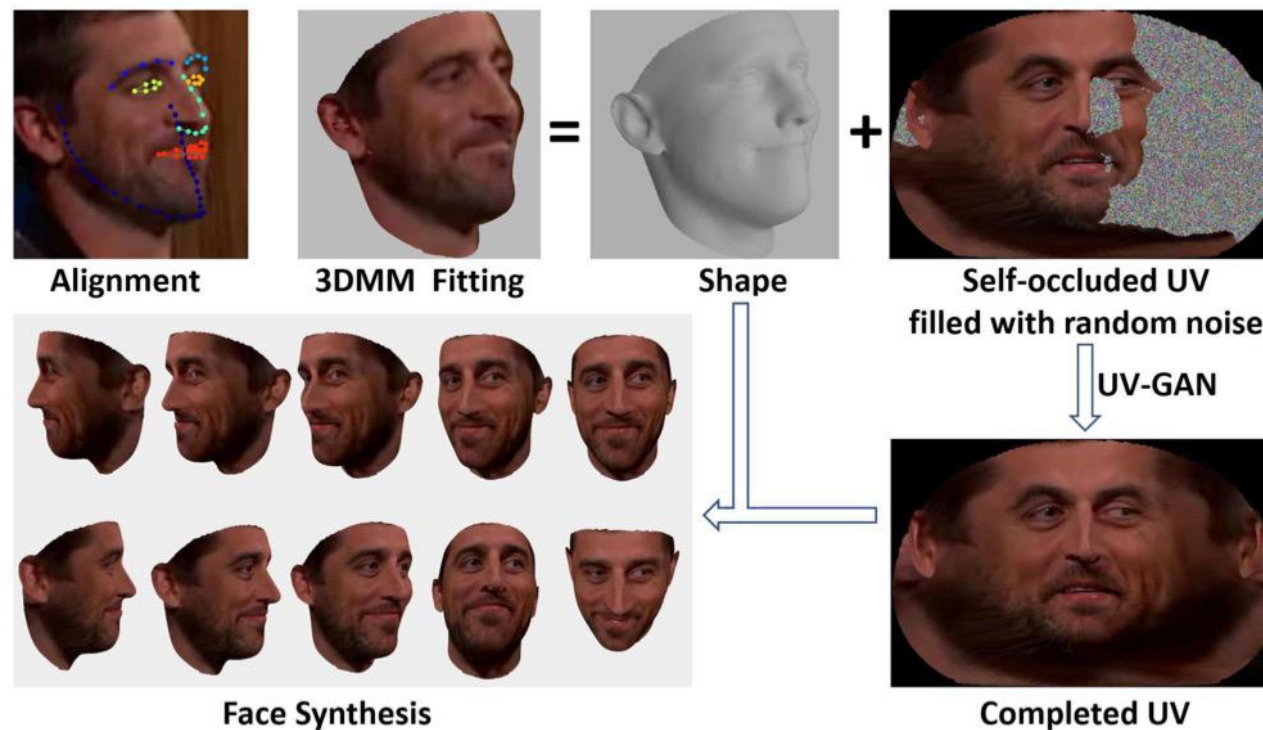

UV-GAN: Adversarial Facial UV Map Completion for Pose-invariant Face Recognition.
J. Deng, S. Cheng et al. CVPR. 2018.

- Problem Definition
- Image Inpainting / Reconstruction / Super Resolution
- **Pix2Pix: paired data**
- Discussion: ideal im2im
- UNIT and CycleGAN: unpaired data
- BiCycleGAN: multi-modality
- MUNIT and Augmented CycleGAN: unpaired data + multi-modality
- DRIT: disentangle domain-specific features
- Attention CycleGAN: maintain background
- StarGAN: label condition
- Breaking the Cycle
- GAN-CLS and SisGAN: text condition

Pix2Pix: paired data

- Pix2Pix: Supervised Image-to-Image Translation


- Beyond MLE: Adversarial Learning



- Question 1: What color are they?

Red? Blue? Yellow? ... obviously there are more than one solution

- Question 2: What if I train a neural net: input x_{grey} output x_{rgb} with MLE?

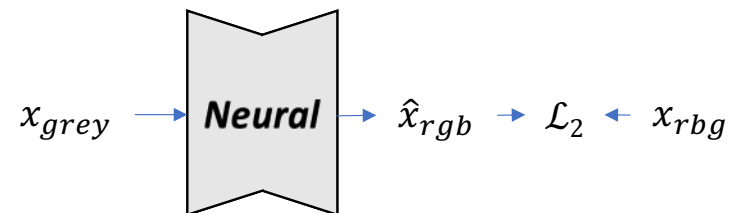



What is the problem??

Colorful Image Colorization. *R. Zhang, P. Isola, A.A. Efros. ECCV. 2016.*

Image-to-Image Translation with Conditional Adversarial Networks. *P. Isola, J. Zhu et al. CVPR 2017.*

Pix2Pix: paired data

- Pix2Pix: Supervised Image-to-Image Translation
- Beyond MLE: Adversarial Learning

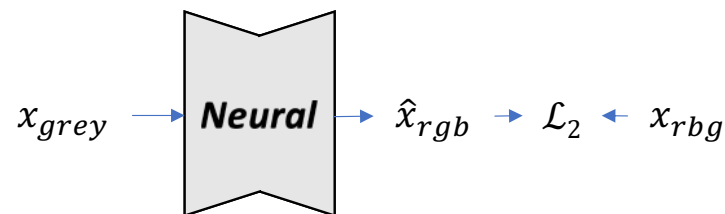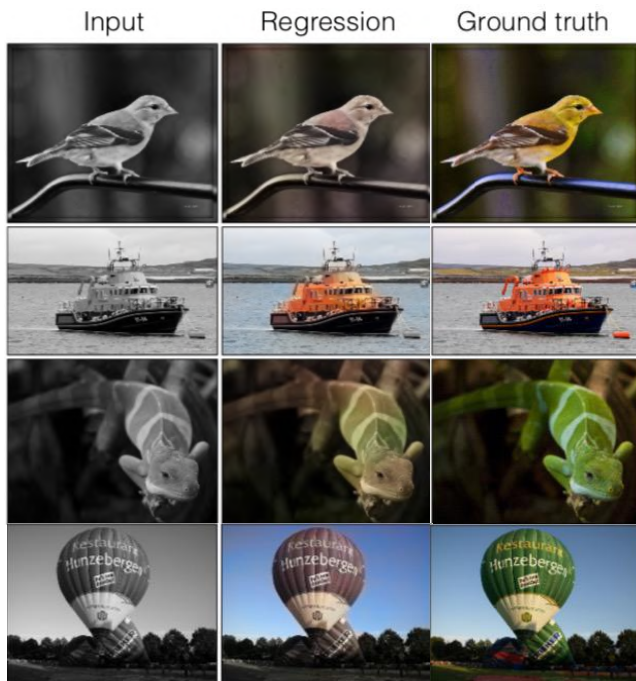

Different colors will have conflicts,
(some want red, some want blue, ...)
resulting “grey” outputs


Colorful Image Colorization. *R. Zhang, P. Isola, A.A. Efros. ECCV. 2016.*

Image-to-Image Translation with Conditional Adversarial Networks. *P. Isola, J. Zhu et al. CVPR 2017.*

Pix2Pix: paired data


- Pix2Pix: Supervised Image-to-Image Translation

- Beyond MLE: Adversarial Learning

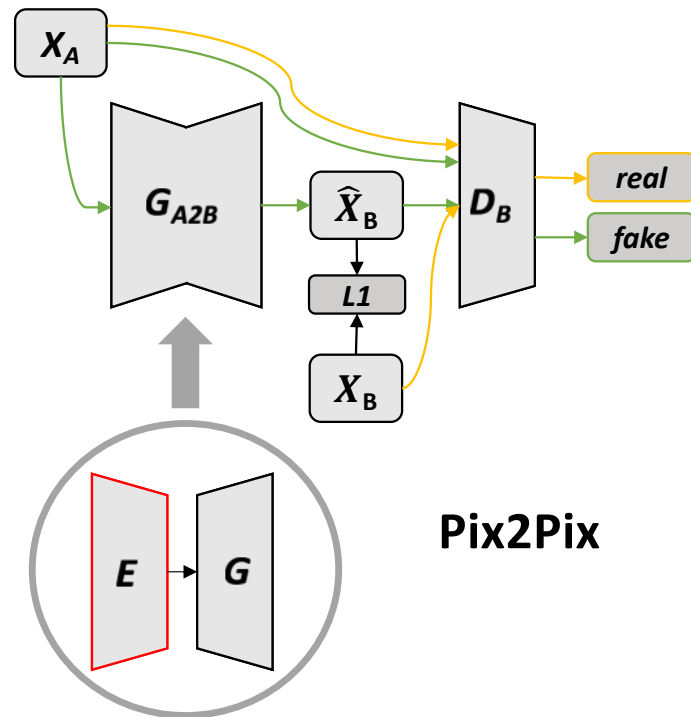

Encoder is a part of the generator (fully conv nets)

Image-to-Image Translation with Conditional Adversarial Networks. *P. Isola, J. Zhu et al. CVPR 2017.*

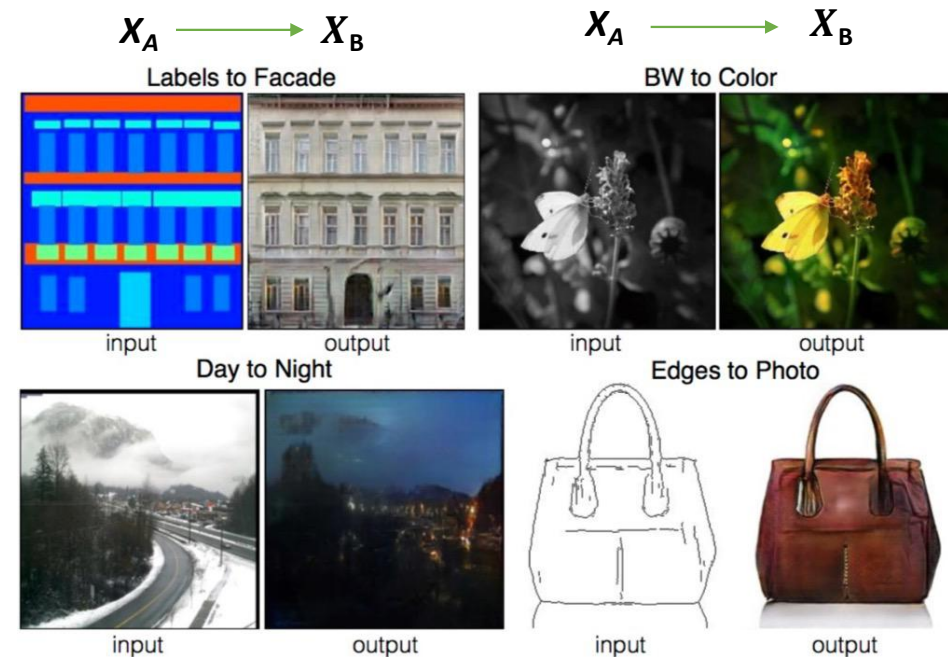

$$\mathcal{L}_D = \mathbb{E}_{x \sim p_{data}} [\log D(x_A, x_B)] + \mathbb{E}_{x \sim p_{data}} [\log(1 - D(x_A, G(x_A)))]$$

$$\mathcal{L}_G = \mathbb{E}_{x \sim p_{data}} [\log D(x_A, G(x_A))]$$


Pix2Pix: paired data

- Pix2Pix: Supervised Image-to-Image Translation


Labels to Street Scene



Labels to Facade

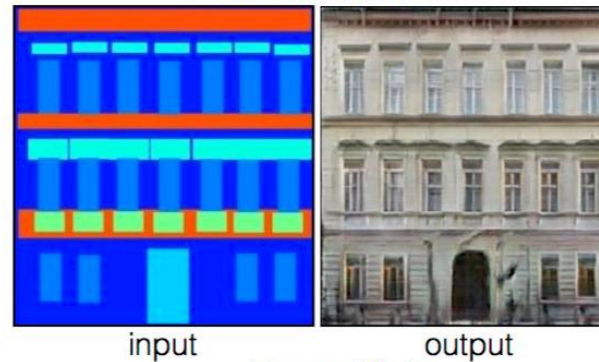


BW to Color

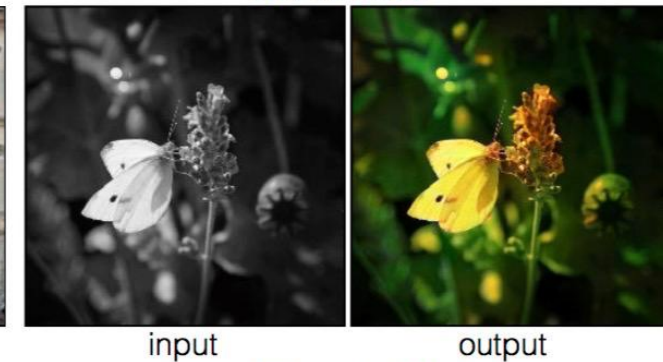

Aerial to Map



Day to Night

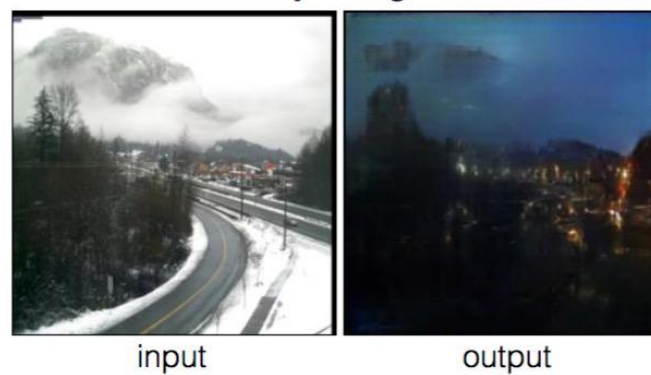

Edges to Photo



Image-to-Image Translation with Conditional Adversarial Networks. *P. Isola, J. Zhu et al. CVPR 2017.*

Pix2Pix: paired data

- Pix2Pix: Supervised Image-to-Image Translation

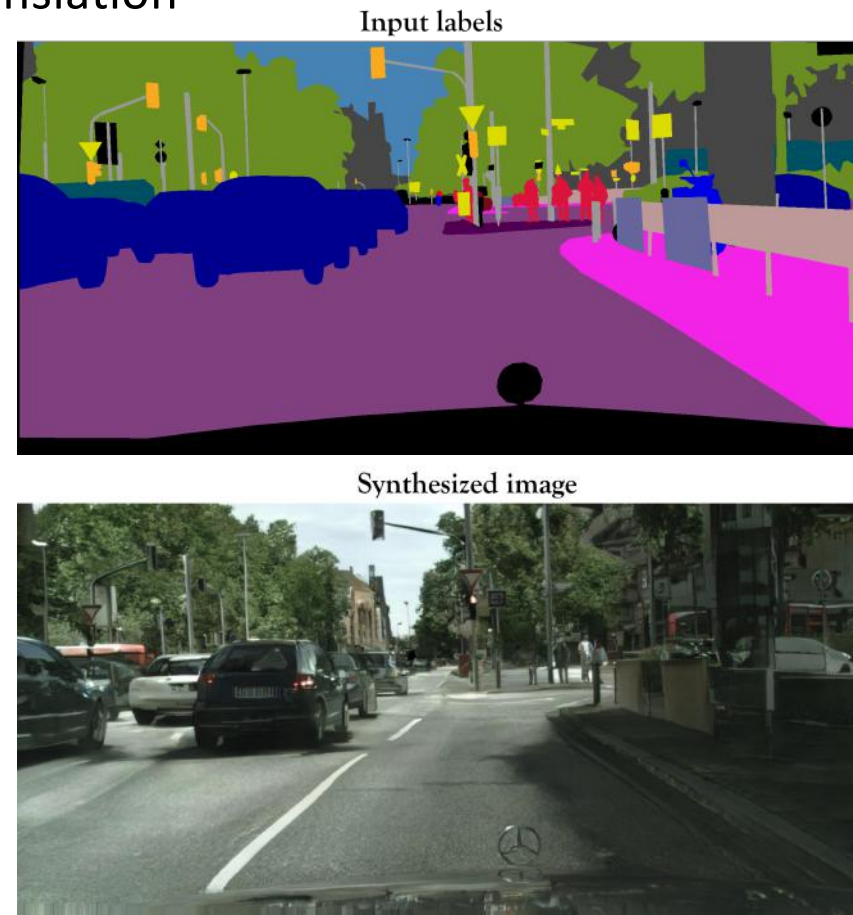


Image-to-Image Translation with Conditional Adversarial Networks. *P. Isola, J. Zhu et al. CVPR 2017.*



- Problem Definition
- Image Inpainting / Reconstruction / Super Resolution
- Pix2Pix: paired data
- **Discussion: ideal im2im**
- UNIT and CycleGAN: unpaired data
- BiCycleGAN: multi-modality
- MUNIT and Augmented CycleGAN: unpaired data + multi-modality
- DRIT: disentangle domain-specific features
- Attention CycleGAN: maintain background
- StarGAN: label condition
- Breaking the Cycle
- GAN-CLS and SisGAN: text condition

Discussion: ideal im2im

- What should the ideal image-to-image translation to be?
 - Unpaired data
 - Maintain background
 - Multi-modality
 - Disentanglement
 - Multi-domain
 - Conditional translation

- Problem Definition
- Image Inpainting / Reconstruction / Super Resolution
- Pix2Pix: paired data
- Discussion: ideal im2im
- **UNIT and CycleGAN: unpaired data**
- BiCycleGAN: multi-modality
- MUNIT and Augmented CycleGAN: unpaired data + multi-modality
- DRIT: disentangle domain-specific features
- Attention CycleGAN: maintain background
- StarGAN: label condition
- Breaking the Cycle
- GAN-CLS and SisGAN: text condition

GAN with Encoder -- Unsupervised Image-to-Image Translation

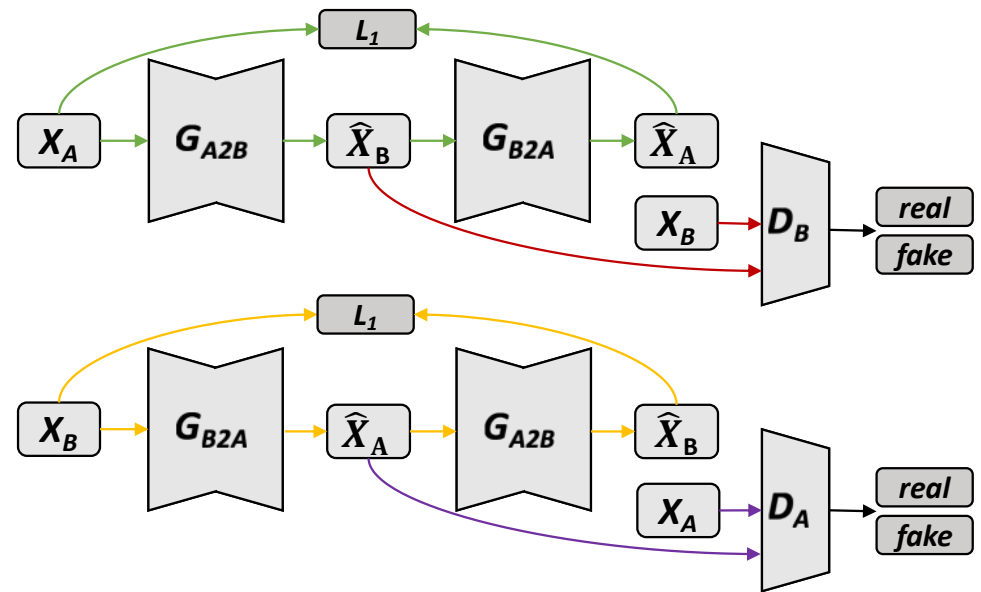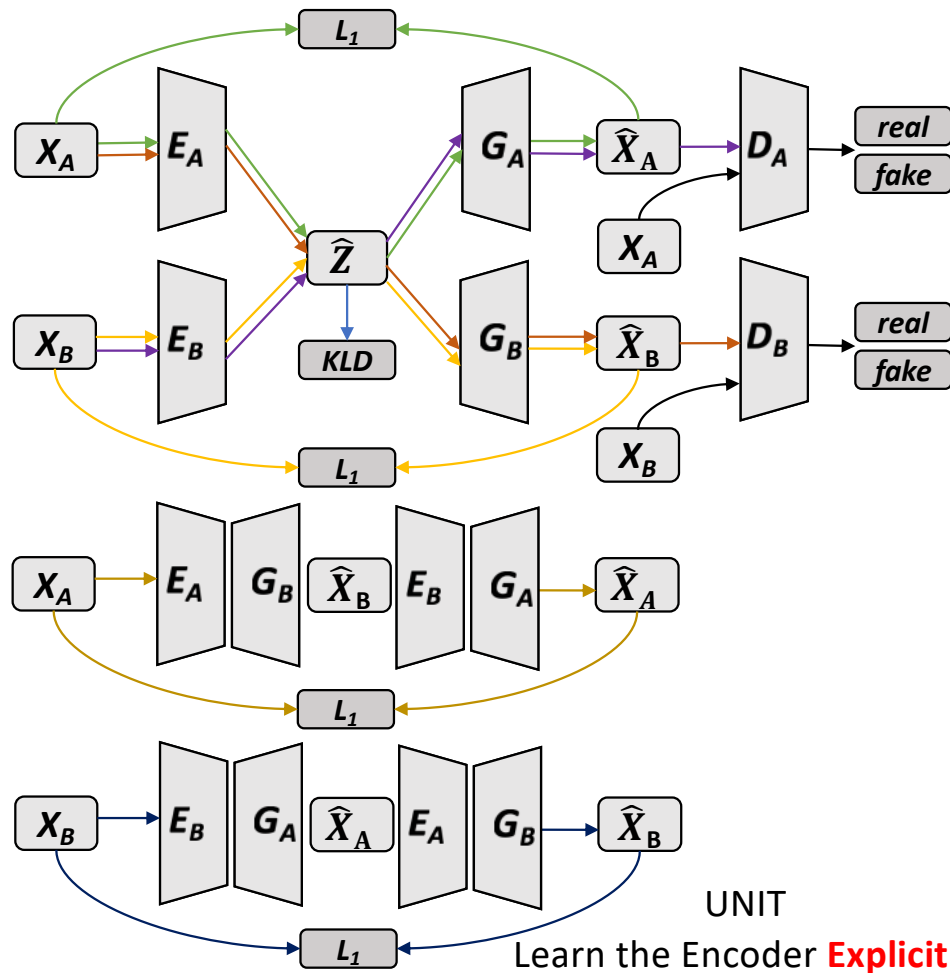

Unsupervised image-to-image translation networks. *M.Y. Liu, T. Breuel, J. Kautz. NIPS. 2017*

Unpaired Image-to-Image Translation using Cycle-Consistent Adversarial Networks. *J. Zhu, T. Park et al. ICCV 2017.*


UNIT and CycleGAN: unpaired data

- CycleGAN: Unpaired Image-to-Image Translation



Liu et al.

Learn the Encoder **Explicitly**

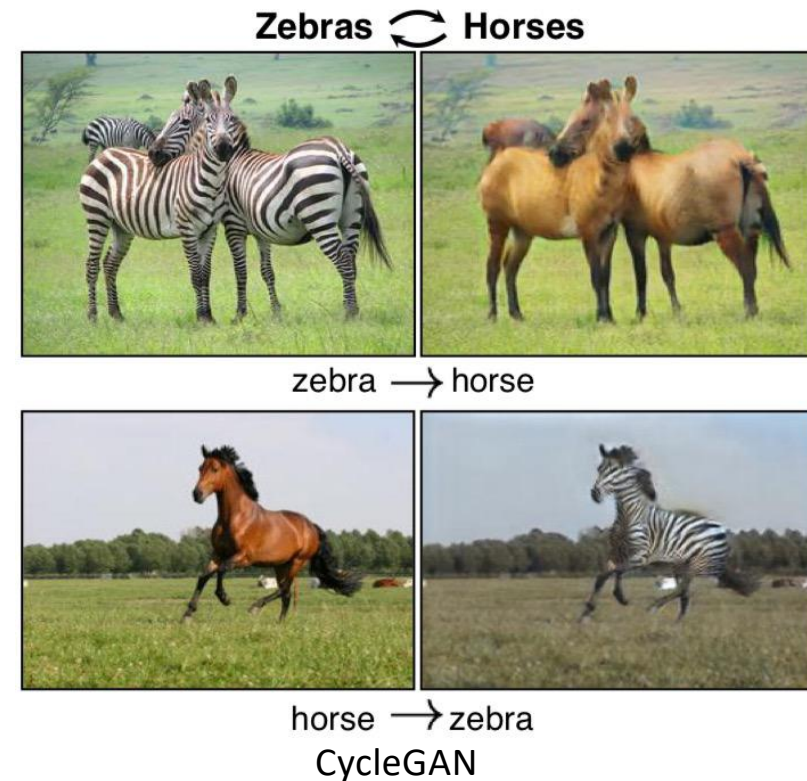

Learn the Encoder **Implicitly**

Unsupervised image-to-image translation networks. *M.Y. Liu, T. Breuel, J. Kautz. NIPS. 2017*

Unpaired Image-to-Image Translation using Cycle-Consistent Adversarial Networks. *J. Zhu, T. Park et al. ICCV 2017.*

UNIT and CycleGAN: unpaired data

- CycleGAN: Unpaired Image-to-Image Translation



Input GTA5 CG

<https://blog.csdn.net/gdymind>



Output image with German street view style

blog.csdn.net/gdymind

Unsupervised image-to-image translation networks. *M.Y. Liu, T. Breuel, J. Kautz. NIPS. 2017*

Unpaired Image-to-Image Translation using Cycle-Consistent Adversarial Networks. *J. Zhu, T. Park et al. ICCV 2017.*


UNIT and CycleGAN: unpaired data

- Discussion: are they unsupervised learning?
 - NO, two image domains == binary labels.
- Why the background / shape can be maintained?
 - Fully convolutional networks → inductive bias
 - Cycle-consistency loss
- Questions?

- Problem Definition
- Image Inpainting / Reconstruction / Super Resolution
- Pix2Pix: paired data
- Discussion: ideal im2im
- UNIT and CycleGAN: unpaired data
- **BiCycleGAN: multi-modality**
- MUNIT and Augmented CycleGAN: unpaired data + multi-modality
- DRIT: disentangle domain-specific features
- Attention CycleGAN: maintain background
- StarGAN: label condition
- Breaking the Cycle
- GAN-CLS and SisGAN: text condition


BiCycleGAN: multi-modality

- Support diverse (multi-modal) outputs but still need paired data

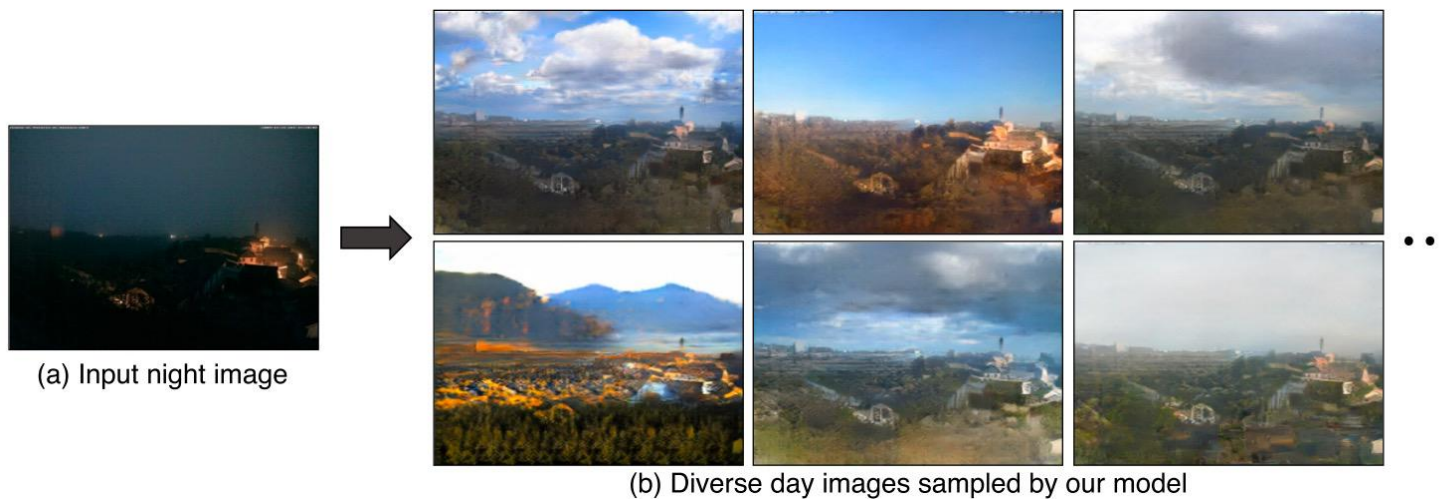


BiCycleGAN: multi-modality

- Cycle on latent noises + Cycle on translated images

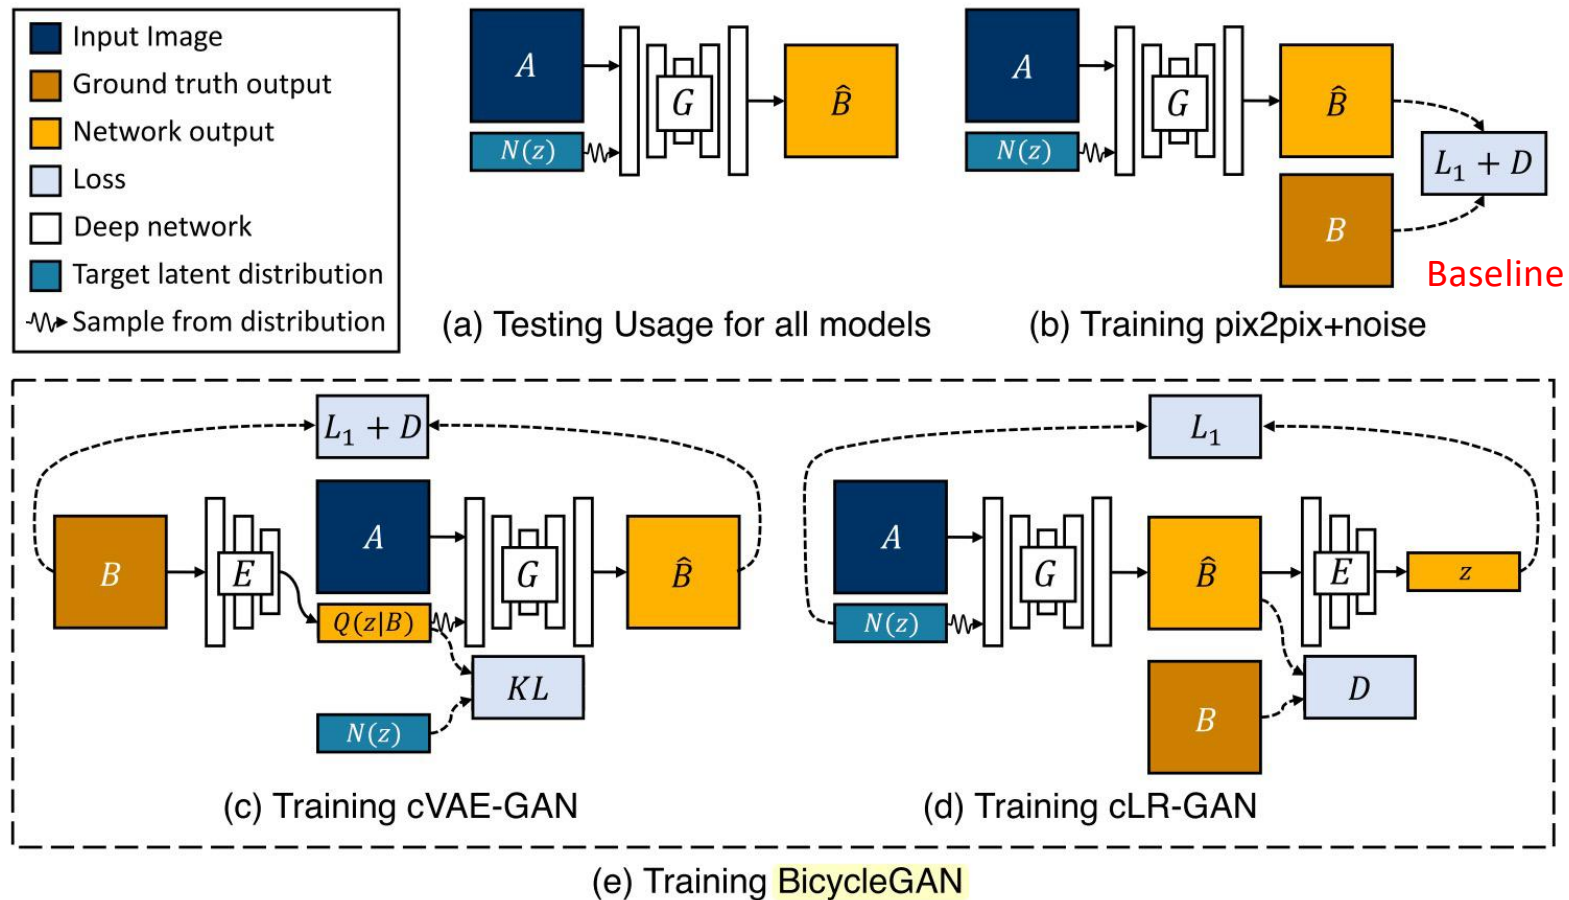

BiCycleGAN: multi-modality

- Result

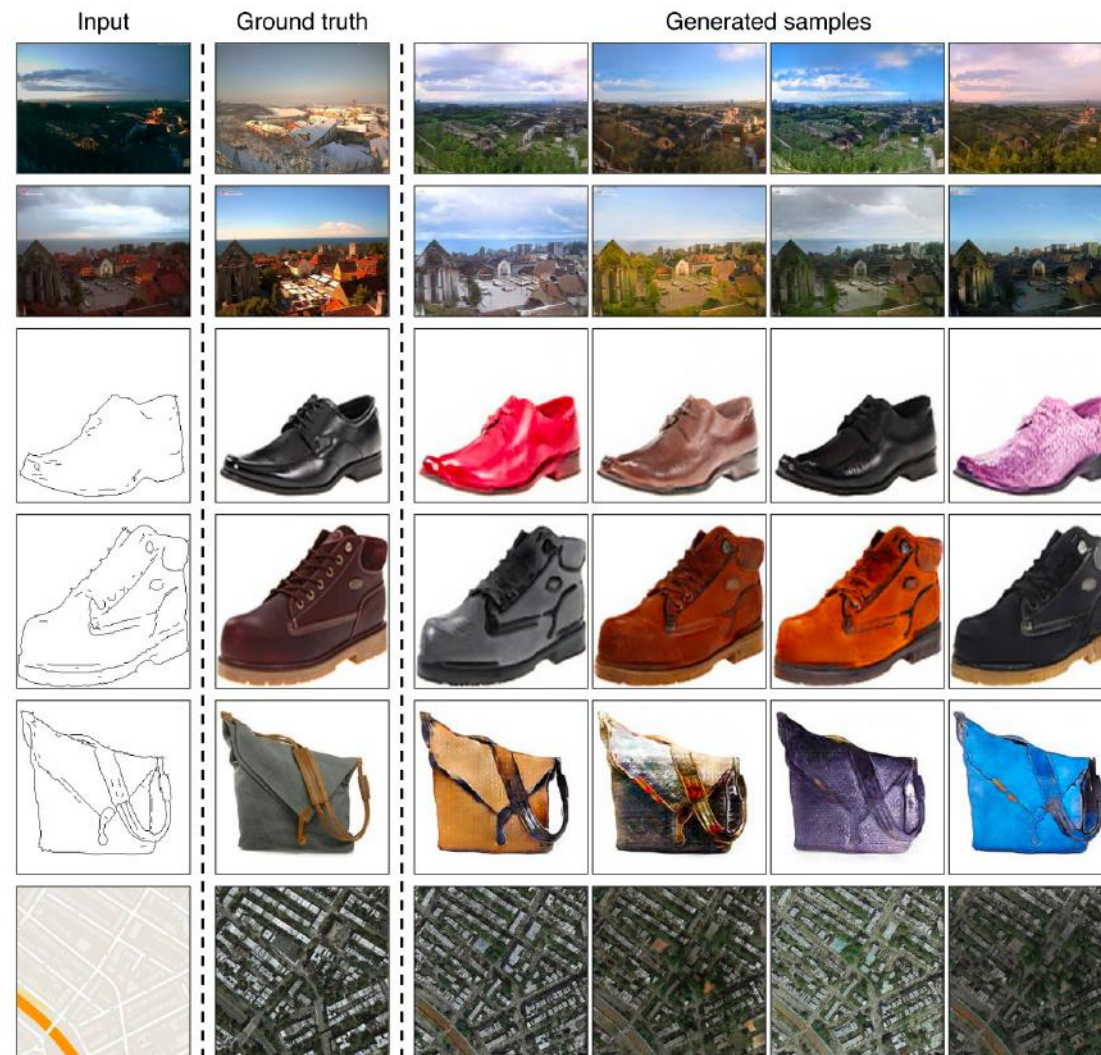

- Problem Definition
- Image Inpainting / Reconstruction / Super Resolution
- Pix2Pix: paired data
- Discussion: ideal im2im
- UNIT and CycleGAN: unpaired data
- BiCycleGAN: multi-modality
- **MUNIT and Augmented CycleGAN: unpaired data + multi-modality**
- DRIT: disentangle domain-specific features
- Attention CycleGAN: maintain background
- StarGAN: label condition
- Breaking the Cycle
- GAN-CLS and SisGAN: text condition


MUNIT and Augmented CycleGAN: unpaired + multi-modal

- Goal: unpaired + multi-modal results




MUNIT and Augmented CycleGAN: unpaired + multi-modal

- Latent reconstruction + Adversarial learning

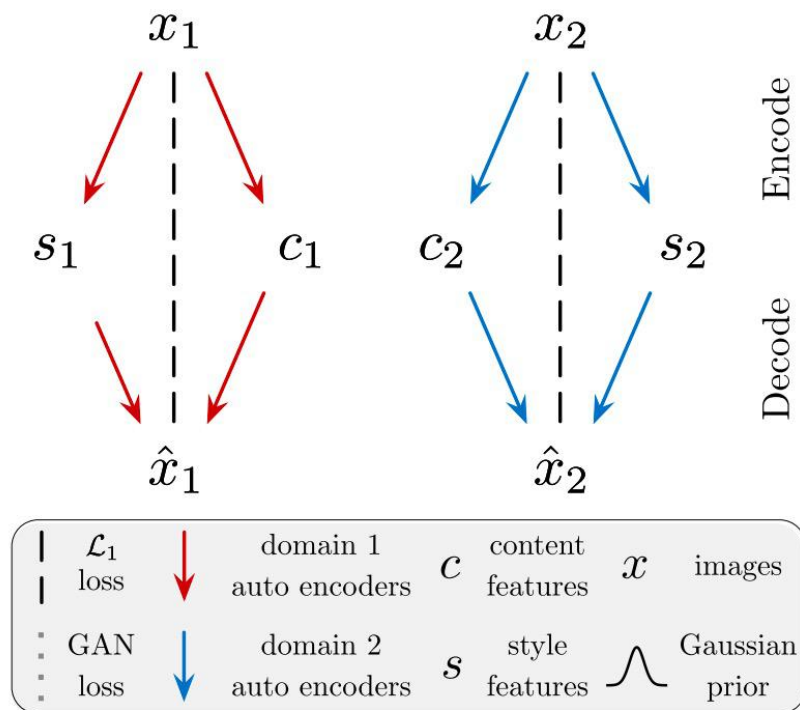

(a) Within-domain reconstruction

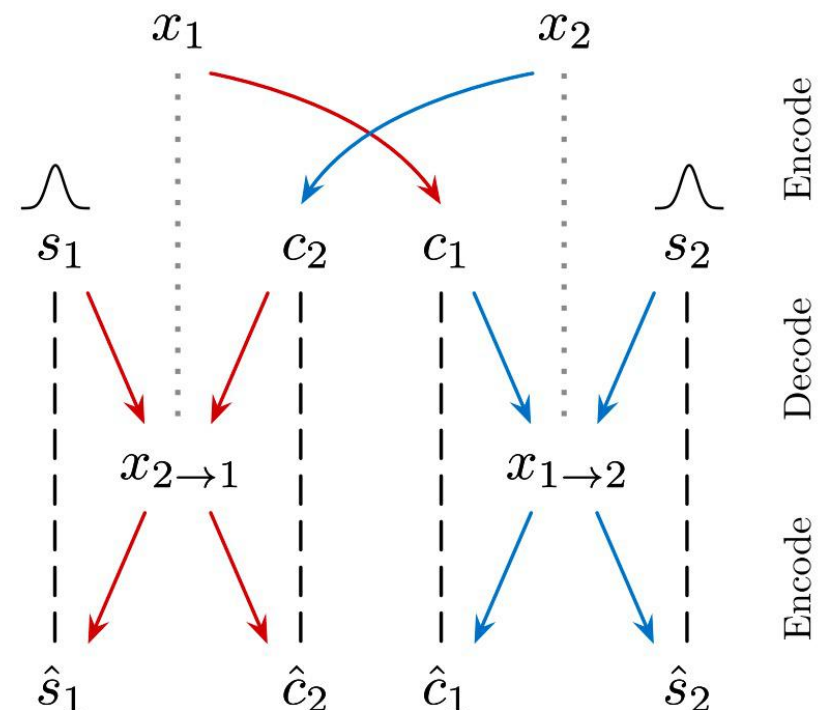

(b) Cross-domain translation

MUNIT and Augmented CycleGAN: unpaired + multi-modal

- Comparison against previous methods



MUNIT: Multimodal Unsupervised Image-to-Image Translation. ECCV 2018.

- Problem Definition
- Image Inpainting / Reconstruction / Super Resolution
- Pix2Pix: paired data
- Discussion: ideal im2im
- UNIT and CycleGAN: unpaired data
- BiCycleGAN: multi-modality
- MUNIT and Augmented CycleGAN: unpaired data + multi-modality
- **DRIT: disentangle domain-specific features**
- Attention CycleGAN: maintain background
- StarGAN: label condition
- Breaking the Cycle
- GAN-CLS and SisGAN: text condition


DRIT: disentangle domain-specific features

- Goal: Multi-modal results + Disentanglement




DRIT: disentangle domain-specific features

- Network bottleneck + Adversarial learning

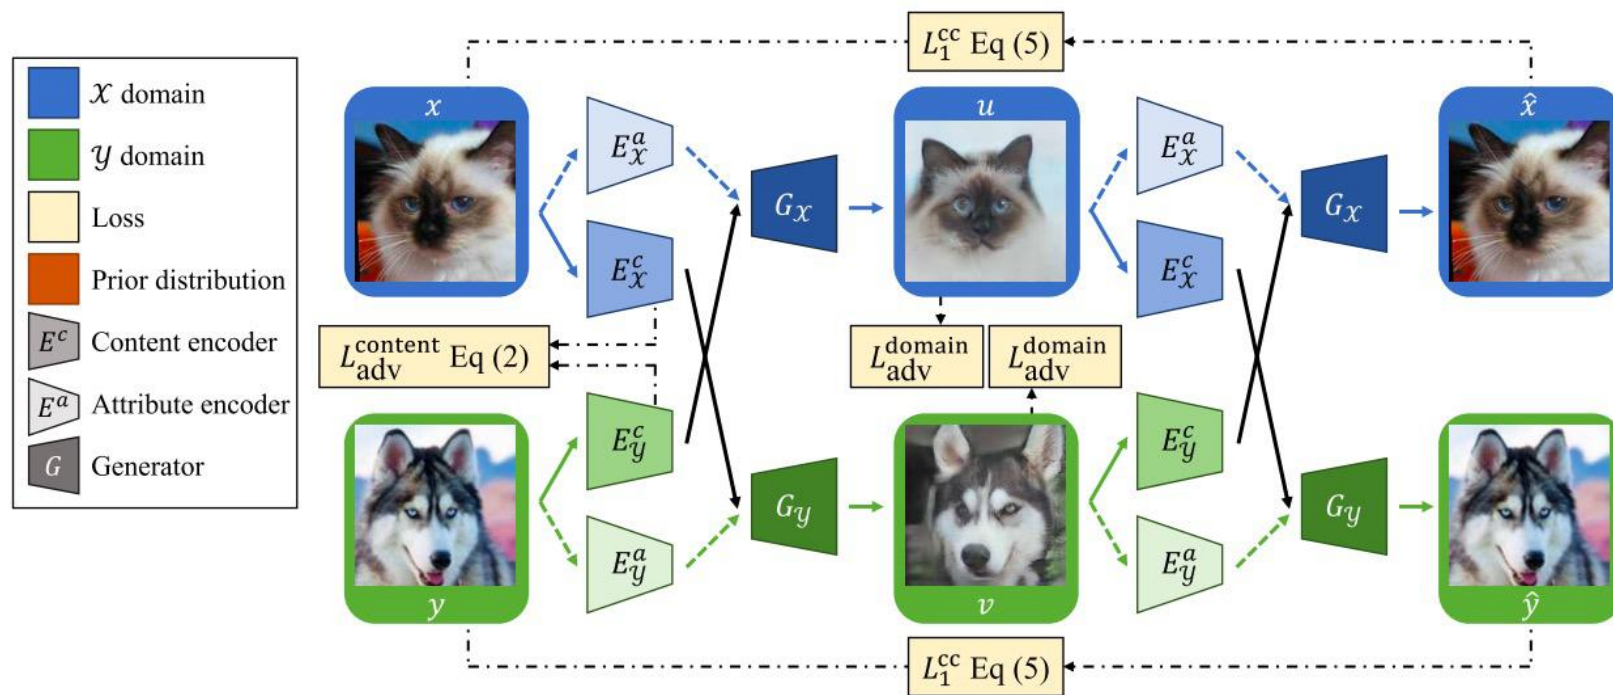


DRIT: disentangle domain-specific features

- Additional losses for better disentanglement

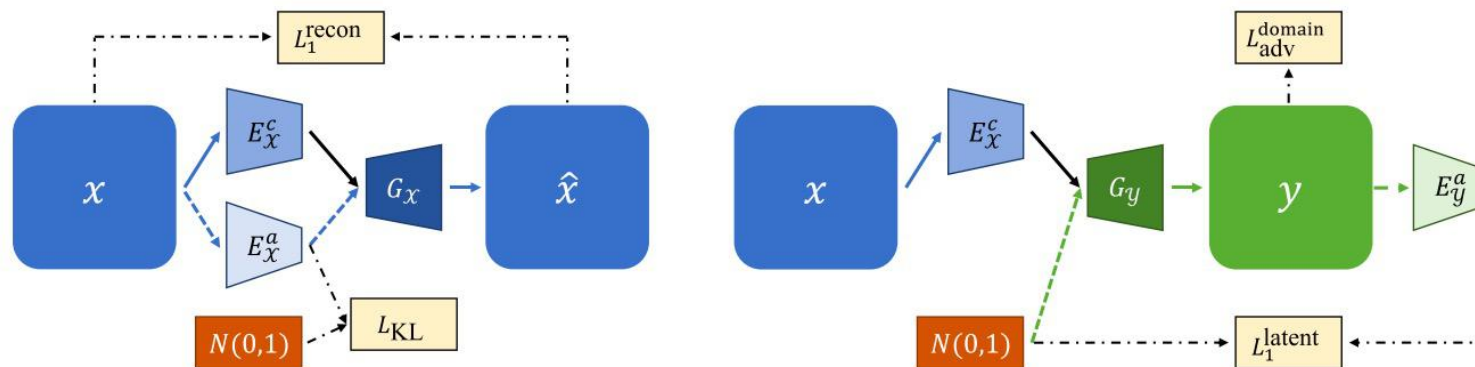

DRIT: disentangle domain-specific features

- Results

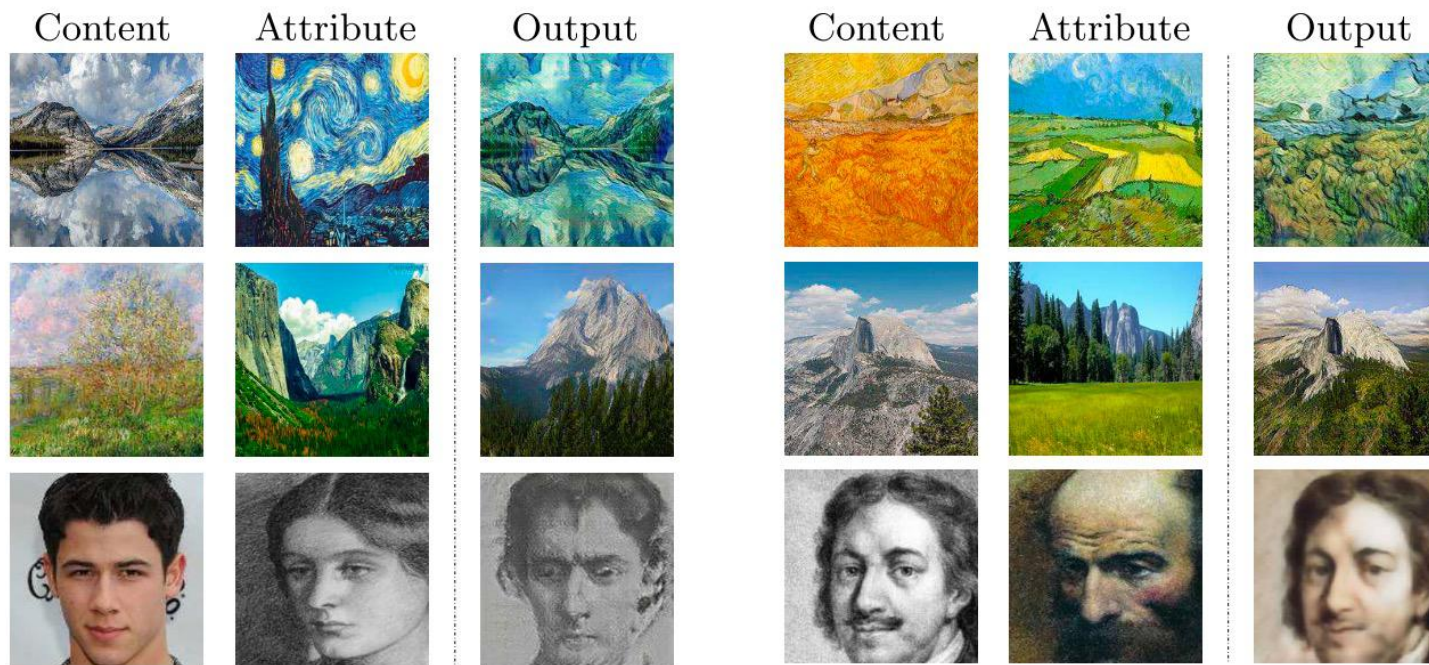


(a) Inter-domain attribute transfer

(b) Intra-domain attribute transfer

- Problem Definition
- Image Inpainting / Reconstruction / Super Resolution
- Pix2Pix: paired data
- Discussion: ideal im2im
- UNIT and CycleGAN: unpaired data
- BiCycleGAN: multi-modality
- MUNIT and Augmented CycleGAN: unpaired data + multi-modality
- DRIT: disentangle domain-specific features
- **Attention CycleGAN: maintain background**
- StarGAN: label condition
- Breaking the Cycle
- GAN-CLS and SisGAN: text condition


Attention CycleGAN: maintain background

- Learn the segmentation via synthesis

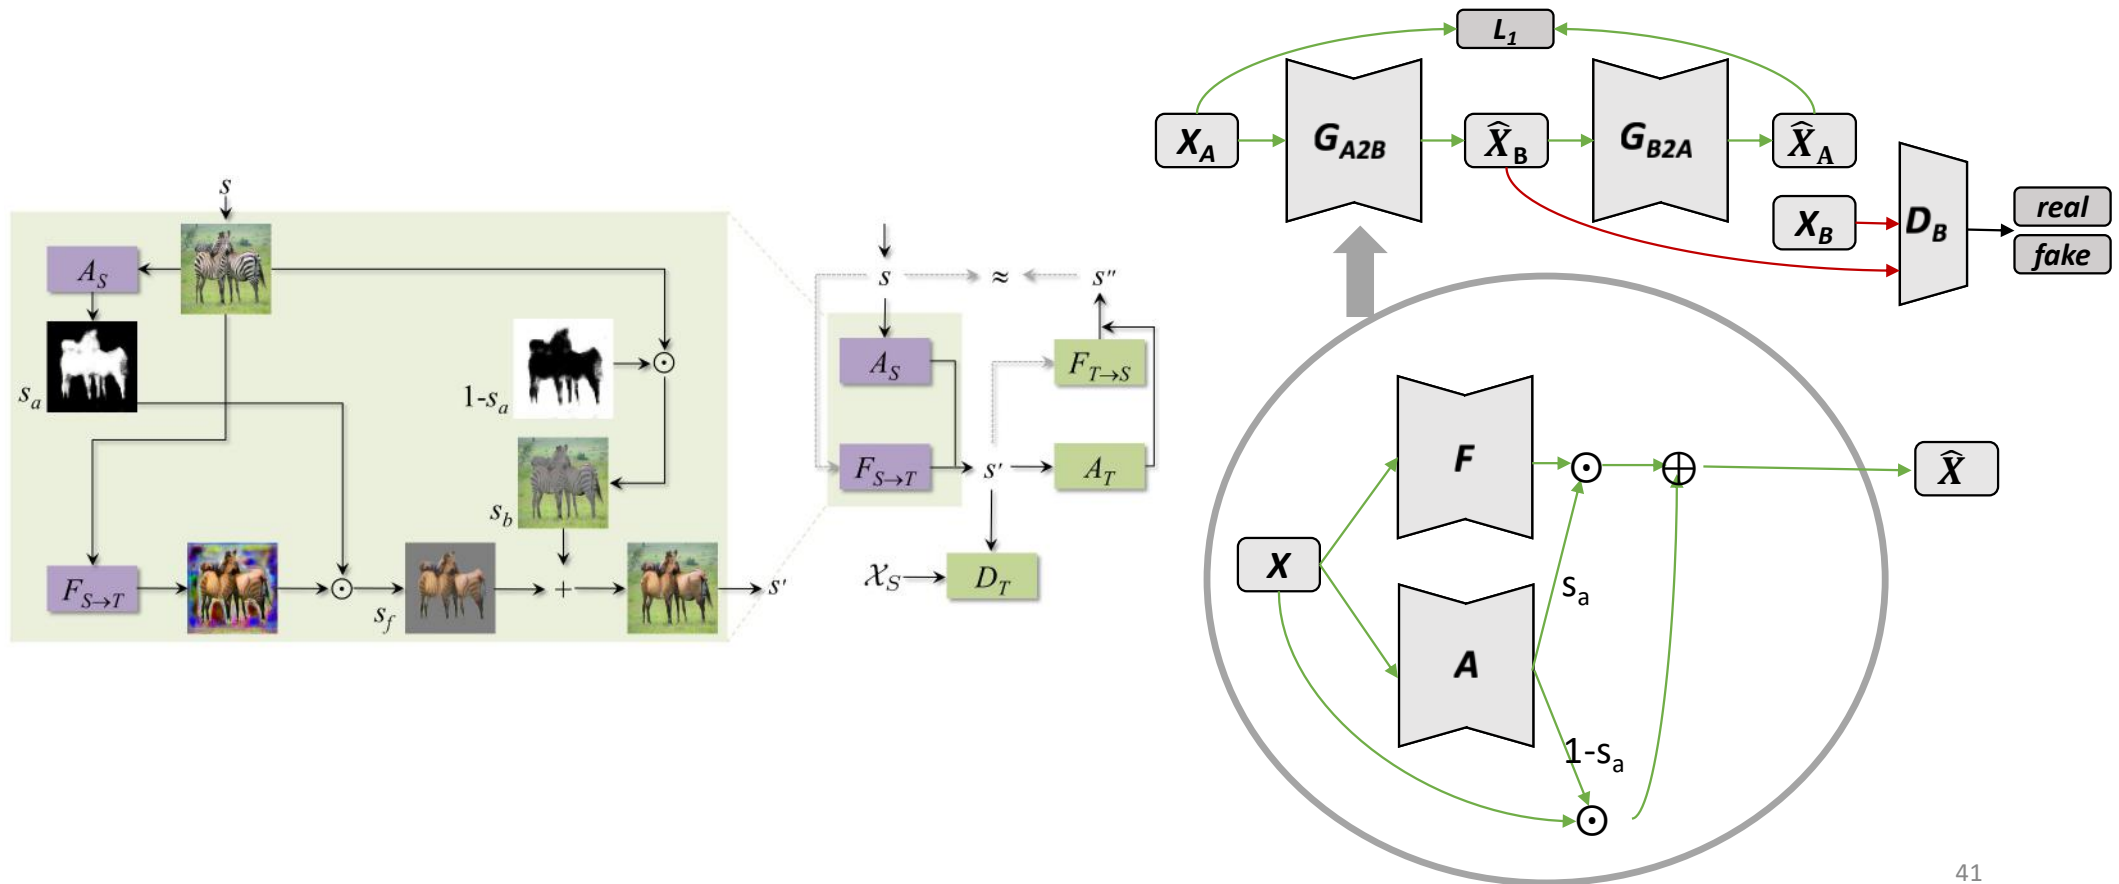

Attention CycleGAN: maintain backgrounds

- Maintain backgrounds better

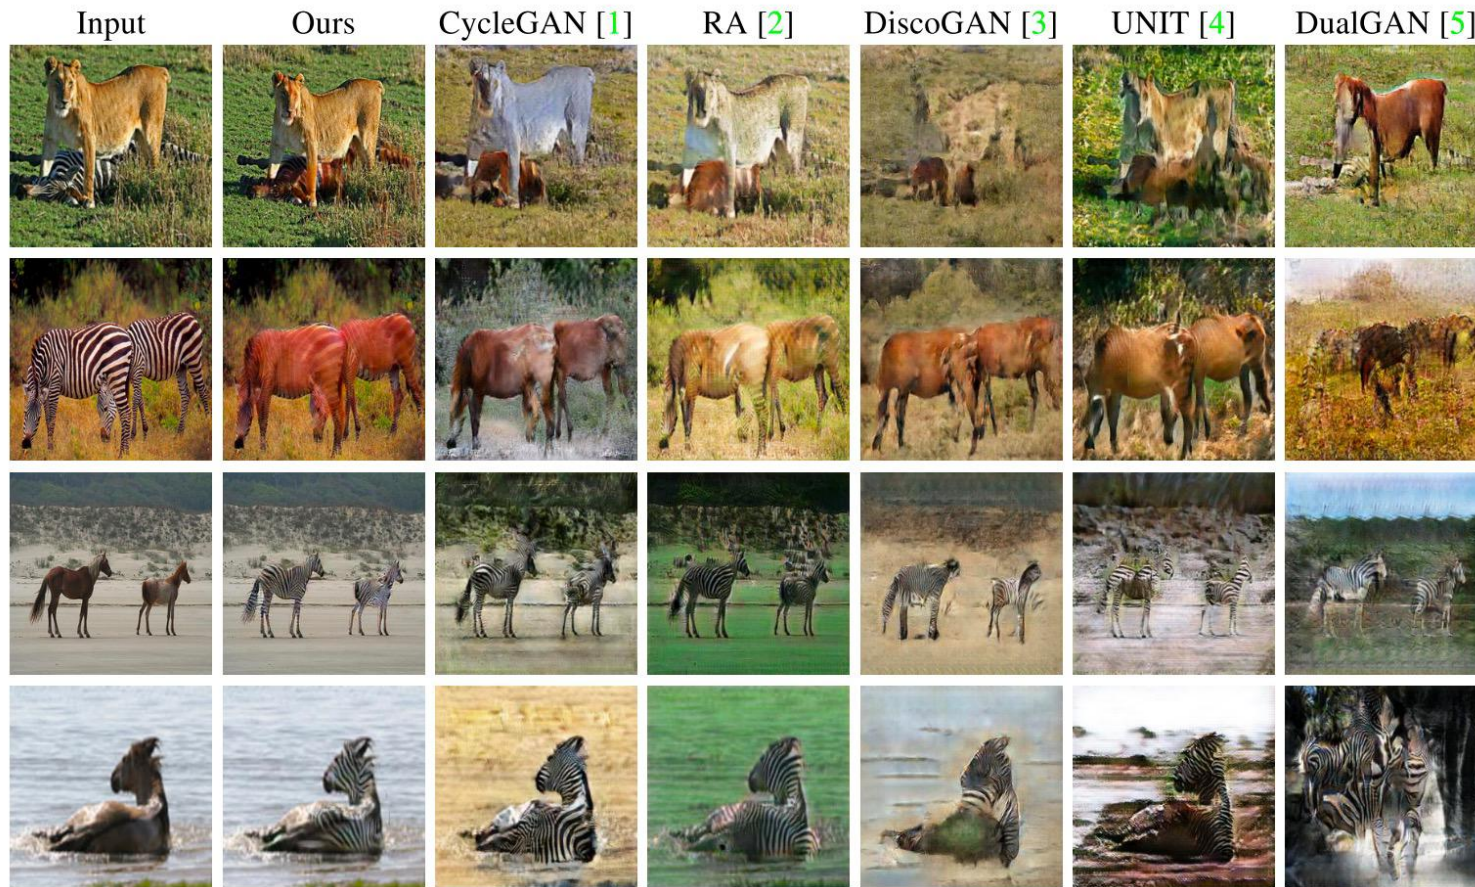

Unsupervised Attention-guided Image-to-Image Translation. Mejjati, Y. A., Richardt, C., & Cosker, D. NIPS, 2018

Attention CycleGAN: maintain backgrounds

- Learn the segmentation without segmentation labels



- Problem Definition
- Image Inpainting / Reconstruction / Super Resolution
- Pix2Pix: paired data
- Discussion: ideal $im2im$
- UNIT and CycleGAN: unpaired data
- BiCycleGAN: multi-modality
- MUNIT and Augmented CycleGAN: unpaired data + multi-modality
- DRIT: disentangle domain-specific features
- Attention CycleGAN: maintain background
- **StarGAN: label condition**
- Breaking the Cycle
- GAN-CLS and SisGAN: text condition

StarGAN: label condition



- Limitation of CycleGAN

Translations between N domains require $N(N-1)$ models

StarGAN: One model to rule them all !!

StarGAN: label condition


- Add a class condition into the generator and the output of the discriminator

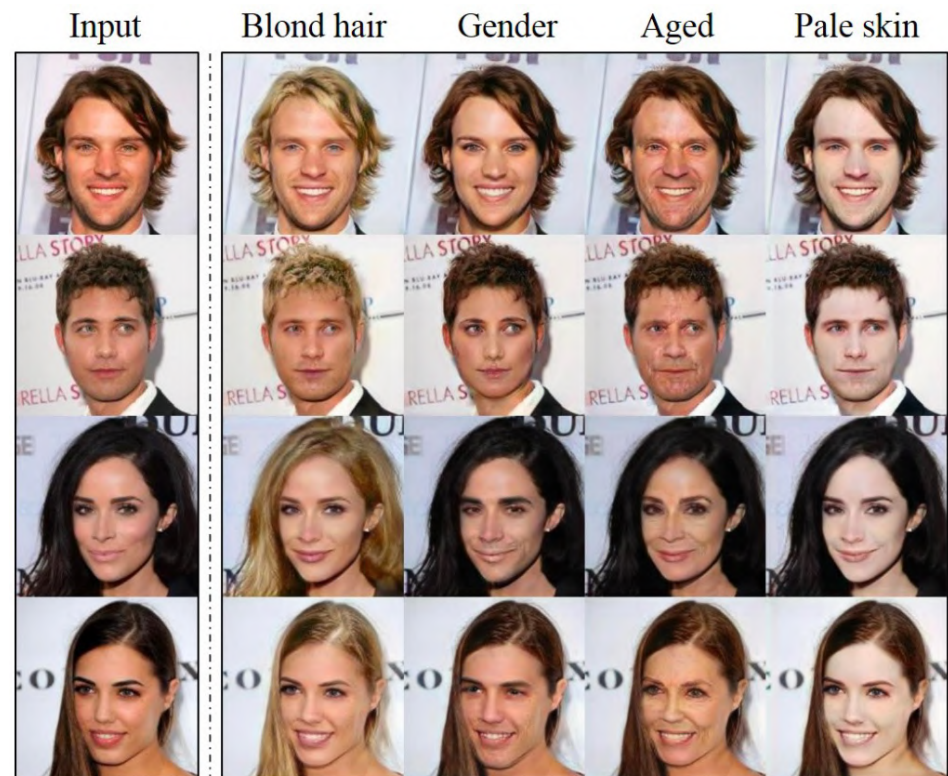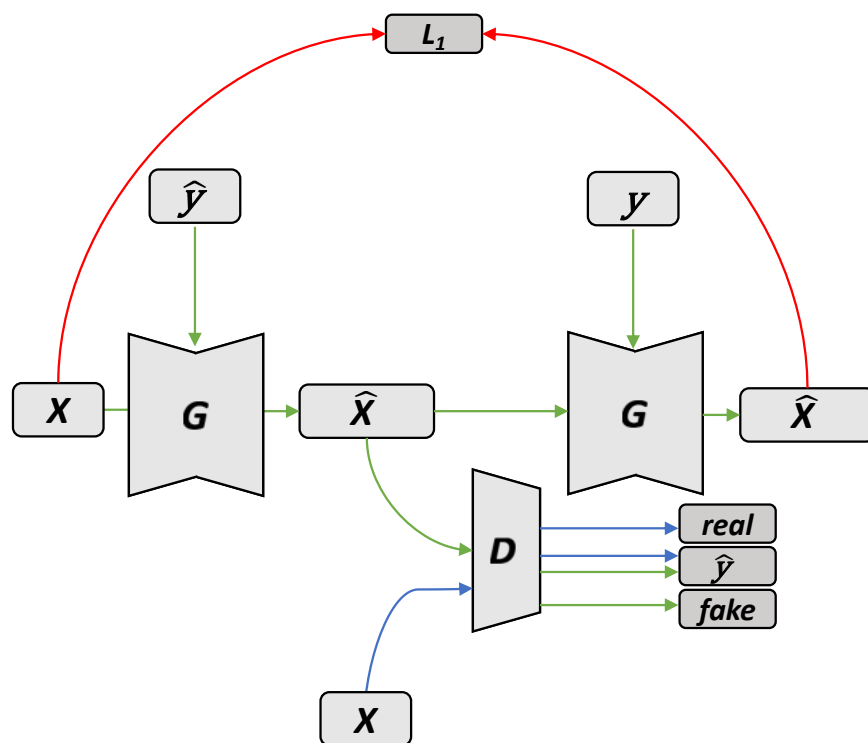

- Problem Definition
- Image Inpainting / Reconstruction / Super Resolution
- Pix2Pix: paired data
- Discussion: ideal $im2im$
- UNIT and CycleGAN: unpaired data
- BiCycleGAN: multi-modality
- MUNIT and Augmented CycleGAN: unpaired data + multi-modality
- DRIT: disentangle domain-specific features
- Attention CycleGAN: maintain background
- StarGAN: label condition
- **Breaking the Cycle**
- GAN-CLS and SisGAN: text condition

Breaking the Cycle


- Limitation of the cycle-consistency loss

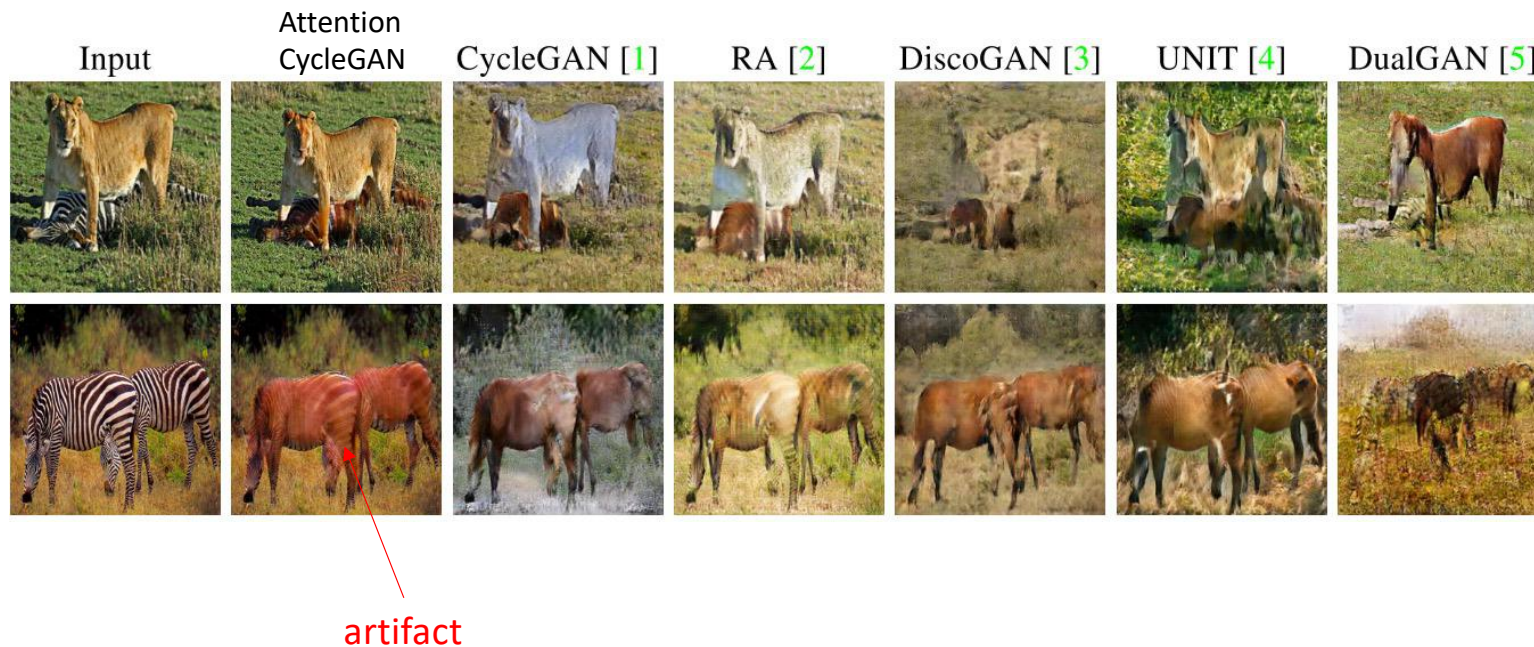

Cycle loss enforces the constraint that translating an image to the target domain and back, should obtain the original image

Breaking the Cycle

- Limitation of cycle-consistency loss


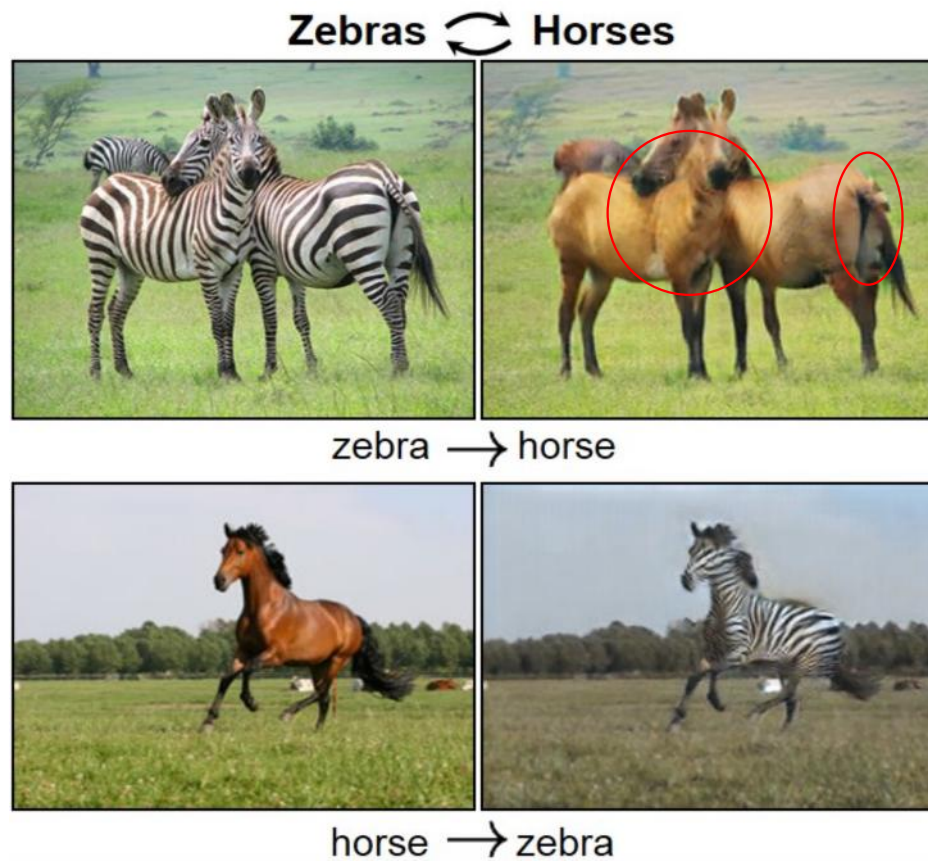


zebra \rightarrow horse Hidden Info

horse \rightarrow zebra OK

Breaking the Cycle


- Colleagues are all you need

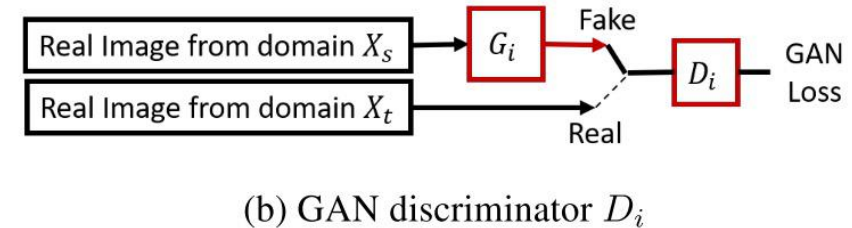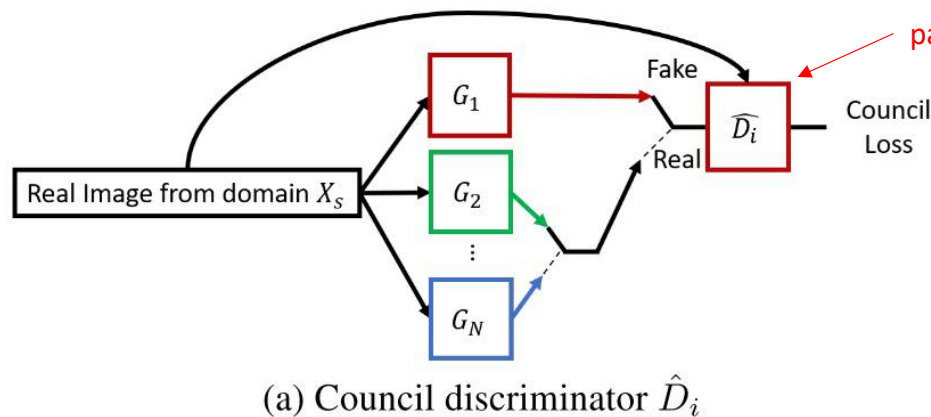

- Each member of the council is a triplet (Red indicates one council), whose components are one generator and two discriminators.
- The task of discriminator D_i is to distinguish between the generator's G_i output and real examples.
- The goal of discriminator \hat{D}_i is to distinguish between images produced by G_i and images produced by the other generators in the council. This discriminator is the core of the model and this is what differentiates the model from the classical GAN model. It enforces the generator to converge to images that could be acknowledged by all council.

Breaking the Cycle

- Colleagues are all you need

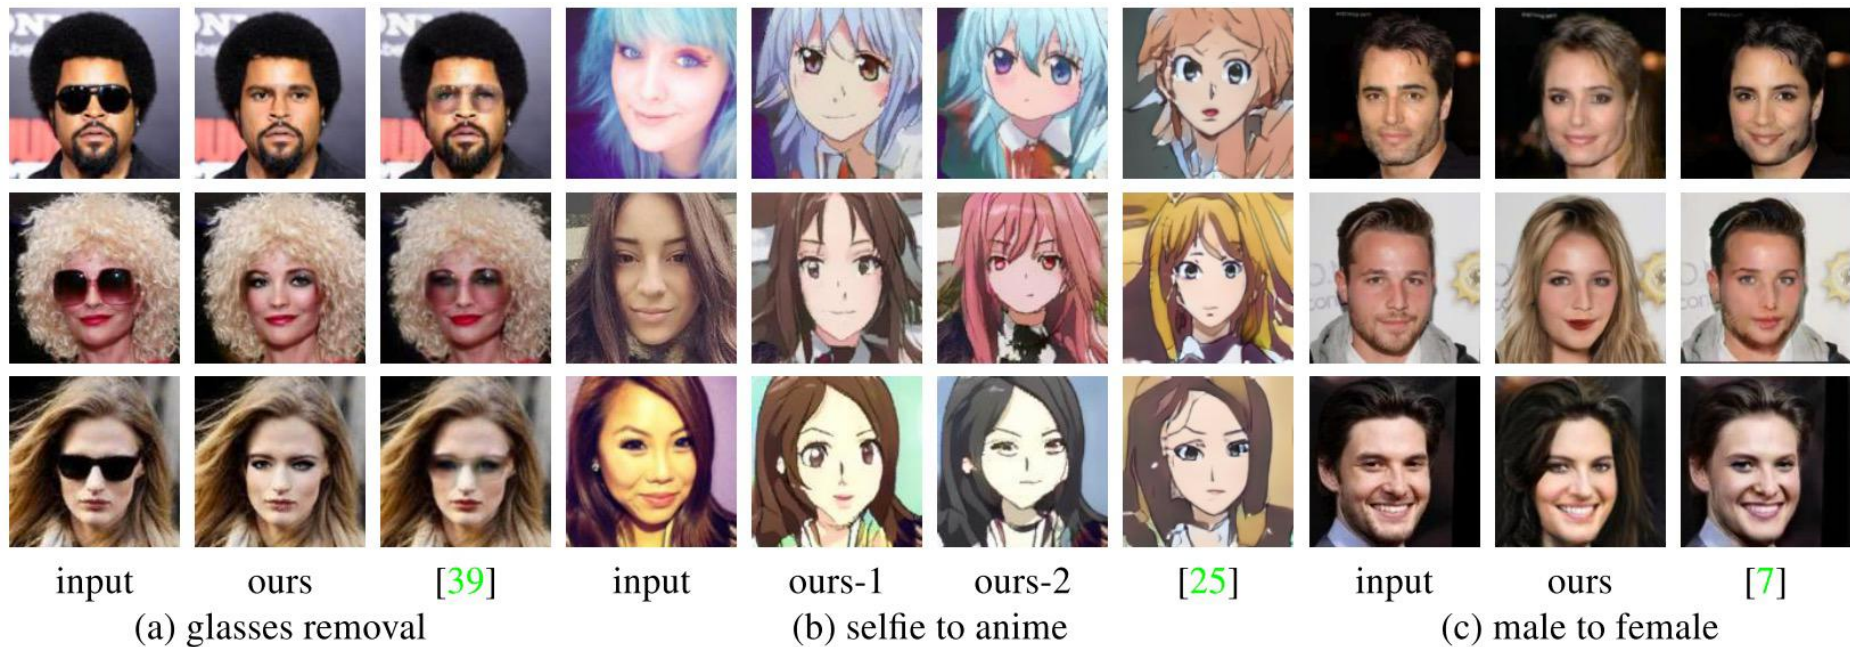

Breaking the Cycle

- Discussion: Why it works?
- It is not only for im2im,
other distribution transformations may also benefit from this approach
- Better Methods:
 - ACL-GAN
 - XDCycleGAN

- Problem Definition
- Image Inpainting / Reconstruction / Super Resolution
- Pix2Pix: paired data
- Discussion: ideal im2im
- UNIT and CycleGAN: unpaired data
- BiCycleGAN: multi-modality
- MUNIT and Augmented CycleGAN: unpaired data + multi-modality
- DRIT: disentangle domain-specific features
- Attention CycleGAN: maintain background
- StarGAN: label condition
- Breaking the Cycle
- **GAN-CLS and SisGAN: text condition**

GAN-CLS and SisGAN

- Text-to-image synthesis

this small bird has a pink breast and crown, and black primaries and secondaries.



the flower has petals that are bright pinkish purple with white stigma



this magnificent fellow is almost all black with a red crest, and white cheek patch.



this white and yellow flower have thin white petals and a round yellow stamen




- Classic multi-modal problem

$$P(t, z)$$

Generative Adversarial Text to Image Synthesis. *S. Reed, Z. Akata et al. ICML. 2016.*



GAN-CLS and SisGAN

- Text-to-image synthesis

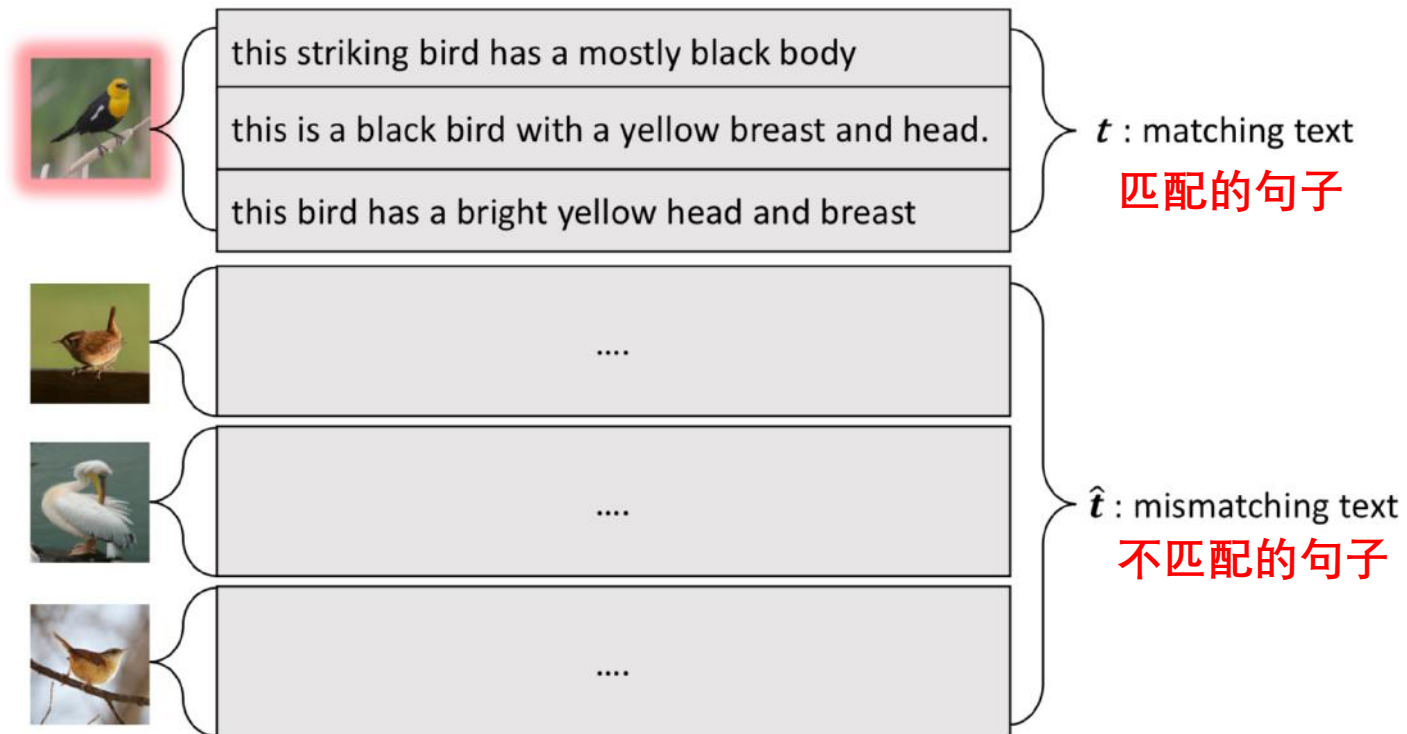



GAN-CLS and SisGAN

- Text-to-image synthesis

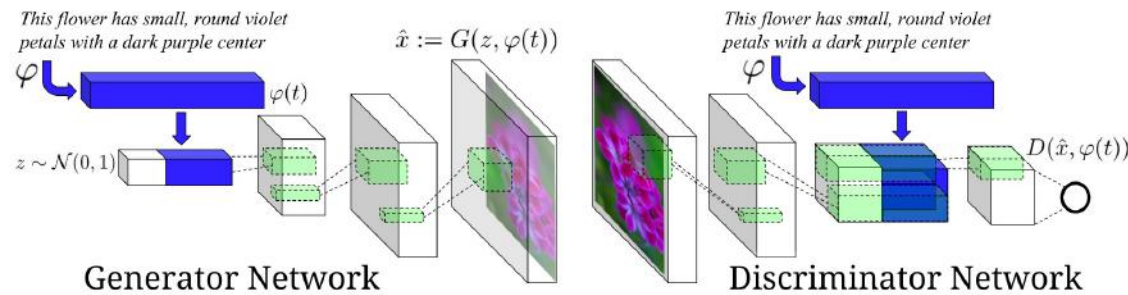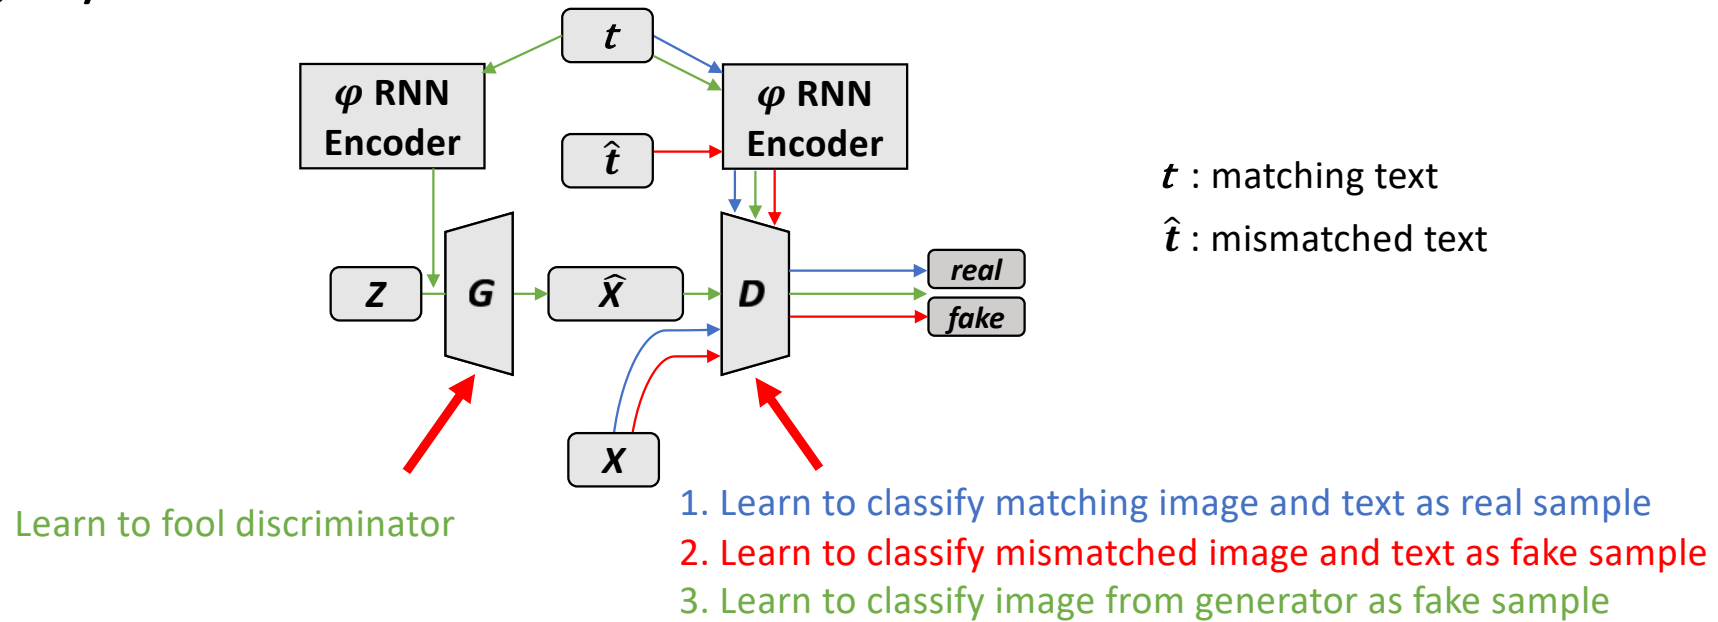


GAN-CLS and SisGAN

- Text-to-image synthesis + High resolution image

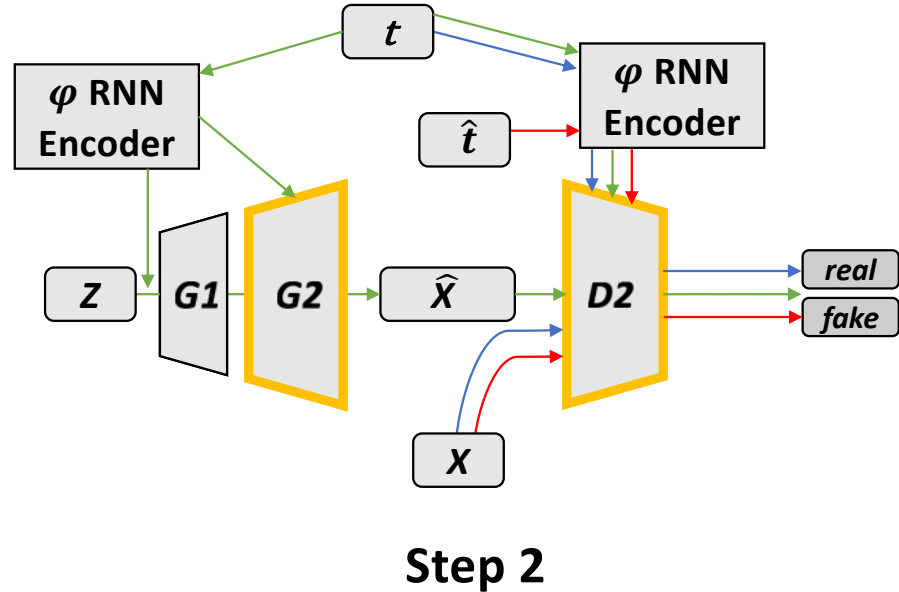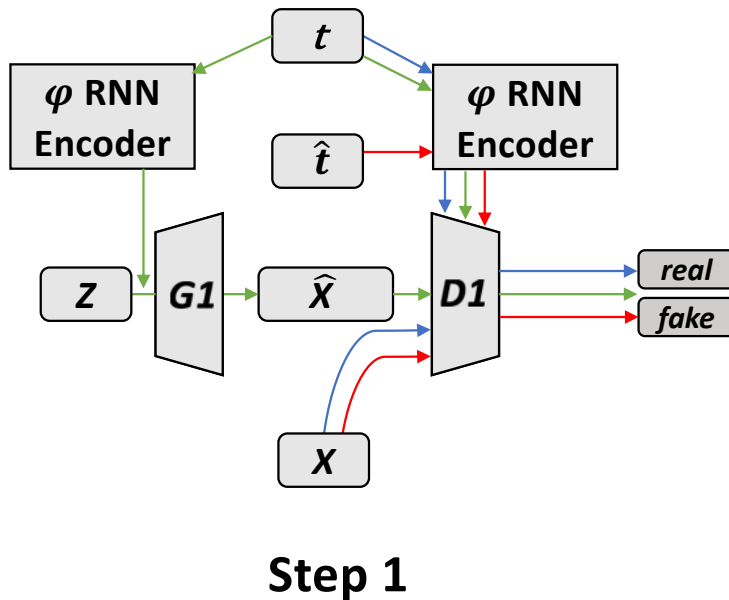


GAN-CLS and SisGAN

- Text-to-image synthesis + High resolution image

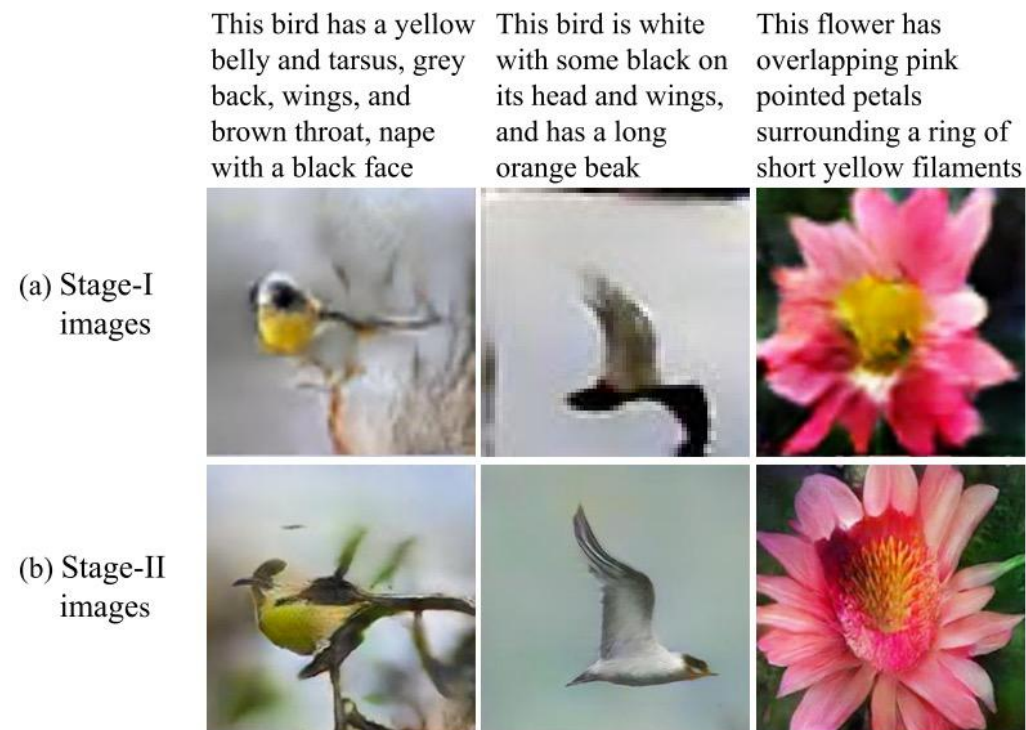

GAN-CLS and SisGAN


- Semantic image synthesis: image manipulation with natural language

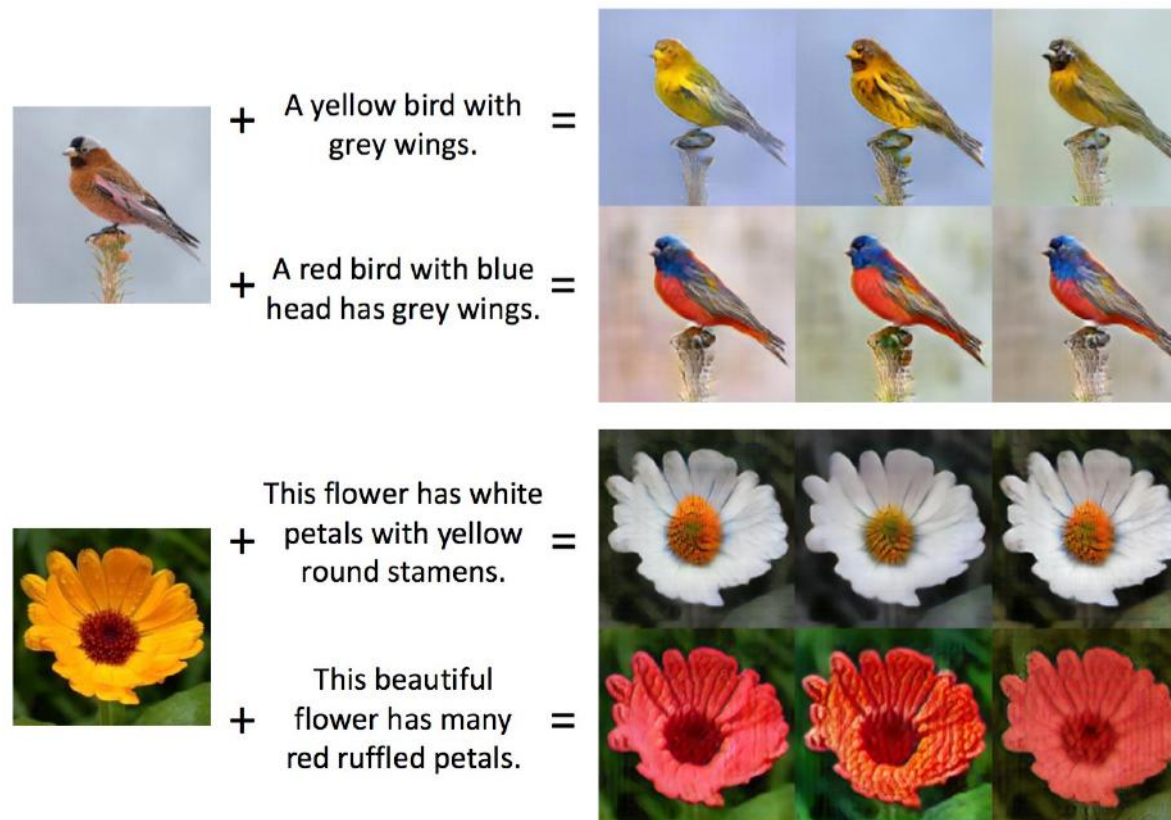

Semantic Image Synthesis via Adversarial Learning. *H. Dong, S. Yu et al. ICCV 2017.*

GAN-CLS and SisGAN

- Semantic image synthesis: image manipulation with natural language

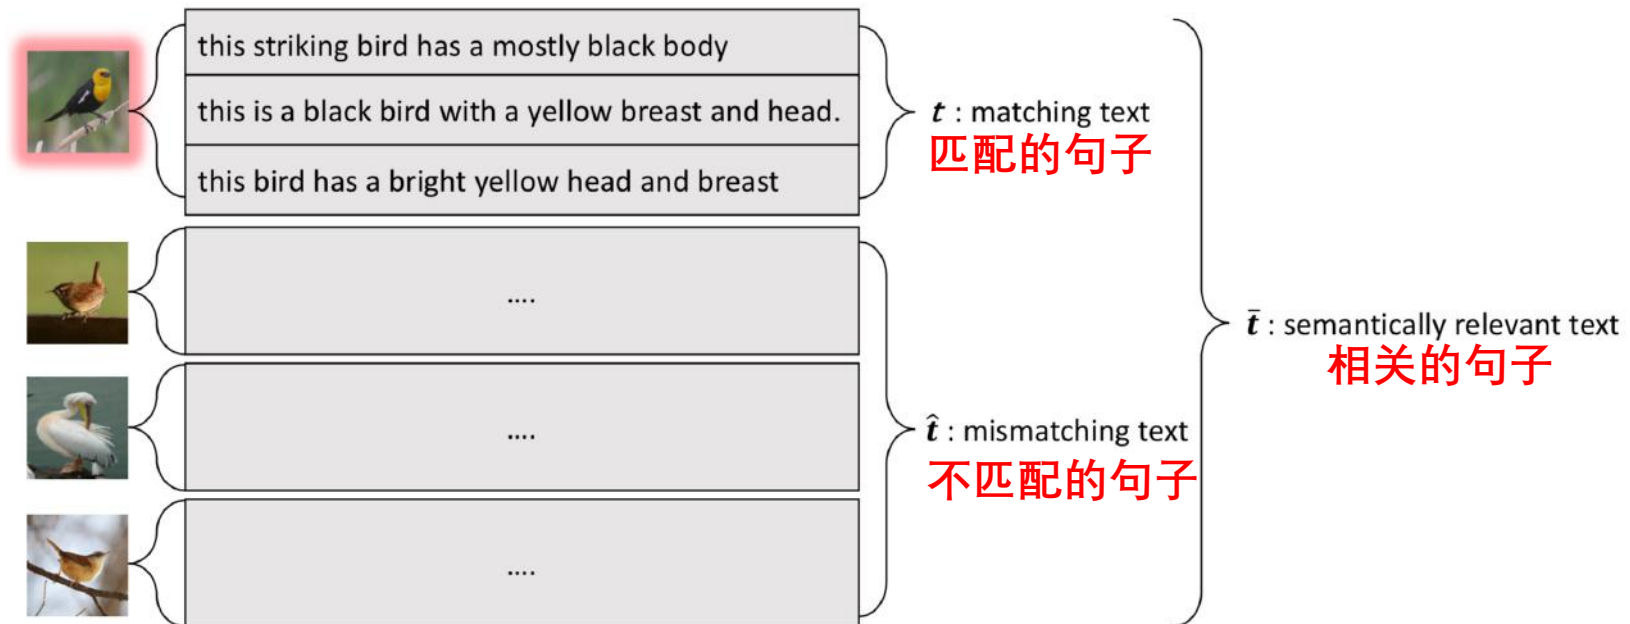


GAN-CLS and SisGAN

- Semantic image synthesis: image manipulation with natural language

t : matching text

\hat{t} : mismatched text

\bar{t} : semantically relevant text

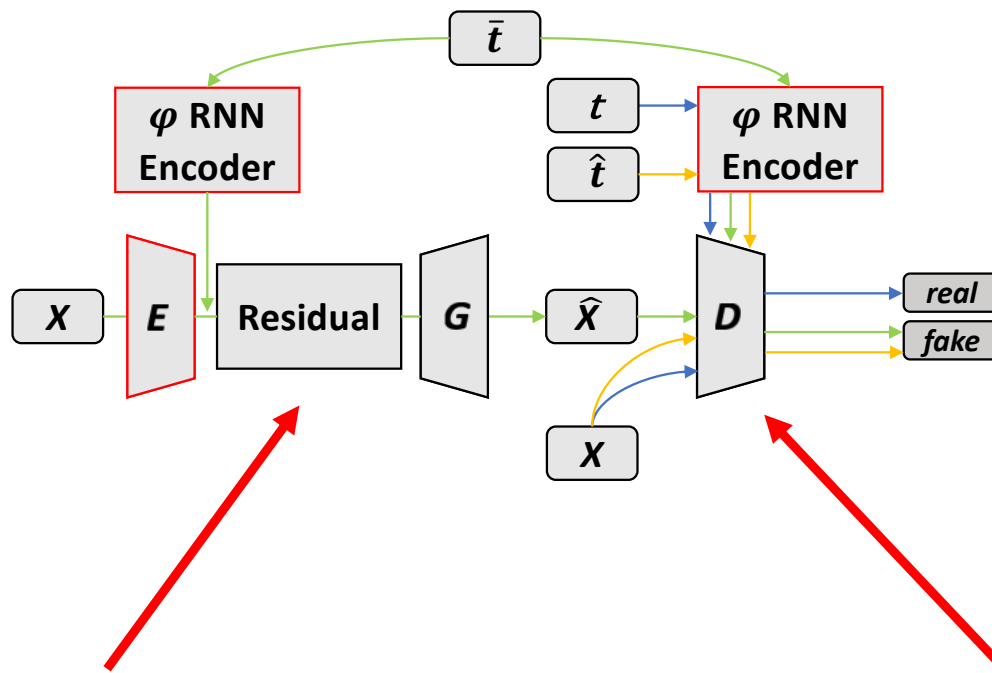



Learn to fool discriminator
when inputting image with
semantically relevant text

1. Learn to classify matching image and text pairs as real samples
2. Learn to classify mismatched image and text pairs as fake samples
3. Learn to classify samples from generator as fake samples

$$\begin{aligned} \mathcal{L}_D = & \mathbb{E}_{(x,t) \sim p_{data}} \log D(x, \varphi(t)) \\ & + \mathbb{E}_{(x,\hat{t}) \sim p_{data}} \log(1 - D(x, \varphi(\hat{t}))) \\ & + \mathbb{E}_{(x,\bar{t}) \sim p_{data}} \log(1 - D(G(x, \varphi(\bar{t})), \varphi(\bar{t}))) \\ \mathcal{L}_G = & \mathbb{E}_{(x,\bar{t}) \sim p_{data}} \log(D(G(x, \varphi(\bar{t})), \varphi(\bar{t}))) \end{aligned}$$

GAN-CLS and SisGAN

- Semantic image synthesis: Learn the location information via synthesis

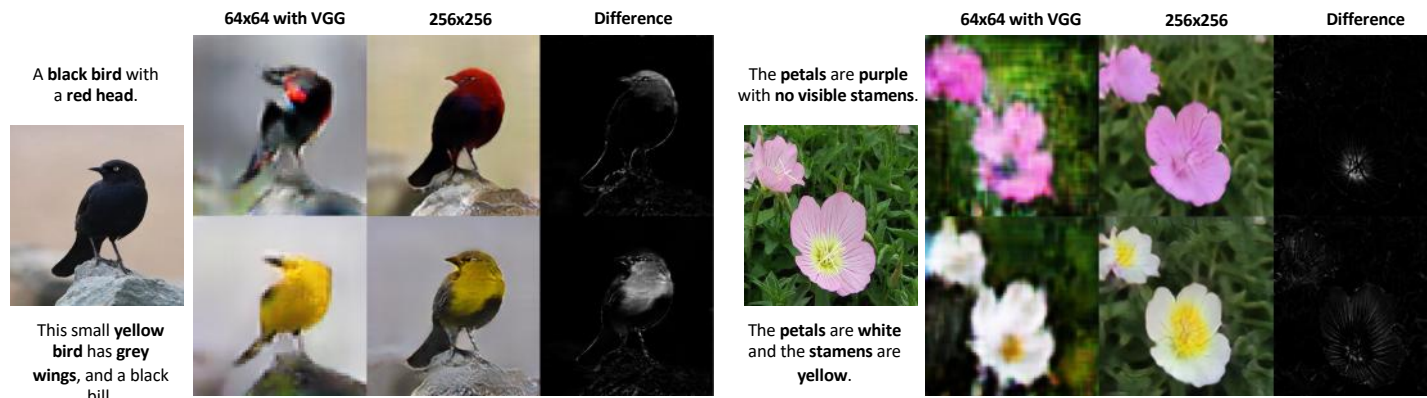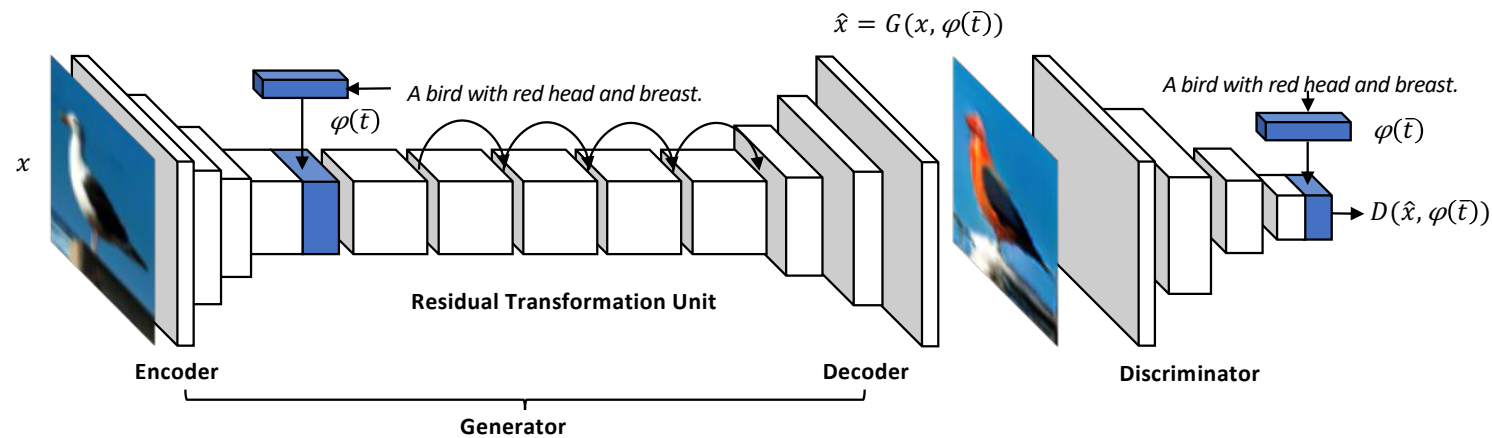

Summary

- Problem Definition
- Image Inpainting / Reconstruction / Super Resolution
- Pix2Pix: paired data
- Discussion: ideal im2im
- UNIT and CycleGAN: unpaired data
- BiCycleGAN: multi-modality
- MUNIT and Augmented CycleGAN: unpaired data + multi-modality
- DRIT: disentangle domain-specific features
- Attention CycleGAN: maintain background
- StarGAN: label condition
- Breaking the Cycle
- GAN-CLS and SisGAN: text condition

Discussion: ideal im2im

- What should the ideal image-to-image translation to be?
 - Unpaired data
 - Maintain background
 - Multi-modality
 - Disentanglement
 - Multi-domain
 - Conditional translation

Thanks