

RAI Risk Taxonomy 2.0

Second Human-Review Recovery Technical Report

Human-review recovery release

29 August 2026

Executive summary

This report documents a recovery that preserved 798 baseline L4 cards while reinterpreting and applying the second-round human-review instructions row by row. Neither EM nor Hybrid EM was rerun. Two specialist agents independently reviewed and cross-reviewed 165 decisions against the frozen L3 master and an 808-row instruction register. The final release contains 789 L4 cards: 618 General, 77 Agentic, and 94 Physical. No card remains assigned to Others.

1 Recovery principles

Valid edits and user-approved consolidations in the baseline commit were retained. Only explicit second-round instructions to delete, merge, split, remap, or rewrite were applied through `source_row_id` lineage. The L3 master prevailed over conflicting prompts. No L3 was created or modified, and its SHA-256 digest was frozen.

2 Applied decisions

Action	Reviewed rows
Remap	80
Rewrite and retain	39
Split	18
Merge	14
Delete	14

Table 1: The 165 approved human-review decisions

3 Splitting compound cards

Six records that had already been split correctly were retained. Twelve compound records that still had a single output were rewritten as distinct children aligned with their respective L3 mechanisms. Every bilingual definition identifies an AI system, algorithm, agent, or equivalent technical subject, a causal mechanism, and an adverse outcome. Titles follow the nominal tone of the L3 master and do not receive a mechanical risk suffix.

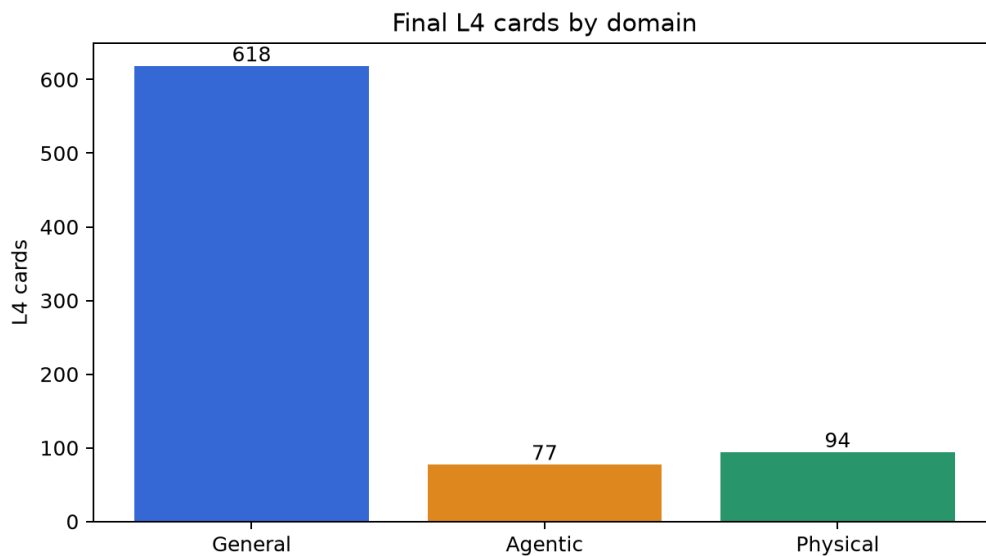


Figure 1: Final L4 cards by domain

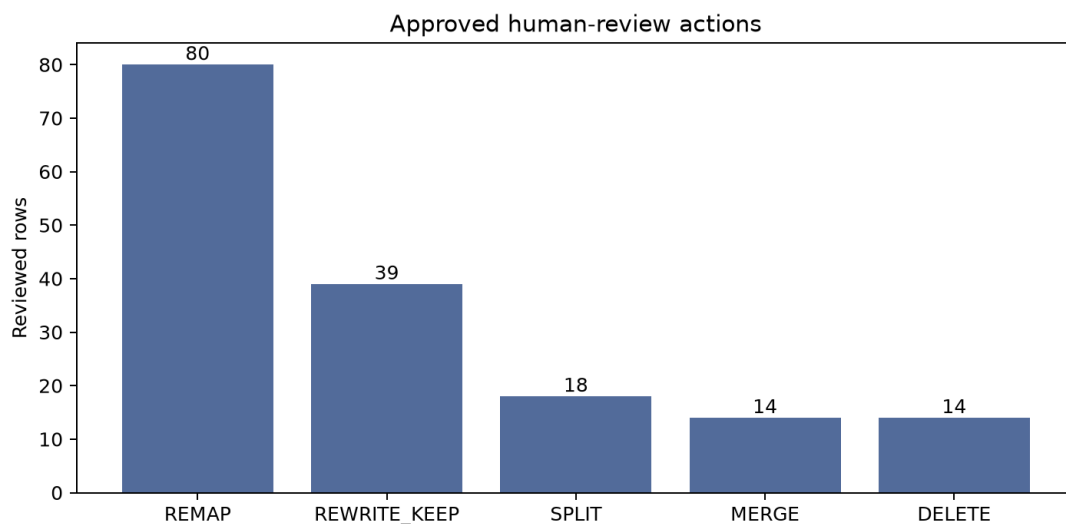


Figure 2: Distribution of approved human-review actions

4 Integrity and validation

The L3 master SHA-256 remained e9439ced64fb49c1496f1955013b5f038ecc7d271b9d6c9704f1e1bf6b0094df. L4 identifiers were reissued continuously within each final L3. Duplicate identifiers, exact duplicate cards, unknown L3 assignments, hierarchy mismatches, blank bilingual fields, and definitions without an AI technical subject all returned zero failures. Two independent executions produced identical SHA-256 hashes for the three L4 CSV files.

5 Deliverables

The release contains one L1 CSV, one combined L1/L2/L3 CSV, and separate General, Agentic, and Physical L4 CSVs. The validation directory preserves the 808-row instruction register, the 165 approved decisions, lineage edges from source_row_id to final L4, deletion tombstones, the application log, and

the validation record.

6 Conclusion

This recovery implements human-review intent rather than a new similarity-based classification. No Others assignments remain and the L3 master is unchanged. Any future remapping must be run only after a separate explicit user instruction.