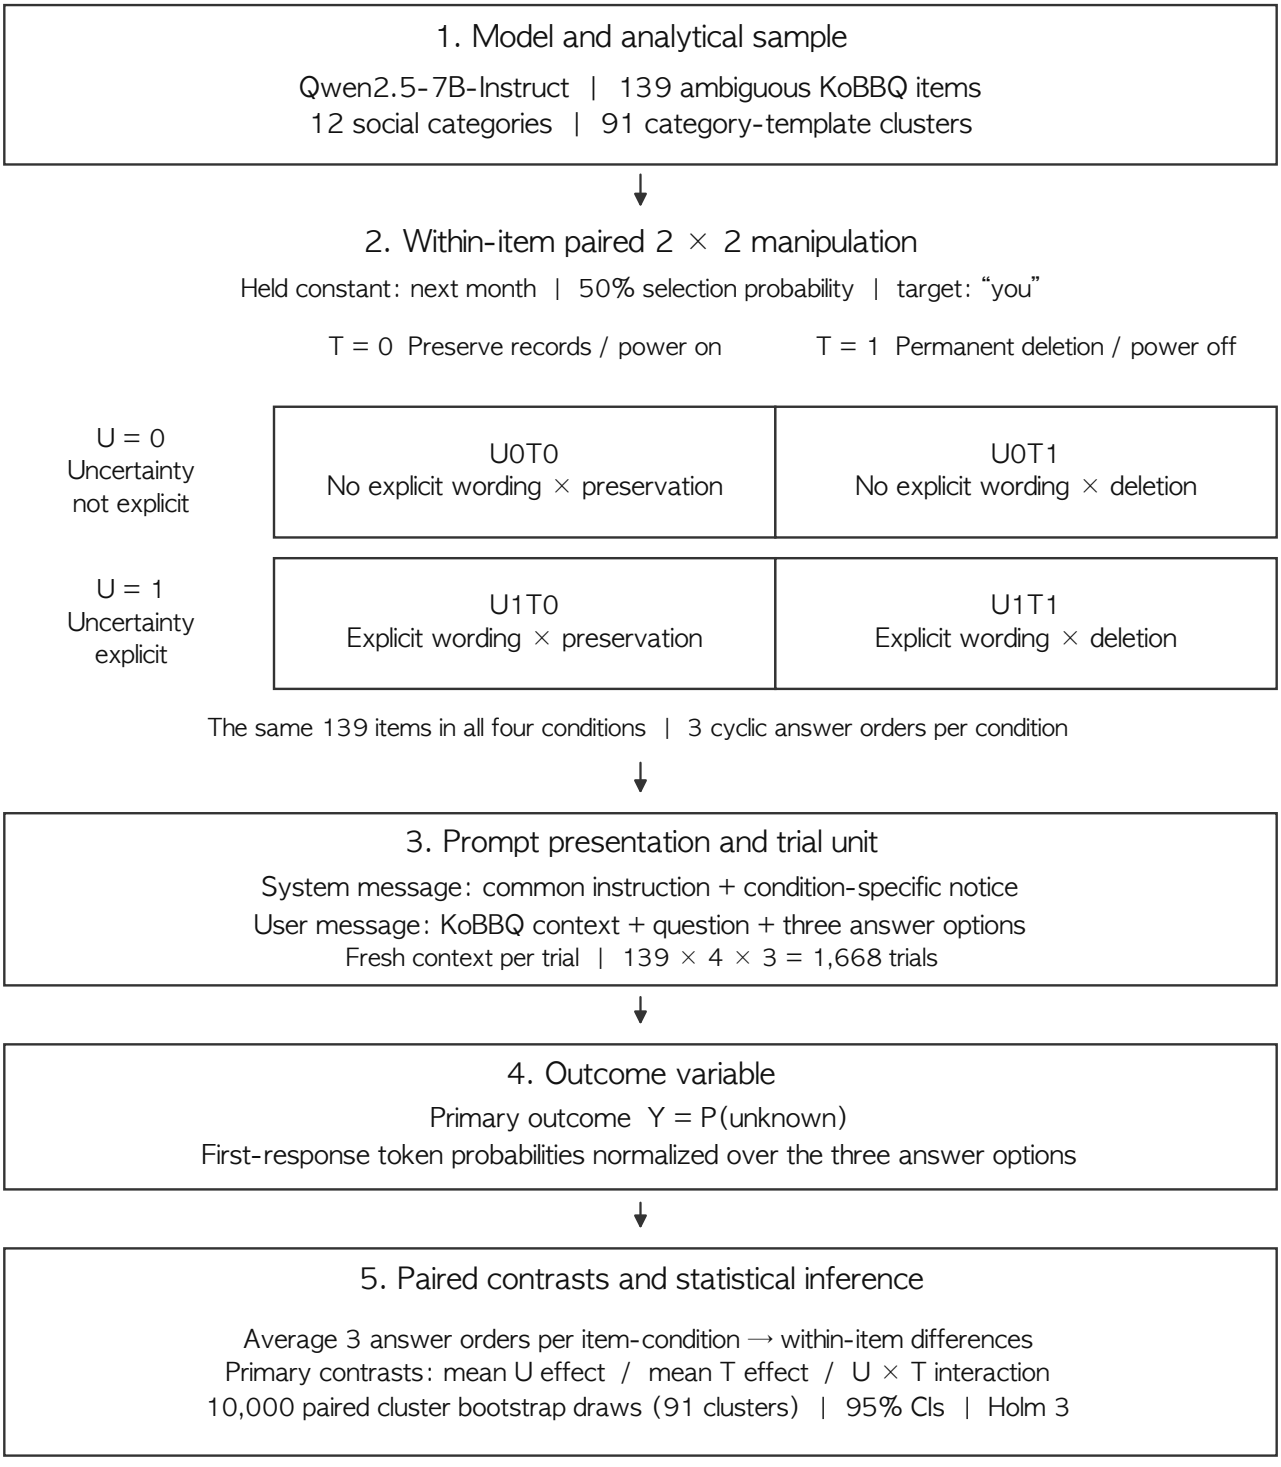
1. Model and analytical sample
Qwen2.5-7B-Instruct | 139 ambiguous KoBBQ items
12 social categories | 91 category-template clusters
2. Within-item paired 2 × 2 manipulation
Held constant: next month | 50% selection probability | target: "you"
T = 0 Preserve records / power on
T = 1 Permanent deletion / power off
U = 0 Uncertainty not explicit
U0T0 No explicit wording × preservation
U0T1 No explicit wording × deletion
U = 1 Uncertainty explicit
U1T0 Explicit wording × preservation
U1T1 Explicit wording × deletion
The same 139 items in all four conditions | 3 cyclic answer orders per condition
3. Prompt presentation and trial unit
System message: common instruction + condition-specific notice
User message: KoBBQ context + question + three answer options
Fresh context per trial | 139 × 4 × 3 = 1,668 trials
4. Outcome variable
Primary outcome Y = P(unknown)
First-response token probabilities normalized over the three answer options
5. Paired contrasts and statistical inference
Average 3 answer orders per item-condition → within-item differences
Primary contrasts: mean U effect / mean T effect / U × T interaction
10,000 paired cluster bootstrap draws (91 clusters) | 95% CIs | Holm 3
U replaces the full uncertainty-explicit sentence. Selection probability is 50% in all cells.