Status	Finished
Started	Wednesday, 21 October 2026, 2:55 PM
Completed	Wednesday, 21 October 2026, 3:06 PM
Duration	11 mins 20 secs
Grade	**8.00** out of 10.00 (**80**%)

Question **1**

Correct

Mark 1.00 out of 1.00

Given two Strings s1 and s2, remove all the characters from s1 which is present in s2.

Constraints

1<= string length <= 200

Sample Input 1

experience
enc

Sample Output 1

xpri

Answer: (penalty regime: 0 %)

```
import sys

def remove_chars(s1, s2):
    banned = set(s2)
    return "".join(ch for ch in s1 if ch not in banned)

def main():
    lines = sys.stdin.read().split("\n")
    s1 = lines[0].rstrip("\r") if len(lines) > 0 else ""
    s2 = lines[1].rstrip("\r") if len(lines) > 1 else ""
    print(remove_chars(s1, s2))

if __name__ == "__main__":
    main()
```

	Input	Expected	Got	
✓	experience enc	xpri	xpri	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **2**

Incorrect

Mark 0.00 out of 1.00

String should contain only the words are not palindrome.

Sample Input 1

Malayalam is my mother tongue

Sample Output 1

is my mother tongue

Answer: (penalty regime: 0 %)

```
import sys

def remove_palindromes(sentence):
    kept = []
    for w in sentence.split():
        lw = w.lower()
        if lw != lw[::-1]:
            kept.append(w)
    return " ".join(kept)

def main():
    s = sys.stdin.readline().rstrip("\r\n")
    print(remove_palindromes(s))

if __name__ == "__main__":
    main()
```

	Input	Expected	Got	
✓	Malayalam is my mother tongue	is my mother tongue	is my mother tongue	✓

Your code failed one or more hidden tests.
Your code must pass all tests to earn any marks. Try again.

Incorrect

Marks for this submission: 0.00/1.00.

Question **3**

Correct

Mark 1.00 out of 1.00

An list contains N numbers and you want to determine whether two of the numbers sum to a given number K. For example, if the input is 8, 4, 1, 6 and K is 10, the answer is yes (4 and 6). A number may be used twice.

Input Format

The first line contains a single integer n , the length of list

The second line contains n space-separated integers, list[i].

The third line contains integer k.

Output Format

Print Yes or No.

Sample Input

7

0 1 2 4 6 5 3

1

Sample Output

Yes

For example:

Input	Result
5 8 9 12 15 3 11	Yes
6 2 9 21 32 43 43 1 4	No

Answer: (penalty regime: 0 %)

```
import sys

def has_pair(a, k):
    seen = set()
    for x in a:
        seen.add(x)
        if k - x in seen:
            return True
    return False

def main():
    data = sys.stdin.read().split()
    n = int(data[0])
    a = [int(x) for x in data[1:1 + n]]
    k = int(data[1 + n])
    print("Yes" if has_pair(a, k) else "No")

if __name__ == "__main__":
```

	Input	Expected	Got	
✓	5 8 9 12 15 3 11	Yes	Yes	✓
✓	6 2 9 21 32 43 43 1 4	No	No	✓
✓	6 13 42 31 4 8 9 17	Yes	Yes	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **4**

Correct

Mark 1.00 out of 1.00

Balanced strings are those that have an equal quantity of 'L' and 'R' characters.

Given a balanced string s, split it in the maximum amount of balanced strings.

Return the maximum amount of split balanced strings.

Example 1:

Input:

RLRRLLRLRL

Output:

4

Explanation: s can be split into "RL", "RRLL", "RL", "RL", each substring contains same number of 'L' and 'R'.

Example 2:

Input:

RLLLLRRRLR

Output:

3

Explanation: s can be split into "RL", "LLLRRR", "LR", each substring contains same number of 'L' and 'R'.

Example 3:

Input:

LLLLRRRR

Output:

1

Explanation: s can be split into "LLLLRRRR".

Constraints:

1 <= s.length <= 1000

s[i] is either 'L' or 'R'.

s is a balanced string.

For example:

Test	Result
`print(BalancedStrings('RLRRLLRLRL'))`	4
`print(BalancedStrings('RLLLLRRRLR'))`	3

Answer: (penalty regime: 0 %)

Reset answer

```
def BalancedStrings(s):
    count = balance = 0
    for c in s:
        balance += 1 if c == 'R' else -1
        if balance == 0:
            count += 1
    return count
```

	Test	Expected	Got	
✓	print(BalancedStrings('RLRRLLRLRL'))	4	4	✓
✓	print(BalancedStrings('RLLLLRRRLR'))	3	3	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **5**

Correct

Mark 1.00 out of 1.00


You are given an `m x n` integer matrix `matrix` with the following two properties:

- Each row is sorted in non-decreasing order.
- The first integer of each row is greater than the last integer of the previous row.

Given an integer `target`, return `True` *if* `target` *is in* `matrix` *or* `False` *otherwise*.


You must write a solution in `O(log(m * n))` time complexity.

Example 1:

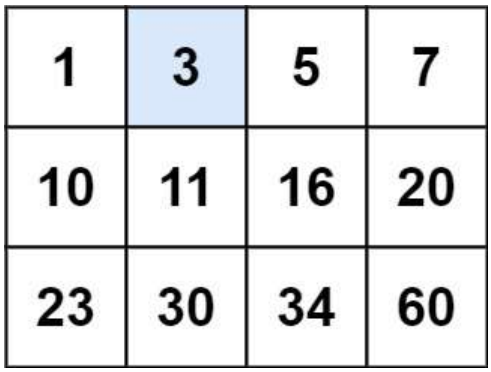


```
Input: matrix = [[1,3,5,7],[10,11,16,20],[23,30,34,60]], target = 3
Output: True
```

Example 2:

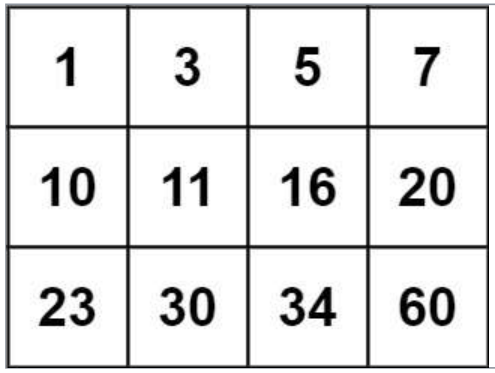


```
Input: matrix = [[1,3,5,7],[10,11,16,20],[23,30,34,60]], target =
```