

HIMITSU Protocol


Spend private funds without a relayer.

THE PROBLEM


Privacy protocols rely
on relayers to send transactions.

TORNADO CASH CLASSIC


01 DEPOSIT

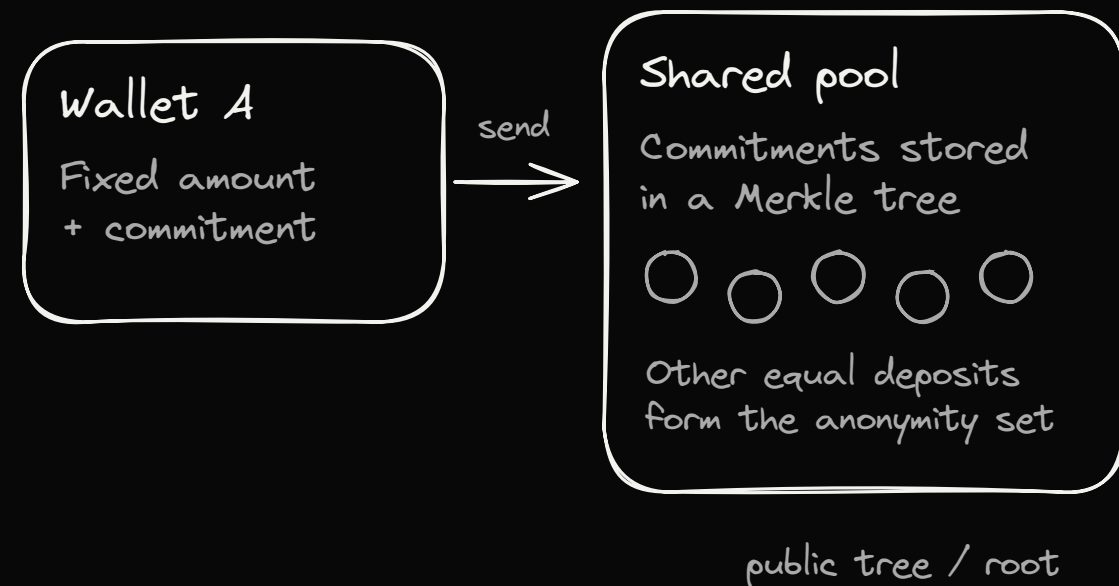

02 PROVE

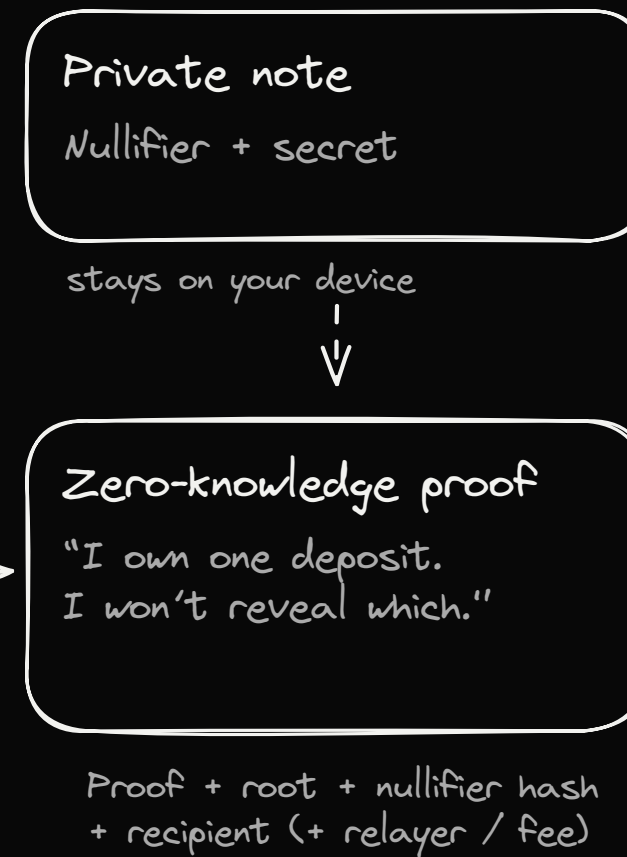

03 WITHDRAW

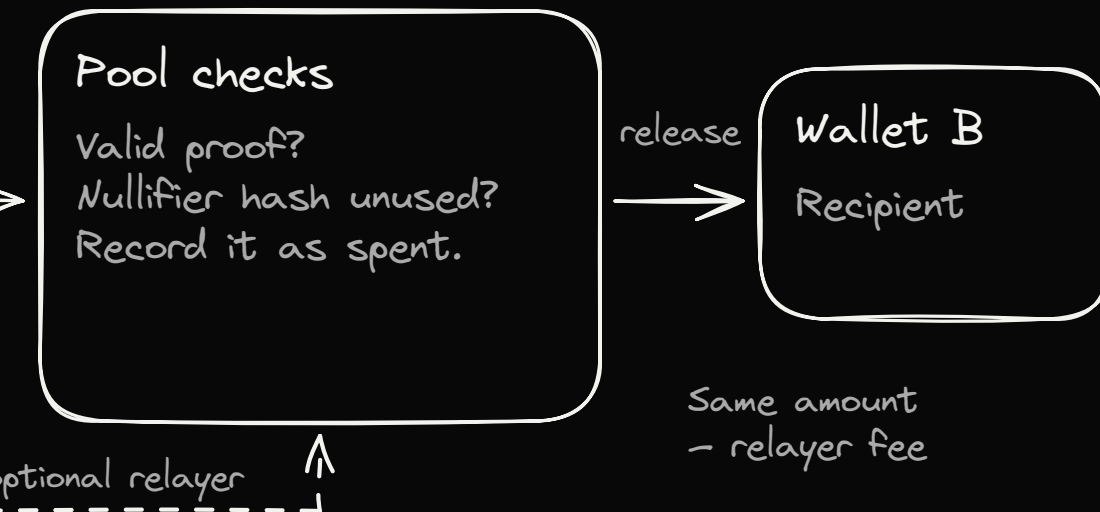

Optional relayer Pays withdrawal gas; cannot change the proof-bound recipient.

Deposits and withdrawals are public. The proof hides which deposit is spent; timing and metadata can still reveal links.

Classic fixed-denomination Tornado Cash · Source: github.com/tornadocash/tornado-core (Tornado.sol / withdraw.circum)

RELAYER RISKS

1. IP address exposure
2. Tracking by transaction timing
3. Tracking repeated activity
4. Blocking selected transactions
5. Denial-of-service (DoS) attacks
6. Leaked relayer records

HIMITSU


NOW

Send transactions directly.
A sponsor pays the gas.

HIMITSU PROTOCOL FLOW

01 DEPOSIT + SAVE 02 PROVE LOCALLY

03 AUTHORIZE + SETTLE

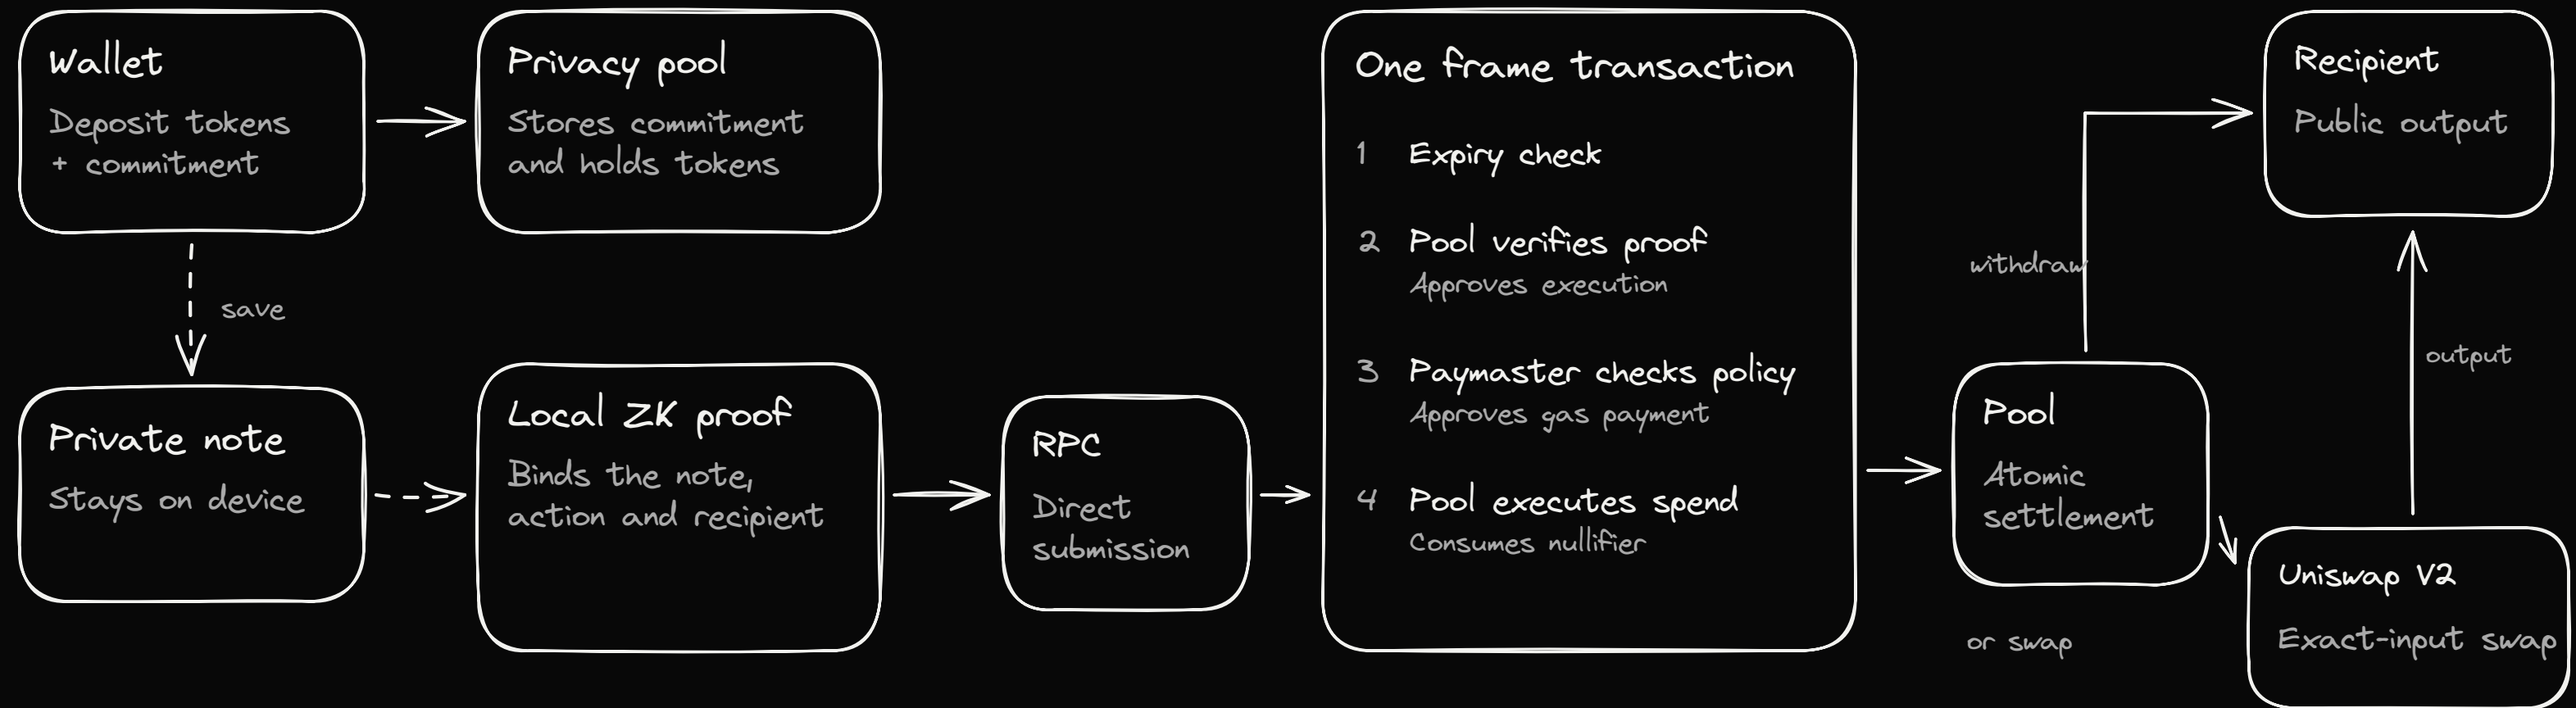

ETH-funded paymaster No per-transaction operator signature. No token allowance to the DEX.

A failed spend rolls back; included failures can still cost gas. Recipient, amounts and swaps are public.

Devnet prototype · Proofs hide the input deposit link. Direct RPC does not hide network metadata. · Source: repository README

WHAT HIMITSU IS

Use a secret note
to withdraw or swap tokens.

THE IMPACT

Spend without waiting
for a relayer.

WHAT EIP-8141 IS

EIP-8141 lets contracts
approve transactions and gas.

HOW HIMITSU USES EIP-8141

Check the request.

Check the proof.

Approve gas. Move the tokens.

PRIVACY AND CURRENT STATUS

The trade is public.

The proof hides which deposit
you spent.