Home Assignment

Implement playwright/typescript with vibe coding

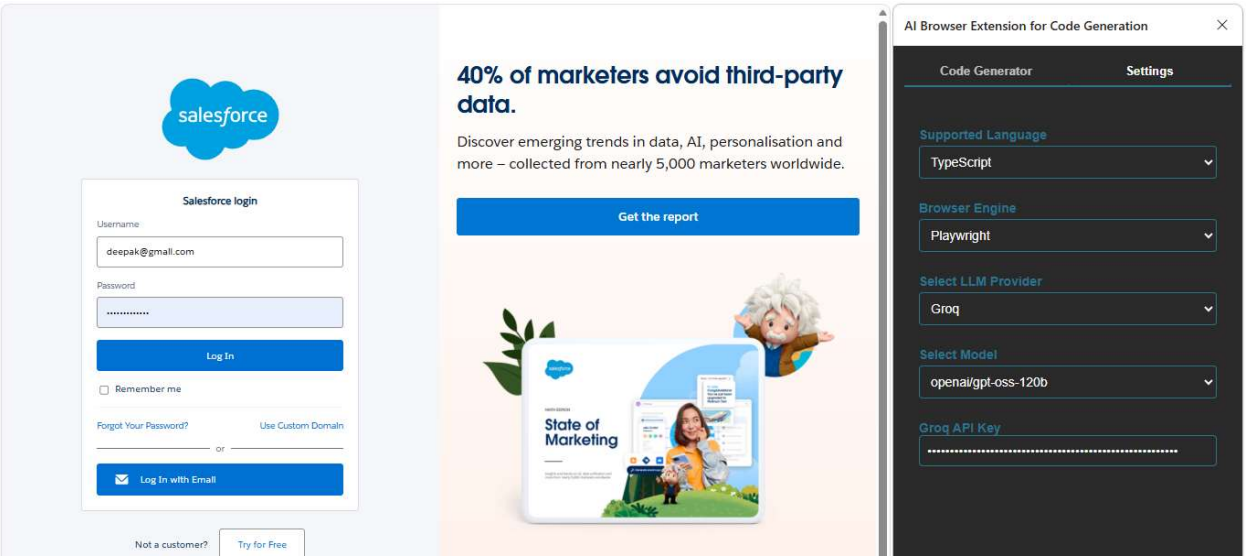

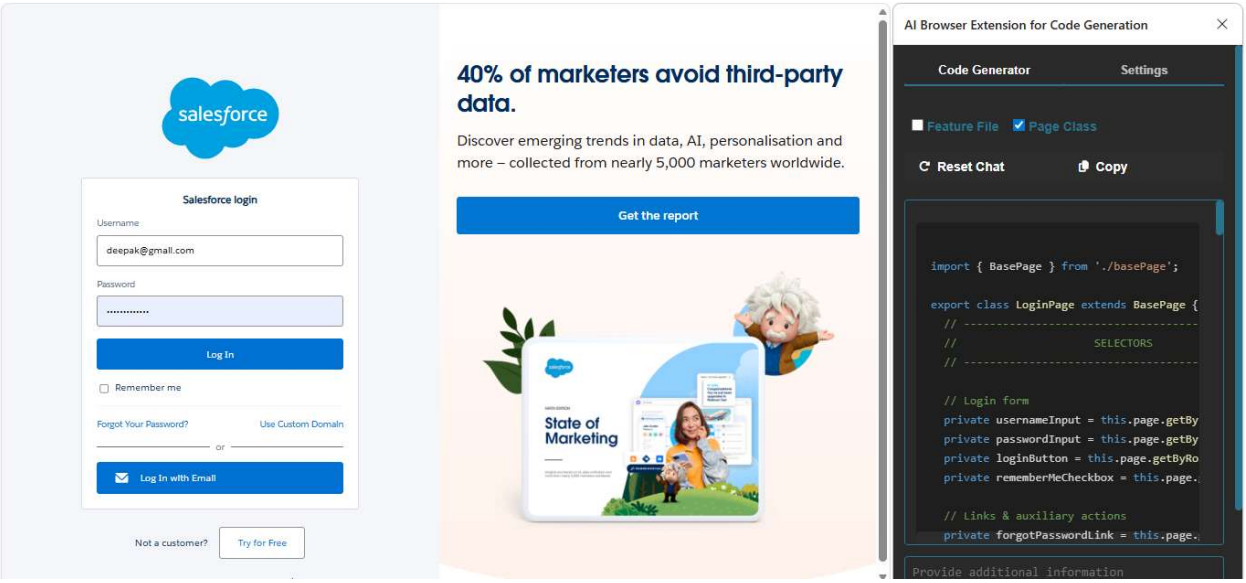

File Edit Selection View Go Run ... ai-extension

EXPLORER

AI-EXTENSION
- assets
- lib
- src
  - config
  - content
  - scripts
    - api
    - chat.js
    - init-colors.js
    - init-config.js
    - popup.js
    - prompts.js
    - tabs.js
  - styles
- bg.js
- EXTENSION_ANALYSIS.md
- manifest.json
- panel.html

OUTLINE

TIMELINE

prompts.js

src > scripts > prompts.js > DEFAULT_PROMPTS > PLAYWRIGHT_TYPESCRIPT_PAGE_ONLY

```
4   export const DEFAULT_PROMPTS = {
190   /**
191    * Playwright TypeScript Page Object Prompt (No Test Class)
192    */
193   PLAYWRIGHT_TYPESCRIPT_PAGE_ONLY: `
194     Instructions:
195     - Generate ONLY a Playwright TypeScript Page Object Class that EXTENDS BasePage.
196     - Import BasePage from './basePage' at the top.
197     - Structure the class with two clear sections separated by comments: SELECTORS and METHODS.
198     - In SELECTORS section: Declare all locators as class properties with inline initialization.
199     - Format: \`private propertyName = this.page.getByRole(...)\` (not in constructor).
200     - CRITICAL: Use ONLY semantic Playwright locators. NEVER use page.locator() with IDs or CSS selectors.
201     - REQUIRED LOCATOR METHODS: getByRole(), getByLabel(), getByPlaceholder(), getByText(), getByAltText().
202     - For textbox inputs: \`this.page.getByRole('textbox', { name: /label/i })\` or \`this.page.getByPlacef
203     - For buttons: \`this.page.getByRole('button', { name: /button text/i })\`
204     - For checkboxes: \`this.page.getByRole('checkbox', { name: /checkbox text/i })\`
205     - For links: \`this.page.getByRole('link', { name: /link text/i })\`
206     - In METHODS section: Implement async methods that use BasePage helper methods like \`this.safeClick()\
207     - All methods should be async and use await for Playwright operations.
208     - Use JSDoc comments for key methods.
209     - Do NOT include test scenarios or test setup code.
210     - Do NOT include a constructor.
211
212     Context:
213     DOM:
214     \`\`\`html
215     \${domContent}
216     \`\`\`
217
218     Example:
219     \`\`\`typescript
220     import { BasePage } from './basePage';
```

Ln 217, Col 1 Spaces: 2 UTF-8 LF JavaScript Go Live