

Cucumber Report

18-Oct-2022, 3:07:08 pm

Start : Oct 18, 3:06:08.539 pm

End : Oct 18, 3:06:57.266 pm

Duration : 48.727 s

Features

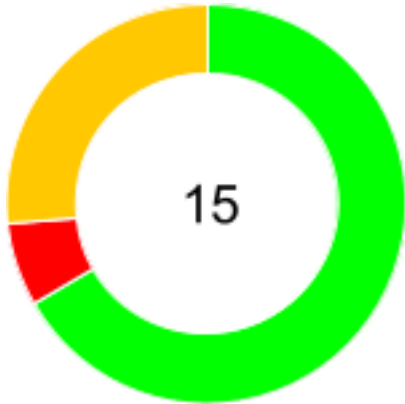
Scenarios

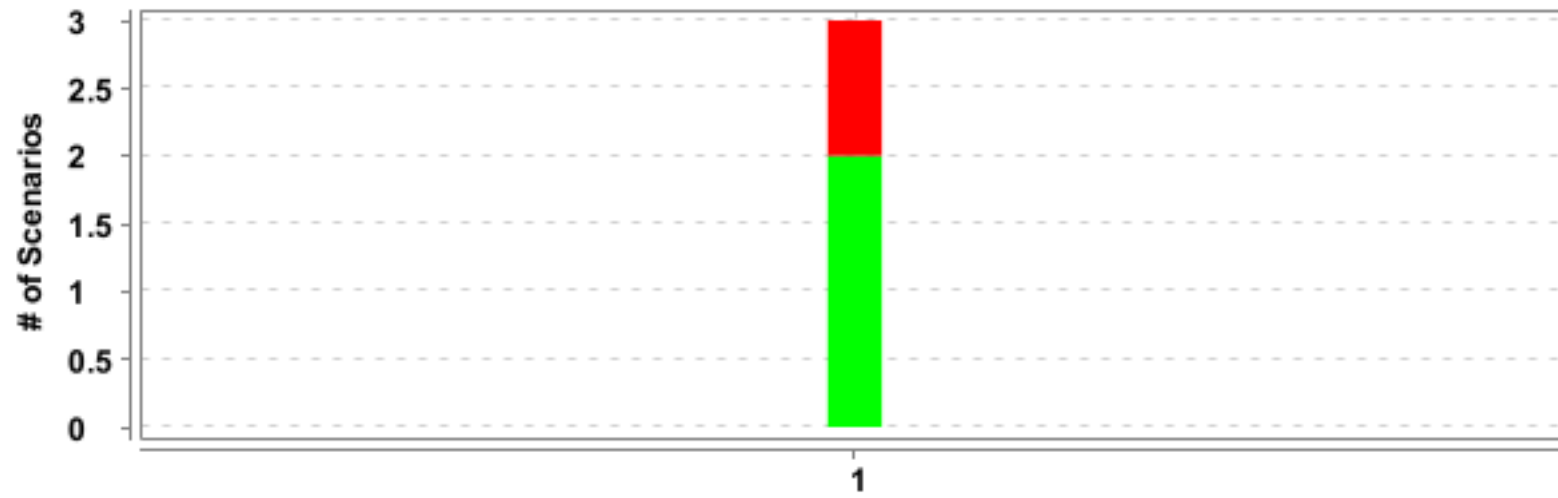
Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

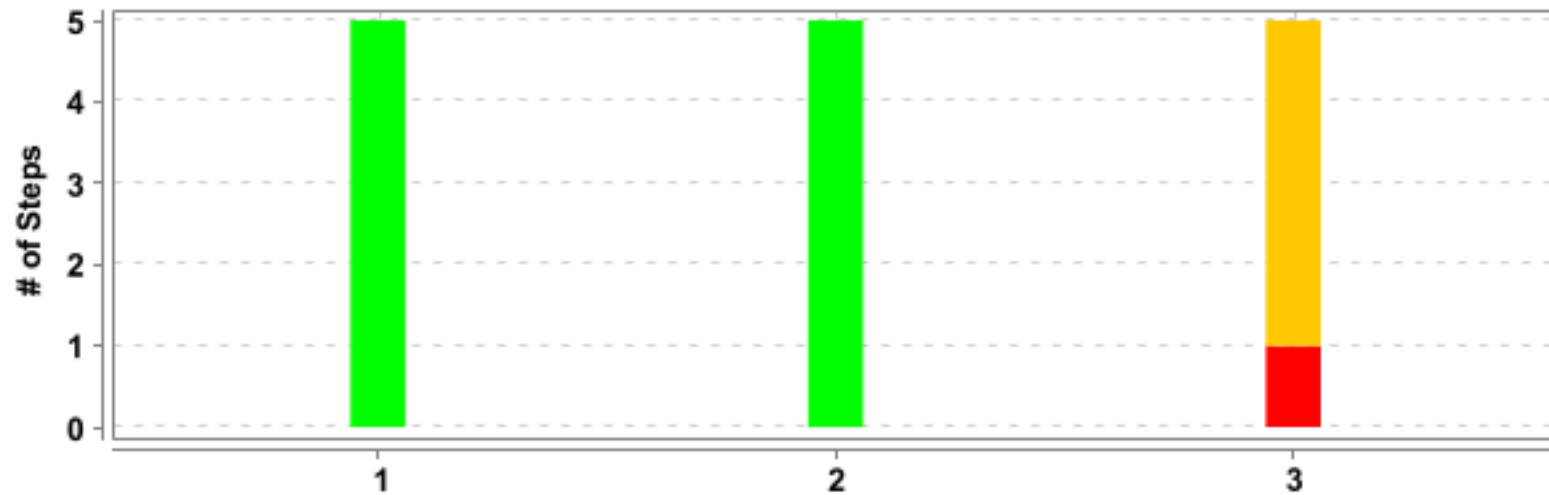
PASSED - 2
FAILED - 1
SKIPPED - 0

PASSED - 10
FAILED - 1
SKIPPED - 4







#	Feature Name	T	P	F	S	Duration
1	<u>To search and verify the product in amazon site</u>	3	2	1	0	48.727 s

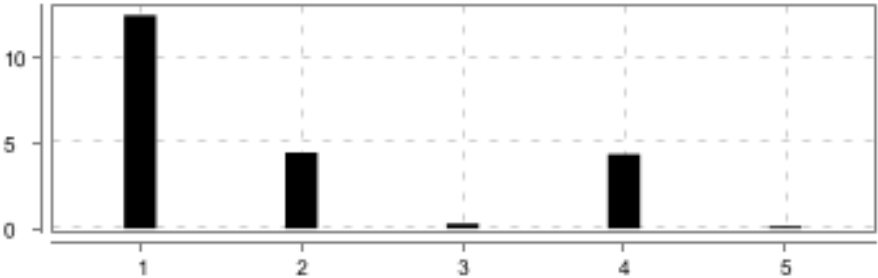



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>To search and verify the product in amazon site</u>	<u>User enters invalid book name in search box and get unavailability</u>	5	5	0	0	21.738 s
2	<u>To search and verify the product in amazon site</u>	<u>User enters invalid book name in search box and get unavailability</u>	5	5	0	0	22.456 s
3	<u>To search and verify the product in amazon site</u>	<u>User enters invalid book name in search box and get unavailability</u>	5	0	1	4	4.475 s

(F)- To search and verify the product in amazon site

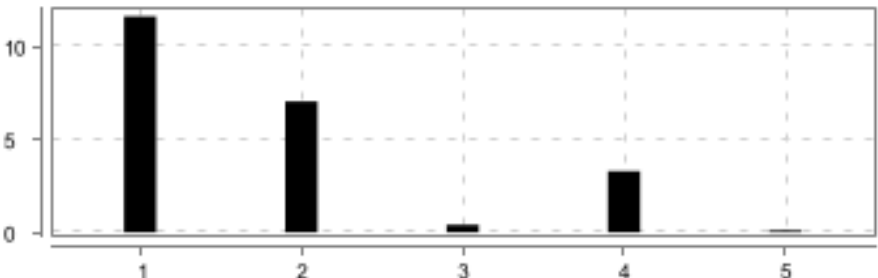

FAILED	DURATION - 48.727 s	Scenarios		Steps	
/ 3:06:08.539 pm // 3:06:57.266 pm /		Total - 3		Total - 15	
		Pass - 2		Pass - 10	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 4	

(S)- User enters invalid book name in search box and get unavailability

<div>PASSED</div> <div>DURATION - 21.738 s</div>		<div></div>	<div>Steps</div> <div>Total - 5</div> <div>Pass - 5</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 3:06:08.543 pm // 3:06:30.281 pm /</div>				
<div>To search and verify the product in amazon site</div>				
<div>@TestUnavailability</div>				

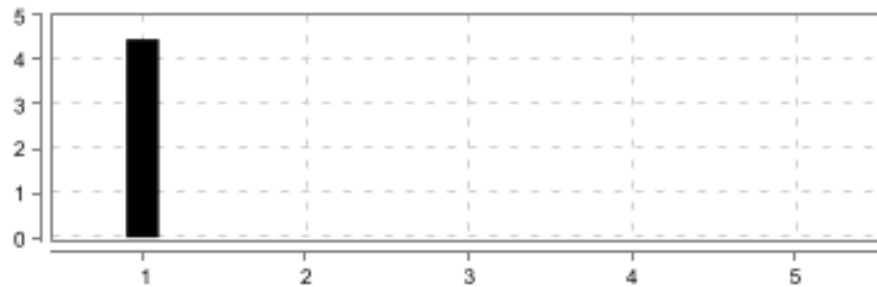

#	Step / Hook Details	Status	Duration
1	Given User should launch the "chrome"	PASSED	12.473 s
2	And User should launch the Amazon website	PASSED	4.436 s
3	When user enters the "ikai" on search box	PASSED	0.283 s
4	And user click on search button	PASSED	4.344 s
5	Then user verify the book name	PASSED	0.142 s

(S)- User enters invalid book name in search box and get unavailability

<div>PASSED</div> <div>DURATION - 22.456 s</div>	<div></div>	<div>Steps</div> <div>Total - 5</div> <div>Pass - 5</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
/ 3:06:30.317 pm // 3:06:52.773 pm /			
To search and verify the product in amazon site			
@TestUnavailability			

#	Step / Hook Details	Status	Duration
1	Given User should launch the "edge"	PASSED	11.610 s
2	And User should launch the Amazon website	PASSED	7.032 s
3	When user enters the "ikai" on search box	PASSED	0.402 s
4	And user click on search button	PASSED	3.297 s
5	Then user verify the book name	PASSED	0.103 s

(S)- User enters invalid book name in search box and get unavailability

<div>FAILED</div> <div>DURATION - 4.475 s</div>		<div></div>	<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	<div></div>
/ 3:06:52.791 pm // 3:06:57.266 pm /				
To search and verify the product in amazon site				
@TestUnavailability				

#	Step / Hook Details	Status	Duration
1	<p>Given User should launch the "firefox"</p> <p>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Build info: version: '4.1.3', revision: '7b1ebf28ef' System info: host: 'IN3234427W1', ip: '192.168.1.3', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '18' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {}}, desiredCapabilities=Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {}}] at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:585) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:248) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:164) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:118) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:106) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:86) at com.Library.Library.getBrowser(Library.java:35) at com.stepdefination_crossbrowser.Stepdefination_crossbrowser.user_should_launch_the(Stepdefination_crossbrowser.java:21) at ?.User should launch the "firefox"(file:///C:/Users/TZ167UZ/eclipse-workspace/Amazon_Crossbrowser/src/main/resources/Product_crossbrowser.feature:21) Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:58407 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:80) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:51)</p>	FAILED	4.457 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:124) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:102) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:84) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:62) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:248) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:164) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:118) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:106) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:86) at com.Library.Library.getBrowser(Library.java:35) at com.stepdefinition_crossbrowser.Stepdefinition_crossbrowser.user_should_launch_the(Stepdefinition_crossbrowser.java:21) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104) at java.base/java.lang.reflect.Method.invoke(Method.java:577) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) at io.cucumber.core.runner.TestStep.run(TestStep.java:64) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:104) at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200)		

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) at org.junit.internal.runners.statements.RunBefores.evaluate(RunBefores.java:26) at org.junit.internal.runners.statements.RunAfters.evaluate(RunAfters.java:27) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:1]:58407 at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:578) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:571) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:550) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:491) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:616) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:609) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:117) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:986) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:1]:58407 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) </p>		

#	Step / Hook Details	Status	Duration
	at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:330) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:710) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:658) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:584) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:496) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:986) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) * Not displayable characters are replaced by '?'.		
2	And User should launch the Amazon website	SKIPPED	0.001 s
3	When user enters the "ikai" on search box	SKIPPED	0.001 s
4	And user click on search button	SKIPPED	0.001 s
5	Then user verify the book name	SKIPPED	0.000 s